400023


National Semiconductor

FAST® Advanced Schottky TTL Logic Databook

A Corporate Dedication to Quality and Reliability

National Semiconductor is an industry leader in the manufacture of high quality, high reliability integrated circuits. We have been the leading proponent of driving down IC defects and extending product lifetimes. From raw material through product design, manufacturing and shipping, our quality and reliability is second to none.

We are proud of our success . . . it sets a standard for others to achieve. Yet, our quest for perfection is ongoing so that you, our customer, can continue to rely on National Semiconductor Corporation to produce high quality products for your design systems.

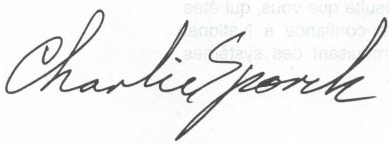

Charles E. Sporck
President, Chief Executive Officer
National Semiconductor Corporation

Wir fühlen uns zu Qualität und Zuverlässigkeit verpflichtet

National Semiconductor Corporation ist führend bei der Herstellung von integrierten Schaltungen hoher Qualität und hoher Zuverlässigkeit. National Semiconductor war schon immer Vorreiter, wenn es galt, die Zahl von IC Ausfällen zu verringern und die Lebensdauern von Produkten zu verbessern. Vom Rohmaterial über Entwurf und Herstellung bis zur Auslieferung, die Qualität und die Zuverlässigkeit der Produkte von National Semiconductor sind unübertroffen.

Wir sind stolz auf unseren Erfolg, der Standards setzt, die für andere erstrebenswert sind. Auch ihre Ansprüche steigen ständig. Sie als unser Kunde können sich auch weiterhin auf National Semiconductor verlassen.

La Qualité et La Fiabilité:

Une Vocation Commune Chez National Semiconductor Corporation


National Semiconductor Corporation est un des leaders industriels qui fabrique des circuits intégrés d'une très grande qualité et d'une fiabilité exceptionelle. National a été le premier à vouloir faire chuter le nombre de circuits intégrés défectueux et a augmenter la durée de vie des produits. Depuis les matières premières, en passant par la conception du produit sa fabrication et son expédition, partout la qualité et la fiabilité chez National sont sans équivalents.

Nous sommes fiers de notre succès et le standard ainsi défini devrait devenir l'objectif à atteindre par les autres sociétés. Et nous continuons à vouloir faire progresser notre recherche de la perfection; il en résulte que vous, qui êtes notre client, pouvez toujours faire confiance à National Semiconductor Corporation, en produisànt des systèmes d'une très grande qualité standard.

Un Impegno Societario di Qualità e Affidabilità

National Semiconductor Corporation è un'industria al vertice nella costruzione di circuiti integrati di altà qualità ed affidabilità. National è stata il principale promotore per l'abbattimento della difettosità dei circuiti integrati e per l'allungamento della vita dei prodotti. Dal materiale grezzo attraverso tutte le fasi di progettazione, costruzione e spedizione, la qualità e affidabilità National non è seconda a nessuno.

Noi siamo orgogliosi del nostro successo che fissa per gli altri un traguardo da raggiungere. Il nostro desiderio di perfezione è d'altra parte illimitato e pertanto tu, nostro cliente, puoi continuare ad affidarti a National Semiconductor Corporation per la produzione dei tuoi sistemi con elevati livelli di qualità.



Charles E. Sporck
President, Chief Executive Officer
National Semiconductor Corporation

FAST
DATABOOK

1990 Edition

Circuit Characteristics

Ratings, Specifications, and Waveforms

Design Considerations

Advanced Schottky TTL Datasheets

Ordering Information and Physical Dimensions

TRADEMARKS

Following is the most current list of National Semiconductor Corporation's trademarks and registered trademarks.

ABiC™
Abuseable™
Anadig™
ANS-R-TRAN™
APPS™
ASPECT™
Auto-Chem Deflasher™
BCP™
BI-FET™
BI-FET II™
BI-LINE™
BIPLAN™
BLC™
BLX™
BMAC™
Brite-Lite™
BSI™
BTL™
CDD™
CheckTrack™
CIM™
CIMBUS™
CLASIC™
Clock✓Chek™
COMBO®
COMBO I™
COMBO II™
COPS™ microcontrollers
CRD™
DA4™
Datachecker®
DENSPAK™
DIB™
Digitalker®
DISCERN™
DISTILL™
DNR®
DPVM™
E²CMOS™
ELSTAR™
Embedded System Processor™
E-Z-LINK™
FACT™
FACT Quiet Series™
FAIRCAD™
Fairtech™
FAST®
5-Star Service™
Flash™
GENIX™
GNX™
GTO™
HAMR™
HandiScan™
HEX 3000™
HPC™
I³L®
ICM™
INFOCHEX™
Integral ISE™
Intelisplay™
ISE™
ISE/06™
ISE/08™
ISE/16™
ISE32™
ISOPLANAR™
ISOPLANAR-Z™
KeyScan™
LMCMOS™
M²CMOS™
Macrobus™
Macrocomponent™
MAXI-ROM®
Meat✓Chek™
MenuMaster™
Microbus™ data bus
MICRO-DAC™
μtalker™
Microtalker™
MICROWIRE™
MICROWIRE/PLUS™
MOLE™
MPA™
MST™
Naked-8™
National®
National Semiconductor®
National Semiconductor Corp.®
NAX 800™
Nitride Plus™
Nitride Plus Oxide™
NML™
NOBUS™
NSC800™
NSCISE™
NSX-16™
NS-XC-16™
NTERCOM™
NURAM™
OXISS™
P²CMOS™
PC Master™
Perfect Watch™
Pharma✓Chek™
PLAN™
PLANAR™
PLAYER™
Plus-2™
Polycraft™
POSilink™
POSitalker™
Power + Control™
POWERplanar™
QUAD3000™
QUIKLOOK™
RAT™
RTX16™
SABR™
Script✓Chek™
SCX™
SERIES/800™
Series 900™
Series 3000™
Series 32000®
Shelf✓Chek™
Simple Switcher™
SofChek™
SONIC™
SPIRE™
Staggered Refresh™
STAR™
Starlink™
STARPLEX™
Super-Block™
SuperChip™
SuperScript™
SYS32™
TapePak®
TDS™
TeleGate™
The National Anthem®
Time✓Chek™
TINA™
TLC™
Trapezoidal™
TRI-CODE™
TRI-POLY™
TRI-SAFE™
TRI-STATE®
TURBOTRANSCEIVER™
VIP™
VR32™
WATCHDOG™
XMOS™
XPU™
Z STAR™
883B/RETS™
883S/RETS™

Ethernet® is a registered trademark of Xerox Corporation.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation 2900 Semiconductor Drive, P.O. Box 58090, Santa Clara, California 95052-8090 (408) 721-5000
TWX (910) 339-9240

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied, and National reserves the right, at any time without notice, to change said circuitry or specifications.

Table of Contents

Fairchild Advanced Schottky TTL, FAST®, is a family of TTL circuits that exhibits a combination of performance and efficiency unapproached by any other TTL family. Made with the proven Isoplanar process, 54F/74F circuits offer the switching speed and output drive capability of Schottky TTL, with superior noise margins and only one-fourth the power consumption.

Product Index and Selection Guide

Lists 54F/74F circuits currently available, in design or planned. The Selection Guide groups the circuits by function.

Section 1 Circuit Characteristics 1-1

Discusses FAST technology, circuit configurations and characteristics.

Section 2 Ratings, Specifications and Waveforms 2-1

Contains common ratings and specifications for FAST devices, as well as AC test load and waveforms.

Section 3 Design Considerations 3-1

Provides the designer with useful guidelines for dealing with transmission and other high speed design concerns.

Section 4 Data Sheets 4-1

Contains data sheets for currently available and pending new products.

Section 5 Ordering Information and Package Outlines, Field Sales Offices, Representatives and Distributor Locations 5-1

Explains simplified purchasing code which identifies device type, package type and temperature range. Contains detailed physical dimension drawings for each package.

National Semiconductor

Product Status Definitions

Definition of Terms

Data Sheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This data sheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This data sheet contains preliminary data, and supplementary data will be published at a later date. National Semiconductor Corporation reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
No Identification Noted	Full Production	This data sheet contains final specifications. National Semiconductor Corporation reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

National Semiconductor Corporation reserves the right to make changes without further notice to any products herein to improve reliability, function or design. National does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Alpha-Numeric Index

29F52 8-Bit Registered Transceiver 4-637
29F53 8-Bit Registered Transceiver 4-637
29F68 Dynamic RAM Controller 4-643
54F/74F00 Quad 2-Input NAND Gate 4-6
54F/74F02 Quad 2-Input NOR Gate 4-9
54F/74F04 Hex Inverter 4-12
54F/74F08 Quad 2-Input AND Gate 4-15
54F/74F10 Triple 3-Input NAND Gate 4-18
54F/74F11 Triple 3-Input AND Gate 4-21
54F/74F13 Dual 4-Input NAND Schmitt Trigger 4-24
54F/74F14 Hex Inverter Schmitt Trigger 4-27
54F/74F20 Dual 4-Input NAND Gate 4-30
54F/74F27 Triple 3-Input NOR Gate 4-33
54F/74F30 8-Input NAND Gate 4-36
54F/74F32 Quad 2-Input OR Gate 4-39
54F/74F37 Quad 2-Input NAND Buffer 4-42
54F/74F38 Quad 2-Input NAND Buffer (Open Collector) 4-45
54F/74F40 Dual 4-Input NAND Buffer 4-48
54F/74F51 2-2-2-3 AND-OR-Invert Gate 4-51
54F/74F64 4-2-3-2-Input AND-OR-Invert Gate 4-54
54F/74F74 Dual D-Type Positive Edge-Triggered Flip-Flop 4-57
54F/74F86 Quad 2-Input Exclusive-OR Gate 4-61
54F/74F109 Dual $J\overline{K}$ Positive Edge-Triggered Flip-Flop 4-64
54F/74F112 Dual JK Negative Edge-Triggered Flip-Flop 4-68
54F/74F113 Dual JK Negative Edge-Triggered Flip-Flop 4-72
54F/74F114 Dual JK Negative Edge-Triggered Flip-Flop with Common Clocks and Clears 4-76
54F/74F125 Quad Buffer (TRI-STATE) 4-80
54F/74F132 Quad 2-Input NAND Schmitt Trigger 4-83
54F/74F138 1-of-8 Decoder/Demultiplexer 4-86
54F/74F139 Dual 1-of-4 Decoder/Demultiplexer 4-90
54F/74F148 8-Line to 3-Line Priority Encoder 4-94
54F/74F151A 8-Input Multiplexer 4-98
54F/74F153 Dual 4-Input Multiplexer 4-102
54F/74F157A Quad 2-Input Multiplexer 4-106
54F/74F158A Quad 2-Input Multiplexer (Inverted) 4-110
54F/74F160A Synchronous Presettable BCD Decade Counter (Asynchronous Reset) 4-114
54F/74F161A Synchronous Presettable Binary Counter (Asynchronous Reset) 4-121
54F/74F162A Synchronous Presettable BCD Decade Counter (Synchronous Reset) 4-114
54F/74F163A Synchronous Presettable Binary Counter (Synchronous Reset) 4-121
54F/74F164A Serial-In, Parallel-Out Shift Register 4-127
54F/74F168 4-Stage Synchronous Bidirectional Counter 4-131
54F/74F169 4-Stage Synchronous Bidirectional Counter 4-131
54F/74F174 Hex D Flip-Flop with Master Reset 4-137
54F/74F175 Quad D Flip-Flop 4-141
54F/74F181 4-Bit Arithmetic Logic Unit 4-145
54F/74F182 Carry Lookahead Generator 4-151
54F/74F189 64-Bit Random Access Memory with TRI-STATE Outputs 4-156
54F/74F190 Up/Down Decade Counter with Preset and Ripple Clock 4-160
54F/74F191 Up/Down Binary Counter with Preset and Ripple Clock 4-165
54F/74F192 Up/Down Decade Counter with Separate Up/Down Clocks 4-170
54F/74F193 Up/Down Binary Counter with Separate Up/Down Clocks 4-175

Alpha-Numeric Index (Continued)

54F/74F194 4-Bit Bidirectional Universal Shift Register 4-180
54F/74F219 64-Bit Random Access Memory with TRI-STATE Outputs 4-184
54F/74F240 Octal Buffer/Line Driver with TRI-STATE Outputs (Inverting) 4-188
54F/74F241 Octal Buffer/Line Driver with TRI-STATE Outputs 4-188
54F/74F243 Quad Bus Transceiver with TRI-STATE Outputs 4-192
54F/74F244 Octal Buffer/Line Driver with TRI-STATE Outputs 4-188
54F/74F245 Octal Bidirectional Transceiver with TRI-STATE Outputs 4-195
54F/74F251A 8-Input Multiplexer with TRI-STATE Outputs 4-199
54F/74F253 Dual 4-Bit Multiplexer with TRI-STATE Outputs 4-203
54F/74F257A Quad 2-Input Multiplexer with TRI-STATE Outputs 4-207
54F/74F258A Quad 2-Input Multiplexer with TRI-STATE Outputs (Inverting) 4-211
54F/74F269 8-Bit Bidirectional Binary Counter 4-215
54F/74F273 Octal D Flip-Flop 4-219
54F/74F280 9-Bit Parity Generator/Checker 4-223
54F/74F283 4-Bit Binary Full Adder with Fast Carry 4-227
54F/74F299 Octal Universal Shift/Storage Register with Common Parallel I/O Pins 4-232
54F/74F322 Octal Serial/Parallel Register with Sign Extend 4-237
54F/74F323 Octal Universal Shift/Storage Register with Synchronous Reset and Common I/O Pins 4-242
54F/74F350 4-Bit Shifter with TRI-STATE Outputs 4-247
54F/74F352 Dual 4-Input Multiplexer 4-253
54F/74F353 Dual 4-Input Multiplexer with TRI-STATE Outputs 4-257
54F/74F365 Hex Buffer/Driver with TRI-STATE Outputs 4-261
54F/74F366 Hex Inverter/Buffer with TRI-STATE Outputs 4-264
54F/74F368 Hex Inverter/Buffer with TRI-STATE Outputs 4-264
54F/74F373 Octal Transparent Latch with TRI-STATE Outputs 4-268
54F/74F374 Octal D-Type Flip-Flop with TRI-STATE Outputs 4-272
54F/74F377 Octal D-Type Flip-Flop with Clock Enable 4-276
54F/74F378 Parallel D Register with Enable 4-280
54F/74F379 Quad Parallel Register with Enable 4-284
54F/74F381 4-Bit Arithmetic Logic Unit 4-288
54F/74F382 4-Bit Arithmetic Logic Unit 4-294
54F/74F384 8-Bit Serial/Parallel Twos' Complement Multiplier 4-300
54F/74F385 Quad Serial Adder/Subtractor 4-306
54F/74F398 Quad 2-Port Register 4-311
54F/74F399 Quad 2-Port Register 4-311
54F/74F401 Cyclic Redundancy Check Generator/Checker 4-316
54F/74F402 Serial Data Polynomial Generator/Checker 4-321
54F/74F403A 16 x 4 First-In First-Out Buffer Memory 4-329
54F/74F407 Data Access Register 4-346
54F/74F410 Register Stack—16 x 4 RAM TRI-STATE Output Register 4-353
54F/74F412 Multi-Mode Buffered 8-Bit Latch with TRI-STATE Outputs 4-357
54F/74F413 64 x 4 First-In First-Out Buffer Memory with Parallel I/O 4-362
54F/74F420 Paralleled Check Bit/Syndrome Bit Generator 4-366
54F/74F432 Multi-Mode Buffered 8-Bit Latch with TRI-STATE Outputs 4-371
54F/74F433 64 x 4 First-In First-Out Buffer Memory 4-377
54F/74F521 8-Bit Identity Comparator 4-391
54F/74F524 8-Bit Registered Comparator 4-395
54F/74F525 16-Bit Programmable Counter 4-402
54F/74F533 Octal Transparent Latch with TRI-STATE Outputs 4-409
54F/74F534 Octal D Flip-Flop with TRI-STATE Outputs 4-413

Alpha-Numeric Index (Continued)

54F/74F537 1-of-10 Decoder with TRI-STATE Outputs 4-417
54F/74F538 1-of-8 Decoder with TRI-STATE Outputs 4-421
54F/74F539 Dual 1-of-4 Decoder with TRI-STATE Outputs 4-425
54F/74F540 Octal Buffer/Line Driver with TRI-STATE Outputs (Inverting) 4-429
54F/74F541 Octal Buffer/Line Driver with TRI-STATE Outputs 4-429
54F/74F543 Octal Registered Transceiver 4-433
54F/74F544 Octal Registered Transceiver (Inverting in Both Directions) 4-438
54F/74F545 Octal Bidirectional Transceiver with TRI-STATE Outputs 4-443
54F/74F547 Octal Decoder/Demultiplexer with Address Latches and Acknowledge 4-446
54F/74F548 Octal Decoder/Demultiplexer with Acknowledge 4-451
54F/74F550 Octal Registered Transceiver with Status Flags 4-455
54F/74F551 Octal Registered Transceiver with Status Flags 4-455
54F/74F552 Octal Registered Transceiver with Parity and Flags 4-461
54F/74F563 Octal D-Type Latch with TRI-STATE Outputs 4-466
54F/74F564 Octal D-Type Flip-Flop with TRI-STATE Outputs 4-470
54F/74F568 4-Bit Bidirectional Decade Counter with TRI-STATE Outputs 4-474
54F/74F569 4-Bit Bidirectional Binary Counter with TRI-STATE Outputs 4-474
54F/74F573 Octal D-Type Latch with TRI-STATE Outputs 4-485
54F/74F574 Octal D-Type Flip-Flop with TRI-STATE Outputs 4-489
54F/74F579 8-Bit Bidirectional Binary Counter with TRI-STATE Outputs 4-493
54F/74F582 4-Bit BCD Arithmetic Logic Unit 4-494
54F/74F583 4-Bit BCD Adder 4-498
54F/74F588 Octal Bidirectional Transceiver with IEEE-488 Termination Resistors and TRI-STATE Inputs/Outputs 4-502
54F/74F620 Inverting Octal Bus Transceiver with TRI-STATE Outputs 4-506
54F/74F623 Inverting Octal Bus Transceiver with TRI-STATE Outputs 4-506
54F/74F632 32-Bit Parallel Error Detection and Correction Circuit 4-510
54F/74F640 Octal Bus Transceiver with TRI-STATE Outputs 4-522
54F/74F643 Octal Bus Transceiver with TRI-STATE Outputs 4-522
54F/74F645 Octal Bus Transceiver with TRI-STATE Outputs 4-522
54F/74F646 Octal Transceiver/Register with TRI-STATE Outputs 4-527
54F/74F648 Octal Transceiver/Register with TRI-STATE Outputs 4-527
54F/74F651 Octal Transceiver/Register with TRI-STATE Outputs (Inverting) 4-534
54F/74F652 Octal Transceiver/Register with TRI-STATE Outputs 4-534
54F/74F657 Octal Bidirectional Transceiver with 8-Bit Parity Generator/Checker and TRI-STATE Outputs 4-540
54F/74F673A 16-Bit Serial-In, Serial/Parallel-Out Shift Register (Common Serial I/O Pin) 4-545
54F/74F675A 16-Bit Serial-In, Serial/Parallel-Out Shift Register 4-550
54F/74F676 16-Bit Serial/Parallel-In, Serial-Out Shift Register 4-554
54F/74F779 8-Bit Bidirectional Binary Counter with TRI-STATE Outputs 4-558
54F/74F784 8-Bit Serial/Parallel Multiplier with Adder/Subtractor 4-559
54F/74F794 8-Bit Register with Readback 4-565
54F/74F821 10-Bit D-Type Flip-Flop 4-569
54F/74F823 9-Bit D-Type Flip-Flop 4-573
54F/74F825 8-Bit D-Type Flip-Flop 4-577
54F/74F827 10-Bit Buffer/Line Driver 4-581
54F/74F828 10-Bit Buffer/Line Driver 4-581
54F/74F841 10-Bit Transparent Latch 4-586
54F/74F843 9-Bit Transparent Latch 4-590
54F/74F845 8-Bit Transparent Latch 4-594
54F/74F899 9-Bit Latchable Transceiver with Parity Generator/Checker 4-599

Alpha-Numeric Index (Continued)

54F/74F968 1 Megabit Dynamic RAM Controller 4-609
54F/74F2241 Octal Buffer/Line Driver with 25Ω Series Resistors in the Outputs 4-621
54F/74F2243 Quad Bus Transceiver with 25Ω Resistors in the Outputs 4-625
54F/74F2244 Octal Buffer/Line Driver with 25Ω Series Resistors in the Outputs 4-621
54F/74F2620 Inverting Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-628
54F/74F2623 Inverting Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-628
54F/74F2640 Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-632
54F/74F2643 Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-632
54F/74F2645 Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-632

National Semiconductor

FAST® Product Selection Guide

Gates

Function	Device	Inputs/ Gate	No. of Gates	Leads
NAND/NAND Buffer				
Quad 2-Input NAND	54F/74F00	2	4	14
Triple 3-Input NAND	54F/74F10	3	3	14
Dual 4-Input NAND Schmitt Trigger	54F/74F13	4	2	14
Dual 4-Input NAND	54F/74F20	4	2	14
8-Input NAND	54F/74F30	8	1	14
Quad 2-Input Positive NAND Buffer	54F/74F37	2	4	14
Quad 2-Input NAND Buffer (OC)	54F/74F38	2	4	14
Dual 4-Input Positive NAND Buffer	54F/74F40	4	2	14
Quad 2-Input Positive NAND Schmitt Trigger	54F/74F132	2	4	14
AND				
Quad 2-Input AND	54F/74F08	2	4	14
Triple 3-Input AND	54F/74F11	3	3	14
OR/NOR/Exclusive-OR				
Quad 2-Input NOR	54F/74F02	2	4	14
Triple 3-Input NOR	54F/74F27	3	3	14
Quad 2-Input OR	54F/74F32	2	4	14
Quad 2-Input Exclusive-OR	54F/74F86	2	4	14
Invert/AND-OR-Invert				
Hex Inverter	54F/74F04	1	6	14
Hex Schmitt Trigger Inverter	54F/74F14	1	6	14
Dual AND-OR-Invert	54F/74F51	3/3/2/2		14
AND-OR-Invert	54F/74F64	4/2/3/2		14

Dual Edge Triggered Flip Flops

Function	Device	Clock Inputs	Direct Set	Direct Clear	Leads
Dual D Positive	54F/74F74	⎍	Yes	Yes	14
Dual $J\overline{K}$ Positive	54F/74F109	⎍	Yes	Yes	16
Dual JK Negative	54F/74F112	⎎	Yes	Yes	16
Dual JK	54F/74F113	⎎	Yes		14
Dual JK Negative (Common Clocks & Clears)	54F/74F114	⎎	Yes	Yes	14

Multiple Flip-Flops

Function	Device	Clock Inputs	Master Reset	Broadside Pinout	TRI-STATE® Outputs	Leads
Hex D Flip-Flop	54F/74F174	⎍	Yes			16
Quad D Flip-Flop	54F/74F175	⎍	Yes			16
Octal D Flip-Flop	54F/74F273	⎍	Yes			20
Octal D Flip-Flop	54F/74F374	⎍			Yes	20
Octal D Flip-Flop w/Clock Enable	54F/74F377	⎍				20
Parallel D Register w/Enable	54F/74F378	⎍				16
Parallel D Register w/Enable	54F/74F379	⎍				16
Octal D Flip-Flop	54F/74F534	⎍			Yes	20
Octal D Flip-Flop	54F/74F564	⎍		Yes	Yes	20
Octal D Flip-Flop	54F/74F574	⎍		Yes	Yes	20
10-Bit D Flip-Flop	54F/74F821	⎍		Yes	Yes	24
9-Bit D Flip-Flop	54F/74F823	⎍	Yes	Yes	Yes	24
8-Bit D Flip-Flop	54F/74F825	⎍	Yes	Yes	Yes	24

Registers

Function	Device	Clock Inputs	Leads
Parallel D Register w/Enable	54F/74F378	⎍	16
Quad Parallel D Register w/Enable	54F/74F379	⎍	16
Quad 2-Port Register	54F/74F398	⎍	20
Quad 2-Port Register	54F/74F399	⎍	16
Serial Data Polynomial Generator/Checker	54F/74F402	⎍	16
Data Access Register	54F/74F407	⎍	24
Register Stack—16 x 4 RAM TRI-STATE Output Register	54F/74F410	⎍	18
8-Bit Register with Readback	54F/74F794	⎍	20

Latches

Function	Device	Enable Inputs	Broadside Pinout	Inverting	TRI-STATE Outputs	Leads
Octal Latch	54F/74F373	1(L) & 1(H)			Yes	20
Multimode Buffered 8-Bit Latch	54F/74F412				Yes	24
Multimode Buffered 8-Bit Latch	54F/74F432			Yes	Yes	24
Octal D Latch	54F/74F533	1(L) & 1(H)		Yes	Yes	20
Octal D Latch	54F/74F563	1(L) & 1(H)	Yes	Yes	Yes	20
Octal D Latch	54F/74F573	1(L) & 1(H)	Yes		Yes	20
10-Bit D Latch	54F/74F841	1(L) & 1(H)	Yes		Yes	24
9-Bit D Latch	54F/74F843	1(L) & 1(H)	Yes		Yes	24
8-Bit D Latch	54F/74F845	3(L) & 1(H)	Yes		Yes	24

Counters

Function	Device	Parallel Entry	Reset	Up/ Down	TRI-STATE Outputs	Leads
Presettable 4-Bit BCD Decade	54F/74F160A	S	A			16
Presettable 4-Bit Binary	54F/74F161A	S	A			16
Presettable 4-Bit BCD Decade	54F/74F162A	S	S			16
Presettable 4-Bit Binary	54F/74F163A	S	S			16
4-Bit BCD Decade	54F/74F168	S		Yes		16
4-Bit Binary	54F/74F169	S		Yes		16
4-Bit BCD Decade w/Preset & Ripple Clock	54F/74F190	A		Yes		16
4-Bit Binary w/Preset & Ripple Clock	54F/74F191	A				16
4-Bit BCD Decade w/Separate Up/Down Clocks	54F/74F192	A	A	Yes		16
4-Bit Binary w/Separate Up/Down Clocks	54F/74F193	A	A	Yes		16
8-Bit Binary	54F/74F269	S		Yes		24
16-Stage Programmable	54F/74F525		A			28
4-Bit BCD Decade	54F/74F568	S	S/A	Yes	Yes	20
4-Bit Binary	54F/74F569	S	S/A	Yes	Yes	20
8-Bit Binary	54F/74F579	S	S	Yes	Yes	20
8-Bit Binary	54F/74F779	S		Yes	Yes	16

S = Synchronous
A = Asynchronous

Shift Registers

Function	Device	No. of Bits	Serial Inputs	Parallel Inputs	TRI-STATE Outputs	Leads
Shift Right, Serial-In, Parallel-Out	54F/74F164A	8	2			14
Bidirectional, Universal	54F/74F194	4	2	Yes		16
Universal Octal Shift/Storage w/Common I/O Pins	54F/74F299	8	2	Yes	Yes	20
Octal Serial/Parallel w/Sign Extend	54F/74F322	8	2	Yes	Yes	20
Universal Octal Shift/Storage w/Synch. Reset	54F/74F323	8	2	Yes	Yes	20
Serial-In, Serial/Parallel-Out (Common I/O Pin)	54F/74F673A	16	1		Yes	24
Serial-In, Serial/Parallel-Out	54F/74F675A	16	1			24
Serial/Parallel-In, Serial-Out	54F/74F676	16	1	Yes		24

Buffers/Line Drivers

Function	Device	No. of Bits	Inverting	Noninverting	Broadside Pinout	Leads
Quad Buffer (TRI-STATE)	54F/74F125	4		Yes		14
Octal Buffer/Line Driver (TRI-STATE)	54F/74F240	8	Yes			20
Octal Buffer/Line Driver (TRI-STATE)	54F/74F241	8		Yes		20
Octal Buffer/Line Driver (TRI-STATE)	54F/74F244	8		Yes		20
Hex Buffer/Driver (TRI-STATE)	54F/74F365	6		Yes		16
Hex Inverter/Buffer (TRI-STATE)	54F/74F366	6	Yes			16
Hex Inverter/Buffer (TRI-STATE)	54F/74F368	6	Yes			16
Octal Buffer/Line Driver (TRI-STATE)	54F/74F540	8	Yes		Yes	20
Octal Buffer/Line Driver (TRI-STATE)	54F/74F541	8		Yes	Yes	20
10-Bit Buffer/Line Driver	54F/74F827	10		Yes	Yes	24
10-Bit Buffer/Line Driver	54F/74F828	10	Yes		Yes	24
Octal Buffer/Line Driver with 25Ω Resistor in the Output Pull-Down	54F/74F2241	8		Yes		20
Octal Buffer/Line Driver with 25Ω Resistor in the Output Pull-Down	54F/74F2244	8		Yes		20

Transceivers/Registered Transceivers

Function	Device	Registered	Enable Inputs	Features	Leads
Quad Bus Transceiver	54F/74F243		1(L) & 1(H)		14
Octal Bidirectional Transceiver	54F/74F245		1(L)	TRI-STATE Inputs	20
Octal Registered Transceiver	54F/74F543	Yes	6(L)		24
Octal Registered Transceiver	54F/74F544	Yes	6(L)	Inverting in Both Directions	24
Octal Bidirectional Transceiver	54F/74F545		1(L)	TRI-STATE Inputs	20
Octal Registered Transceiver	54F/74F550	Yes	4(L)	Status Flags	28
Octal Registered Transceiver	54F/74F551	Yes	4(L)	Status Flags, Inverting	28
Octal Registered Transceiver	54F/74F552	Yes	2(L)	Parity & Flag	28
Octal Bidirectional Transceiver	54F/74F588		1(L)	GPIB Compatible	20
Octal Bus Transceiver	54F/74F620		2(H)	Inverting	20
Octal Bus Transceiver	54F/74F623		2(H)		20
Octal Bus Transceiver	54F/74F640		1(L)	25Ω Resistor in Output Pull-Down, Inverting	20
Octal Bus Transceiver	54F/74F643		1(L)	25Ω Resistor in Output Pull-Down, Invert/Noninvert	20
Octal Bus Transceiver	54F/74F645		1(L)	25Ω Resistor in Output Pull-Down	20
Octal Bus Transceiver	54F/74F646	Yes	1(L) & 1(H)		24
Octal Bus Transceiver	54F/74F648	Yes	1(L) & 1(H)	Inverting	24
Octal Bus Transceiver	54F/74F651	Yes	1(L) & 1(H)	Inverting	24
Octal Bus Transceiver	54F/74F652	Yes	1(L) & 1(H)	Noninverting	24
Octal Bidirectional Transceiver	54F/74F657		1(L) & 1(H)	8-Bit Parity Gen./Checker	24
9-Bit Registered Transceiver	54F/74F899	Yes	2(L)	Parity Generate/Check	28
Quad Bus Transceiver	54F/74F2243		1(L) & 1(H)	25Ω Resistor in Output Pull-Down	20
Quad Bus Transceiver	54F/74F2620		1(L) & 1(H)	25Ω Resistor in Output Pull-Down, Inverting	20
Quad Bus Transceiver	54F/74F2623		1(L) & 1(H)	25Ω Resistor in Output Pull-Down	20
Quad Bus Transceiver	54F/74F2640		1(L)	25Ω Resistor in Output Pull-Down, Inverting	20
Quad Bus Transceiver	54F/74F2643		1(L)	25Ω Resistor in Output Pull-Down, Invert/Noninvert	20
Quad Bus Transceiver	54F/74F2645		1(L)	25Ω Resistor in Output Pull-Down	20
Octal Registered Transceiver	29F52	Yes	4(L)		24
Octal Registered Transceiver	29F53	Yes	4(L)	Inverting	24

Multiplexers

Function	Device	Enable Inputs	True Output	Complement Output	Leads
8-Input	54F/74F151A	1(L)	Yes	Yes	16
Dual 4-Input	54F/74F153	2(L)	Yes		16
Quad 2-Input	54F/74F157A	1(L)	Yes		16
Quad 2-Input (Inverting)	54F/74F158A	1(L)		Yes	16
8-Input (TRI-STATE)	54F/74F251A	1(L)	Yes	Yes	16
Dual 4-Input (TRI-STATE)	54F/74F253	2(L)	Yes		16
Quad 2-Input (TRI-STATE)	54F/74F257A	1(L)	Yes		16
Quad 2-Input (TRI-STATE, Inverting)	54F/74F258A	1(L)		Yes	16
4-Input w/Shift (TRI-STATE)	54F/74F350	1(L)	Yes		16
Dual 4-Input	54F/74F352	2(L)		Yes	16
Dual 4-Input (TRI-STATE)	54F/74F353	2(L)		Yes	16
Quad 2-Port Register	54F/74F398		Yes	Yes	20
Quad 2-Port Register	54F/74F399		Yes		16

Decoders/Demultiplexers

Function	Device	Address Inputs	Enable	Output Enable	Outputs	Leads
1-of-8 Decoder/Demultiplexer	54F/74F138	3	2(L) & 1(H)		8(L)	16
Dual 1-of-4 Decoder/Demultiplexer	54F/74F139	2 & 2	1(L) & 1 (L)		4(L) & 4(L)	16
1-of-10 Decoder (TRI-STATE)	54F/74F537	4	1(L) & 1(H)	1(L)	10(H)	20
1-of-8 Decoder (TRI-STATE)	54F/74F538	3	2(L) & 2(H)	2(L)	8(H)	20
Dual 1-of-4 Decoder (TRI-STATE)	54F/74539	2 & 2	1(L) & 1(L)	1(L) & 1(L)	4(H) & 4(H)	20
Octal Decoder/Demultiplexer w/Latches	54F/74F547	3	1(L) & 2(H)		8(L)	20
Octal Decoder/Demultiplexer w/Acknowledge	54F/74F548	3	2(L) & 2(H)		8(L)	20

Adders/Subtractors

Function	Device	Master Reset	Carry Lookahead	Leads
Binary Full Adder w/Fast Carry	54F/74F283		Yes	16
Quad Serial Adder/Subtractor	54F/74F385	Yes		20
4-Bit BCD Adder	54F/74F583		Yes	16

Multipliers

Function	Device	Expandable	Adder/Subtractor	Leads
8-Bit Serial/Parallel Multiplier	54F/74F384	Yes		16
8-Bit Serial/Parallel Multiplier	54F/74F784	Yes	Yes	20

Comparators

Function	Device	Features	Leads
8-Bit Identity Comparator	54F/74F521	Expandable	20
8-Bit Comparator	54F/74F524	Expandable, Registered	20
Register/Counter/Comparator	54F/74F701	Expandable	24

Divider

Function	Device	Features	Leads
16-Stage Programmable Counter/Divider	54F/74F525	Crystal Oscillator	28

ALUs

Function	Device	No. of Bits	Arithmetic Functions	Logic Functions	Features	Leads
Arithmetic Logic Unit	54F/74F181	4	16	16	Carry Generate/ Propagate Outputs	24
Arithmetic Logic Unit	54F/74F381	4	3	3	Carry Generate/ Propagate Outputs	20
Arithmetic Logic Unit	54F/74F382	4	3	3	Ripple Carry Expansion	20
BCD Adder/Subtractor	54F/74F582	4	2		Lookahead & Ripple Carry Expansion	24

ALU Support

Function	Device	No. of Bits	Features	Leads
Carry Lookahead Generator	54F/74F182	4	Carry Lookahead Generator for 4 ALUs	16
4-Bit Shifter (Specialized Multiplexer)	54F/74F350	4	Expandable Shifter	16
ALU/Function Generator	54F/74F881	4 & 4		24

FIFOs

Function	Device	Input	Output	Leads
16 x 4 FIFO Buffer Memory	54F/74F403A	Serial/Parallel	Serial/Parallel	24
FIFO RAM Controller	54F/74F411			20
64 x 4 FIFO Buffer Memory	54F/74F413	Parallel	Serial/Parallel	16
64 x 4 FIFO Buffer Memory	54F/74F433	Serial/Parallel	Serial/Parallel	24

Memories

Function	Device	TRI-STATE Outputs	Leads
16 x 4 RAM	54F/74F189	Yes	16
16 x 4 RAM	54F/74F219	Yes	16
16 x 4 FIFO Buffer Memory	54F/74F403	Yes	24
64 x 4 FIFO Buffer Memory	54F/74F413		16
64 x 4 FIFO Buffer Memory	54F/74F433	Yes	24

Memory Support

Function	Device	Features	Leads
Data Access Register	54F/74F407	TRI-STATE Outputs	24
Register Stack—16 x 4 RAM	54F/74F410	TRI-STATE Output Register	18
FIFO RAM Controller	54F/74F411		40
Parallel Check Bit/Syndrome Bit Generator	54F/74F420	TRI-STATE Outputs	48
32-Bit Error Detection & Correction	54F/74F632	Latched, TRI-STATE Outputs	52
1 Megabit Dynamic RAM Controller	54F/74F968	TRI-STATE Outputs	52
Dynamic RAM Controller	29F68	TRI-STATE Outputs	48

Cyclic Redundancy Checker-Generator

Function	Device	Polynomial Length	Expandable	Leads
Cyclic Redundancy Check Generator/Checker	54F/74F401	16		14
Serial Data Polynomial Generator/Checker	54F/74F402	64	Yes	16

Parity Generator/Checker

Function	Device	Features	Leads
Parity Generator/Checker	54F/74F280	Odd/Even Outputs, 9-Bits In	14
Parallel Check Bit/Syndrome Bit Generator	54F/74F420		48
Octal Bidirectional Transceiver	54/74F657	Parity Generate/Check	24
9-Bit Registered Transceiver	54/74F899	Parity Generate/Check	28

Error Detection and Correction

Function	Device	Leads
32-Bit Error Detection and Correction	54F/74F632	52

Microprocessor Support

Function	Device	Leads
8-Line to 3-Line Priority Encoder	54F/74F148	16

TTL to ECL Translators

Function	Device	Complementary	Latched	Features
Hex TTL-ECL Translator	F100124	Yes		Enable Input
Hex ECL-TTL Translator	F100125	Yes		Common Mode Rejection = +1V
Octal ECL-TTL Transceiver	F100128		Yes	ECL Output Cut-Off State

For further information on TTL to ECL translators, refer to the F100K databook.

Memory Support

Function	Device	Features	Leads
Data Access Register	54HV74F407	TRI-STATE Outputs	24
Register Stack—16 x 4 RAM	54F/74F219	TRI-STATE Output Register	16
FIFO RAM Controller	54F/74F233		40
Parallel Check Bit/Synd rome Bit Generator	54F/74F630	TRI-STATE Outputs	48
32-Bit Error Detection & Correction	54F/74F632	Latched, TRI-STATE Outputs	52
4 Megabit Dynamic RAM Controller	54F/74F636	TRI-STATE Outputs	52
Dynamic RAM Controller	29C95	TRI-STATE Outputs	48

Cyclic Redundancy Checker-Generator

Function	Device	Polynomial Length	Expandable	Leads
Cyclic Redundancy Check Generator/Checker	54F/74F-401	16		14
Serial Data Polynomial Generator/Checker	54F/74F402	8,16	Yes	16

Parity Generator/Checker

Function	Device	Features	Leads
Parity Generator/Checker	54F/74F280	Odd/Even Outputs, 9-Bits in	14
Parallel Check Bit/Synd rome Bit Generator	54F/74F630		48
Octal Bidirectional Transceiver	54F/74F657	Parity Generate/Check	24
9-Bit Registered Transceiver	54F/74F658	Parity Generate/Check	28

Error Detection and Correction

Function	Device	Leads
32-Bit Error Detection and Correction	54F/74F632	52

Microprocessor Support

Function	Device	Leads
8-Line to 3-Line Priority Encoder	54F/74F148	16

TTL to ECL Translators

Function	Device	Complementary	Latched	Features
Hex TTL-ECL Translator	F100124	Yes		Enable Input
Hex ECL-TTL Translator	F100125	Yes		Common Mode Rejection ≥ +1V
Octal ECL-TTL Transceiver	F100129		Yes	ECL Output Cut-Off State

For further information on TTL to ECL translators, refer to the F 100K databook.



Section 1

Circuit Characteristics

Section 1 Contents

FAST Technology 1-3
FAST Circuitry 1-4
Output Characteristics 1-6
Input Characteristics 1-8
TRI-STATE Outputs 1-9
FAST ESD Protection 1-9
Glossary 1-14
AC Switching Parameters 1-14
Logic Symbols & Terminology 1-15

National Semiconductor

Circuit Characteristics


FAST® Technology

FAST (Fairchild Advanced Schottky TTL) circuits are made with the advanced Isoplanar II process, which produces transistors with very high, well-controlled switching speeds, extremely small parasitic capacitances and f_T in excess of 5 GHz. Isoplanar is an established National process, used for years in the manufacture of bipolar memories, CMOS, subnanosecond ECL and I^3L™ (Isoplanar Integrated Injection Logic) LSI devices.

In the isoplanar process, components are isolated by a selectively grown thick oxide rather than the p^+ isolation region used in the planar process. Since this oxide needs no separation from the base-collector regions, component and chip sizes are substantially reduced. The base and emitter ends terminate in the oxide wall; masks can thus overlap the device area into the isolation oxide. This overlap feature eliminates the extremely close tolerances normally required for base and emitter masking, and the standard photolithograhic processes can be used.

Figure 1-1 shows the relative size of phase splitter transistors (Q2 in *Figure 1-3*) used in Schottky, Low Power Schottky and FAST circuits. The LS-TTL transistor is smaller than that of S-TTL because of process refinements, shallower diffusions and smaller operating currents. The relative size of the FAST and FAST LSI transistors illustrate the reduction afforded by the Isoplanar process. This in turn reduces junction capacitances, while the use of oxide isolation reduces sidewall capacitance. The end result of these reductions is an increase in frequency response by a factor of three or more. *Figure 1-2* shows the frequency response of two sizes of transistors made with the Isoplanar II process. Because they have modest, well-defined loads and thus can use smaller, faster transistors, internal gates of MSI devices are faster than SSI gates such as the 'F00 or 'F02. SSI gates, on the other hand, are designed to have high output drive capability and thus use larger transistors.


As is the case with other modern LSI processes, the shallower diffusions and thinner oxides make FAST devices more susceptible to damage from electrostatic discharge than are devices of earlier TTL families. Users should take the usual precautions when handling FAST devices: avoid placing them on non-conductive plastic surfaces or in plastic bags, make sure test equipment and jigs are grounded, individuals should be grounded before handling the devices, etc.

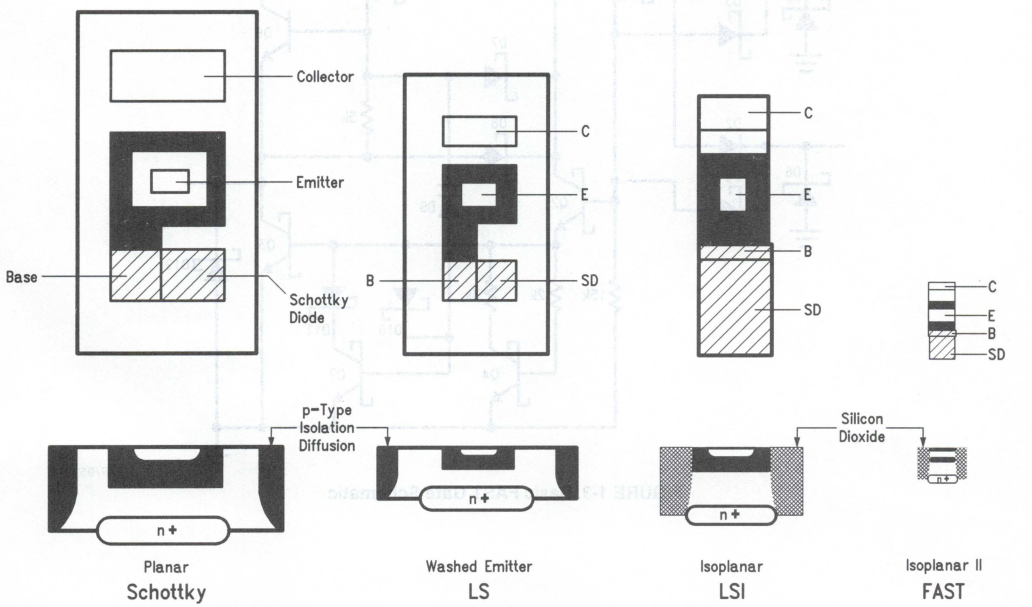

TL/F/9592-1

FIGURE 1-1. Relative Transistor Sizes in Various TTL Families

FAST Technology (Continued)

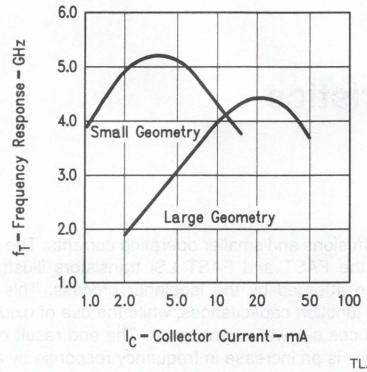


TL/F/9592–2

FIGURE 1-2. Isoplanar Transistor Frequency Response

FAST Circuitry

The 2-input NAND gate, shown in *Figure 1-3*, has three stages of gain (Q1, Q2, Q3) instead of two stages as in other TTL families. This raises the input threshold voltage and increases the output drive. The higher threshold makes it possible to use pn diodes for the input AND function (D1 and D2) and still achieve an input threshold of 1.5V. The capacitance of these diodes is comparatively low, which results in improved AC noise immunity. The effect of the threshold adjustment can be seen in the voltage transfer characteristics of *Figures 1-4, 1-5* and *1-6*. At 25°C *(Figure 1-5)* the FAST circuit threshold is nearly centered between the 0.8V and 2.0V limits specified for TTL circuits. This gives a better balance between the HIGH- and LOW-state noise margins The +125°C characteristics *(Figure 1-6)* show that the FAST circuits threshold is comfortably above the 0.8V specification, more so than in S-TTL or LS-TTL circuits. At −55°C, the FAST circuit threshold is still well below the 2.0V specification, as shown in *Figure 1-4*.

FAST circuits contain several speed-up diodes to help discharge internal capacitances. Referring again to *Figure 1-3*, when a HIGH-to-LOW transition occurs at the D1 input, for example, Schottky diode D3 acts as a low-resistance path to discharge the several parasitic capacitances connected to the base of Q2. This effect only comes into play, however, as the input signal falls below about 1.2V; D3 does not act as an entry path for negative spikes superimposed on a HIGH input level. When Q2 turns ON and its collector voltage falls, D7 provides a discharge path for capacitance at the base of Q6. Whereas D3, D4 and D7 enhance switching speed by helping to discharge internal nodes, D8 contributes to the ability of a FAST circuit to rapidly discharge load capacitance. Part of the charge stored in load capacitance passes through D8 and Q2 to increase the base current of Q3 and increase Q3's current sinking capability during the HIGH-to-LOW output voltage transition.

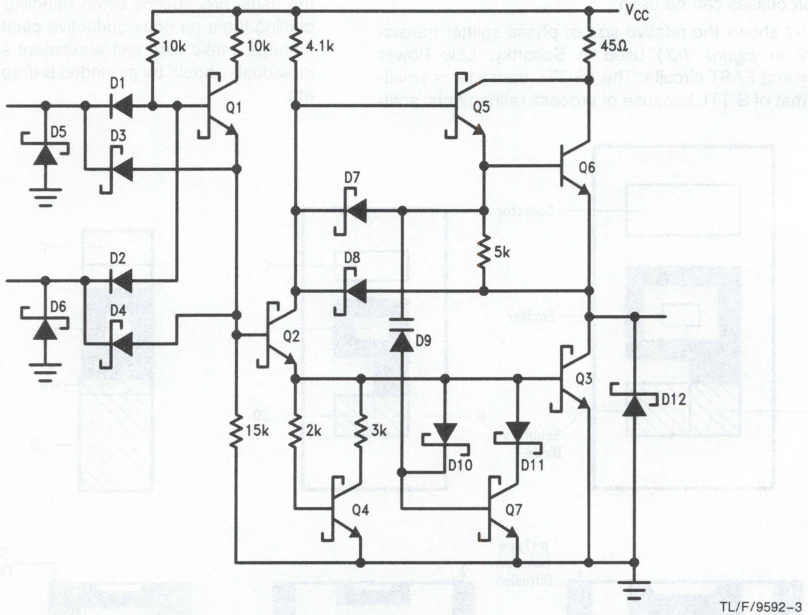


TL/F/9592–3

FIGURE 1-3. Basic FAST Gate Schematic

FAST Circuitry (Continued)

In addition to the 2K-Q4-3K squaring network, which is standard for Schottky-clamped TTL circuits, FAST circuits contain a network D9-D10-D11-Q7 whose purpose is to provide a momentary low impedance at the base of Q3 during an output LOW-to-HIGH transition. The rising voltage at the emitter of Q5 causes displacement current to flow through varactor diode D9 and momentarily turn ON Q7, which in turn pulls down the base of Q3 and absorbs the displacement current that flows through the collector-base capacitance (not shown) of Q3 when the output voltage rises. Without the D9–Q7 network, the displacement current through the collector-base capacitance acts as base current, tending to prolong the turn-off of Q3 and allow current to flow from Q6 to ground through Q3.

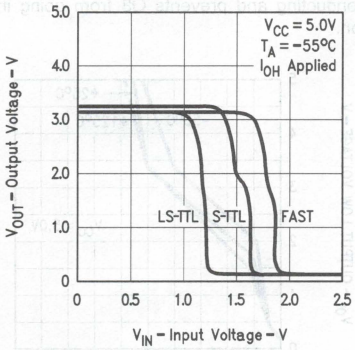


TL/F/9592–4

FIGURE 1-4. Transfer Functions at Low Temperature

The collector-base capacitance of Q3, although small, is effectively multiplied by the voltage gain of Q3. This phenomenon, first identified many years ago with vacuum tube triodes, is called the Miller effect. Thus the D9–Q7 network is familiarly called the 'Miller Killer' circuit and its use improves the output rise time and minimizes power consumption during repetitive switching at high frequencies. Diode D10 completes the discharge path for D9 through D7 when Q2 turns on. D11 limits how low Q7 pulls down the base of Q3 to a level adequate for the intended purpose, without sacrificing turn-on speed when a circuit is cycled rapidly.

Also shown in *Figure 1-3* is a clamp diode, D12, at the output. This diode limits negative voltage excursions due to parasitic coupling in signal lines or transmission line effects.

The Schottky clamping diodes built into the transistors prevent saturation, thereby eliminating storage time as a factor in switching speed. Similarly, the speed-up diodes tend to minimize the impact of other variables on switching speed. The overall effect is to minimize variation in switching speed of FAST circuits with variations in supply voltage and ambient temperature *(Figures 1-7* and *1-8)*. Propagation delay is specified not only under nominal supply voltage and temperature conditions, but also over the recommended operating range of V_{CC} and T_A for both military and commercial grade devices.

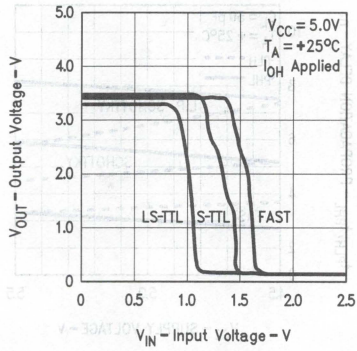


TL/F/9592–5

FIGURE 1-5. Transfer Functions at Room Temperature

The internal switching speed of a logic circuit is only one aspect of the circuit's suitability for high-speed operations at the system or subsystem level; the other aspect is the ability of the circuit to drive load capacitance. FAST circuit outputs are structured to sink at least 20 mA in the LOW state, the same as S-TTL. This capability plus the effect of the aforementioned feedback through D8 assures that the circuit can rapidly discharge capacitance. During a LOW-to-HIGH transition, the pull-up current is limited by the 45Ω resistor, versus 55Ω for S-TTL. Therefore, FAST circuits are inherently more capable than S-TTL of charging load capacitance.

Figure 1-9 shows the effects of load capacitance on propagation delays of FAST, S-TTL and LS-TTL NAND gates. The curves show that FAST gates are not only faster than those of earlier families, but also are less affected by capacitance and exhibit less skew between the LOW-to-HIGH and HIGH-to-LOW delays. These improved characteristics offered by FAST circuits make it easier to predict system performance early in the design phase, before loading details are precisely known. The curves show that the skew between HIGH-to-LOW and LOW-to-HIGH delays for the FAST gate is only about 0.5 ns over a broad range of load capacitance, whereas the skew for the S-TTL gate is 1 ns or greater, depending on loading.

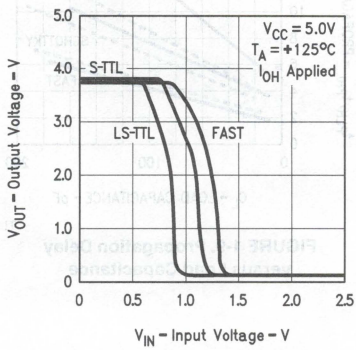

TL/F/9592–6

FIGURE 1-6. Transfer Functions at High Temperature

FAST Circuitry (Continued)

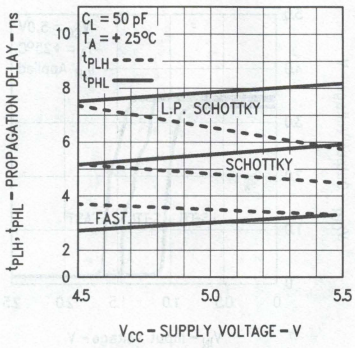


FIGURE 1-7. Propagation Delay versus V_{CC}

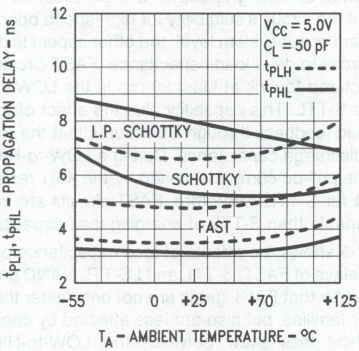


FIGURE 1-8. Propagation Delay versus Temperature

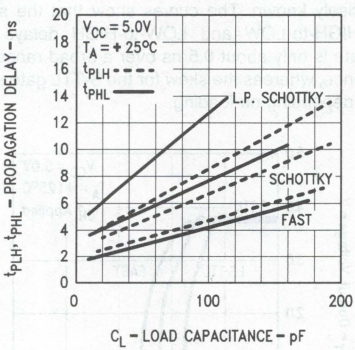


FIGURE 1-9. Propagation Delay versus Load Capacitance

Output Characteristics

Figure 1-10 shows the current-voltage characteristics of a FAST gate with the pull-down transistor Q3 turned ON. These curves illustrate instantaneous conditions in discharging load capacitance during an output HIGH-to-LOW transmission. When the output voltage is at about 3.5V, for example, the circuit can absorb charge from the load capacitance at a 500 mA rate at +25°C. From this level the rate decreases steadily down to about 100 mA at 1.5V. In this region from 3.5V to 1.5V, part of the charge from the load capacitance is fed back through D8 *(Figure 1-3)* and Q2 to provide extra base current for Q3, boosting its current sinking capability and thus reducing the fall time. Below the 1.5V level, Q3 continues to discharge the load capacitance, but without extra base current from D8. At about 0.5V, the integral Schottky clamp diode from base to collector of Q3 starts conducting and prevents Q3 from going into deep saturation.

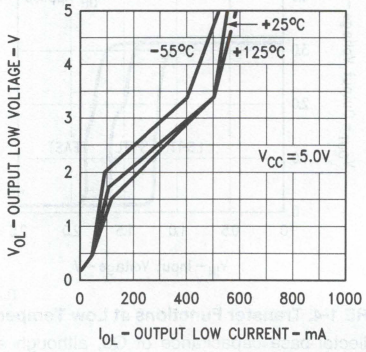


FIGURE 1-10. Output LOW Characteristics— 'F00


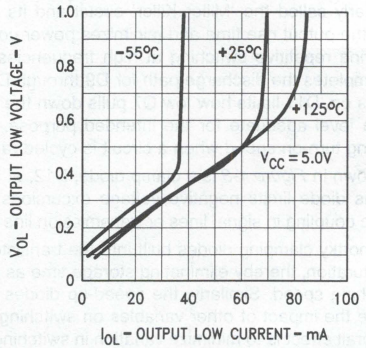


FIGURE 1-11. Output LOW Characteristics— 'F00


Output Characteristics (Continued)

On a greatly expanded scale, the output LOW characteristics of a gate are shown in *Figure 1-11*. With no load, the output voltage is about 0.1V, increasing with current on a slope of about 7.5Ω. When the load current increases beyond the current-sinking capability of Q3, the output voltage rises steeply. It can be seen that the worst-case specification of 0.5V max at 20 mA load is easily met. Similar characteristics for a buffer shown in *Figure 1-12*, over a broader current range. The curves are well below the output LOW voltage specification of 0.55V max at 48 mA over the military temperature range or 64 mA over the commercial temperature range.

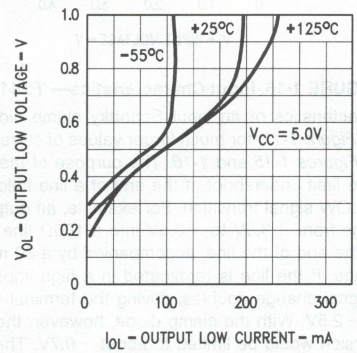

TL/F/9592–12

FIGURE 1-12. Output LOW Characteristics— 'F244

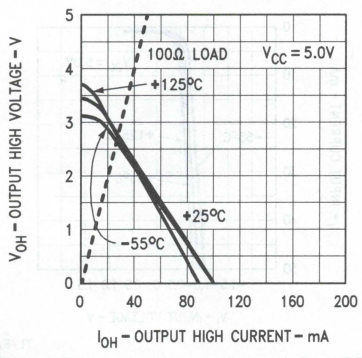


TL/F/9592–13

FIGURE 1-13. Output HIGH Characteristics— 'F00

The output HIGH characteristics of a FAST gate are shown in *Figure 1-13*. At low values of output current the voltage is approximately 3.5V. This value is just the supply voltage minus the combined base-emitter voltages of the Darlington pull-up transistors Q5 and Q6 *(Figure 1-3)*. For load currents above 16 mA or 18 mA, the voltage drop across the 45Ω Darlington collector resistor becomes appreciable and the Darlington saturates. For greater load currents the output voltage decreases with a slope of about 50Ω, which is largely due to the 45Ω resistor. The value of current where a characteristic intersects the horizontal axis is the short-circuit output current I_{OS}. This is guaranteed to be at least 60 mA for a FAST gate, compared to 40 mA for S-TTL. This parameter is an important indicator of the ability of an output to charge load capacitance. Thus the FAST specifications insure that an output can charge load capacitance faster, or force a higher LOW-to-HIGH voltage step into the dynamic impedance of a long interconnection.

The output HIGH characteristics of a buffer are shown in *Figure 1-14*. These are similar in shape to *Figure 1-13* but at higher levels of current. The output HIGH voltage of a buffer is guaranteed at two different levels of load current. With a 3 mA load, V_{OH} is guaranteed to be at least 2.4V for both military and commercial devices. V_{OH} is also guaranteed to be at least 2.0V with a 12 mA load for military or 15 mA load for commercial devices. In addition, the short-circuit output current of a buffer is guaranteed to be at least 100 mA.

When an output is driving a long interconnection, the initial LOW-to-HIGH transition is somewhat less than the final, quiescent HIGH level because of the loading effect of the line impedance. The full HIGH voltage level is only reached after the reflection from the far end of the line returns to the driver. The initial LOW-to-HIGH voltage step that an output can force into a line is determined by drawing a load line on the graph containing the output HIGH characteristic and noting the voltage value where the load line intersects the characteristic. For example, if a FAST gate is driving a 100Ω line, a straight line from the lower left origin up to the point 5V, 50 mA intersects the −55°C characteristic curve at about 2.8V. This indicates that the gate output voltage will rise to 2.8V initially, and the 2.8V signal, accompanied by 28 mA of current, will travel to the end of the line. If not terminated, the 28 mA is forced to return to the driver, whereupon it unloads the driver and the output voltage rises to the maximum value. Similarly, a 50Ω load line drawn on the buffer characteristic shows an intercept voltage of 2.5V. In both cases, the initial voltage step is great enough to pass through the switching region of any inputs that might be located near the driver end of the lline, and thus would not exhibit any exaggerated propagation delay due to the loading effect of the line impedance on the driver output. Thus the FAST output characteristics insure better system performance under adverse loading conditions.

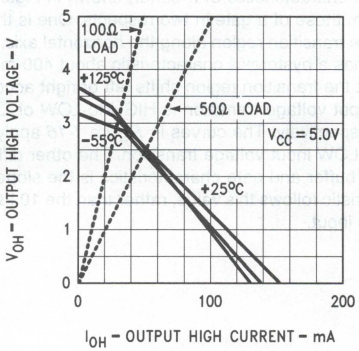


TL/F/9592–14

FIGURE 1-14. Output HIGH Characteristics— 'F244

Input Characteristics

The input of a FAST circuit represents a small capacitance, typically 4 pF to 5 pF, in parallel with an I-V characteristic that exhibits different slopes over different ranges of input voltage. *Figure 1-15* shows the input characteristic of a FAST gate at three temperatures. In the upper right, the flat horizontal portion is the $V_{IH}-I_{IH}$ characteristic. In this region, all of the current from the 10 kΩ input resistor *(Figure 1-3)* is flowing into the base of Q1 and the only current flowing in the input diode is the leakage current I_{IH}. When the input voltage decreases to about 1.7V (+25°C), current starts to flow out of the input diode and the curve shows a knee. At this point some of the current from the 10 kΩ resistor is diverted from the base of Q1. When the input voltage declines to about 1.4V the curve shows another knee; at this point, substantially all of the current from the 10 kΩ resistor flows out of the input diode. The portion of the curve between 1.4V and 1.7V input voltage is the active region, essentially corresponding to the FAST transfer function in *Figure 1-5*.

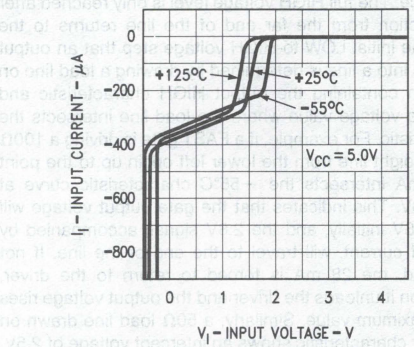


TL/F/9592–15

FIGURE 1-15. Input Characteristics— 'F00

Below 1.4V input, the characteristic has the slope of the 10 kΩ input resistor. When the input voltage declines to about −0.3V, the Schottky clamping diode starts conducting and the current increases rapidly as the input voltage decreases further.


The input characteristics of a buffer, shown in *Figure 1-16*, differ from those of a gate in two respects. One is the location of the transition region along the horizontal axis. A buffer input has a hysteresis characteristic about 400 mV wide, such that the transition region shifts left or right accordingly as the input voltage transition is HIGH-to-LOW or LOW-to-HIGH, respectively. The curves in *Figure 1-16* apply to the HIGH-to-LOW input voltage transition. The other difference between buffer and gate characteristics is the slope of the characteristic follows this value, rather than the 10 kΩ slope of a gate input.

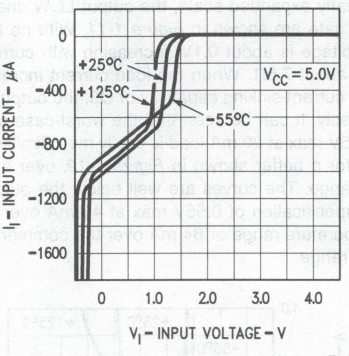

TL/F/9592–16


FIGURE 1-16. Input Characteristics— 'F244

The characteristics of an input Schottky clamp diode are shown in *Figure 1-17*, for much larger values of current than those of *Figures 1-15* and *1-16*. The purpose of the clamp diode is to limit undershoot at the end of a line following a HIGH-to-LOW signal transition. For example, an output signal change from +3.5V to +0.5V into a 100Ω line propagates to the end of the line, accompanied by a 30 mA current change. If the line is terminated in a high impedance the 3V signal change doubles, driving the terminal voltage down to −2.5V. With the clamp diode, however, the negative excursion would be limited to about −0.7V. The same HIGH-to-LOW signal change on a 50Ω line would be clamped at about −1.0V. *Figure 1-18* shows the typical breakdown characteristics for a FAST input.



TL/F/9592–17

FIGURE 1-17. Input Characteristics— 'F00 or 'F244



TL/F/9592–18

FIGURE 1-18. Input Characteristics— 'F00 or 'F244

TRI-STATE® Outputs

A partial schematic of a circuit having a TRI-STATE output is shown in *Figure 1-19*. When the internal Output Enable (OE) signal is HIGH, the circuit operates in the normal fashion to provide HIGH or LOW output drive characteristics. When OE is LOW, however, the bases of Q1, Q2 and Q5 are pulled down. In this condition the output is a high impedance. In this High Z condition, the output leakage is guaranteed not to exceed 50 μA. In the case of a transceiver, each data pin is an input as well as an output and the leakage specification is increased to 70 μA. In the High Z state, output capacitance averages about 5 pF for a 20 mA output and about 12 pF for a 64 mA output.

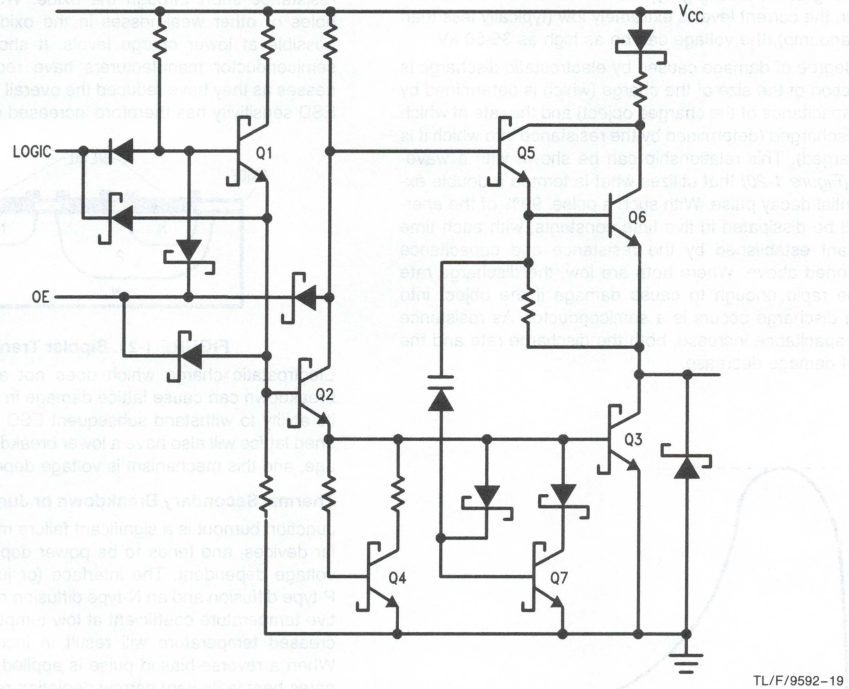


FIGURE 1-19. Typical TRI-STATE Input Control

FAST ESD Protection

INTRODUCTION

The study of ESD failures began in earnest back when system designers, faced with very expensive assembly and post-assembly rework, began investigating system failures in great detail. In the course of their study, they checked all the records to determine which devices has passed earlier testing, but had failed once in the system. The data clearly indicated that something in the handling process resulted in higher attrition rates among the devices. Reliability physicists examined the failed devices in minute detail, in some cases subjecting them to examination under high powered scanning electron microscopes.

The problem was found to be one of electrical overstress, and further investigation determined that the cause of the overstress was a phenomenon called electrostatic discharge (or ESD).


EXPLANATION OF HOW ESD OCCURS

The concept of electrostatic discharge is easily understood. Electrostatic energy is static electricity, a stationary charge which can build up in either a nonconductive material or in an ungrounded conductive material. This charge can occur in one of two ways, either through polarization, which occurs when a conductive material is exposed to a magnetic field, or triboelectric effects, which occur when two surfaces contact and then separate, leaving one positively charged and one negatively charged. Friction between two materials increases triboelectric charge by increasing the surface area that comes in contact. A good example of this phenomenon would be the charge one accumulates walking across a nylon carpet. The discharge occurs when one reaches for a doorknob or other conductive surface. The types of ESD with which we will be concerned fall into the category of triboelectric effects. Within this category, various materials have differing potentials for charge. Asbestos, nylon, human and animal hair and wool have a high positive triboelectric potential. Silicon has one of the highest negative triboelectric potentials, followed by such materials as polyurethane, polyester and rayon. Cotton, wood, steel and paper all tend to be relatively neutral, which makes cotton clothing and steel table tops excellent ESD protective materials in environments where ESD problems can be anticipated.

FAST ESD Protection (Continued)

The intensity of the charge is inversely proportional to the relative humidity. As humidity decreases, ESD problems increase. For example, walking across a carpet will generate a 1.5 kV charge at 90%RH, but will generate 35 kV at 10%RH. When an object storing a static charge comes in contact with another object, the charge will attempt to find a path to ground, discharging into the contacted object. Although the current level is extremely low (typically less than 0.1 nanoamp), the voltage can be as high as 35-50 kV.

The degree of damage caused by electrostatic discharge is a function of the size of the charge (which is determined by the capacitance of the charged object) and the rate at which it is discharged (determined by the resistance into which it is discharged). This relationship can be shown with a waveform *(Figure 1-20)* that utilizes what is termed a double exponential decay pulse. With such a pulse, 99% of the energy will be dissipated in five time constants, with each time constant established by the resistance and capacitance mentioned above. Where both are low, the discharge rate will be rapid enough to cause damage if the object into which discharge occurs is a semiconductor. As resistance and capacitance increase, both the discharge rate and the risk of damage decrease.

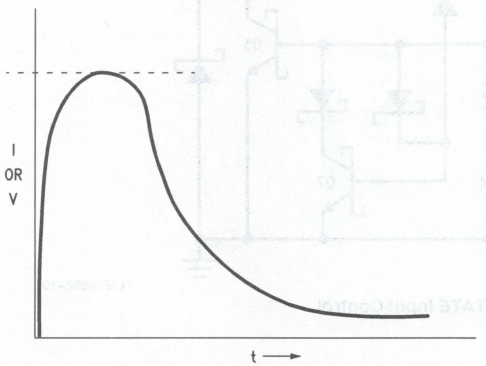

TL/F/9592–31

FIGURE 1-20. Ideal RC Waveform


It is estimated that the value of devices lost to ESD could run as high as $1 billion per year. Most electrostatic damage is caused by the handling of devices by personnel who have not taken adequate precautions. One would expect this in light of the fact that the capacitance of the human body ranges from 50 to 200 pF. The ESD characteristics of work surfaces and of materials passing through the area should not be ignored, however, in an attempt to concentrate on the human effect.

TYPES OF ESD DAMAGE

The damage caused by ESD results from the charge's tendency to seek the shortest path to ground, overstressing any electrical interfaces in that path. There are several different types of damage that result, and each of these tends to be typical of specific component technologies and elements.

Dielectric Breakdown

Dielectric breakdown occurs when the voltage across an oxide exceeds its dielectric breakdown strength. The single most important factor in this breakdown is the oxide thickness *(Figure 1-21)*. Thinner oxide is more susceptible to electrostatic punch-through, which leaves a permanent low-resistance short through the oxide. Where there are pin holes or other weaknesses in the oxide, damage will be possible at lower charge levels. It should be noted that semiconductor manufacturers have reduced oxide thicknesses as they have reduced the overall size of the devices. ESD sensitivity has therefore increased dramatically.

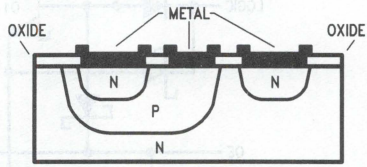

TL/F/9592-32

FIGURE 1-21. Bipolar Transistor

Electrostatic charge which does not actually result in a breakdown can cause lattice damage in the oxide, lowering its ability to withstand subsequent ESD exposure. A weakened lattice will also have a lower breakdown threshold voltage, and this mechanism is voltage dependent.

Thermal Secondary Breakdown or Junction Burnout

Junction burnout is a significant failure mechanism for bipolar devices, and tends to be power dependent rather than voltage dependent. The interface (or junction) between a P-type diffusion and an N-type diffusion normally has a positive temperature coefficient at low temperatures (that is, increased temperature will result in increased resistance). When a reverse-biased pulse is applied, the junction dissipates heat in its very narrow depletion region, and the temperature increases rapidly. If enough energy is applied, the temperature of the junction will reach a point at which the temperature coefficient of the silicon will turn negative (that is, at which increased temperature will result in **decreased** resistance). Since the area of the junction is not uniform, hot spots occur. When the melting temperature of silicon (1415°C) is reached as a result of the ensuing thermal runaway condition, junction melting occurs in the localized area. If there is an additional energy available after the initiation of melt, the hot spot can grow into a filament short. The longer the pulse, the wider the resultant filament short.

After the occurrence of the transient, the silicon will resolidify. In a relatively short pulse, a hot spot may form, but not grow completely across the junction. As a result, the damage may not manifest itself immediately as a junction short but will appear at a later time as a result of electromigration. Shrinking geometries will decrease junction areas, and this should increase the susceptibility of these devices to ESD related junction problems.

FAST ESD Protection (Continued)

Metallization Melt

Semiconductor interconnect metallization typically has a small cross-sectional area and limited current carrying capability. As feature sizes continue to be reduced, metallization cross-section will be reduced as well. Reducing metallization line width by half and metallization thickness by half reduces the current carrying capability of that metallization stripe by 75%. Metallization melt, which is a power-dependent failure mechanism, is more likely to occur during short duration, high current pulses, since the only available heat sink (the bonding pad) is nearby and the heat dissipated in the metallization does not have time to flow into the surrounding areas. It can also occur as a side effect during junction melt.

Latent Failures

Immediate failure resulting from ESD exposure is easily determined: the device no longer works. A failed device may be removed from the lot or from the subassembly in which it is installed, and it represents no further reliability risk to the system. There are, however, devices which have been exposed to ESD but which have not immediately failed. Unfortunately, there has never been sufficient data dealing with the long-term reliability of devices which have survived ESD exposure, although some experts feel that two to five devices are degraded for every one that fails. It should be obvious from an examination of the failure mechanisms described above that there can be significant degradation without immediate failure. Damage can manifest itself in either a shortening of the device's lifetime (a possible cause for many of the infant mortality failures seen during burn-in) or in electrical performance shifts, many of which cause the device to fail electrical test limits.

ESD PROTECTIVE MEASURES


It should be obvious then that there are three principal considerations when dealing with ESD. The first is that the device should be designed in a manner that minimizes ESD sensitivity and incorporates some ESD protective features. The second is that both manufacturers and users must understand the ESD susceptibility of the devices with which they are dealing. Thirdly, both user and manufacturer must understand the generation of and sources of ESD charges well enough to establish proper precautions throughout their plants.

Fast Dual-Rail ESD Protection

The continuing development of faster and more complex IC's makes it unlikely that we will see a return to thicker oxide layers and larger junctions. Early IC's used fairly simple clamping diodes on the inputs to protect them against voltage transients in the system. Similar, but more comprehensive protective networks can be employed to provide ESD protection. *Figure 1-22* shows National's FAST proprietary dual-rail ESD protection circuitry. These structures are included on most of the high volume FAST products and are now standard on all new FAST designs and redesigns. (See individual product specifications for identification of parts with enhanced ESD protection.) By its design, this form of ESD control limits product vulnerability to both positive and negative ESD/EOS voltages by protecting inputs and outpus to V_{CC} as well as ground.

Protection to ground is provided through transistor Q2 on the input and diode D2 on the output. On the input, the unique design and layout of the Schottky device insures a minimum turn-on voltage as well as maximum current carrying capability. For the output the standard Schottky clamp diode provides the protection. Q1 and Q3, through use of a BVCEO breakdown mechanism, protects the path to V_{CC}. Diode D1 and D3 insure isolation of the input or output from V_{CC} leakages. Again, these devices have been designed and laid-out to insure dependable turn-on characteristics as well as robustness.

Dual-rail ESD protection has provided FAST parts with protection levels exceeding 4000V. In fact, as measured through use of the MIL-STD-883 techniques described below, FAST ESD protection has averaged in excess of 8000V. Best of all, this protection has been achieved with no appreciable effect on speed or significant increase in input capacitance.

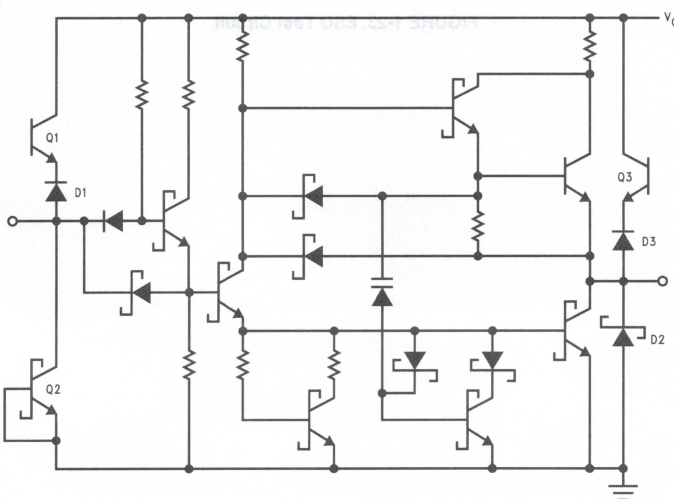

TL/F/9592–33

FIGURE 1-22. FAST ESD Circuitry

FAST ESD Protection (Continued)

Assessing ESD Tolerance Levels

As awareness of the importance of addressing ESD concerns spread, many experts felt that ESD testing had to be uniform if results were to be shared. Method 3015 of MIL-STD-883 was created for the purpose of allowing manufacturers to assess the ESD tolerance levels of the devices they offered and to allow users to determine the ESD sensitivity of the parts with which they were assembling systems. Method 3015 has established a test circuit (see *Figure 1-23*) which approximates the resistance and capacitance found in the human body (which continues to provide the major source of destructive ESD). The testing is performed by charging the capacitor in the test circuit and then discharging that capacitor into the unit under test. After testing, a device will be classified as either Class 1, those devices which exhibit ESD-induced failure or degradation at levels between zero volts and 1,999V; or Class 2, those which may exhibit ESD sensitivity at levels between 2,000V and 3,999V; or Class 3, those devices which may exhibit ESD sensitivity at levels above 4,000V but have passed all testing up to that level. This testing is performed on a sample basis at initial device qualification and need not be repeated unless the device is redesigned. The testing is considered destructive, even for those devices which do not fail.


A device may be characterized as Class 1 in lieu of testing at a manufacturer's discretion. Some manufacturers, concerned with the possibility of latent damage due to inadequate protection of devices which test as Class 2, and concerned that static charges resulting from handling can run as high as 50 kV, have elected to treat all of their devices as Class 1, thus ensuring that consistent implementation of common handling procedures will provide maximum protection for all devices.

Data generated by an RADC study of electrostatic discharge susceptibility (VZAP-1, Spring 1983) would seem to support that kind of a conservative approach. The data (see *Figure 1-24*) shows the point at which failure first occurred for a given device. It indicates that there are a number of devices which can be expected to fail between 2 kV and 5 kV, but few that will survive beyond 10 kV.

Those devices which are classified as Class 1 must be marked with one equilateral triangle, and those classified as Class 2 must be marked with two equilateral triangles to identify them as static sensitive. (Class 3 devices will have no top mark designator.)

TABLE I. Device ESD Failure Threshold Classification


MIL Class	ESD Tolerance	Top Mark Designation
Class 1	0V to 1,999V	One triangle (i.e., ▲)
Class 2	2,000V to 3,995V	Two triangles (i.e., ▲▲)
Class 3	4,000V and above	No mark

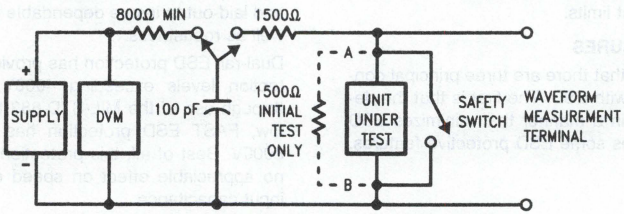

TL/F/9592–34

FIGURE 1-23. ESD Test Circuit

FAST ESD Protection (Continued)

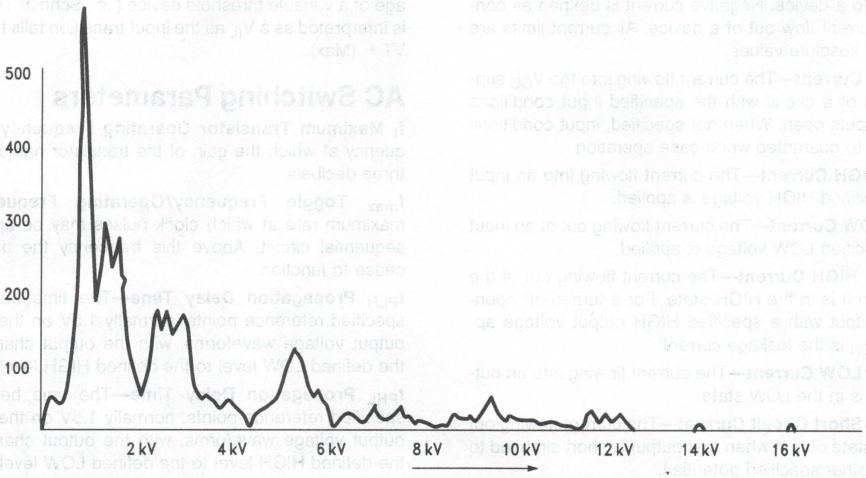

TL/F/9592–35

FIGURE 1-24. Failure Rate at Ascending ESD Voltages

ESD Precautionary Measures

ESD protective measures fall into two categories: those which shield the device from ESD and those which control the occurrence of ESD. ESD shielding can be accomplished by either grounding all of the device leads together, thus providing a more direct path to ground, or by surrounding the device with insulating material that would keep ESD from reaching the device. The first method is most practical during device assembly and environmental test, the second during shipment and storage. However, neither can be utilized during electrical testing.

Most of the handling of ICs, however, occurs during electrical testing. Testing cannot be performed if the device's leads are shorted together, nor can it take place if the device is within an insulated container. Control of ESD during testing is therefore extremely important. This is accomplished through the grounding of all potential sources of ESD. Stainless steel work surfaces connected to ground through an appropriate resistive element provide a harmless bleed-off of any charge that occurs. Requiring that all personnel who handle devices wear ground straps can effectively eliminate the human body and its clothing as sources of ESD. It is also important to minimize the handling of devices. This can be partially accomplished through the use of automated test handlers, which allow the devices to be loaded into the testers from ESD-protective rails and returned to those rails from the tester. Equally important is the elimination of any unnecessary testing or test insertions. Semiconductor manufacturers have decreased the number of test insertions for many devices by combining parametric, functional and switching tests onto a single insertion test program. Users have minimized handling by relying more heavily on the testing performed by their vendors and by eliminating incoming testing. Pick-and-place systems and other automated board assembly hardware have also helped to minimize device handling. Most systems manufacturers have also implemented procedures that minimize the handling of boards and subassemblies in order to ensure that devices receive no potentially damaging exposure to ESD after board assembly.

Effective control of ESD, however, cannot be accomplished unless the entire work area is designed around ESD concerns. This level of attention to detail is essential to the minimization of ESD problems.

SUMMARY

Electrostatic discharge will continue to be a major concern for those who use semiconductor devices. As device geometries continue to shrink, the ESD sensitivity of devices will increase. Only through proper handling and packaging, and through proper attention to ESD concerns will we be able to ensure that long term reliability of key systems is not negatively affected by ESD problems.

Glossary

Currents—Positive current is defined as conventional current flow into a device. Negative current is defined as conventional current flow out of a device. All current limits are specifed as absolute values.

I_{CC} Supply Current—The current flowing into the V_{CC} supply terminal of a circuit with the specified input conditions and the outputs open. When not specified, input conditions are chosen to guarantee worst-case operation.

I_{IH} Input HIGH Current—The current flowing into an input when a specified HIGH voltage is applied.

I_{IL} Input LOW Current—The current flowing out of an input when a specified LOW voltage is applied.

I_{OH} Output HIGH Current—The current flowing out of the output when it is in the HIGH state. For a turned-off open-collector output with a specified HIGH output voltage applied, the I_{OH} is the leakage current.

I_{OL} Output LOW Current—The current flowing into an output when it is in the LOW state.

I_{OS} Output Short Circuit Current—The current flowing out of a HIGH-state output when that output is short circuited to ground (or other specified potential).

I_{OZH} Output OFF Current HIGH—The current flowing into a disabled TRI-STATE output with a specified HIGH output voltage applied.

I_{OZL} Output OFF Current LOW—The current flowing out of a disabled TRI-STATE output with a specified LOW output voltage applied.

Voltages—All voltages are referenced to the ground pin. Negative voltage limits are specified as absolute values (i.e., $-10.0V$ is greater than $-1.0V$).

V_{CC} Supply Voltage—The range of power supply voltage over which the device is guaranteed to operate within the specified limits.

V_{CD} (Max) Input Clamp Diode Voltage—The most negative voltage at an input when a specified current is forced out of that input terminal. This parameter guarantees the integrity of the input diode, intended to clamp negative ringing at the input terminal.

V_{IH} Input HIGH Voltage—The range of input voltages that represents a logic HIGH in the system.

V_{IH} (Min) Minimum Input HIGH Voltage—The minimum allowed input HIGH in a logic system. This value represents the guaranteed input HIGH threshold for the device.

V_{IL} Input LOW Voltage—The range of input voltages that represent a logic LOW in the system

V_{IL} (Max) Maximum Input LOW Voltage—The maximum allowed input LOW in a system. This value represents the guaranteed input LOW threshold for the device.

V_{OH} (Min) Output HIGH Voltage—The minimum voltage at an output terminal for the specified output current I_{OH} and at the minimum value of V_{CC}.

V_{OL} (Max) Output LOW Voltage—The maximum voltage at an output terminal sinking the maximum specified load current I_{OL}.

VT+ Positive-Going Threshold Voltage—The input voltage of a variable threshold device (i.e., Schmitt Trigger) that is interpreted as a V_{IH} as the input transition rises from below VT− (Min).

VT− Negative-Going Threshold Voltage—The input voltage of a variable threshold device (i.e., Schmitt Trigger) that is interpreted as a V_{IL} as the input transition falls from above VT+ (Max).

AC Switching Parameters

f_t Maximum Transistor Operating Frequency—The frequency at which the gain of the transistor has dropped by three decibels.

f_{max} Toggle Frequency/Operating Frequency—The maximum rate at which clock pulses may be applied to a sequential circuit. Above this frequency the device may cease to function.

t_{PLH} Propagation Delay Time—The time between the specified reference points, normally 1.5V on the input and output voltage waveforms, with the output changing from the defined LOW level to the defined HIGH level.

t_{PHL} Propagation Delay Time—The time between the specified reference points, normally 1.5V on the input and output voltage waveforms, with the output changing from the defined HIGH level to the defined LOW level.

t_w Pulse Width—The time between 1.5V amplitude points on the leading and trailing edges of a pulse.

t_h Hold Time—The interval immediately following the active transition of the timing pulse (usually the clock pulse) of following the transition of the control input to its latching level, during which interval the data to be recognized must be maintained at the input to ensure its continued recognition. A negative hold time indicates that the correct logic level may be released prior to the active transition of the timing pulse and still be recognized.

t_s Setup Time—The interval immediately preceding the active transition of the timing pulse (usually the clock pulse) or preceding the transition of the control input to its latching level, during which interval the data to be recognized must be maintained at the input to ensure its recognition. A negative setup time indicates that the correct logic level may be initiated sometime after the active transition of the timing pulse and still be recognized.

t_{PHZ} Output Disable Time (of a TRI-STATE Output) from HIGH Level—The time between the 1.5V level on the input and a voltage 0.3V below the steady state output HIGH level with the TRI-STATE output changing from the defined HIGH level to a high impedance (OFF) state.

t_{PLZ} Output Disable Time (of a TRI-STATE Output) from LOW Level—The time between the 1.5V level on the input and a voltage 0.3V above the steady state output LOW level with the TRI-STATE output changing from the defined LOW level to a high impedance (OFF) state.

t_{PZH} Output Enable Time (of a TRI-STATE Output) to a HIGH Level—The time between the 1.5V levels of the input and output voltage waveforms with the TRI-STATE output changing from a high impedance (OFF) state to a HIGH level.

t_{PZL} Output Enable Time (of a TRI-STATE Output) to a LOW Level—The time between the 1.5V levels of the input and output voltage waveforms with the TRI-STATE output changing from a high impedance (OFF) state to a LOW level.

t_{rec} Recovery Time—The time between the 1.5V level on the trailing edge of an asynchronous input control pulse and the same level on a synchronous input (clock) pulse such that the device will respond to the synchronous input.





Logic Symbols and Terminology

The definitions of LOW and HIGH logic levels are: LOW- a voltage defined by V_{IL}; HIGH- a voltage defined by V_{IH}. A LOW condition represents logic '0'; a HIGH condition, logic '1'.

The logic symbols used to represent the FAST devices follow MIL-STD-806B for logic symbols. Elements are represented by rectangular blocks with appropriate external AND/OR gates when necessary. A small circle at an external input means that the specific input is active-LOW; (it produces the desired function, in conjunction with other inputs, if its voltage is the lower of the two logic levels in the system). A circle at the output indicates that when the function designated is true, the output is LOW. Generally, inputs are at the top and left and outputs appear at the bottom and right of the logic symbol. An exception is the asynchronous Master Reset in some sequential circuits which is always at the left hand bottom corner.






Inputs and outputs are labeled with mnemonic letters as illustrated in Table 1-1. Note that an active LOW function labeled outside of the logic symbol is given a bar over the label, while the same function inside the symbol is labeled without the bar. When several inputs or outputs use the same letter, subscript numbers starting with zero are used in an order natural for device operation.

TABLE 1-1

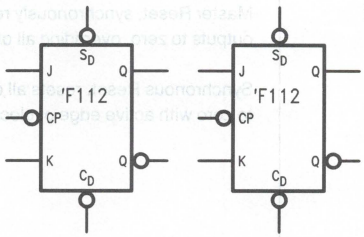Label	Meaning	Example
I_X	General term for inputs to combinatorial circuits.	 TL/F/9592–20
J, K S, R D	Inputs to JK, SR and D flip-flops and latches.	 TL/F/9592–21
A_X, S_X	Address or Select inputs, used to select an input, output, data route, junction, or memory location.	 TL/F/9592–22
LE	Enable, active LOW on all TTL/MSI. A latch can receive new data when its Enable input is in the active state.	 TL/F/9592–23



Logic Symbols and Terminology (Continued)

TABLE 1-1 (Continued)

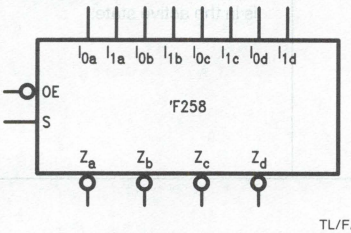Label	Meaning	Example
$\overline{PE}$	Parallel Enable, a control input used to synchronously load information in parallel into an otherwise autonomous circuit.	
P	Parallel data inputs to shift registers and counters.	TL/F/9592–24
$\overline{PL}$	Parallel Load; similar to Parallel Enable except that $\overline{PL}$ overrides the clock and forces parallel loading asynchronously.	
		TL/F/9592–25
$\overline{MR}$	Master Reset, synchronously resets all outputs to zero, overriding all other inputs.	*R = $\overline{MR}$ on 'F160A/'F161A $\overline{SR}$ on 'F162A/'F163A
$\overline{SR}$	Synchronous Reset, resets all outputs to zero with active edge of clock.	
		TL/F/9592–26
CP	Clock Pulse, genrally a HIGH-to-LOW-to-HIGH transition. An active HIGH clock (no circle) means outputs change on LOW-to-HIGH clock transition	
CE, CEP, CET	Clock Enable inputs for counters.	TL/F/9592–27
Z_X, O_X, F_X	General terms for outputs of combinatorial circuits	
		TL/F/9592–28

Logic Symbols and Terminology (Continued)

TABLE 1-1 (Continued)

Label	Meaning	Example
Q_X	General term for latch and flip-flop outputs. If they pass through an enable gate before exiting the package, Q or $\overline{Q}$ changes to O or $\overline{O}$.	
TC	Terminal Count output (1111 for up binary counters, 1001 for up decimal counters, or 0000 for down counters).	 TL/F/9592–29
$\overline{OE}$	Output Enable, used to force TRI-STATE outputs into the high impedance state.	 TL/F/9592–30

This nomenclature is used throughout this book and may differ from nomenclature used on other data books, where outputs use alphabetic subscripts or use number sequences starting with one.

Handling Precautions for Semiconductor Components

The following standard handling precautions should be observed for oxide isolation, shallow junction processed parts, such as FAST or 100k ECL:

1. All National devices are shipped in conducting foam or antistatic tubes. When they are removed for inspection or assembly, proper precautions should be used.
2. National devices, after removal from their shipping material, should be placed leads down on a grounded surface. Under no circumstances should they be placed in polystyrene foam or non-conducting plastic trays used for shipment and handling of conventional ICs.
3. Individuals and tools should be grounded before coming in contact with these devices.
4. Do not insert or remove devices in sockets with power applied. Ensure that power supply transients, such as occur during power turn-on or off, do not exceed maximum ratings.
5. After assembly on PC boards, ensure that static discharge cannot occur during handling, storage or maintenance. Boards may be stored with their connectors surrounded with conductive foam.

Logic Symbols and Terminology (Continued)

TABLE 1-1 (Continued)

Label	Meaning	Example
Qx	General term for latch and flip-flop outputs. If they pass through an enable gate before exiting the package, Q or $\overline{Q}$ changes to Q or $\overline{Q}$.	
TC	Terminal Count output (1111 for up binary counters, 1001 for up decimal counters, 0000 for down counters).	
$\overline{OE}$	Output Enable, used to force TRI-STATE outputs into the high impedance state.	



Section 2

Ratings, Specifications, and Waveforms

Section 2 Contents

Unit Loads 2-3
AC Loading and Waveforms 2-4
Absolute Maximum Ratings 2-6
Recommended Operating Conditions 2-6
Family DC Electrical Characteristics 2-6

National Semiconductor

Ratings, Specifications and Waveforms

For convenience in system design, the input loading and fan-out characteristics of each circuit are specified in terms of unit loads.

One unit load in the HIGH state is defined as 20 μA; thus both the input HIGH leakage current, I_{IH}, and the output HIGH current-sourcing capability, I_{OH}, are normalized to 20 μA. The specified I_{IH} for a typical FAST® single load input is 20 μA or 1.0 U.L. The I_{OH} rating for a FAST output depends upon whether the device has a standard or TRI-STATE® output or if the device is a buffer/line driver. The I_{OH} rating for a standard FAST device is 1.0 mA or 50 U.L., while TRI-STATE is 3.0 mA or 150 U.L. and line driver/buffers specify I_{OH} of 12.0 mA or 600 U.L.

Similarly, one unit load in the LOW state is defined as 0.6 mA and both the input LOW current, I_{IL}, and the output LOW current-sinking capability, I_{OL}, are normalized to 0.6 mA. The specified maximum I_{IL} for a typical FAST single load input is 0.6 mA or 1.0 U.L. However, the I_{OL} rating differs among standard, TRI-STATE and buffer/line driver outputs. The I_{OL} rating for a standard output is 20 mA or 33.3 U.L. FAST devices with TRI-STATE outputs specify I_{OL} at 24 mA or 40 U.L. for commercial temperature range and 20 mA or 33.3 U.L. for military temperature range. The I_{OH} rating for a FAST buffer/line driver output is 64 mA or 106.6 U.L. for the commercial temperature range and 48 mA or 80 U.L. over the military temperature range.

On the data sheets the input and output load factors are listed in the Input Loading/Fan-Out table. The tables from the 54F/74F373 Transparent Latch and the 29F52 Registered Transceiver are reproduced below.

In the second column from the right, the 54F/74F373 input HIGH/LOW load factors are 1.0/1.0 with the first number representing I_{IH} and the second representing I_{IL}. The 29F52 has input HIGH/LOW load factors of 1.0/1.0 for the typical FAST single load inputs and 3.5/1.083 for the register inputs. For testing procurement purposes, these unit load specifications can easily be translated into actual test limits by multiplying the HIGH/LOW load factors by 20 μA and 0.6 mA respectively. The current limits are listed as well.

Also in this column are the output HIGH/LOW output load factors, with the first number representing I_{OH} and the second representing I_{OL}.These load factors can be translated to actual test limits by multiplying them by 20 μA and 0.6 mA respectively. These are shown in the far right column. The 54F/74F373 output HIGH/LOW drive factors are 150/40 (33.3) which translate into an I_{OH} of 3.0 mA and I_{OL} of 24 mA for commercial grade and 20 mA for military grade. The 29F52 A-Register outputs are TRI-STATE outputs with HIGH/LOW drive factors of 150/40 (33.3) indicating an I_{OH} of 3 mA and I_{OL} of 24 mA for commercial and 20 mA for military. The B-Register outputs specify unit load factors of 600/106.6 (80) translating into an I_{OH} of 12 mA and I_{OL} of 64 mA for commercial and 48 mA for military.

Unit Loading/Fan Out 29F52: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_7	A-Register Inputs	3.5/1.083	70 μA/0.65 mA
	A-Register Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
B_0–B_7	B-Register Inputs	3.5/1.083	70 μA/0.65 mA
	B-Register Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)
$\overline{OEA}$	Output Enable A-Register	1.0/1.0	20 μA/−0.6 mA
CPA	A-Register Clock	1.0/1.0	20 μA/−0.6 mA
$\overline{CEA}$	A-Register Clock Enable	1.0/1.0	20 μA/−0.6 mA
$\overline{OEB}$	Output Enable B-Register	1.0/1.0	20 μA/−0.6 mA
CPB	B-Register Clock	1.0/1.0	20 μA/−0.6 mA
$\overline{CEB}$	B-Register Clock Enable	1.0/1.0	20 μA/−0.6 mA

Unit Loading/Fan Out 54F/74F373: See Section 2 for U.L. definitions

Pin Names	Description	29F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	TRI-STATE Latch Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

AC Loading and Waveforms

Figure 2-1 shows the AC loading circuit used in characterizing and specifying propagation delays of all FAST devices, unless otherwise specified in the data sheet of a specific device. The use of this load, which differs somewhat from previous practice, provides more meaningful information and minimizes problems of instrumentation and customer correlation. In the past, +25°C propagation delays for TTL devices were specified with a load of 15 pF to ground; this required great care in building test jigs to minimize stray capacitance, and implied the use of high impedance, high frequency scope probes. FAST circuits changed to 50 pF of capacitance allowing more leeway in stray capacitance and also loading the device during rising or falling output transitions. This more closely resembles the loading to be expected in average applications and thus gives the designer more useful delay figures. The net effect of the change in AC load is to increase the observed propagation delay by an average of about 1 ns.

The 500Ω resistor to ground, in *Figure 2-1*, acts as a ballast, to slightly load the totem-pole pull-up and limit the quiescent HIGH-state voltage to about +3.5V. Otherwise, an output would rise quickly to about +3.5V but then continue to rise very slowly to about +4.4V. On the subsequent HIGH-to-LOW transition the observed t_{PHL} would vary slightly with duty cycle, depending on how long the output voltage was allowed to rise before switching to the LOW state. Perhaps more importantly, the 500Ω resistor to ground can be a high frequency passive probe for a sampling scope, which costs much less than the equivalent high impedance probe. Alternatively, the 500Ω load to ground can simply be a 450Ω resistor feeding into a 50Ω coaxial cable leading to a sampling scope input connector, with the internal 50Ω termination of the scope completing the path to ground. Note that with this scheme there should be a matching cable from the device input pin to the other input of the sampling scope; this also serves as a 50Ω termination for the pulse generator that supplies the input signal.


Also shown in *Figure 2-1* is a second 500Ω resistor from the device output to a switch. For most measurements this switch is open; it is closed for measuring a device with open-collector outputs and for measuring one set of the Enable/Disable parameters (LOW-to-OFF and OFF-to-LOW) of a TRI-STATE output. With the switch closed, the pair of 500Ω resistors and the +7.0V supply establish a quiescent HIGH level of +3.5V, which correlates with the HIGH level discussed in the preceding paragraph.

Figure 2-5 shows that the Disable times are measured at the point where the output voltage has risen or fallen by 0.3V from the quiescent level (i.e., LOW for t_{PLZ} or HIGH for t_{PHZ}), compared to a ΔV of 0.5V used in previous practice. This change enhances the repeatability of measurements and gives the system designer more realistic delay times to use in calculating minimum cycle times. Since the rising or falling waveform is RC-controlled, the first 0.3V of change is more linear than the first 0.5V and is less susceptible to external influences. More importantly, perhaps, from the system designer's point of view, a ΔV of 0.3V is adequate to ensure that a device output has turned OFF; measuring to a ΔV of 0.5V merely exaggerates the apparent Disable time and thus penalizes system performance, since the designer must use the Enable and Disable times to devise worst-case timing signals to ensure that the output of one device is disabled before that of another device is enabled.

Figure 2-2 describes the input signal voltages recommended for use when testing FAST circuits. The AC input signal levels follow industry convention of V_{IN} switching 0 to 3 volts. DC low input levels are typically 0 to V_{IL}, and high input levels are typically V_{IH} to V_{CC}. Input thresholds are guaranteed during V_{OL} and V_{OH} tests. High level noise immunity is the difference between V_{OH} and V_{IH}. Low level noise immunity is the difference between V_{IL} and V_{OL}. Noise-free V_{IH} or V_{IL} levels should not induce a switch on the appropriate output of the FAST device. When testing in an automatic test environment, extreme caution should be taken to ensure that input levels plus noise do not go into the transition region.

Good high frequency wiring practices should be used in constructing test jigs. Leads on the load capacitor should be as short as possible to minimize ripples on the output waveform transitions and to minimize undershoot. Generous ground metal (preferably a ground plane) should be used for the same reasons. A V_{CC} bypass capacitor should be provided at the test socket, also with minimum lead lengths. Input signals should have rise and fall times of 2.5 ns and signal swing of 0V to +3.0V. Rise and fall times ≤ 1 ns should be used for testing f_{max} or pulse width. A 1.0 MHz square wave is recommended for most propagation delay tests. The repetition rate must necessarily be increased for testing f_{max}. A 50% duty cycle should always be used when testing f_{max}. Two pulse generators are usually required for testing such parameters as setup time, hold time, recovery time, etc.

Precautions should be taken to prevent damage to devices by electrostatic charge. Static charge tends to accumulate on insulated surfaces, such as synthetic fabrics or carpeting, plastic sheets, trays, foam, tubes or bags, and on ungrounded electrical tools or appliances. The problem is much worse in a dry atmosphere. In general, it is recommended that individuals take the precaution of touching a known ground before handling devices. To effectively avoid electrostatic damage to FAST devices it may be necessary for individuals to wear a grounded wrist strap when handling devices.

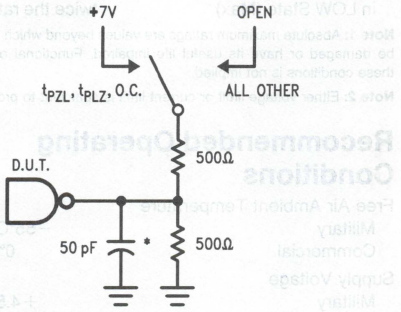

*Includes jig and probe capacitance

FIGURE 2-1. Test Load

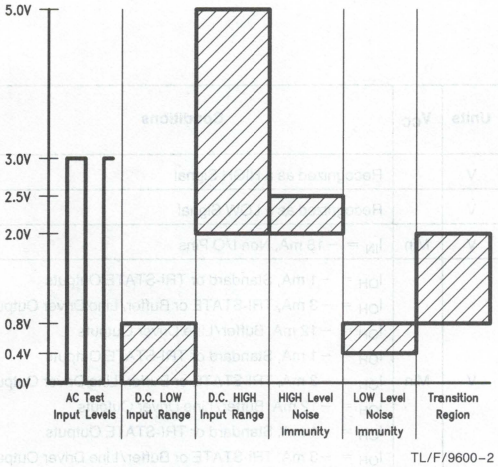


FIGURE 2-2. Test Input Signal Levels

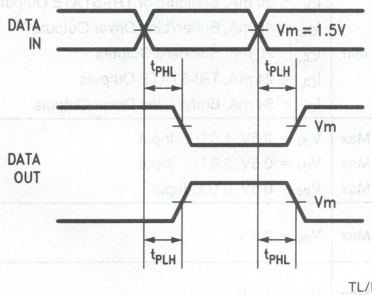


FIGURE 2-3. Propagation Delay Waveforms for Inverting and Non-Inverting Functions

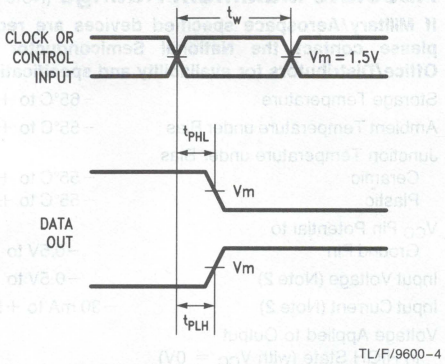


FIGURE 2-4. Propagation Delay, Pulse Width Waveforms

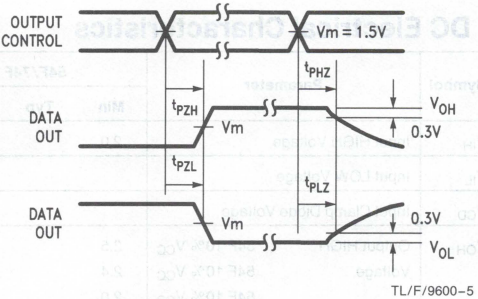


FIGURE 2-5. TRI-STATE Output HIGH and LOW Enable and Disable Times

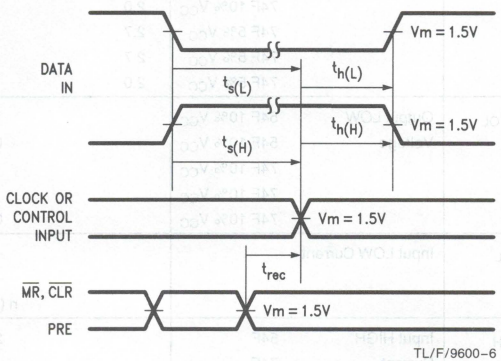


FIGURE 2-6. Setup Time, Hold Time and Recovery Time Waveforms

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	
Ceramic	−55°C to +175°C
Plastic	−55°C to +150°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA, Non I/O Pins
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA, Standard or TRI-STATE Outputs
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA, TRI-STATE or Buffer/Line Driver Outputs
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA, Buffer/Line Driver Outputs
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA, Standard or TRI-STATE Outputs
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA, TRI-STATE or Buffer/Line Driver Outputs
		74F 10% V_{CC}	2.0					I_{OH} = −12 mA, Buffer/Line Driver Outputs
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA, Standard or TRI-STATE Outputs
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA, TRI-STATE or Buffer/Line Driver Outputs
		74F 5% V_{CC}	2.0					I_{OH} = −15 mA, Buffer/Line Driver Outputs
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA, Standard or TRI-STATE Outputs
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA, Buffer/Line Driver Outputs
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA, Standard Outputs
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA, TRI-STATE Outputs
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA, Buffer/Line Driver Outputs
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V, 1.0 U.L. Input
					−1.2	mA	Max	V_{IN} = 0.5V, 2.0 U.L. Input
					n (−0.6)	mA	Max	V_{IN} = 0.5V, n U.L. Input
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7 V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0 V
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (i/o)	54F			1.0	mA	Max	V_{IN} = 5.5 V
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{OZH}	Output Leakage Current			50	μA	Max	V_{OUT} = 2.7V, TRI-STATE Outputs, Non I/O
I_{OZL}	Output Leakage Current			−50	μA	Max	V_{OUT} = 0.5V, TRI-STATE Outputs, Non I/O
$I_{IH} + I_{OZH}$	Output Leakage Current			70	μA	Max	$V_{I/O}$ = 2.7V, I/O Pins
$I_{IL} + I_{OZL}$	Output Leakage Current			−650	μA	Max	$V_{I/O}$ = 0.5V, I/O Pins
I_{OS}	Output Short-Circuit Current	−60		−150	mA	Max	V_{OUT} = 0V, Standard or TRI-STATE Outputs
		−100		−225	mA	Max	V_{OUT} = 0V, Buffer/Line Driver Outputs
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V TRI-STATE Outputs
I_{OHC}	Open Collector, Output OFF Leakage Test			250	μA	Min	V_{OUT} = V_{CC}, O.C. Outputs
I_{CCH}	Power Supply Current				mA	Max	V_{OUT} = HIGH
I_{CCL}	Power Supply Current				mA	Max	V_{OUT} = LOW
I_{CCZ}	Power Supply Current				mA	Max	V_{OUT} = HIGH Z

DC Electrical Characteristics (Continued)

Symbol	Parameter	Min	Typ	Max	Units	V_{CC}	Conditions
$I_{O,H}$	Output Leakage Current			50	µA	Max	V_{OUT} = 2.7V, TRI-STATE Output, Non I/O
I_{OZL}	Output Leakage Current			−50	µA	Max	V_{OUT} = 0.5V, TRI-STATE Output, Non I/O
I_{IH} + I_{OZH}	Output Leakage Current			70	µA	Max	V_{IN} = 2.7V, I/O Pins
I_{IL} + I_{OZL}	Output Leakage Current			−500	µA	Max	V_{IN} = 0.5V, I/O Pins
I_{OS}	Output Short-Circuit Current	−30 −110		−150 −250	mA mA	Max Max	V_{OUT} = 0V, Steered or TRI-STATE Outputs V_{OUT} = 0V, Push-Pull Drive Outputs
I_{ZZ}	Bus Clamps Test			500	µA	0.0V	V_{EXT} = 5.25V, TRI-STATE Outputs
I_{OHO}	Open Collector Output OFF Leakage Test			250	µA	Min	V_{OUT} = V_{CC}, O.C. Outputs
I_{CCH}	Power Supply Current				mA	Max	V_{OUT} = HIGH
I_{CCL}	Power Supply Current				mA	Max	V_{OUT} = LOW
I_{CCZ}	Power Supply Current				mA	Max	V_{OUT} = LIGH Z



Section 3

Design Considerations

Section 3 Contents

Introduction 3-3
Threshold and Noise Margins 3-4
Test and Specification Improvements 3-5
Transmission Lines and Termination 3-5
Decoupling 3-14
Design Guidelines 3-15

FAST® Design Considerations

National Semiconductor
Application Note 661

FAST® is a high-speed logic family that achieves speeds typically 30% faster than the Schottky family with a corresponding power reduction of approximately 75%. It is fabricated with an advanced oxide isolation technique, Isoplanar II, which produces transistors with very high, well-controlled switching speeds, extremely small parasitic capacitances and f_T in excess of 5 GHz.


Since the family is designed to be pin-compatible with other TTL families such as Schottky, Low Power Schottky and standard TTL, existing designs can be easily upgraded. FAST logic offers significant improvement over the Schottky family in addition to improved speed and power specifications. Other key advantages are higher input threshold levels (improving noise margins), reduced input loading, and increased output drive. The FAST family contains a full complement of circuits for more efficient design capabilities: small scale integration, medium scale integration and large scale integration.

Fairchild engineers had some specific design objectives in mind when they developed the FAST logic family. The primary objective was the improvement of the circuit speed-power performance versus earlier TTL families. Another important objective was increasing threshold levels to improve DC noise immunity. Other goals were maintaining or improving the output drive of Schottky for improved line driving capability, and reducing input loading for increasing the overall fanout out of the family. Output and input voltage levels, functions and pinouts were standardized to previous TTL families to maintain compatibility.

The primary design consideration was to improve speed while reducing power. The speed of any device is limited by the charge storage of the transistors. The time required to remove this charge is proportional to the capacitance and current available. Thus, to improve the speed, either the internal resistor values must be lowered to increase the available current and therefore remove the charge faster, such as in the Schottky family, or the capacitance must be reduced.


The speed-power curve shown in *Figure 3-1a* was used empirically to determine the optimum operating power level for the FAST family. Several internal gates programmed at a variety of power levels were produced on a wafer and the propagation delay of an internal gate for each power level was measured.

a.

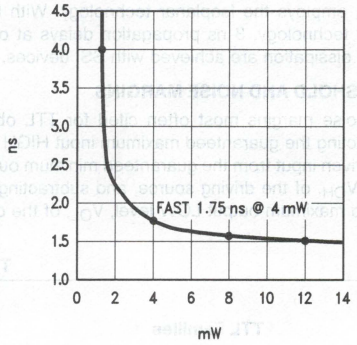

TL/F/9607–1

b.

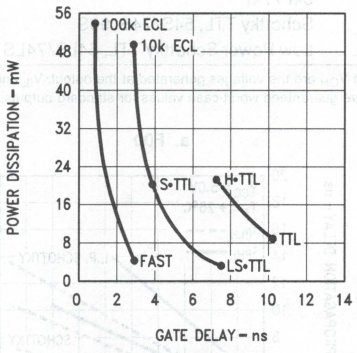

TL/F/9607–2

FIGURE 3-1. Speed-Power Product

As can be seen from the curves, power levels significantly below 4 mW per gate exhibit a dramatic degradation in performance. Power levels significantly above 4 mW, however, appear to have passed the point of diminishing returns with only minor improvements in propagation delay resulting from increased power. It was therefore concluded that the FAST family could be biased at 4 mW achieving a 1.75 ns propagation delay.

Figure 3-1b compares the FAST logic family with previous TTL and ECL logic families. Each curve groups families with similar technologies. The first line, known as "gold doped," groups together the 7400 and the 74H families into one technology grouping. These saturating logic families can be seen to have a relatively poor speed-power curve.

The second curve notes the Schottky, Low Power Schottky and 10k ECL families. They use non-gold doped, soft saturated (Baker clamped) or current steering logic in order to achieve their speed-power performance; however, they still employ the planar technology. The last curve, which shows the FAST family with its ECL counterpart, the 100k ECL family, employs the Isoplanar technology. With FAST Isoplanar technology, 3 ns propagation delays at only 4 mW power dissipation are achieved with SSI devices.

THRESHOLD AND NOISE MARGINS

The noise margins most often cited for TTL obtained by subtracting the guaranteed maximum input HIGH level, V_{IH}, of a driven input from the guaranteed minimum output HIGH level, V_{OH}, of the driving source, and subtracting the guaranteed maximum output LOW level, V_{OL}, of the driver from the guaranteed minimum input LOW level, V_{IL}, of a driven circuit. The guaranteed worst-case values of these parameters vary slightly among the various circuit families and are summarized in Table III-I. Note that although the 9000 Series V_{IH} and V_{IL} specifications have different limits at different temperatures, they are grouped with the 54/74 family in the table as a matter of convenience. Note also that the V_{OL} limit listed for 74LS is 0.5V, whereas these circuits are also specified at 04.V at a lower level of I_{OL}. Noise margins calculated in this manner are quite conservative, since it is assumed that both the driver output characteristics are worst-case and that V_{CC} is on the low side for the driver and on the high side for the receiver.

Figure 3-2 shows how load capacitance affects the propagation delay of Low Power Schottky, Schottky and FAST gates, flip-flops, registers and decoders, etc. As would be expected, Low Power Schottky TTL shows greater sensitivity since LS output drive capability is not as great as either Schottky or FAST. Significantly, FAST is less affected than Schottky by load capacity. *Figure 3-2* shows propagation delay versus load capacitance for buffers and line drivers since they are designed for greater output drive.

TABLE III-I. Parameter Limits

TTL Families		Military (−55°C to +125°C				Commercial (0°C to +70°C)				Units
		V_{IL}	V_{IH}	V_{OL}	V_{OH}	V_{IL}	V_{IH}	V_{OL}	V_{OH}	
TTL	Standard TTL, 9000, 54/74	0.8	2.0	0.4	2.4	0.8	2.0	0.4	2.4	V
FAST	54F/74F	0.8	2.0	0.5	2.4	0.8	2.0	0.5	2.5	V
S-TTL	Schottky TTL, 54S/74S, 93S	0.8	2.0	0.5	2.5	0.8	2.0	0.5	2.7	V
LS-TTL	Low Power Schottky TTL, 54LS/74LS	0.7	2.0	0.4	2.5	0.8	2.0	0.5	2.7	V

V_{OL} and V_{OH} are the voltages generated at the output. V_{IL} and V_{IH} are the voltages required at the input to generate the appropriate levels. The numbers given above are guaranteed worst-case values for standard outputs.

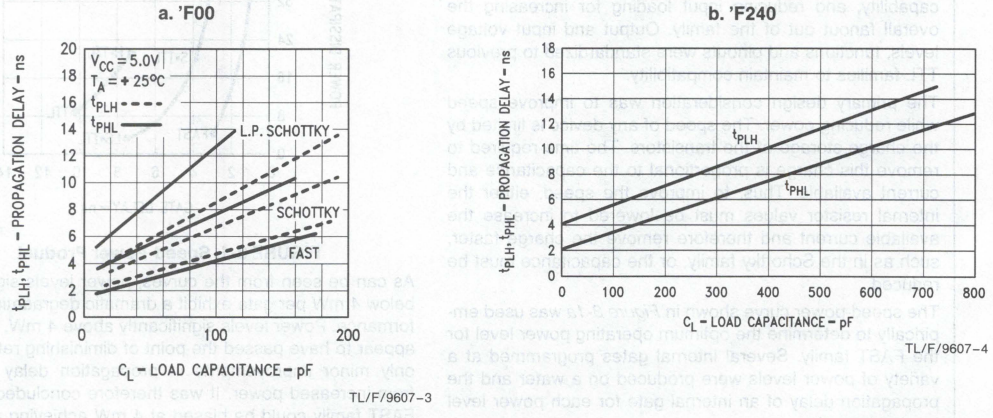


FIGURE 3-2. Propagation Delay vs Load Capacitance

Notice also that for Schottky, the HIGH-to-LOW output transition is more affected than its LOW-to-HIGH transition, while for FAST both transitions are equally affected. This indicates a better balance in the design of the FAST output, and minimizes pulse stretching and compressing.

Designers are cautioned that curves of this type do not apply when the load capacitance is distributed along an interconnection.

TEST AND SPECIFICATION IMPROVEMENTS

Because the circuitry and technological improvements (feedback and speedup diodes and the Miller Killer circuitry) yield well-controlled AC parameters, the FAST family can be specified over extremes of external influences. FAST is the first TTL logic family which does not require derating estimates for worst-case design. This has been accomplished by specifying minimum and maximum propagation delays over the operating temperature and supply voltage ranges with 50 pF loading.

In order to achieve easier correlation with our customers' needs, a change in the actual AC test load was needed. Previously, most TTL families were measured with three serial diodes in parallel with the load capacitor. For the FAST logic family, a 50 pF capacitance in parallel with a 500Ω resistor is employed. This facilitates fabrication of low capacitance test jigs. It also provides better correlation with customers' measurements of propagation delay. Passive 500Ω scope probes, which are less expensive and easier to use than the high impedance FET input scope probes, can be employed. This facilitates measurement of the AC performance on automatic test equipment and yields more conservative AC figures than are achieved with the previous AC load technique.

DESIGN CONSIDERATIONS

There are areas of concern which need to be addressed when designing with any high performance logic family. These topics include: transmission line concepts, printed circuit board layout, interfacing between technologies, open collector outputs, fanout, and unused inputs.

For additional information, please refer to National's FAST Applications Handbook.

TRANSMISSION LINES

Practical transmission lines, cables and strip lines used for TTL interconnections have a characteristic impedance between 30Ω and 150Ω. FAST is capable of driving a 50Ω line under worst-case conditions.

These considerations, applicable only when the round trip delay of the line is longer than the rise or fall time of the driving signal (2td > tr), do not affect most TTL interconnections. Short interconnections do not behave like a resistive transmission line, but more like a capacitive load. Since the rise time of different TTL outputs is known, the longest interconnection that can be tolerated without causing transmission line effects can easily be calculated and is listed in Table III-II.

TABLE III-II. PC Board Interconnections

TTL Family	Rise Time	Fall Time	Max Interconnection Length
54/74, 54/74LS	6–9 ns	4–6 ns	18 in. (45 cm)
54S/74S	4–6 ns	2–3 ns	9 in. (22.5 cm)
FAST	1.8–2.8 ns	1.6–2.6 ns	7.5 in. (19 cm)

Assuming 1.7 ns/foot propagation speed, typical for epoxy fiberglass PC boards with $\epsilon_r = 4.7$.

Slightly longer interconnections show minimal transmission line effects; the longer the interconnections, the greater the chance that system performance may be degraded due to reflections and ringing.

TRANSMISSION LINE EFFECTS

The fast rise and fall times of TTL outputs (2.0 ns to 6.0 ns) produce transmission line effects even with relatively short (<2 ft) interconnections. Consider one TTL device driving another and switching from the LOW to the HIGH state. If the propagation delay of the interconnection is long compared to the rise time of the signal, the arrangement behaves like a transmission line driven by a generator with a non-linear output impedance. Simple transmission line theory shows that the initial voltage step at the output just after the driver has switched is

$$V_{OUT} = V_E \frac{Z_O}{Z_O + R_O}$$

where Z_O is the characteristic impedance of the line, R_O is the output impedance of the driver, and V_E is the equivalent output voltage source in the driver, (i.e., V_{CC} minus the forward drop of the pull-up transistors).

Figure 3-3 shows how the initial voltage step can be determined graphically by superimposing lines of constant impedance of the static input and output characteristics of TTL elements. The constant impedance lines are drawn from the intersection of the V_{IN} and V_{OL} characteristics which is the quiescent condition preceding a LOW-to-HIGH transition. After this transition the V_{OH} characteristic applies, and the intersection of a particular impedance line with the V_{OH} characteristic determines the initial voltage step. The V_{OH} characteristic shown in *Figure 3-3* has an R_O of about 80Ω and V_E of approximately 4.0V, for calculation purposes.

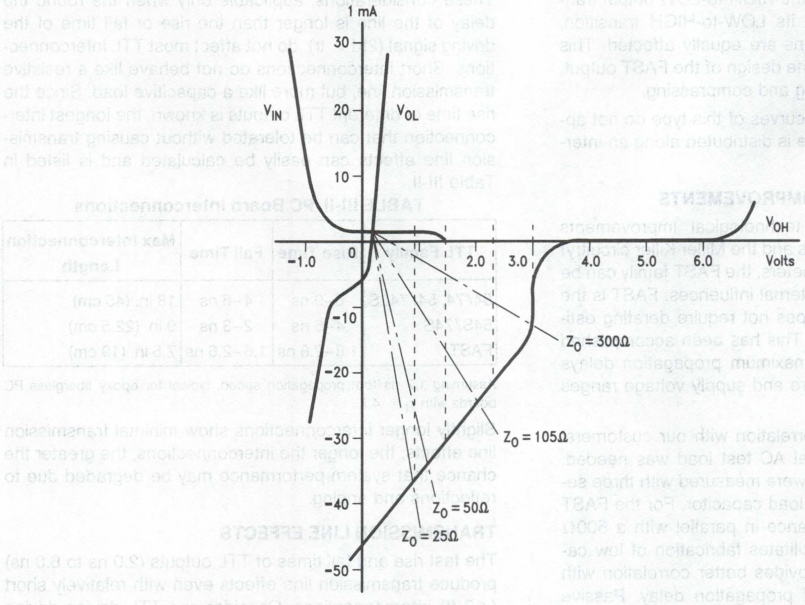


FIGURE 3-3. Initial Output Voltage of TTL Driving Transmission Line

This initial voltage step propagates down the line and reflects at the end, assuming the typical case where the line is open-ended or terminated in an impedance greater than its characteristic impedance Z_O. Arriving back at the source, this reflected wave increases V_{OUT}. If the total round-trip delay is larger than the rise time of the driving signal, there is a staircase response at the driver output and anywhere along the line. If one of the loads (gate inputs) is connected to the line close to the driver, the initial output voltage V_{OUT} might not exceed V_{IH}. This input is then undetermined until after the round trip of the system. *Figure 3-4* shows the 'F00 driver output waveform for four different line impedances.

For Z_O of 25Ω and 50Ω, the initial voltage step is in the threshold region of a TTL input and the output voltage only rises above the guaranteed 2.0V V_{IH} level after a reflection returns from the end of the line. If V_{OUT} is increased to >2.0V, by either increasing Z_O or decreasing R_O, additional delay does not occur. R_O is characteristic of the driver output configuration, varying between the different TTL speed categories. Z_O can be changed by varying the width of the conductor and its distance from ground. Table III-III lists the lowest transmission line impedance that can be driven by different TTL devices to insure an initial voltage step of 2.0V.

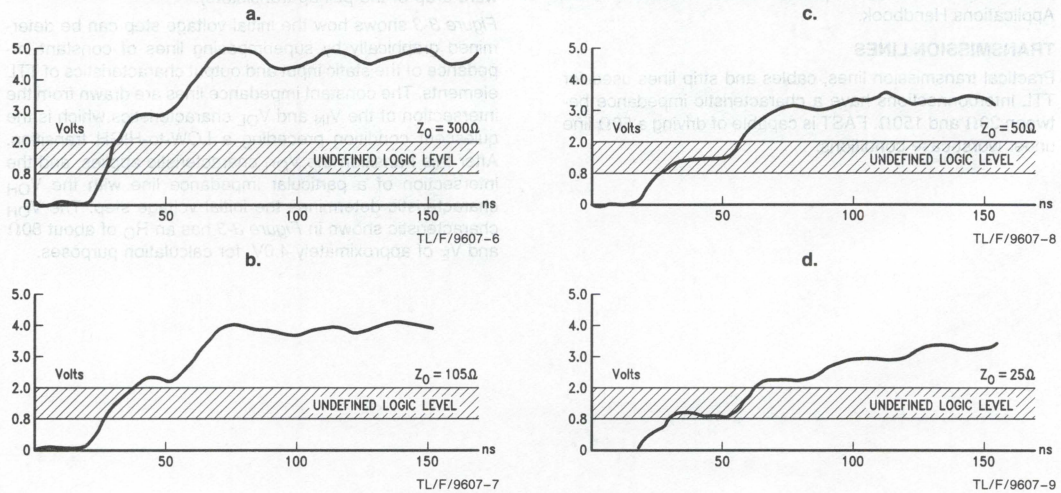


FIGURE 3-4. TTL Driving Transmission Line

Note that the worst-case value, assuming a +30% tolerance on the current limiting resistor and a −10% tolerance on V_{CC}, is 80% higher than the value for nominal conditions.

TABLE III-III. Transmission Line Driving Capability

TTL Family or Device	Collector Resistor RΩ	Lowest Transmission Line Impedance Ω				
		Worst Case (R + 30%)		Nominal	Best Case (R − 30%)	
54/74	130	241.4	204.8	136.8	84.6	75.8
54S/74S	55	110.0	92.2	61.1	37.5	33.4
5440/7440	100	185.7	157.5	105.2	65.1	58.3
54S/74S40	25	50.0	41.9	27.7	17.0	15.2
54F/74F00	45	66.2	57.7	40.9	27.6	25.0
54F/74F258	25	36.76	32.0	22.7	15.3	13.9
54F/74F240	15	22.0	19.2	13.6	9.2	8.3
Supply Voltage (V_{CC})		4.50	4.75	5.00	5.25	5.50

A graphical method provides excellent insight into the effects of high-speed digital circuits driving interconnections acting as transmission lines. A load line is drawn for each input and output situation. Each load line starts at the previous quiescent point, determined where the previous load line intersects the appropriate characteristic. The magnitude of the slope of the load lines is identical and equal to the characteristics impedance of the line, but alternate load lines have opposite signs representing the change in direction of current flow. The points where the load lines intersect the input and output characteristics represent the voltage and current value at the input or output, respectively, for that reflection. The results, *Figure 3-5*, are shown with and without the input diode and illustrate how the input diode on TTL elements assists in eliminating spurious switching due to reflection.

TRANSMISSION LINE CONCEPTS

The interactions between wiring and circuitry in high-speed systems are more easily determined by treating the interconnections as transmissions lines. A brief review of basic concepts is presented and simplified methods of analysis are used to examine situations commonly encountered in digital systems. Since the principles and methods apply to any type of logic circuit, normalized pulse amplitudes are used in sample waveforms and calculations.

SIMPLIFYING ASSUMPTIONS

For the great majority of interconnections in digital systems, the resistance of the conductors is much less than the input and output resistance of the circuits. Similarly, the insulating materials have very good dielectric properties. These circumstances allow such factors as attenuation, phase distortion and bandwidth limitations to be ignored. With these simplifications, interconnections can be dealt with in terms of characteristic impedance and propagation delay.

CHARACTERISTIC IMPEDANCE

The two conductors that interconnect a pair of circuits have distributed series inductance and distributed capacitance between them, and thus constitute a transmission line. For any length in which these distributed parameters are constant, the pair of conductors have a characteristic imped-

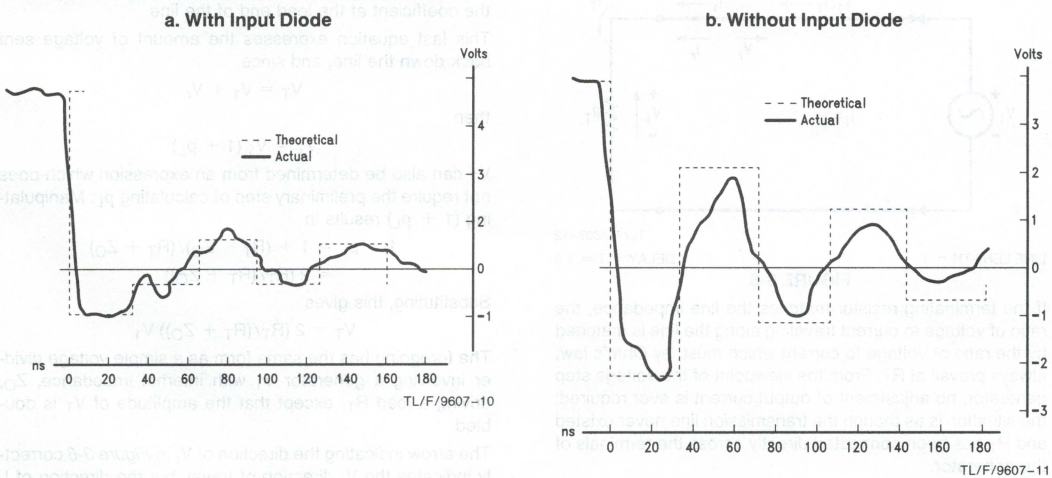


FIGURE 3-5. Ringing Caused by Reflections

ance Z_O. Where quiescent conditions on the line are determined by the circuits and terminations, Z_O is the ratio of transient voltage to transient current passing by a point on the line when a signal change or other electrical disturbance occurs. The relationship between transient voltage, transient current, characteristic impedance, and the distributed parameters is expressed as follows:

$$V/I = Z_O = \sqrt{L_O/C_O}$$

where L_O = inductance per unit length, and C_O = capacitance per unit length. Z_O is in ohms, L_O in henries, and C_O in farads.

PROPAGATION VELOCITY

Propagation velocity (v) and its reciprocal, delay per unit length δ, can also be expressed in terms of L_O and C_O. A consistent set of units is nanoseconds, microhenries and picofarads, with a common unit of length.

$$v = 1/\sqrt{L_O C_O} \qquad \delta = \sqrt{L_O C_O}$$


These equations provide a convenient means of determining the L_O and C_O of a line when delay, length and impedance are known. For a length 1 and delay T, δ is the ratio T/1. To determine L_O and C_O, combine these equations.

$$L_O = \delta Z_O$$
$$C_O = \delta/Z_O$$

More formal treatments of transmission line effects are available from many sources.

TERMINATION AND REFLECTION

A transmission line with a terminating resistor is shown in *Figure 3-6*. As indicated, a positive step function voltage travels from left to right. To keep track of reflection polarities, it is convenient to consider the lower conductor as the voltage reference and to think in terms of current flow in the top conductor only. The generator is assumed to have zero internal impedance. The initial current I_1 is determined by V_1 and Z_O.

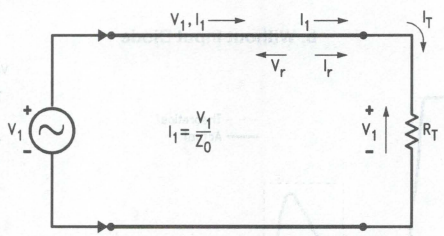

TL/F/9607–12

LINE LENGTH = 1 DELAY = T = 1 δ

FIGURE 3-6

If the terminating resistor matches the line impedance, the ratio of voltage to current traveling along the line is matched by the ratio of voltage to current which must, by Ohm's law, always prevail at R_T. From the viewpoint of the voltage step generator, no adjustment of output current is ever required; the situation is as though the transmission line never existed and R_T has been connected directly across the terminals of the generator.

From the R_T viewpoint, the only thing the line did was delay the arrival of the voltage step by the amount of time T.

When R_T is not equal to Z_O, the initial current starting down the line is still determined by V_1 and Z_O but the final steady state current, after all reflections have died out, is determined by V_1 and R_T (ohmic resistance of the line is assumed to be negligible). The ratio of voltage to current in the initial wave is not equal to the ratio of voltage to current demanded by R_T. Therefore, at the instant the initial wave arrives at R_T, another voltage and current wave must be generated so that Ohm's law is satisfied at the line-load interface. This reflected wave, indicated by V_r and I_r in *Figure 3-6*, starts to return toward the generator. Applying Kirchoff's laws to the end of the line at the instant the initial wave arrives results in the following:

$$I_i + I_r = I_T = \text{current into } R_T$$

Since only one voltage can exist at the end of the line at this instant of time, the following is true:

$$V_1 + V_r = V_T$$

thus,

$$I_T = V_T/R_T = (V_1 + V_r)/R_T$$

also,

$$I_1 = V_1/Z_O \text{ and } I_r = -V_r/Z_O$$

with the minus sign indicating that V_r is moving toward the generator.

Combining the foregoing relationships algebraically and solving for V_r yields a simplified expression in terms of V_1, Z_O and R_T.

$$\frac{V_1}{Z_O} - \frac{V_r}{Z_O} = \frac{V_1 + V_r}{R_T} = \frac{V_1}{R_T} + \frac{V_r}{R_T}$$

$$V1\left(\frac{1}{Z_O} - \frac{1}{R_T}\right) = V_r\left(\frac{1}{R_T} + \frac{1}{Z_O}\right)$$

$$V_r = V_1\left(\frac{R_T - Z_O}{R_T + Z_O}\right) = \rho_L V_1$$

The term in parentheses is called the coefficient of reflection (ρ_L). With R_T ranging between zero (shorted line) and infinity (open line), the coefficient ranges between -1 and $+1$ respectively. The subscript L indicates that ρ_L refers to the coefficient at the load end of the line.

This last equation expresses the amount of voltage sent back down the line, and since

$$V_T = V_1 + V_r$$

then

$$V_T = V_1 (1 + \rho_L)$$

V_T can also be determined from an expression which does not require the preliminary step of calculating ρ_L. Manipulating $(1 + \rho_L)$ results in

$$1 + \rho_L = 1 + (R_T - Z_O)/(R_T + Z_O)$$
$$= 2 (R_T/(R_T + Z_O))$$

Substituting, this gives

$$V_T = 2 (R_T/(R_T + Z_O)) V_1$$

The foregoing has the same form as a simple voltage divider involving a generator V_1 with internal impedance, Z_O, driving a load R_T, except that the amplitude of V_T is doubled.

The arrow indicating the direction of V_r in *Figure 3-6* correctly indicates the V_r direction of travel, but the direction of I_r flow depends on the V_r polarity. If V_r is positive, I_r flows toward the generator, opposing I_1. This relationship between the polarity of V_r and the direction of I_r can be deduced by noting that if V_r is positive it is because R_T is greater than Z_O. In turn, this means that the initial current I_r

is larger than the final quiescent current, dictated by V_1 and R_T. Hence I_r must oppose I_1 to reduce the line current to the final quiescent value. Similar reasoning shows that if V_r is negative, I_r flows in the same direction as I_1.

It is somewhat easier to determine the effect of V_r on line conditions by thinking of it as an independent voltage generator in series with R_T. With this concept, the direction of I_r is immediately apparent; its magnitude, however, is the ratio of V_r to Z_O, i.e., R_T is already accounted for in the magnitude of V_r. The relationships between incident and reflected signals are represented in *Figure 3-7* for both cases of mismatch between R_T and Z_O.

The incident wave is shown in *Figure 3-7a*, before it has reached the end of the line. In *Figure 3-7b*, a positive V_r is returning to the generator. To the left of V_r the current is still I_1, flowing to the right, while to the right of V_r the net current in the line is the difference between I_1 and Ir. In *Figure 3-7c,* the reflection coefficient is negative, producing a negative V_r. This, in turn, causes an increase in the amount of current flowing to the right behind the V_r wave.

SOURCE IMPEDANCE, MULTIPLE REFLECTIONS

When a reflected voltage arrives back at the source (generator), the reflection coefficient at the source determines the response to V_r. The coefficient of reflection at the source is governed by Z_O and the source resistance R_S.


$$\rho_S = (R_S - Z_O)/(R_S + Z_O)$$

If the source impedance matches the line impedance, a reflected voltage arriving at the source is not reflected back toward the load end. Voltage and current on the line are stable with the following values.

$$V_T = V_i + V_r$$


If neither source impedance nor terminating impedance matches Z_O, multiple reflections occur; the voltage at each end of the line comes closer to the final steady state value with each succeeding reflection. An example of a line mismatched on both ends is shown in *Figure 3-8*. The source is a step function of V_{CC} = 5.0V amplitude occurring at time t0. The initial value of V_1 starting down the line is 2.4V due to the voltage divider action of Z_O and R_S. The time scale in the photograph shows that the line delay is approximately 6 ns. Since neither end of the line is terminated in its characteristic impedance, multiple reflections occur.

a. Incident Wave

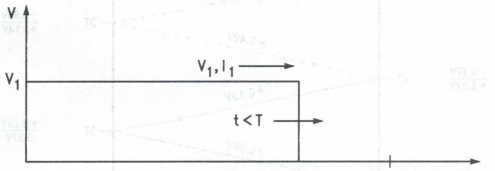


TL/F/9607–13

b. Reflected Wave for $R_T > Z_O$

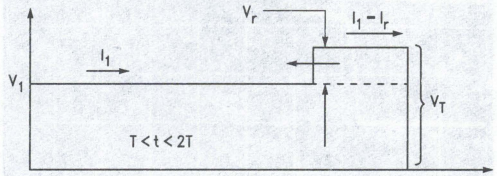


TL/F/9607–14

c. Reflected Wave for $R_T > Z_O$

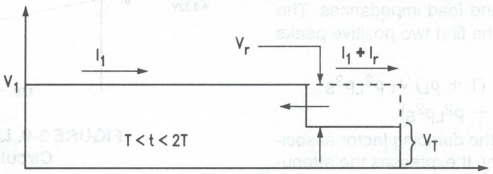

TL/F/9607–15

FIGURE 3-7. Reflections for $R_T = Z_O$

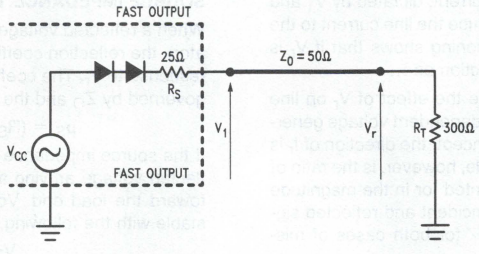

TL/F/9607–16


FIGURE 3-8. Multiple Reflections Due to Mismatch at Load and Source

$$V_O = V_{CC} - 2 \bullet V_{BE} = 3.6V$$

$$\rho_S = \frac{(25 - 50)\Omega}{(25 + 50)\Omega} = -0.33$$


$$\text{initially, } V_1 = \frac{Z_O}{Z_O + R_S} \bullet V_O = \frac{50\Omega}{(50 + 25)\Omega}(3.6V) = 2.4V$$

$$\rho_L = \frac{(300 - 50)\Omega}{(300 + 50)\Omega} = 0.71$$

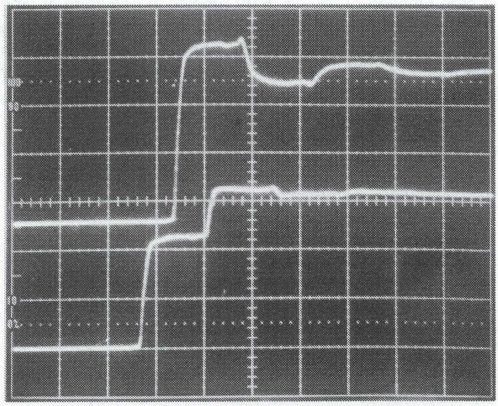

TL/F/9607–17

H = 20 ns/div.
V = 1V/div.

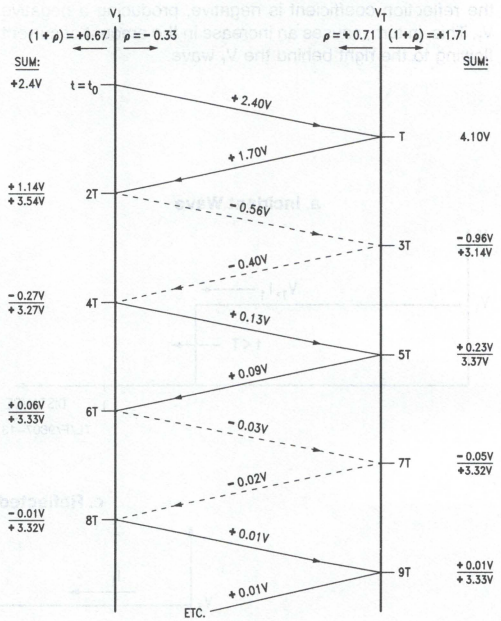

TL/F/9607–18

FIGURE 3-9. Lattice Diagram for the Circuit of *Figure 3-8*

The amplitude and persistence of the ringing shown in *Figure 3-8* become greater with increasing mismatch between the line impedance and source and load impedances. The difference in amplitude between the first two positive peaks observed at the open end is

$$V_T - V'_T = (1 + \rho_L)\, V_1 - (1 + \rho_L)\, V_1\, \rho^2_L \rho^2_S$$
$$= (1 + \rho_L)\, V_1\, (1 - \rho^2_L \rho^2_S)$$

The factor $(1 - \rho^2_S)$ is similar to the damping factor associated with lumped constant circuitry. It expresses the attenuation of successive positive or negative peaks of ringing.

LATTICE DIAGRAM

In the presence of multiple reflections, keeping track of the incremental waves on the line and the net voltage at the ends becomes a bookkeeping chore. A convenient and systematic method of indicating the conditions which combine magnitude, polarity and time utilizes a graphic construction called a lattice diagram. A lattice diagram for the line conditions of *Figure 3-8* is shown in *Figure 3-9*.

The vertical lines symbolize discontinuity points, in this case the ends of the line. A time scale is marked off on each line in increments of 2T, starting at t0 for V_1 and T voltages traveling between the ends of the line; solid lines are used for positive voltages and dashed lines for transmission multipliers ρ and $(1 + \rho)$ at each vertical line, and to tabulate the incremental and net voltages in columns alongside the vertical lines. Both the lattice diagram and the waveform photograph show that V_1 and V_T asymptomatically approach 3.4V, as they must with a 3.4V source driving a lightly loaded line.

SHORTED LINE

The open-ended line in *Figure 3-8* has a reflection coefficient of 0.71 and the successive reflections tend toward the steady state conditions of zero line current and a line voltage equal to the source voltage. In contrast, a shorted line has a reflection coefficient of -1 and successive reflections must cause the line conditions to approach the steady state conditions of zero voltage and a line current determined by the source voltage and resistance.

Shorted line conditions are shown in *Figure 3-10a* with the reflection coefficient at the source end of the line also negative. A negative coefficient at both ends of the line means that any voltage approaching either end of the line is reflected in the opposite polarity. *Figure 3-10b* shows the response to an input step-function with a duration much longer than the line delay. The initial voltage starting down the line is about 2.4V, which is inverted at the shorted end and returned toward the source as -2.4V. Arriving back at the source end of the line, this voltage is multiplied by $(1 + \rho_S)$, causing a -1.61V net change in V_1. Concurrently, a reflected voltage of $+0.80$V (-2.4V times ρ_S of -0.33) starts back toward the shorted end of the line. The voltage at V_1 is reduced by 50% with each successive round trip of reflections, thus leading to the final condition of zero volts on the line.


When the duration of the input pulse is less than the delay of the line, the reflections observed at the source end of the line constitute a train of negative pulses, as shown in *Figure 3-10c*. The amplitude decreases by 50% with each successive occurrence as it did in *Figure 3-10b*.

SERIES TERMINATION

Driving an open-ended line through a source resistance equal to the line impedance is called series termination. It is particularly useful when transmitting signals which originate on a PC board and travel through the back-plane to another board, with the attendant discontinuities, since reflections coming back to the source are absorbed and ringing thereby controlled. The amplitude of the initial signal sent down the line is only half of the generator voltage, while the voltage at the open end of the line is doubled to full amplitude $(1 + \rho_L = 2)$. The reflected voltage arriving back at the source raises V_1 to the full amplitude of the generator signal. Since the reflection coefficient at the source is zero, no further changes occur and the line voltage is equal to the generator voltage. Because the initial signal on the line is only half the normal signal swing, the loads must be connected at or near the end of the line to avoid receiving a 2-step input signal.


A TTL output driving a series-terminated line is severely limited in its fanout capabilities due to the IR drop associated with the collective I_{IL} drops of the inputs being driven. For most TTL families other than FAST it should not be considered since either the input currents are so high (TTL, S, H) or the input threshold is very low (LS). In either case the noise margins are severely degraded to the point where the circuit becomes unusable. In FAST, however, the I_{IL} of 0.6 mA, if sunk through a resistor of 25Ω used a series terminating resistor, will reduce the low level noise margin 15 mV for each standard FAST input driven.

a. Reflection Coefficients for Shorted Line

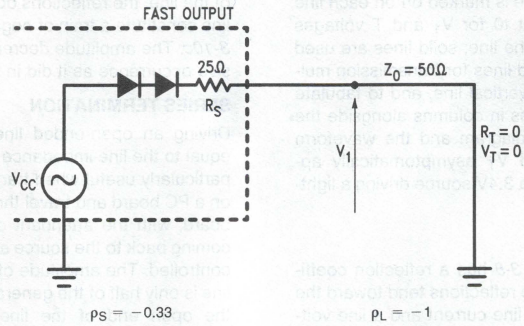


TL/F/9607–19

b. Input Pulse Duration ≫ Line Delay

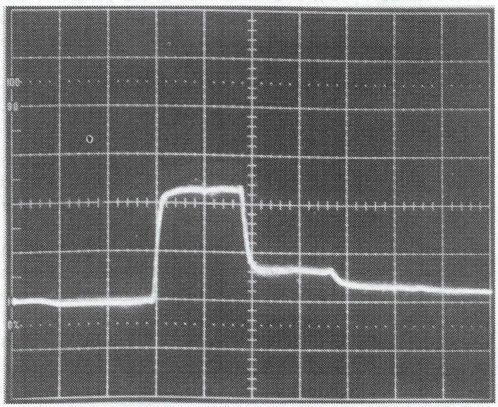

TL/F/9607–21

c. Input Pulse Duration < Line Delay

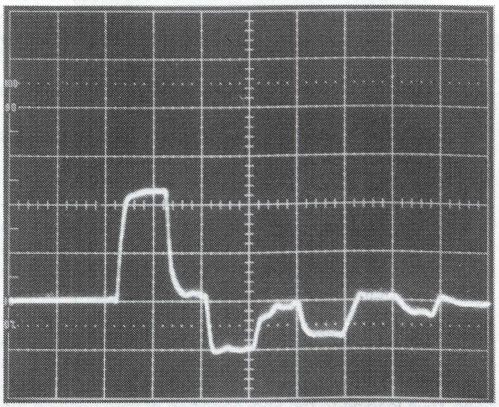

TL/F/9607–20

V = 1V/div.
H = 20 ns/div.

FIGURE 3-10. Reflections of Long and Short Pulses on a Shorted Line

TABLE III-IV. Relative Dielectric Constants of Various Materials

Material	ϵ_r
Air	1.0
Polyethylene Foam	1.6
Cellular Polyethylene	1.8
Teflon	2.1
Polyethylene	2.3
Polystyrene	2.5
Nylon	3.0
Silicon Rubber	3.1
Polyvinylchloride (PVC)	3.5
Epoxy Resin	3.6
Delrin	3.7
Epoxy Glass	4.7
Mylar	5.0
Polyurethane	7.0


All the above information on impedance and propagation delays are for the circuit interconnect only. The actual impedance and propagation delays will differ from this by the loading effects of gate input and output capacitances, and by any connectors that may be in line. The effective impedance and propagation delay can be determined from the following formula:

$$Z_O' = \frac{Z_O}{\sqrt{1 + \left(\frac{C_L}{C_O}\right)}}\ \Omega$$

$$t_{PD} = \sqrt{L_O C_O} \quad \therefore t_{PD}' = t_{PD}\sqrt{1 + \left(\frac{C_L}{C_O}\right)}$$

where C_L is the total of all additional loading.

The results of these formulas will frequently give effective impedances of less than half Z_O, and interconnect propagation delays greater than the driving device propagation delays, thus becoming the predominant delay.

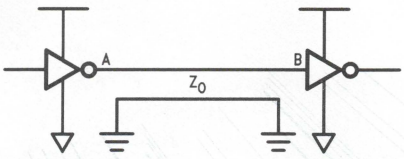

TL/F/9607–22


FIGURE 3-11. Unterminated

The maximum length for an unterminated line can be determined by

$$l_{max} = T_r/2t_{pd}$$

and for FAST, t_r = 3 ns, so l_{max} = 10 inches for trace on GIO epoxy glass PC.

The voltage wave propagated down the transmission line (V step) is the full output drive of the device into Z_O'. Reflections will not be a problem if $l \leq l_{max}$. Lines longer than l_{max} will be subject to ringing and reflections and will drive the inputs and outputs below ground.

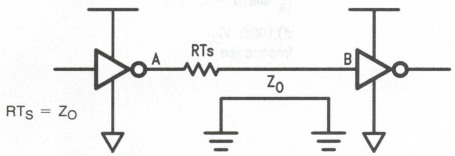

TL/F/9607–23

FIGURE 3-12. Series-Terminated

Series termination has limited use in TTL interconnect schemes due to the voltage drop across RTs in the LOW state, reducing noise margins at the receiver. Series termination is the ideal termination for highly capacitive memory arrays whose DC loadings are minimal. RTs values of 10Ω to 50Ω are normally found in these applications.

Four possibilities for parallel termination exist:


A. Z_O' to V_{CC}. This will consume current from V_{CC} when output is LOW;

B. Z_O' to GND. This will consume current from V_{CC} when output is HIGH;

C. Thevenin equivalent termination. This will consume half the current of A and B from the output stage, but will have reduced noise margins, and consume current from V_{CC} with outputs HIGH or LOW. If used on a TRI-STATE® bus, this will set the quiescent line voltage to half.


D. AC Termination. An RC termination to GND, C = $3tr/Z_O$. This consumes no DC current with outputs in either state. If this is used on a TRI-STATE bus, then the quiescent voltage on the line can be established at V_{CC} or GND by a high value pull up (down) resistor to the appropriate supply rail.

a. RT to V_{CC}
RT = Z_O'




TL/F/9607–24

b. RT to GND
RT = Z_O'

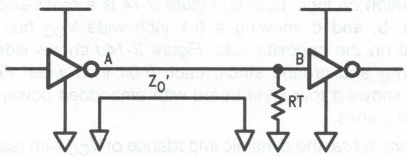


TL/F/9607–25

c. Thevenin Termination
RT = $2Z_O'$

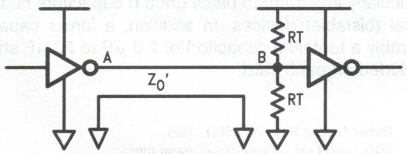

TL/F/9607–26


d. AC Termination to GND
$R_T + X_{CT} = Z_O'$

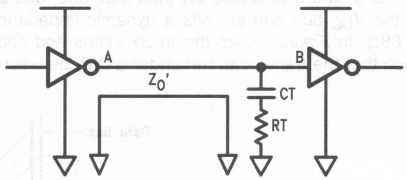

TL/F/9607–27

FIGURE 3-13. Parallel Terminated

DECOUPLING

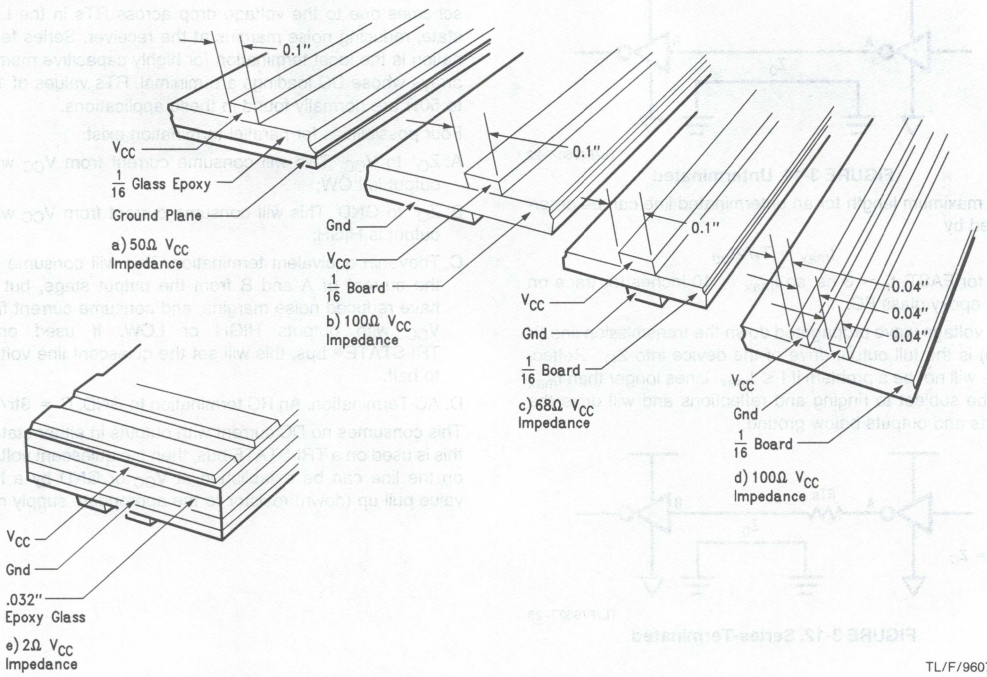

TL/F/9607–28


FIGURE 3-14. Typical Dynamic Impedance of Unbypassed V_{CC} Runs

This diagram shows several schemes for power and ground distribution on logic boards. *Figure 3-14* is a cross-section, with a, b, and c showing a 0.1 inch wide V_{CC} bus and ground on the opposite side. *Figure 3-14d* shows side-by-side V_{CC} and ground strips, each 0.04 inch wide. *Figure 3-14e* shows a four layer board with embedded power and ground planes.

In *Figure 3-14a,* the dynamic impedance of V_{CC} with respect to ground is 50Ω, even though the V_{CC} trace width is generous and there is a complete ground plane. In *Figure 3-14b,* the ground plane stops just below the edge of the V_{CC} bus and the dynamic impedance doubles to 100Ω. In *Figure 3-14c,* the ground bus is also 0.1 inch wide and runs along under the V_{CC} bus and exhibits a dynamic impedance of about 68Ω. In *Figure 3-14d,* the trace widths and spacing are such that the traces can run under a DIP, between two rows of pins. The impedance of the power and ground planes in *Figure 3-14e* is typically less than 2Ω.

These typical dynamic impedances point out why a sudden current demand due to an IC output switching can cause a momentary reduction in V_{CC}, unless a bypass capacitor is located near the IC.

Decoupling capacitors should be used on every PC card, at least one for every five to ten standard TTL packages, one for every five 'LS and 'S packages, one for every three FAST packages, and one for every one-shot (monostable), line driver and line receiver package. They should be good quality rf capacitors of 0.01 μF to 0.1 μF with short leads. It is particularly important to place good rf capacitors near sequential (bistable) devices. In addition, a larger capacitor (preferably a tantalum capacitor) of 2.0 μF to 20 μF should be included on each card.

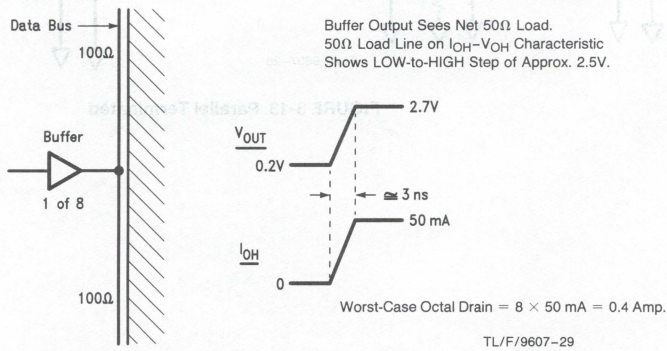


TL/F/9607–29

FIGURE 3-15. I_{CC} Drain Due to Line Driving

This diagram illustrates the sudden demand for current from V_{CC} when a buffer output forces a LOW-to-HIGH transition into the midpoint of a data bus. The sketch shows a wire-over-ground transmission line, but it could also be a twisted pair, flat cable or PC interconnect.

The buffer output effectively sees two 100Ω lines in parallel and thus a 50Ω load. For this value of load impedance, the buffer output will force an initial LOW-to-HIGH transition from 0.2V to 2.7V in about 3 ns. This net charge of 2.5V into a 50 load causes an output-HIGH current change of 50 mA. If all eight outputs of an octal buffer switch simultaneously, in this application the current demand on V_{CC} would be 0.4A. Clearly, a nearby V_{CC} bypass capacitor is needed to accommodate this demand.

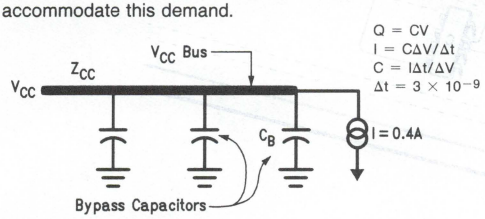

TL/F/9607–30

FIGURE 3-16. V_{CC} Bypass Capacitor for Octal Driver

Specify V_{CC} Droop = 0.1V max.

$$C = \frac{0.4 \times 3 \times 10^{-9}}{0.1} = 12 \times 10^{-9} = 0.012\ \mu F$$

Select $C_B \geq 0.02\ \mu F$

A V_{CC} bus with bypass capacitors connected periodically along its length is shown above. Also shown is a current source representing the current demand of the buffer in the preceding application.

The equations illustrate an approximation method of estimating the size of a bypass capacitor based on the current demand, the drop in V_{CC} that can be tolerated and the length of time that the capacitor must supply the charge. While the demand is known, the other two parameters must be chosen. A V_{CC} droop of 0.1V will not cause any appreciable change in performance, while a time duration of 3 ns is long enough for other nearby bypass capacitors to help supply charge. If the current demand continues over a long period of time, charge must be supplied by a very large capacitor on the board. This is the reason for the recommendation that a large capacitor be located where V_{CC} comes onto a board. If the buffers are also located near the connector end of the board, the large capacitor helps supply charge sooner.

DESIGN GUIDELINES

Ground

A good ground system is essential for a PC card containing a large number of packages. The ground can either be a good ground bus, or better, a ground plane which, incorporated with the V_{CC} supply, forms a transmission line power system. Power transmission systems, which can be attached to a PC card to give an excellent power system without the cost of a multilayer PC card, are commercially available. Ground loops on or off PC cards are to be avoided unless they approximate a ground plane.


With the advent of FAST, with considerably faster edge rates and switching times, proper grounding practice has become of primary concern in printed circuit layout. Poor circuit grounding layout techniques may result in crosstalk and slowed switching rates. This reduces overall circuit performance and may necessitate costly redesign. Also when FAST chips are substituted for standard TTL-designed printed circuit boards, faster edge rates can cause noise problems. The source of these problems can be sorted into three categories:

1. V_{CC} droop due to faster load capacitance charging;
2. Coupling via ground paths adjacent to both signal sources and loads; and
3. Crosstalk caused by parallel signal paths.

V_{CC} droop can be remedied with better or more bypassing to ground. The rule here is to place 0.01 μF capacitors from V_{CC} to ground for every three FAST circuits used, as near the IC as possible. The other two problems are not as easily corrected, because PC boards, may already be manufactured and utilized. In this case, simply replacing TTL circuits with FAST compatible circuits is not always as easy as it may seem, especially on two-sided boards. In this situation IC placement is critical at high speeds. Also when designing high density circuit layout, a ground-plane layer is imperative to provide both a sufficiently low inductance current return path and to provide electromagnetic and electrostatic shielding thus preventing noise problem 2 and reducing, by a large degree, noise problem 3.


Two-Sided PC Board Layout

When considering the two-sided PC board, more than one ground trace is often found in a parallel or non-parallel configuration. For this illustration parallel traces tied together at one end are shown. This arrangement is referred to as a ground comb. The ground comb is placed on one side of the PC board while the signal traces are on the other side, thus the two-sided circuit board.

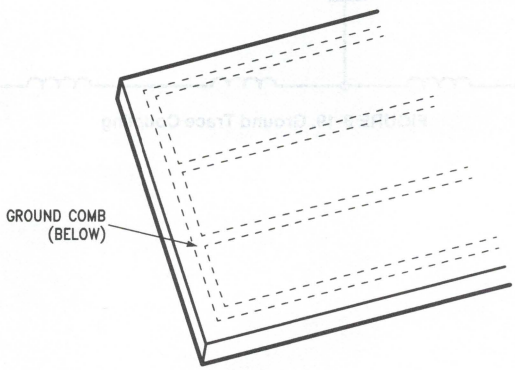

TL/F/9607–31


FIGURE 3-17

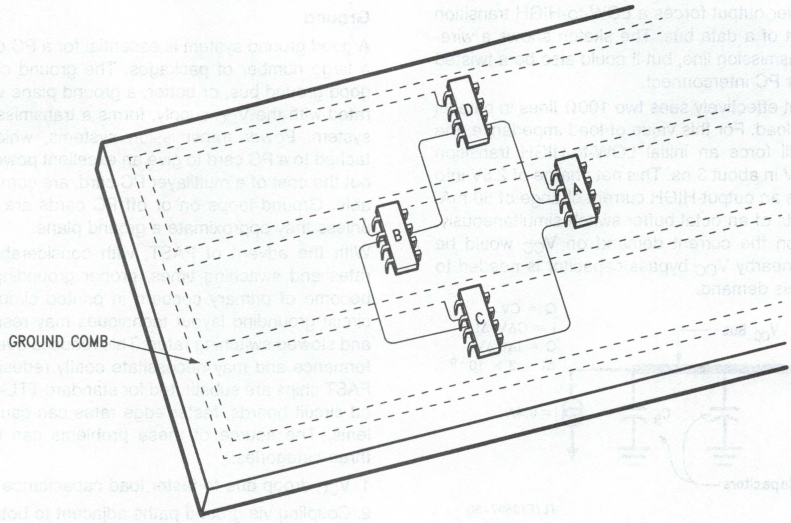

TL/F/9607–32

FIGURE 3-18

Figure 3-18 illustrates how noise is generated even though there is no apparent means of crosstalk between the circuits. If package A has an output which drives package D input and package B output drives package C input, there is no apparent path for crosstalk since mutual signal traces are remotely located. What is significant, and must be emphasized here, is that circuit packages A and B accept their ground link from the same trace. Hence, circuit A may well couple noise to circuit B via the common or shared portion of the trace. This is especially true at high switching speeds.

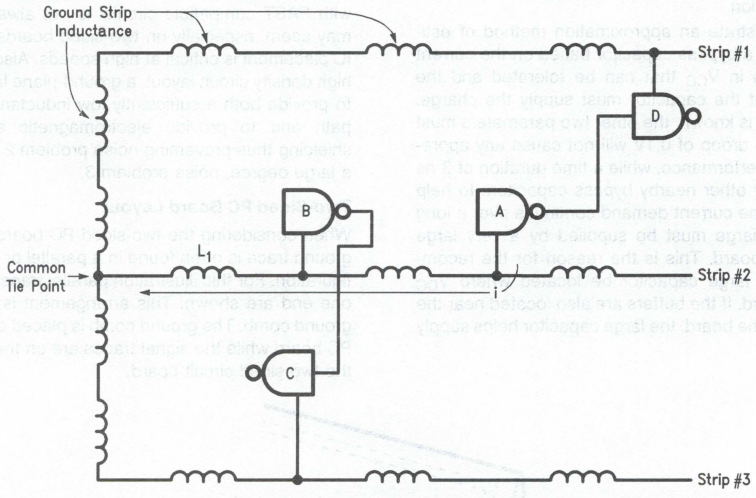

TL/F/9607–33

FIGURE 3-19. Ground Trace Coupling

Ground trace noise coupling is illustrated by a model circuit in *Figure 3-19*. With the ground comb configuration, the ground strips may be shown to contain distributed inductance, as is indeed the case. Referring to *Figure 3-19* we can see that if we switch gate A from HIGH to LOW, the current for the transition is drawn from ground strip number two. Current flows in the direction indicated by the arrow to the common tie point. It can be seen that gate B shares ground strip number two with gate A from the point where gate B is grounded back to the common tie point. This length is represented by L1. When A switches states there is a current transient which occurs on the ground strip in the positive direction. This current spike is caused by the ground strip inductance and it is "felt" by gate B. If gate B is in a LOW state (V_{OL}) the spike will appear on the output since gate B's V_{OL} level is with reference to ground. Thus if gate B's ground reference rises momentarily V_{OL} will also rise. Consequently, if gate B is output to another gate (C in the illustration) problems may arise.

Supply Voltage and Temperature

The normal supply voltage V_{CC} for all TTL circuits is +5.0V. Commercial grade parts are guaranteed to perform with a ±10% supply tolerance (±500 mV) over an ambient temperature range of 0°C. Military grade parts are guaranteed to perform with ±10% supply tolerance (±500 mV) over an ambient temperature range of −55°C to +125°C.

The actual junction temperature can be calculated by multiplying the power dissipation of the device with the thermal resistance of the package and adding it to the measured ambient temperature T_A or package (case) temperature T_C. For example, a device in ceramic DIP (θJA 100°C/W) dissipates typically 145 mW. At +55°C ambient temperature, the junction temperature is

$$T_J = (0.145 \times 100) + 55°C$$

Designers should note that localized temperatures can rise well above the general ambient in a system enclosure. On a large PC board mounted in a horizontal plane, for example, the local temperature surrounding an IC in the middle of the board can be quite high due to the heating effect of the surrounding packages and the very poor natural convection. Low velocity forced air cooling is usually sufficient to alleviate such localized static air conditions.

Interfacing

All TTL circuits are compatible, and any TTL output can drive a certain number of TTL inputs. There are only subtle differences in the worst-case noise immunity when low power, standard and Schottky TTL circuits are intermixed. Open-collector outputs, however, require a pull-up resistor to drive TTL inputs reliably.


While TTL is the dominating logic family, and many systems use TTL exclusively, there are cases where different semiconductor technologies are used in one system, either to improve the performance or to lower the cost, size and power dissipation. The following explains how TTL circuits can interface with ECL, CMOS and discrete transistors.

Interfacing TTL and ECL—Mixing ECL and TTL logic families offers the design engineer a new level of freedom and opens the entire VHF frequency spectrum to the advantages of digital measurement, control and logic operation.

The main advantages gained with ECL are high speed, flexibility, design versatility and transmission line compatibility. But application and interfacing cost problems have traditionally discouraged the use of ECL in many areas, particularly in low cost, less sophisticated systems.

The most practical interfacing method for smaller systems involves using a common supply of +5.0V to +5.2V. Care must be exercised with both logic families when using this technique to assure proper bypassing of the power supply to prevent any coupling of noise between circuit families. When larger systems are operated on a common supply, separate power buses to each logic family help prevent problems. Otherwise, good high frequency bypassing techniques are usually sufficient.

ECL devices have high input impedance with input pull-down resistors (> 20 kΩ) to the negative supply. In the TTL to ECL interface circuits in *Figure 3-20*, it is assumed that the ECL devices have high input impedance.

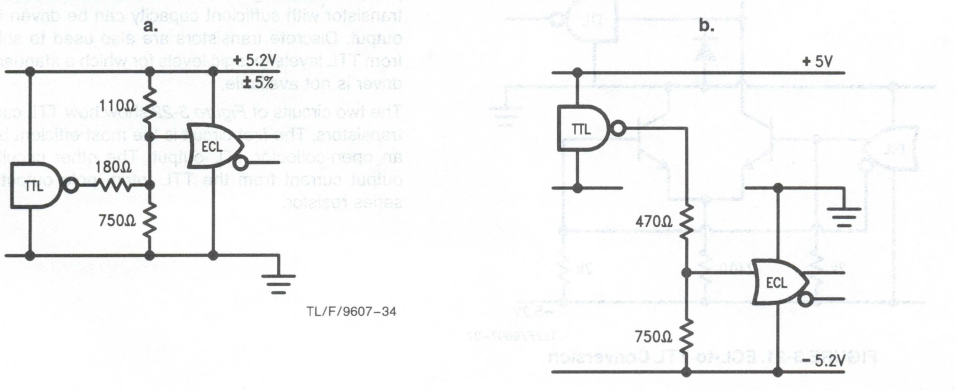

TL/F/9607–34


TL/F/9607–35

FIGURE 3-20. TTL-to-ECL Conversion

All circuits described operate with ±5% ECL and ±10% TTL supply variations, except those with ECL and TTL on a common supply. In those cases, the supply can be ±10% with ECL. All resistors are ¼W, ±5% composition type.


TTL to ECL conversion is easily accomplished with resistors, which simultaneously attenuate the TTL signal swing, shift the signal levels, and provide low impedance for damping and immunity to stray noise pick-up. The resistors should be located as near as possible to the ECL circuit for optimum effect. The circuits in *Figure 3-20* assume an unloaded TTL gate as the standard TTL source. ECL input impedance is predominantly capacitive (approximately 3 pF); the net RC time constant of this capacitance with the indicated resistors assures a net propagation delay governed primarily by the TTL signal.

a. Common Power Supply

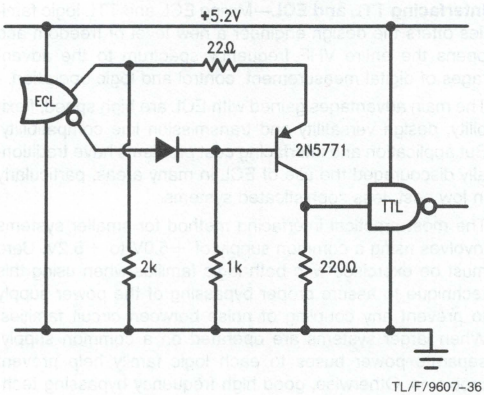

TL/F/9607–36

b. Separate Power Supplies

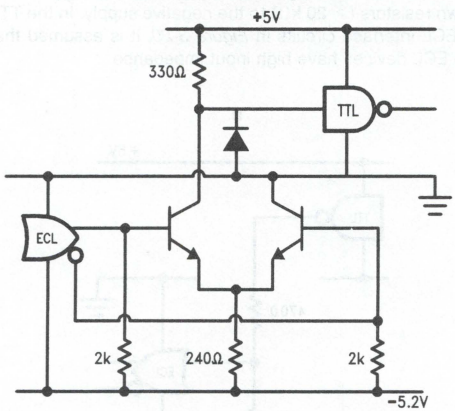

TL/F/9607–37

FIGURE 3-21. ECL-to-TTL Conversion

When interfacing between high voltage swing TTL logic and low voltage swing ECL logic, the more difficult conversion is from ECL to TTL. This requires a voltage amplifier to build up the 0.8V logic swing to a minimum of 2.5V. The circuits shown in *Figure 3-21* may be used to interface from ECL to TTL.

The higher speed converters usually have the lowest fanout: only one or two TTL gates. This fanout can be increased simply by adding a TTL buffer gate to the output of the converter. Another option, where ultimate speed is required, is to use additional logic converters.


Interfacing FAST and CMOS—Due to their wide operating voltage range, CMOS devices will function outside of the standard ±5V ±10% supply levels. For our purposes, only the case where both the FAST and CMOS devices are connected to the same voltage source will be considered.

FAST outputs can sink at least 20 mA in the LOW state. This is more than adequate to drive CMOS inputs to a valid LOW level. Due to their output designs, though, FAST outputs are unable to pull CMOS inputs to above approximately 4.0V. If the CMOS device does not have TTL-compatible input levels, the FAST output should be pulled with a resistor to V_{CC}. The value of this resistor will vary according to the system. Factors that affect the selection of the value are: edge rate— the smaller the resistor, the faster the edge rate; fanout—the smaller the resistor, the greater the fanout; and noise margins—the smaller the resistor, the greater the output HIGH noise margin and the smaller the output LOW noise margin. FAST outputs can directly drive TTL-compatible CMOS inputs, such as the inputs on ACT or HCT devices, without pull up registers.

Most CMOS outputs are capable of directly driving FAST inputs. Be aware, though, that TTL inputs have higher loading specifications than CMOS inputs. Care must be taken to insure that the CMOS outputs are not overloaded by the FAST input loading.


TTL Driving Transistors—Although high voltage, high current ICs are available, it is sometimes necessary to control greater currents or voltages than integrated circuits are capable of handling. When this condition arises, a discrete transistor with sufficient capacity can be driven from a TTL output. Discrete transistors are also used to shift voltages from TTL levels to logic levels for which a standard interface driver is not available.

The two circuits of *Figure 3-22* show how TTL can drive npn transistors. The first circuit is the most efficient but requires an open-collector TTL output. The other circuit limits the output current from the TTL totem pole output through a series resistor.

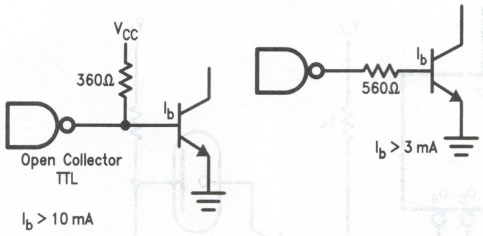

TL/F/9607–38

FIGURE 3-22. TTL Driving npn Transistors

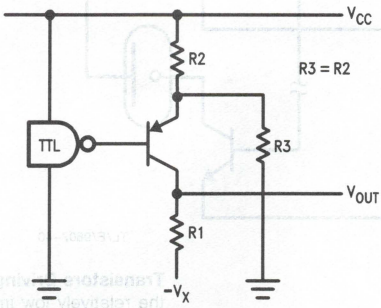

TL/F/9607–39


FIGURE 3-23. pnp Transistor Shifting TTL Output

Shifting a TTL Output to Negative Levels—The circuit of *Figure 3-23* uses a pnp transistor to shift the TTL output to a negative level. When the TTL output is HIGH, the transistor is cut off and the output voltage is $-V_X$. When the TTL output is LOW, the transistor conducts and the output voltage is


$$V_{OUT} = -V_X + R_1/R_2\,(V_{CC} - 2.0V)$$

if the transistor is not saturated, or slightly positive if the transistor is allowed to saturate.

High Voltage Drivers—A TTL output can be used to drive high voltage, low current loads through the simple, non-inverting circuits shown in *Figure 3-24*. This can be useful for driving gas discharge displays or small relays, where the TTL output can handle the current but not the voltage. Load current should not exceed I_{OL} (−4 mA).

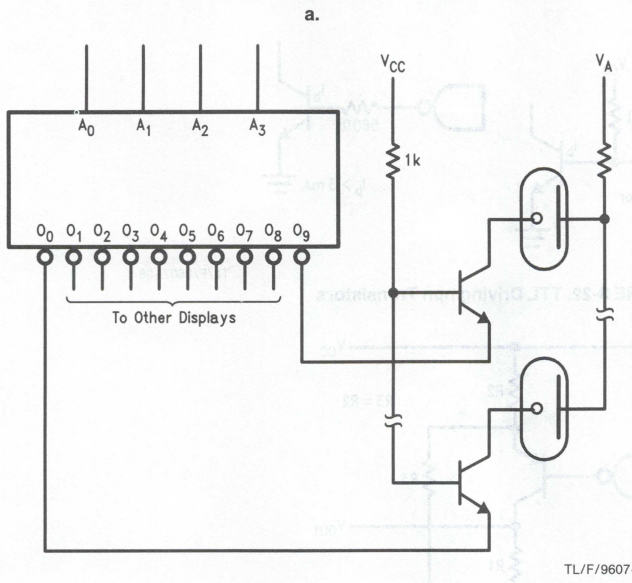


TL/F/9607–40

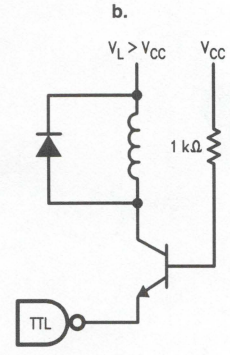


TL/F/9607–41

FIGURE 3-24. Non-Inverting High Voltage Drivers

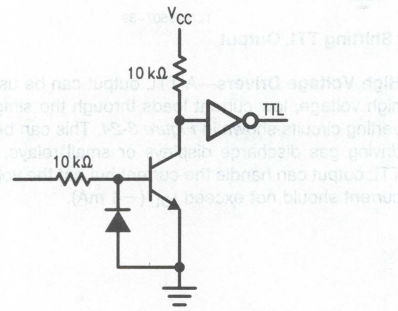

TL/F/9607–42

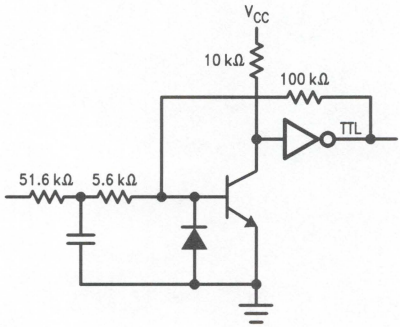

TL/F/9607–43

FIGURE 3-25. Transistors Driving TTL

Transistors Driving TTL—It is sometimes difficult to drive the relatively low impedance and narrow voltage range of TTL inputs directly from external sources, particularly in a rough, electrically noisy environment. The circuits shown in *Figure 3-25* can handle input signal swings in excess of ±100V without harming the circuits. The second circuit has input RC filter that suppresses noise. Unambiguous TTL voltage levels are generated by the positive feedback (Schmitt trigger) connection.

OPEN COLLECTOR OUTPUTS

A number of available circuits have no pull-up circuit on the outputs. Open collector outputs are used for interfacing or for wired-OR (actually wired-AND) functions. The latter is achieved by connecting open collector outputs together and adding an external pull-up resistor.

The value of the pull-up resistor is determined by considering the fanout of the OR tie and the number of devices in the OR tie. The pull-up resistor value is chosen from a range between maximum value (established to maintain the required V_{OH} with all the OR-tied outputs HIGH) and a minimum value (established so that the OR tie fanout is not exceeded when only one output is LOW).

MINIMUM AND MAXIMUM PULL-UP RESISTOR VALUES

$$R_{X(MIN)} = \left(\frac{V_{CC(MAX)} - V_{OL}}{I_{OL} - N_2(LOW) \bullet 1.6\ mA}\right)$$

$$R_{X(MAX)} = \left(\frac{V_{CC(MIN)} - V_{OH}}{N_1 I_{OH} + N_2(HIGH) \bullet 40\ \mu A}\right)$$

where:

R_X = External pull-up resistor
N_1 = Number of wired-OR outputs
N_2 = Number of input unit loads being driven
$I_{OH} = I_{CEX}$ = Output HIGH leakage current
I_{OL} = LOW level fanout current of driving element
V_{OL} = Output LOW voltage level (0.5V)
V_{OH} = Output HIGH voltage level (2.5V)
V_{CC} = Power Supply Voltage

Example: four 'F524 gate outputs driving four other gates or MSI inputs.

$$R_{X\,(MIN)} = \left(\frac{5.5V - 0.5V}{8.0\ mA - 2.4\ mA} = \frac{5.0V}{5.6\ mA}\right) = 893\Omega$$

$$R_{X\,(MAX)} = \left(\frac{4.5V - 2.5V}{4 \bullet 250\ \mu A + 2 \bullet 40\ \mu A} = \frac{2.0V}{1.08\ mA}\right) = 1852\Omega$$

where:

$N_1 = 4$
$N_2(HIGH) = 4 \bullet 0.5$ U.L. $= 2$ U.L.
$N_2(LOW) = 4 \bullet 0375$ U.L. $= 1.5$ U.L.
$I_{OH} = 250\ \mu A$
$I_{OL} = 8.0$ mA
$V_{OL} = 0.5V$
$V_{OH} = 2.5V$

Any values of pull-up resistor between 893Ω and 1852Ω can be used. The lower values yield the fastest speeds while the higher values yield the lowest power dissipation.

INCREASING FANOUT

To increase fanout, inputs and outputs of gates on the same package may be paralleled to those in a single package to avoid large transient supply currents due to different switching times of the gates. This is not detrimental to the devices, but could cause logic problems if the gates are being used as clock drivers.

UNUSED INPUTS

Theoretically, an unconnected input assumes the HIGH logic level, but practically speaking it is in an undefined logic state because it tends to act as an antenna for noise. Only a few hundred millivolts of noise may cause the unconnected input to go to the logic LOW state. On devices with memory (flip-flops, latches, registers, counters), it is particularly important to terminate unused inputs (MR, PE, PL, CP) properly since a noise spike on these inputs might change the contents of the memory. It is a poor design practice to leave unused inputs floating.

If the logic function calls for a LOW input, such as in NOR or OR gates, the input can be connected directly to ground. For a permanent HIGH signal, unused inputs can be tied directly to V_{CC}. An unused input may also be tied to a used input having the same logic function, such as NAND and AND gates, provided that the driver can handle the added I_{IH}. This practice is not recommended for diode-type inputs in a noisy environment, since each diode represents a small capacitor and two or more in parallel can act as an entry port for negative spikes superimposed on a HIGH level and cause momentary turn-off of Q2.

MINIMUM AND MAXIMUM PULL-UP RESISTOR VALUES

$$R_{X(MIN)} = \left(\frac{V_{CC(MAX)} - V_{OL}}{I_{OL} - N_H(LOW) * I_{IL}}\right)$$

$$R_{X(MAX)} = \left(\frac{V_{CC(MIN)} - V_{OH}}{N_H(HIGH) * I_{OH} + I_{LX}}\right)$$

where:

R_X = External pull-up resistor
N_H = Number of wired-OR outputs
N_L = Number of input unit loads being driven
I_{OH} = I_{CEX} = Output HIGH leakage current
I_{OL} = LOW level fanout current of driving element
V_{OL} = Output LOW voltage level (0.5V)
V_{OH} = Output HIGH voltage level (2.5V)
V_{CC} = Power Supply Voltage

Example: four 'F824 gate outputs driving four other gates or MSI inputs.

$$R_{X\,(MIN)} = \left(\frac{5.5V - 0.5V}{8.0\ mA - 2.4\ mA}\right) = \left(\frac{5.0V}{5.6\ mA}\right) = 893\Omega$$

$$R_{X\,(MAX)} = \left(\frac{4.5V - 2.5V}{(4 * 250\ \mu A) + 2 * 40\ \mu A}\right) = \left(\frac{2.0V}{1.08\ mA}\right) = 1852\Omega$$

where:

N_H = 4
$N_H(HIGH)$ = 4 * 0.5 U.L. = 2 U.L.
$N_L(LOW)$ = 4 * 0.75 U.L. = 1.5 U.L.
I_{OH} = 250 µA
I_{OL} = 8.0 mA
V_{OL} = 0.5V
V_{OH} = 2.5V

Any values of pull-up resistor between 893Ω and 1852Ω can be used. The lower values yield the fastest speeds while the higher values yield the lowest power dissipation.

INCREASING FANOUT

To increase fanout, inputs and outputs of gates on the same package may be paralleled. In those in a single package to avoid large transient supply currents due to different switching times of the gates. This is not detrimental to the devices, but could cause logic problems if the gates are being used as clock drivers.

UNUSED INPUTS

Theoretically, an unconnected input assumes the HIGH logic level, but practically speaking it is an undefined logic state because it tends to act as an antenna for noise. Only a few hundred millivolts of noise may cause the unconnected input to go to the logic LOW state. On devices with memory (flip-flops, latches, registers, counters), it is particularly important to terminate unused inputs (MR, PE, CP) properly since a noise spike on these inputs might change the contents of the memory. It is a poor design practice to leave unused inputs floating.

If the logic function calls for a LOW input, such as in NOR or OR gates, the input can be connected directly to ground. For a permanent HIGH signal, unused inputs can be tied directly to V_{CC}. An unused input may also be tied to a used input having the same logic function, such as NAND and AND gates, provided that the driver can handle the added I_{IH}. This practice is not recommended for device-type inputs in a noisy environment since each diode represents a small capacitor and two or more in parallel can act as an effective pnd for negative spikes superimposed on a HIGH level and cause momentary turn-off of Qz.



Section 4

Advanced Schottky TTL Datasheets

Section 4 Contents

54F/74F00 Quad 2-Input NAND Gate 4-6
54F/74F02 Quad 2-Input NOR Gate 4-9
54F/74F04 Hex Inverter 4-12
54F/74F08 Quad 2-Input AND Gate 4-15
54F/74F10 Triple 3-Input NAND Gate 4-18
54F/74F11 Triple 3-Input AND Gate 4-21
54F/74F13 Dual 4-Input NAND Schmitt Trigger 4-24
54F/74F14 Hex Inverter Schmitt Trigger 4-27
54F/74F20 Dual 4-Input NAND Gate 4-30
54F/74F27 Triple 3-Input NOR Gate 4-33
54F/74F30 8-Input NAND Gate 4-36
54F/74F32 Quad 2-Input OR Gate 4-39
54F/74F37 Quad 2-Input NAND Buffer 4-42
54F/74F38 Quad 2-Input NAND Buffer (Open Collector) 4-45
54F/74F40 Dual 4-Input NAND Buffer 4-48
54F/74F51 2-2-2-3 AND-OR-Invert Gate 4-51
54F/74F64 4-2-3-2-Input AND-OR-Invert Gate 4-54
54F/74F74 Dual D-Type Positive Edge-Triggered Flip-Flop 4-57
54F/74F86 Quad 2-Input Exclusive-OR Gate 4-61
54F/74F109 Dual J$\overline{K}$ Positive Edge-Triggered Flip-Flop 4-64
54F/74F112 Dual JK Negative Edge-Triggered Flip-Flop 4-68
54F/74F113 Dual JK Negative Edge-Triggered Flip-Flop 4-72
54F/74F114 Dual JK Negative Edge-Triggered Flip-Flop with Common Clocks and Clears ... 4-76
54F/74F125 Quad Buffer (TRI-STATE) 4-80
54F/74F132 Quad 2-Input NAND Schmitt Trigger 4-83
54F/74F138 1-of-8 Decoder/Demultiplexer 4-86
54F/74F139 Dual 1-of-4 Decoder/Demultiplexer 4-90
54F/74F148 8-Line to 3-Line Priority Encoder 4-94
54F/74F151A 8-Input Multiplexer 4-98
54F/74F153 Dual 4-Input Multiplexer 4-102
54F/74F157A Quad 2-Input Multiplexer 4-106
54F/74F158A Quad 2-Input Multiplexer (Inverted) 4-110
54F/74F160A Synchronous Presettable BCD Decade Counter (Asynchronous Reset) 4-114
54F/74F162A Synchronous Presettable BCD Decade Counter (Synchronous Reset) 4-114
54F/74F161A Synchronous Presettable Binary Counter (Asynchronous Reset) 4-121
54F/74F163A Synchronous Presettable Binary Counter (Synchronous Reset) 4-121
54F/74F164A Serial-In, Parallel-Out Shift Register 4-127
54F/74F168 4-Stage Synchronous Bidirectional Counter 4-131
54F/74F169 4-Stage Synchronous Bidirectional Counter 4-131
54F/74F174 Hex D Flip-Flop with Master Reset 4-137
54F/74F175 Quad D Flip-Flop 4-141
54F/74F181 4-Bit Arithmetic Logic Unit 4-145
54F/74F182 Carry Lookahead Generator 4-151
54F/74F189 64-Bit Random Access Memory with TRI-STATE Outputs 4-156
54F/74F190 Up/Down Decade Counter with Preset and Ripple Clock 4-160
54F/74F191 Up/Down Binary Counter with Preset and Ripple Clock 4-165
54F/74F192 Up/Down Decade Counter with Separate Up/Down Clocks 4-170
54F/74F193 Up/Down Binary Counter with Separate Up/Down Clocks 4-175

Section 4 Contents (Continued)

54F/74F194 4-Bit Bidirectional Universal Shift Register 4-180
54F/74F219 64-Bit Random Access Memory with TRI-STATE Outputs 4-184
54F/74F240 Octal Buffer/Line Driver with TRI-STATE Outputs (Inverting) 4-188
54F/74F241 Octal Buffer/Line Driver with TRI-STATE Outputs 4-188
54F/74F244 Octal Buffer/Line Driver with TRI-STATE Outputs 4-188
54F/74F243 Quad Bus Transceiver with TRI-STATE Outputs 4-192
54F/74F245 Octal Bidirectional Transceiver with TRI-STATE Outputs 4-195
54F/74F251A 8-Input Multiplexer with TRI-STATE Outputs 4-199
54F/74F253 Dual 4-Bit Multiplexer with TRI-STATE Outputs 4-203
54F/74F257A Quad 2-Input Multiplexer with TRI-STATE Outputs 4-207
54F/74F258A Quad 2-Input Multiplexer with TRI-STATE Outputs (Inverting) 4-211
54F/74F269 8-Bit Bidirectional Binary Counter 4-215
54F/74F273 Octal D Flip-Flop 4-219
54F/74F280 9-Bit Parity Generator/Checker 4-223
54F/74F283 4-Bit Binary Full Adder with Fast Carry 4-227
54F/74F299 Octal Universal Shift/Storage Register with Common Parallel I/O Pins 4-232
54F/74F322 Octal Serial/Parallel Register with Sign Extend 4-237
54F/74F323 Octal Universal Shift/Storage Register with Synchronous Reset and Common I/O Pins 4-242
54F/74F350 4-Bit Shifter with TRI-STATE Outputs 4-247
54F/74F352 Dual 4-Input Multiplexer 4-253
54F/74F353 Dual 4-Input Multiplexer with TRI-STATE Outputs 4-257
54F/74F365 Hex Buffer/Driver with TRI-STATE Outputs 4-261
54F/74F366 Hex Inverter/Buffer with TRI-STATE Outputs 4-264
54F/74F368 Hex Inverter/Buffer with TRI-STATE Outputs 4-264
54F/74F373 Octal Transparent Latch with TRI-STATE Outputs 4-268
54F/74F374 Octal D-Type Flip-Flop with TRI-STATE Outputs 4-272
54F/74F377 Octal D-Type Flip-Flop with Clock Enable 4-276
54F/74F378 Parallel D Register with Enable 4-280
54F/74F379 Quad Parallel Register with Enable 4-284
54F/74F381 4-Bit Arithmetic Logic Unit 4-288
54F/74F382 4-Bit Arithmetic Logic Unit 4-294
54F/74F384 8-Bit Serial/Parallel Twos' Complement Multiplier 4-300
54F/74F385 Quad Serial Adder/Subtractor 4-306
54F/74F398 Quad 2-Port Register 4-311
54F/74F399 Quad 2-Port Register 4-311
54F/74F401 Cyclic Redundancy Check Generator/Checker 4-316
54F/74F402 Serial Data Polynomial Generator/Checker 4-321
54F/74F403A 16 x 4 First-In First-Out Buffer Memory 4-329
54F/74F407 Data Access Register 4-346
54F/74F410 Register Stack—16 x 4 RAM TRI-STATE Output Register 4-353
54F/74F412 Multi-Mode Buffered 8-Bit Latch with TRI-STATE Outputs 4-357
54F/74F413 64 x 4 First-In First-Out Buffer Memory with Parallel I/O 4-362
54F/74F420 Paralleled Check Bit/Syndrome Bit Generator 4-366
54F/74F432 Multi-Mode Buffered 8-Bit Latch with TRI-STATE Outputs 4-371
54F/74F433 64 x 4 First-In First-Out Buffer Memory 4-377
54F/74F521 8-Bit Identity Comparator 4-391
54F/74F524 8-Bit Registered Comparator 4-395
54F/74F525 16-Bit Programmable Counter 4-402
54F/74F533 Octal Transparent Latch with TRI-STATE Outputs 4-409
54F/74F534 Octal D Flip-Flop with TRI-STATE Outputs 4-413
54F/74F537 1-of-10 Decoder with TRI-STATE Outputs 4-417

Section 4 Contents (Continued)

54F/74F538 1-of-8 Decoder with TRI-STATE Outputs 4-421
54F/74F539 Dual 1-of-4 Decoder with TRI-STATE Outputs 4-425
54F/74F540 Octal Buffer/Line Driver with TRI-STATE Outputs (Inverting) 4-429
54F/74F541 Octal Buffer/Line Driver with TRI-STATE Outputs 4-429
54F/74F543 Octal Registered Transceiver 4-433
54F/74F544 Octal Registered Transceiver (Inverting in Both Directions) 4-438
54F/74F545 Octal Bidirectional Transceiver with TRI-STATE Outputs 4-443
54F/74F547 Octal Decoder/Demultiplexer with Address Latches and Acknowledge 4-446
54F/74F548 Octal Decoder/Demultiplexer with Acknowledge 4-451
54F/74F550 Octal Registered Transceiver with Status Flags 4-455
54F/74F551 Octal Registered Transceiver with Status Flags 4-455
54F/74F552 Octal Registered Transceiver with Parity and Flags 4-461
54F/74F563 Octal D-Type Latch with TRI-STATE Outputs 4-466
54F/74F564 Octal D-Type Flip-Flop with TRI-STATE Outputs 4-470
54F/74F568 4-Bit Bidirectional Decade Counter with TRI-STATE Outputs 4-474
54F/74F569 4-Bit Bidirectional Binary Counter with TRI-STATE Outputs 4-474
54F/74F573 Octal D-Type Latch with TRI-STATE Outputs 4-485
54F/74F574 Octal D-Type Flip-Flop with TRI-STATE Outputs 4-489
54F/74F579 8-Bit Bidirectional Binary Counter with TRI-STATE Outputs 4-493
54F/74F582 4-Bit BCD Arithmetic Logic Unit 4-494
54F/74F583 4-Bit BCD Adder 4-498
54F/74F588 Octal Bidirectional Transceiver with IEEE-488 Termination Resistors and TRI-STATE Inputs/Outputs 4-502
54F/74F620 Inverting Octal Bus Transceiver with TRI-STATE Outputs 4-506
54F/74F623 Inverting Octal Bus Transceiver with TRI-STATE Outputs 4-506
54F/74F632 32-Bit Parallel Error Detection and Correction Circuit 4-510
54F/74F640 Octal Bus Transceiver with TRI-STATE Outputs 4-522
54F/74F643 Octal Bus Transceiver with TRI-STATE Outputs 4-522
54F/74F645 Octal Bus Transceiver with TRI-STATE Outputs 4-522
54F/74F646 Octal Transceiver/Register with TRI-STATE Outputs 4-527
54F/74F648 Octal Transceiver/Register with TRI-STATE Outputs 4-527
54F/74F651 Octal Transceiver/Register with TRI-STATE Outputs (Inverting) 4-534
54F/74F652 Octal Transceiver/Register with TRI-STATE Outputs 4-534
54F/74F657 Octal Bidirectional Transceiver with 8-Bit Parity Generator/Checker and TRI-STATE Outputs 4-540
54F/74F673A 16-Bit Serial-In, Serial/Parallel-Out Shift Register (Common Serial I/O Pin) 4-545
54F/74F675A 16-Bit Serial-In, Serial/Parallel-Out Shift Register 4-550
54F/74F676 16-Bit Serial/Parallel-In, Serial-Out Shift Register 4-554
54F/74F779 8-Bit Bidirectional Binary Counter with TRI-STATE Outputs 4-558
54F/74F784 8-Bit Serial/Parallel Multiplier with Adder/Subtractor 4-559
54F/74F794 8-Bit Register with Readback 4-565
54F/74F821 10-Bit D-Type Flip-Flop 4-569
54F/74F823 9-Bit D-Type Flip-Flop 4-573
54F/74F825 8-Bit D-Type Flip-Flop 4-577
54F/74F827 10-Bit Buffer/Line Driver 4-581
54F/74F828 10-Bit Buffer/Line Driver 4-581
54F/74F841 10-Bit Transparent Latch 4-586
54F/74F843 9-Bit Transparent Latch 4-590
54F/74F845 8-Bit Transparent Latch 4-594
54F/74F899 9-Bit Latchable Transceiver with Parity Generator/Checker 4-599
54F/74F968 1 Megabit Dynamic RAM Controller 4-609
54F/74F2241 Octal Buffer/Line Driver with 25Ω Series Resistors in the Outputs 4-621

Section 4 Contents (Continued)

54F/74F2244 Octal Buffer/Line Driver with 25Ω Series Resistors in the Outputs 4-621
54F/74F2243 Quad Bus Transceiver with 25Ω Resistors in the Outputs 4-625
54F/74F2620 Inverting Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-628
54F/74F2623 Inverting Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-628
54F/74F2640 Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-632
54F/74F2643 Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-632
54F/74F2645 Octal Bus Transceiver with 25Ω Resistors in the Outputs 4-632
29F52 8-Bit Registered Transceiver 4-637
29F53 8-Bit Registered Transceiver 4-637
29F68 Dynamic RAM Controller 4-643

National Semiconductor

54F/74F00
Quad 2-Input NAND Gate

General Description


This device contains four independent gates, each of which performs the logic NAND function.

Features

- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbol




TL/F/9454–3

Connection Diagrams



TL/F/9454–2



TL/F/9454–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n	Inputs	1.0/1.0	20 μA/ −0.6 mA
$\overline{O}_n$	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			1.9	2.8	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			6.8	10.2	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil, $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n to $\overline{O}_n$	2.4 1.5	3.7 3.2	5.0 4.3	2.0 1.5	7.0 6.5	2.4 1.5	6.0 5.3	ns	2–3

National Semiconductor


54F/74F02
Quad 2-Input NOR Gate

General Description

This device contains four independent gates, each of which performs the logic NOR function.


Ordering Code: See Section 5

Logic Symbol




TL/F/9455–3

Connection Diagrams



TL/F/9455–2



TL/F/9455–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_n$	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			3.7	5.6	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			8.7	13.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n to $\overline{O}_n$	2.5 1.5	4.4 3.2	5.5 4.3	2.5 1.5	7.5 6.5	2.5 1.5	6.5 5.3	ns	2–3

National Semiconductor

54F/74F04
Hex Inverter

General Description

This device contains six independent gates, each of which performs the logic INVERT function.


Features

- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9456–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9456–2

Pin Assignment for LCC



TL/F/9456–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_n$	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			2.8	4.2	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			10.2	15.3	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50\ pF$			54F T_A, V_{CC} = Mil, $C_L = 50\ pF$		74F T_A, V_{CC} = Com, $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.4	3.7	5.0	2.0	7.0	2.4	6.0	ns	2–3
t_{PHL}	A_n to $\overline{O}_n$	1.5	3.2	4.3	1.5	6.5	1.5	5.3		

National Semiconductor

54F/74F08
Quad 2-Input AND Gate

General Description

This device contains four independent gates, each of which performs the logic AND function.


Features

- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9457–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9457–2

Pin Assignment for LCC



TL/F/9457–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n	Inputs	1.0/1.0	20 μA/−0.6 mA
O_n	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			5.5	8.3	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			8.6	12.9	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n to O_n	3.0 2.5	4.2 4.0	5.6 5.3	2.5 2.0	7.5 7.5	3.0 2.5	6.6 6.3	ns	2–3

National Semiconductor

54F/74F10
Triple 3-Input NAND Gate


General Description

This device contains three independent gates, each of which performs the logic NAND function.

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9458–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9458–2

Pin Assignment for LCC



TL/F/9458–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n, C_n	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_n$	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC} 74F 10% V_{CC} 74F 5% V_{CC}	2.5 2.5 2.7			V	Min	I_{OH} = −1 mA I_{OH} = −1 mA I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC} 74F 10% V_{CC}			0.5 0.5	V	Min	I_{OL} = 20 mA I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F 74F			20.0 5.0	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test	54F 74F			100 7.0	μA	Max	V_{IN} = 7.0V
I_{CEX}	Output HIGH Leakage Current	54F 74F			250 50	μA	Max	V_{OUT} = V_{CC}
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			1.4	2.1	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			5.1	7.7	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.4	3.7	5.0	2.0	7.0	2.4	6.0	ns	2–3
t_{PHL}	A_n, B_n, C_n to $\overline{O}_n$	1.5	3.2	4.3	1.5	6.5	1.5	5.3		

National Semiconductor


54F/74F11
Triple 3-Input AND Gate

General Description

This device contains three independent gates, each of which performs the logic AND function.


Ordering Code: See Section 5

Logic Symbol

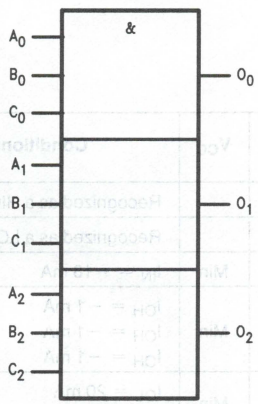


TL/F/9459–3

Connection Diagrams



TL/F/9459–2



TL/F/9459–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n, C_n	Inputs	1.0/1.0	20 μA/−0.6 mA
O_n	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			4.1	6.2	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			6.5	9.7	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F			54F		74F		Units	Fig. No.
		$T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			$T_A, V_{CC} = Mil$ $C_L = 50\ pF$		$T_A, V_{CC} = Com$ $C_L = 50\ pF$			
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n, C_n to O_n	3.0 2.5	4.2 4.1	5.6 5.5	2.5 2.0	7.5 7.5	3.0 2.5	6.6 6.5	ns	2–3

National Semiconductor

54F/74F13
Dual 4-Input NAND Schmitt Trigger

General Description

The 'F13 contains two 4-input NAND gates which accept standard TTL input signals and provide standard TTL output levels. They are capable of transforming slowly changing input signals into sharply defined, jitter-free output signals. In addition, they have a greater noise margin than conventional NAND gates.


Each circuit contains a 4-input Schmitt trigger followed by level shifting circuitry and a standard FAST® output structure. The Schmitt trigger uses positive feedback to effectively speed-up slow input transitions, and provide different input threshold voltages for positive- and negative-going transitions. This hysteresis between the positive-going and negative-going input threshold (typically 800 mV) is determined by resistor ratios and is essentially insensitive to temperature and supply voltage variations.

Features

- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbol

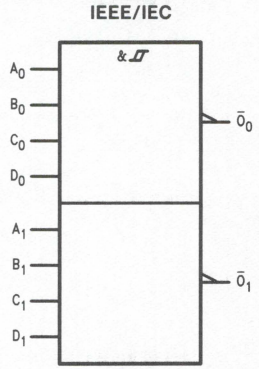


TL/F/9460–3

Connection Diagrams



TL/F/9460–1



TL/F/9460–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n, C_n, D_n	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_n$	Outputs	50/33.3	−1 mA/20 mA

Function Table

Inputs				Output
A	B	C	D	$\overline{O}$
L	X	X	X	H
X	L	X	X	H
X	X	L	X	H
X	X	X	L	H
H	H	H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{T+}	Positive-Going Threshold		1.5		2.0	V	5.0	
V_{T-}	Negative-Going Threshold		0.7		1.1	V	5.0	
ΔV_T	Hysteresis ($V_{T+} - V_{T-}$)		0.4		—	V	5.0	
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			4.5	8.5	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			7.0	10.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n, C_n, D_n to $\overline{O}_n$	5.0 9.5		10.5 17.5	3.0 8.5	16.0 22.0	4.5 9.5	12.0 18.5	ns	2–3

National Semiconductor

54F/74F14
Hex Inverter Schmitt Trigger

General Description

The 'F14 contains six logic inverters which accept standard TTL input signals and provide standard TTL output levels. They are capable of transforming slowly changing input signals into sharply defined, jitter-free output signals. In addition, they have a greater noise margin than conventional inverters.


Each circuit contains a Schmitt trigger followed by a Darlington level shifter and a phase splitter driving a TTL totem-pole output. The Schmitt trigger uses positive feed back to effectively speed-up slow input transition, and provide different input threshold voltages for positive and negative-going transitions. This hysteresis between the positive-going and negative-going input thresholds (typically 800 mV) is determined internally by resistor ratios and is essentially insensitive to temperature and supply voltage variations.

Features

- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbol




TL/F/9461–3

Connection Diagrams



TL/F/9461–1



TL/F/9461–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_n	Input	1.0/1.0	20 μA/ −0.6 mA
$\overline{O}_n$	Output	50/33.3	−1 mA/20 mA

Function Table

Input	Output
A	$\overline{O}$
L	H
H	L

H = HIGH Voltage Level
L = LOW Voltage Level

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{T+}	Positive-Going Threshold		1.5	1.7	2.0	V	5.0V	
V_{T-}	Negative-Going Threshold		0.7	0.9	1.1	V	5.0V	
ΔV_T	Hysteresis ($V_{T+} - V_{T-}$)		0.4	0.8		V	5.0V	
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	Max	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current				25	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				25	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF		54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	4.0	10.5	4.0	14.0	4.0	11.5	ns	2–3
t_{PHL}	$I_n \rightarrow \overline{O}_n$	3.5	8.5	3.5	10.0	3.5	9.0		

National Semiconductor


54F/74F20
Dual 4-Input NAND Gate

General Description

This device contains two independent gates, each of which performs the logic NAND function.


Ordering Code: See Section 5

Logic Symbol

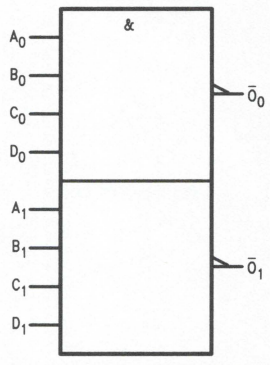


TL/F/9462–3

Connection Diagrams



TL/F/9462–2



TL/F/9462–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n, C_n, D_n	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_n$	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			0.9	1.4	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			3.4	5.1	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.4	3.7	5.0	2.0	7.0	2.4	6.0	ns	2–3
t_{PHL}	A_n, B_n, C_n, D_n to $\overline{O}_n$	1.5	3.2	4.3	1.5	6.5	1.5	5.3		

National Semiconductor

54F/74F27
Triple 3-Input NOR Gate


General Description

This device contains three independent gates, each of which performs the logic NOR function.

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9539–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9539–2

Pin Assignment for LCC



TL/F/9539–1

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n, C_n	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_n$	Data Outputs	50/33.3	−1 mA/20 mA

Function Table

Inputs			Output
A_n	B_n	C_n	$\overline{O}_n$
L	L	L	H
X	X	H	L
X	H	X	L
H	X	X	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			4.0	5.5	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			8.7	12.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F T_A, V_{CC} = Mil $C_L = 50$ pF		74F T_A, V_{CC} = Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay	2.0 1.0	3.8 2.6	6.0 4.0			1.5 1.0	6.5 4.5	ns	2–3

National Semiconductor


54F/74F30
8-Input NAND Gate

General Description

This device contains a single gate, which performs the logic NAND function.


Ordering Code: See Section 5

Logic Symbol




TL/F/9560–4

Connection Diagrams



TL/F/9560–1



TL/F/9560–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_7	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}$	Output	50/33.3	−1 mA/20 mA

Function Table

Inputs								Output
A0	A1	A2	A3	A4	A5	A6	A7	$\overline{O}$
L	X	X	X	X	X	X	X	H
X	L	X	X	X	X	X	X	H
X	X	L	X	X	X	X	X	H
X	X	X	L	X	X	X	X	H
X	X	X	X	L	X	X	X	H
X	X	X	X	X	L	X	X	H
X	X	X	X	X	X	L	X	H
X	X	X	X	X	X	X	L	H
H	H	H	H	H	H	H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			0.5	1.5	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				4.5	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	1.0	3.7	5.0			1.0	5.5	ns	2–3
t_{PHL}	A_n to $\overline{O}$	1.5	2.8	5.0			1.5	5.5		

National Semiconductor

54F/74F32
Quad 2-Input OR Gate

General Description

This device contains four independent gates, each of which performs the logic OR function.


Features

- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9463–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9463–2

Pin Assignment for LCC



TL/F/9463–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n	Inputs	1.0/1.0	20 μA/−0.6 mA
O_n	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			6.1	9.2	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			10.3	15.5	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	3.0	4.2	5.6	3.0	7.5	3.0	6.6	ns	2–3
t_{PHL}	A_n, B_n to O_n	3.0	4.0	5.3	2.5	7.5	3.0	6.3		

National Semiconductor

54F/74F37
Quad Two-Input NAND Buffer


General Description

This device contains four independent gates, each of which performs the logic NAND function.

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9464–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9464–1

Pin Assignment for LCC



TL/F/9464–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n	Inputs	1.0/2.0	20 μA/−1.2 mA
$\overline{O}_n$	Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

Function Table

Inputs		Output
A	B	$\overline{O}$
L	L	H
L	H	H
H	L	H
H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.2	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			3.7	6.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			28.0	33.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n to $\overline{O}_n$	2.0 1.5	3.2 2.4	5.5 4.5			1.5 1.0	6.5 5.0	ns	2–3

National Semiconductor

54F/74F38
Quad Two-Input NAND Buffer (Open Collector)


General Description

This device contains four independent gates, each of which performs the logic NAND function. The open-collector outputs require external pull-up resistors for proper logical operation.

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9465–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9465–1

Pin Assignment for LCC



TL/F/9465–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n	Inputs	1.0/2.0	20 μA/ −1.2 mA
$\overline{O}_n$	Outputs	OC*/106.6 (80)	OC*/64 mA (48 mA)

*OC = Open Collector

Function Table

Inputs		Output
A	B	$\overline{O}$
L	L	H
L	H	H
H	L	H
H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.2	mA	Max	V_{IN} = 0.5V
I_{OHC}	Open Collector, Output OFF Leakage Test				250	μA	Min	V_{OUT} = V_{CC}
I_{CCH}	Power Supply Current			2.1	7.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			26.0	30.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	6.5	9.7	12.5	6.5	14.5	6.5	13.0	ns	2–3
t_{PHL}	A_n, B_n to $\overline{O}_n$	1.0	2.1	5.0	1.0	5.5	1.0	5.5		

National Semiconductor


54F/74F40
Dual 4-Input NAND Buffer

General Description

This device contains two independent gates, each of which performs the logic NAND function.


Ordering Code: See Section 5

Logic Symbol

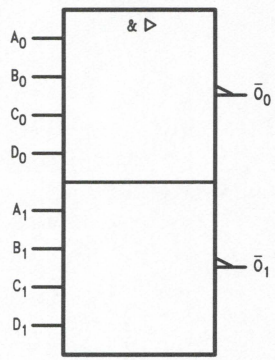


TL/F/9466–3

Connection Diagrams



TL/F/9466–1



TL/F/9466–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n, C_n, D_n	Inputs	1.0/2.0	20 μA/−1.2 mA
$\overline{O}_n$	Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

Function Table

Inputs				Output
A	B	C	D	$\overline{O}$
L	X	X	X	H
X	L	X	X	H
X	X	L	X	H
X	X	X	L	H
H	H	H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output High Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.2	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			1.6	4.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			13.0	17.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n, C_n, D_n to $\overline{O}_n$	2.0 1.5	3.0 2.5	6.0 5.0			1.5 1.0	7.0 5.5	ns	2–3

National Semiconductor

54F/74F51
2-2-2-3 AND-OR-Invert Gate


General Description

This device contains two independent logic units, one performing a 2-2 AND-OR-INVERT and the other performing a 3-3 AND-OR-INVERT function.

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC

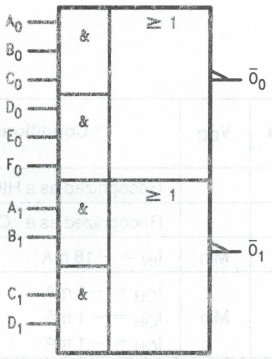

TL/F/9468–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9468–2

Pin Assignment for LCC



TL/F/9468–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n, C_n, D_n, E_n, F_n	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_n$	Outputs	50/33.3	−1 mA/20 mA

Function Table for 3-Input Gates

Inputs						Output
A_0	B_0	C_0	D_0	E_0	F_0	$\overline{O}_0$
H	H	H	X	X	X	L
X	X	X	H	H	H	L
All other combinations						H

Function Table for 2-Input Gates

Inputs				Output
A_1	B_1	C_1	D_1	$\overline{O}_1$
H	H	X	X	L
X	X	H	H	L
All other combinations				H

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			1.9	3.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			5.3	8.5	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F $T_A, V_{CC} = $ Mil, $C_L = 50$ pF		74F $T_A, V_{CC} = $ Comm, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.0	3.7	6.0			1.5	6.5	ns	2–3
t_{PHL}	$A_n, B_n, C_n, D_n, E_n, F_n$ to $\overline{O}_n$	1.0	2.6	4.0			1.0	4.5		

National Semiconductor

54F/74F64
4-2-3-2-Input AND-OR-Invert Gate


General Description

This device contains gates configured to perform a 4-2-3-2 input AND-OR-INVERT function.

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC

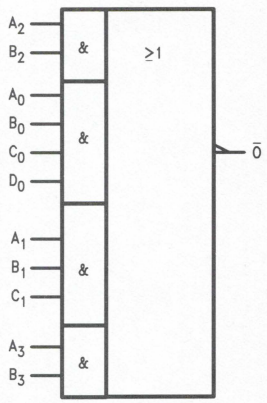

TL/F/9467–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9467–2

Pin Assignment for LCC



TL/F/9467–1

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n, C_n, D_n	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}$	Output	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output High Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			1.9	2.8	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			3.1	4.7	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.5	4.6	6.5	2.5	8.5	2.5	7.5	ns	2–3
t_{PHL}	A_n, B_n, C_n, D_n to $\overline{O}$	1.5	3.2	4.5	1.5	6.5	1.5	5.5		

National Semiconductor

54F/74F74
Dual D-Type Positive Edge-Triggered Flip-Flop

General Description

The 'F74 is a dual D-type flip-flop with Direct Clear and Set inputs and complementary (Q, $\overline{Q}$) outputs. Information at the input is transferred to the outputs on the positive edge of the clock pulse. Clock triggering occurs at a voltage level of the clock pulse and is not directly related to the transition time of the positive-going pulse. After the Clock Pulse input threshold voltage has been passed, the Data input is locked out and information present will not be transferred to the outputs until the next rising edge of the Clock Pulse input.

Asynchronous Inputs:


LOW input to $\overline{S}_D$ sets Q to HIGH level
LOW input to $\overline{C}_D$ sets Q to LOW level
Clear and Set are independent of clock
Simultaneous LOW on $\overline{C}_D$ and $\overline{S}_D$ makes both Q and $\overline{Q}$ HIGH

Features

- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols

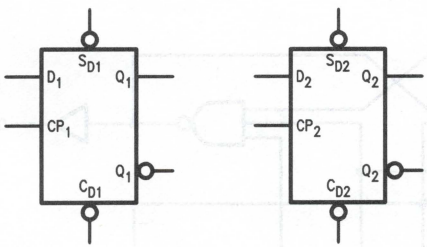

TL/F/9469–3 TL/F/9469–4


IEEE/IEC



TL/F/9469–6


Connection Diagrams

Pin Assignment for DIP, SOIC, and Flatpak



TL/F/9469–1

Pin Assignment for LCC



TL/F/9469–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_1, D_2	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP_1, CP_2	Clock Pulse Inputs (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{C}_{D1}, \overline{C}_{D2}$	Direct Clear Inputs (Active LOW)	1.0/3.0	20 μA/−1.8 mA
$\overline{S}_{D1}, \overline{S}_{D2}$	Direct Set Inputs (Active LOW)	1.0/3.0	20 μA/−1.8 mA
$Q_1, \overline{Q}_1, Q_2, \overline{Q}_2$	Outputs	50/33.3	−1 mA/20 mA

Truth Table

Inputs				Outputs	
$\overline{S}_D$	$\overline{C}_D$	CP	D	Q	$\overline{Q}$
L	H	X	X	H	L
H	L	X	X	L	H
L	L	X	X	H	H
H	H	⎍	h	H	L
H	H	⎍	l	L	H
H	H	L	X	Q_0	$\overline{Q}_0$

H (h) = HIGH Voltage Level
L (l) = LOW Voltage Level
X = Immaterial
Q_0 = Previous Q ($\overline{Q}$) before LOW-to-HIGH Clock Transition
Lower case letters indicate the state of the referenced input or output one setup time prior to the LOW-to-HIGH clock transition.

Logic Diagram

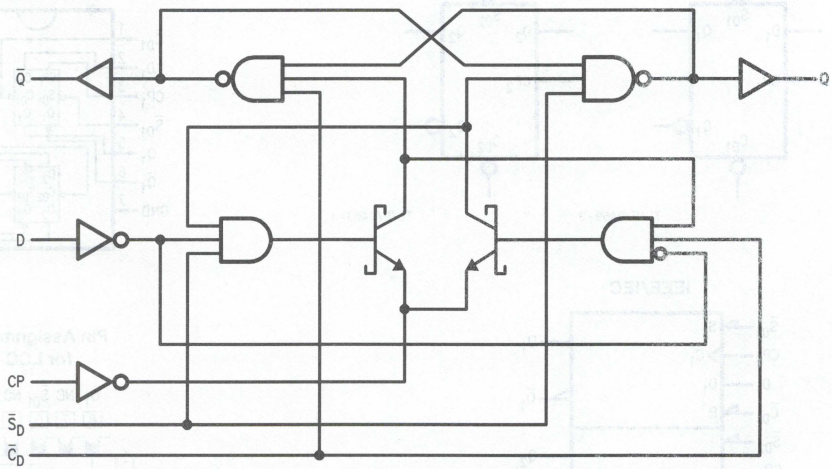

TL/F/9469–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
					−1.8			V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			10.5	16.0	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	125		50		100		MHz	2–1
t_{PLH}	Propagation Delay	3.8	5.3	6.8	3.8	8.5	3.8	7.8	ns	2–3
t_{PHL}	CP_n to Q_n or $\overline{Q}_n$	4.4	6.2	8.0	4.4	10.5	4.4	9.2		
t_{PLH}	Propagation Delay	3.2	4.6	6.1	3.2	8.0	3.2	7.1	ns	2–3
t_{PHL}	$\overline{C}_{Dn}$ or $\overline{S}_{Dn}$ to Q_n or $\overline{Q}_n$	3.5	7.0	9.0	3.5	11.5	3.5	10.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	2.0		3.0		2.0		ns	2–6
$t_s(L)$	D_n to CP_n	3.0		4.0		3.0			
$t_h(H)$	Hold Time, HIGH or LOW	1.0		2.0		1.0			
$t_h(L)$	D_n to CP_n	1.0		2.0		1.0			
$t_w(H)$	CP_n Pulse Width	4.0		4.0		4.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0		6.0		5.0			
$t_w(L)$	$\overline{C}_{Dn}$ or $\overline{S}_{Dn}$ Pulse Width LOW	4.0		4.0		4.0		ns	2–4
t_{rec}	Recovery Time $\overline{C}_{Dn}$ or $\overline{S}_{Dn}$ to CP	2.0		3.0		2.0		ns	2–6

National Semiconductor


54F/74F86
2-Input Exclusive-OR Gate

General Description

This device contains four independent gates, each of which performs the logic exclusive-OR function.


Ordering Code: See Section 5

Logic Symbol




TL/F/9470–3

Connection Diagrams



TL/F/9470–2



TL/F/9470–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n	Inputs	1.0/1.0	20 μA/−0.6 mA
O_n	Outputs	50/33.3	−1 mA/20 mA

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			12	18	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			18	28	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n to O_n (Other Input LOW)	3.0 3.0	4.0 4.2	5.5 5.5	2.5 3.0	7.0 7.0	3.0 3.0	6.5 6.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n to O_n (Other Input HIGH)	3.5 3.0	5.3 4.7	7.0 6.5	3.5 3.0	8.5 8.0	3.5 3.0	8.0 7.5	ns	2–3

National Semiconductor

54F/74F109
Dual $J\overline{K}$ Positive Edge-Triggered Flip-Flop

General Description

The 'F109 consists of two high-speed, completely independent transition clocked $J\overline{K}$ flip-flops. The clocking operation is independent of rise and fall times of the clock waveform. The $J\overline{K}$ design allows operation as a D flip-flop (refer to 'F74 data sheet) by connecting the J and $\overline{K}$ inputs.

Asynchronous Inputs:


LOW input to $\overline{S}_D$ sets Q to HIGH level
LOW input to $\overline{C}_D$ sets Q to LOW level
Clear and Set are independent of clock
Simultaneous LOW on $\overline{C}_D$ and $\overline{S}_D$ makes both Q and $\overline{Q}$ HIGH

Features


- Guaranteed 4000V minimum ESD protection.

Ordering Code: See Section 5

Logic Symbols




TL/F/9471–3



TL/F/9471–4


IEEE/IEC



TL/F/9471–6


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9471–1

Pin Assignment for LCC



TL/F/9471–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$J_1, J_2, \overline{K}_1, \overline{K}_2$	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP_1, CP_2	Clock Pulse Inputs (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{C}_{D1}, \overline{C}_{D2}$	Direct Clear Inputs (Active LOW)	1.0/3.0	20 μA/−1.8 mA
$\overline{S}_{D1}, \overline{S}_{D2}$	Direct Set Inputs (Active LOW)	1.0/3.0	20 μA/−1.8 mA
$Q_1, Q_2, \overline{Q}_1, \overline{Q}_2$	Outputs	50/33.3	−1 mA/20 mA

Truth Table

Inputs					Outputs	
$\overline{S}_D$	$\overline{C}_D$	CP	J	$\overline{K}$	Q	$\overline{Q}$
L	H	X	X	X	H	L
H	L	X	X	X	L	H
L	L	X	X	X	H	H
H	H	⎍	l	l	L	H
H	H	⎍	h	l	Toggle	
H	H	⎍	l	h	Q_0	$\overline{Q}_0$
H	H	⎍	h	h	H	L
H	H	L	X	X	Q_0	$\overline{Q}_0$

H (h) = HIGH Voltage Level
L (l) = LOW Voltage Level
⎍ = LOW-to-HIGH Transition
X = Immaterial
Q_0 ($\overline{Q}_0$) = Before LOW-to-HIGH Transition of Clock
Lower case letters indicate the state of the referenced output one setup time prior to the LOW-to-HIGH clock transition.

Logic Diagram (One Half Shown)

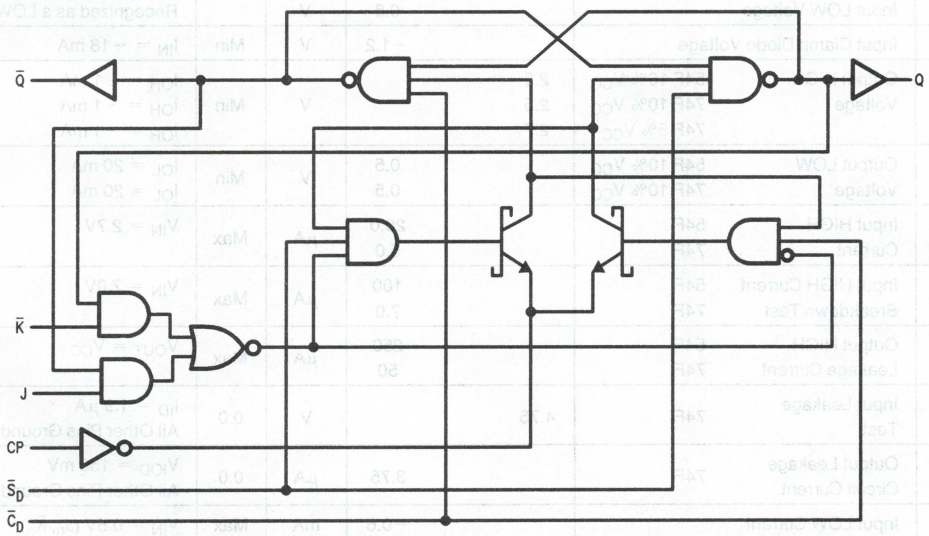

TL/F/9471–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (J_n, $\overline{K}_n$)
					−1.8	mA	Max	V_{IN} = 0.5V ($\overline{C}_{Dn}$, $\overline{S}_{Dn}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			11.7	17.0	mA	Max	CP = 0V

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	125		50		90		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP_n to Q_n or $\overline{Q}_n$	3.8 4.4	5.3 6.2	7.0 8.0	3.8 4.4	9.0 10.5	3.8 4.4	8.0 9.2	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{C}_{Dn}$ or $\overline{S}_{Dn}$ to Q_n or $\overline{Q}_n$	3.2 3.5	5.2 7.0	7.0 9.0	3.2 3.5	9.0 11.5	3.2 3.5	8.0 10.5	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW J_n or $\overline{K}_n$ to CP_n	3.0 3.0		3.0 5.0		3.0 3.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW J_n or $\overline{K}_n$ to CP_n	1.0 1.0		1.0 1.0		1.0 1.0			
$t_w(H)$ $t_w(L)$	CP_n Pulse Width HIGH or LOW	4.0 5.0		4.0 5.0		4.0 5.0		ns	2–4
$t_w(L)$	$\overline{C}_{Dn}$ or $\overline{S}_{Dn}$ Pulse Width, LOW	4.0		4.0		4.0		ns	2–4
t_{rec}	Recovery Time $\overline{C}_{Dn}$ or $\overline{S}_{Dn}$ to CP	2.0		2.0		2.0		ns	2–6

National Semiconductor

54F/74F112
Dual JK Negative Edge-Triggered Flip-Flop


General Description

The 'F112 contains two independent, high-speed JK flip-flops with Direct Set and Clear inputs. Synchronous state changes are initiated by the falling edge of the clock. Triggering occurs at a voltage level of the clock and is not directly related to the transition time. The J and K inputs can change when the clock is in either state without affecting the flip-flop, provided that they are in the desired state during the recommended setup and hold times relative to the falling edge of the clock. A LOW signal on $\overline{S}_D$ or $\overline{C}_D$ prevents clocking and forces Q or $\overline{Q}$ HIGH, respectively. Simultaneous LOW signals on $\overline{S}_D$ and $\overline{C}_D$ force both Q and $\overline{Q}$ HIGH.


Asynchronous Inputs:
- LOW input to $\overline{S}_D$ sets Q to HIGH level
- LOW input to $\overline{C}_D$ sets Q to LOW level
- Clear and Set are independent of clock
- Simultaneous LOW on $\overline{C}_D$ and $\overline{S}_D$ makes both Q and $\overline{Q}$ HIGH

Ordering Code: See Section 5

Logic Symbols




TL/F/9472–3



TL/F/9472–4


IEEE/IEC



TL/F/9472–6


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9472–1

Pin Assignment for LCC



TL/F/9472–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
J_1, J_2, K_1, K_2	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CP}_1, \overline{CP}_2$	Clock Pulse Inputs (Active Falling Edge)	1.0/4.0	20 μA/−2.4 mA
$\overline{C}_{D1}, \overline{C}_{D2}$	Direct Clear Inputs (Active LOW)	1.0/5.0	20 μA/−3.0 mA
$\overline{S}_{D1}, \overline{S}_{D2}$	Direct Set Inputs (Active LOW)	1.0/5.0	20 μA/−3.0 mA
$Q_1, Q_2, \overline{Q}_1, \overline{Q}_2$	Outputs	50/33.3	−1 mA/20 mA


Truth Table

Inputs					Outputs	
$\overline{S}_D$	$\overline{C}_D$	$\overline{CP}$	J	K	Q	$\overline{Q}$
L	H	X	X	X	H	L
H	L	X	X	X	L	H
L	L	X	X	X	H	H
H	H	⌐	h	h	$\overline{Q}_0$	Q_0
H	H	⌐	l	h	L	H
H	H	⌐	h	l	H	L
H	H	⌐	l	l	Q_0	$\overline{Q}_0$

H(h) = HIGH Voltage Level
L(l) = LOW Voltage Level
X = Immaterial
⌐ = HIGH-to-LOW Clock Transition
$Q_0(\overline{Q}_0)$ = Before HIGH-to-LOW Transition of Clock

Lower case letters indicate the state of the referenced input or output one setup time prior to the HIGH-to-LOW clock transition.

Logic Diagram (One Half Shown)

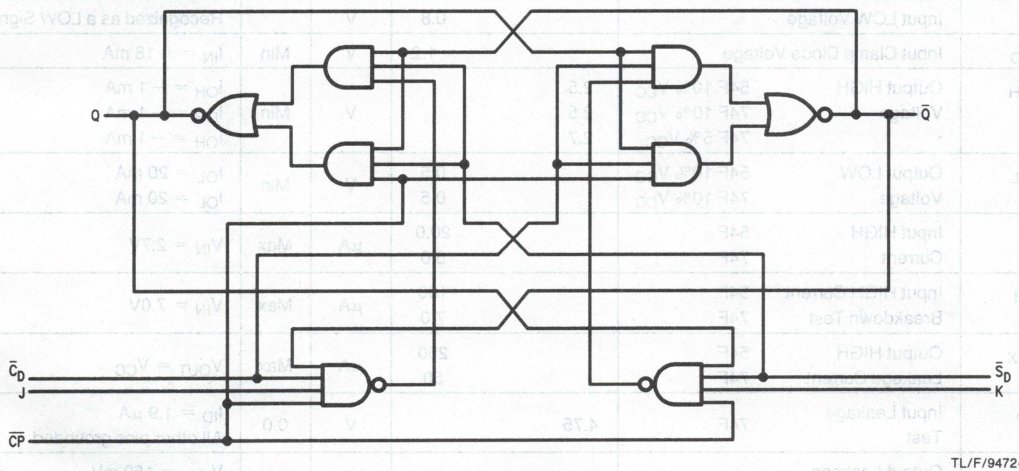

TL/F/9472–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (J_n, K_n)
					−2.4			V_{IN} = 0.5V ($\overline{CP}_n$)
					−3.0			V_{IN} = 0.5V ($\overline{C}_{Dn}$, $\overline{S}_{Dn}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			12	19	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			12	19	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	85	105				80		MHz	2-1
t_{PLH} t_{PHL}	Propagation Delay $\overline{CP}_n$ to Q_n or $\overline{Q}_n$	2.0 2.0	5.0 5.0	6.5 6.5			2.0 2.0	7.5 7.5	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay $\overline{C}_{Dn}$, $\overline{S}_{Dn}$ to $\overline{Q}_n$, $\overline{Q}_n$	2.0 2.0	4.5 4.5	6.5 6.5			2.0 2.0	7.5 7.5	ns	2-3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW J_n or K_n to $\overline{CP}_n$	4.0 3.0				5.0 3.5		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW J_n or K_n to $\overline{CP}_n$	0 0				0 0			
$t_w(H)$ $t_w(L)$	$\overline{CP}$ Pulse Width HIGH or LOW	4.5 4.5				5.0 5.0		ns	2-4
$t_w(L)$	Pulse Width, LOW $\overline{C}_{Dn}$ or $\overline{S}_{Dn}$	4.5				5.0		ns	2-4
t_{rec}	Recovery Time $\overline{S}_{Dn}$, $\overline{C}_{Dn}$ to $\overline{CP}$	4.0				5.0		ns	2-6

National Semiconductor

54F/74F113
Dual JK Negative Edge-Triggered Flip-Flop

General Description


The 'F113 offers individual J, K, Set and Clock inputs. When the clock goes HIGH the inputs are enabled and data may be entered. The logic level of the J and K inputs may be changed when the clock pulse is HIGH and the flip-flop will perform according to the Truth Table as long as minimum setup and hold times are observed. Input data is transferred to the outputs on the falling edge of the clock pulse.

Asynchronous input:
LOW input to $\overline{S}_D$ sets Q to HIGH level
Set is independent of clock


Ordering Code: See Section 5

Logic Symbols


IEEE/IEC



TL/F/9473-6




TL/F/9473-3



TL/F/9473-4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9473-1

Pin Assignment for LCC



TL/F/9473-2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
J_1, J_2, K_1, K_2	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CP}_1, \overline{CP}_2$	Clock Pulse Inputs (Acitve Falling Edge)	1.0/4.0	20 μA/−2.4 mA
$\overline{S}_{D1}, \overline{S}_{D2}$	Direct Set Inputs (Active LOW)	1.0/5.0	20 μA/−3.0 mA
$Q_1, Q_2, \overline{Q}_1, \overline{Q}_2$	Outputs	50/33.3	−1 mA/20 mA


Truth Table

Inputs				Outputs	
$\overline{S}_D$	$\overline{CP}$	J	K	Q	$\overline{Q}$
L	X	X	X	H	L
H	⌐	h	h	$\overline{Q}_0$	Q_0
H	⌐	l	h	L	H
H	⌐	h	l	H	L
H	⌐	l	l	Q_0	$\overline{Q}_0$

H(h) = HIGH Voltage Level
L(l) = LOW Voltage level
⌐ = HIGH-to-LOW Clock Transition
X = Immaterial
Q_0 ($\overline{Q}_0$) = Before HIGH-to-LOW Transition of Clock

Lower case letters indicate the state of the referenced input or output prior to the HIGH-to-LOW clock transition.

Logic Diagram (One Half Shown)

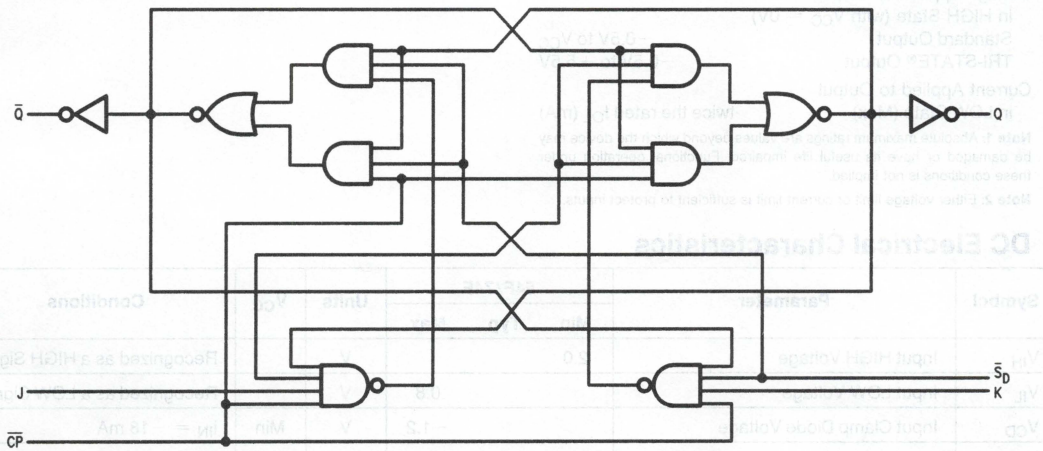

TL/F/9473–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (J_n, K_n)
					−2.4			V_{IN} = 0.5V ($\overline{CP}_n$)
					−3.0			V_{IN} = 0.5V ($\overline{S}_{Dn}$)
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			12	19	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	85	105				80		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay $\overline{CP}_n$ to Q_n or $\overline{Q}_n$	2.0 2.0	4.0 4.0	6.0 6.0			2.0 2.0	7.0 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{S}_{Dn}$ to Q_n or $\overline{Q}_n$	2.0 2.0	4.5 4.5	6.5 6.5			2.0 2.0	7.5 7.5	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW J_n or K_n to $\overline{CP}_n$	4.0 3.0				5.0 3.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW J_n or K_n to $\overline{CP}_n$	0 0				0 0			
$t_w(H)$ $t_w(L)$	$\overline{CP}_n$ Pulse Width HIGH or LOW	4.5 4.5				5.0 5.0		ns	2–4
$t_w(L)$	$\overline{S}_{Dn}$ Pulse Width, LOW	4.5				5.0		ns	2–4
t_{rec}	$\overline{S}_{Dn}$ to $\overline{CP}_n$ Recovery Time	4.0				5.0		ns	2–6

National Semiconductor

54F/74F114
Dual JK Negative Edge-Triggered Flip-Flop with Common Clocks and Clears

General Description


The 'F114 contains two high-speed JK flip-flops with common Clock and Clear inputs. Synchronous state changes are initiated by the falling edge of the clock. Triggering occurs at a voltage level of the clock and is not directly related to the transition time. The J and K inputs can change when the clock is in either state without affecting the flip-flop, provided that they are in the desired state during the recommended setup and hold times relative to the falling edge of the clock. A LOW signal on $\overline{S}_D$ or $\overline{C}_D$ prevents clocking and forces Q or $\overline{Q}$ HIGH, respectively. Simultaneous LOW signals on $\overline{S}_D$ and $\overline{C}_D$ force both Q and $\overline{Q}$ HIGH.

Asynchronous Inputs:

LOW input to $\overline{S}_D$ sets Q to HIGH level
LOW input to $\overline{C}_D$ sets Q to LOW level
Clear and Set are independent of Clock
Simultaneous LOW on $\overline{C}_D$ and $\overline{S}_D$ makes both Q and $\overline{Q}$ HIGH


Ordering Code: See Section 5

Logic Symbols



TL/F/9474–3


IEEE/IEC



TL/F/9474–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9474–1

Pin Assignment for LCC



TL/F/9474–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
J_1, J_2, K_1, K_2	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CP}$	Clock Pulse Input (Active Falling Edge)	1.0/8.0	20 μA/−4.8 mA
$\overline{C}_D$	Direct Clear Input (Active LOW)	1.0/10.0	20 μA/−6.0 mA
$\overline{S}_{D1}, \overline{S}_{D2}$	Direct Set Inputs (Active LOW)	1.0/5.0	20 μA/−3.0 mA
$Q_1, Q_2, \overline{Q}_1, \overline{Q}_2$	Outputs	50/33.3	−1 mA/20 mA


Truth Table

Inputs					Outputs	
$\overline{S}_D$	$\overline{C}_D$	$\overline{CP}$	J	K	Q	$\overline{Q}$
L	H	X	X	X	H	L
H	L	X	X	X	L	H
L	L	X	X	X	H	H
H	H	⌐	h	h	$\overline{Q}_0$	Q_0
H	H	⌐	l	h	L	H
H	H	⌐	h	l	H	L
H	H	⌐	l	l	Q_0	$\overline{Q}_0$

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐ = HIGH-to-LOW Clock Transition
Q_0 ($\overline{Q}_0$) = Before HIGH-to-LOW Transition of Clock

Lower case letters indicate the state of the referenced input or output one setup time prior to the HIGH-to-LOW clock transition.

Logic Diagram (one half shown)

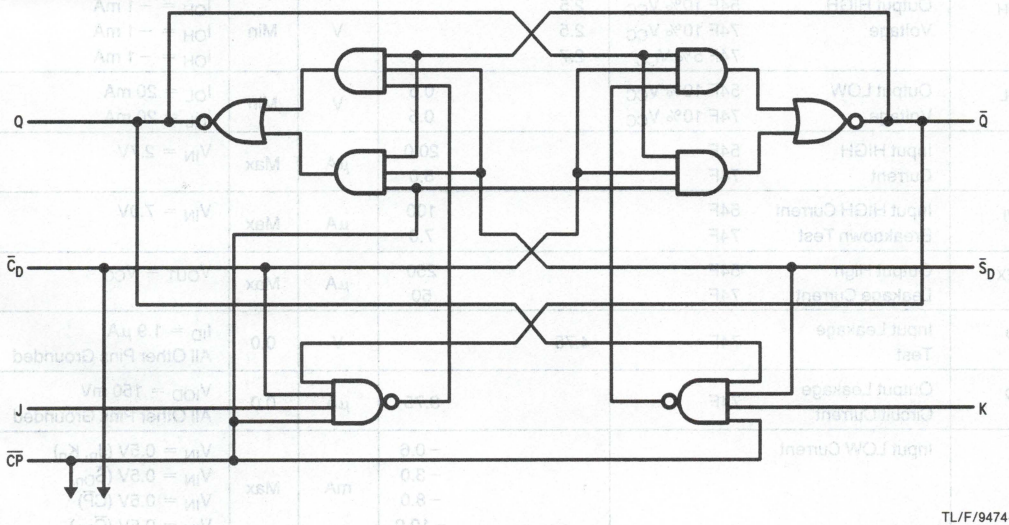

TL/F/9474–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output High Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (J_n, K_n)
					−3.0			V_{IN} = 0.5V ($\overline{S}_{Dn}$)
					−8.0			V_{IN} = 0.5V ($\overline{CP}$)
					−10.0			V_{IN} = 0.5V ($\overline{C}_{Dn}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			12.0	19.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			12.0	19.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	75	95				70		MHz	2-1
t_{PLH} t_{PHL}	Propagation Delay $\overline{CP}$ to Q_n or $\overline{Q}_n$	3.0 3.0	5.0 5.5	6.5 7.5			3.0 3.0	7.5 8.5	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay $\overline{C}_{Dn}$ or $\overline{S}_{Dn}$ to Q_n or $\overline{Q}_n$	3.0 3.0	4.5 4.5	6.5 6.5			3.0 3.0	7.5 7.5	ns	2-3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW J_n or K_n to $\overline{CP}$	4.0 3.0				5.0 3.5		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW J_n or K_n to $\overline{CP}$	0 0				0 0			
$t_w(H)$ $t_w(L)$	$\overline{CP}$ Pulse Width HIGH or LOW	4.5 4.5				5.0 5.0		ns	2-4
$t_w(L)$	$\overline{C}_{Dn}$ or $\overline{S}_{Dn}$ Pulse Width, LOW	4.5				5.0		ns	2-4
t_{rec}	Recovery Time $\overline{S}_{Dn}$, $\overline{C}_{Dn}$, to $\overline{CP}$	4.0				5.0		ns	2-6

National Semiconductor


54F/74F125
Quad Buffer (TRI-STATE®)

Features

- High impedance base inputs for reduced loading


Ordering Code: See Section 5

Logic Symbol




TL/F/9475–4

Connection Diagrams



TL/F/9475–1



TL/F/9475–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{A}_n$, B_n	Inputs	1.0/0.033	20 μA/−20 μA
O_n	Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

Function Table

Inputs		Output
$\overline{A}_n$	B_n	O
L	L	L
L	H	H
H	X	Z

H = High Voltage Level
L = LOW Voltage Level
Z = High Impedance
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
		74F 5% V_{CC}	2.0					I_{OH} = −15 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current				20	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test				100	μA	0.0V	V_{IN} = 7.0V
I_{IL}	Input LOW Current				−20.0	μA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{CEX}	Output HIGH Leakage Current				250	μA	Max	V_{OUT} = V_{CC}
I_{ZZ}	Buss Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			18.5	24.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			31.7	40.0	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			27.6	35.0	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.0	4.0	6.0			2.0	6.5	ns	2–3
t_{PHL}		3.0	4.6	7.5			3.0	8.0		
t_{PZH}	Output Enable Time	3.5	4.7	7.5			3.0	8.5	ns	2–5
t_{PZL}		3.5	5.3	8.0			3.5	9.0		
t_{PHZ}	Output Disable Time	1.5	3.9	5.5			1.5	6.0	ns	2–5
t_{PLZ}		1.5	4.0	6.0			1.5	6.5		

National Semiconductor

54F/74F132
Quad 2-Input NAND Schmitt Trigger

General Description

The 'F132 contains four 2-input NAND gates which accept standard TTL input signals and provide standard TTL output levels. They are capable of transforming slowly changing input signals into sharply defined, jitter-free output signals. In addition, they have a greater noise margin than conventional NAND gates.


Each circuit contains a 2-input Schmitt trigger followed by level shifting circuitry and a standard FAST® output structure. The Schmitt trigger uses positive feedback to effectively speed-up slow input transitions, and provide different input threshold voltages for positive and negative-going transitions. This hysteresis between the positive-going and negative-going input threshold (typically 800 mV) is determined by resistor ratios and is essentially insensitive to temperature and supply voltage variations.

Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9477–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9477–1

Pin Assignment for LCC



TL/F/9477–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_n, B_n	Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_n$	Outputs	50/33.3	−1 mA/20 mA

Function Table

Inputs		Outputs
A	B	$\overline{O}$
L	L	H
L	H	H
H	L	H
H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{T+}	Positive-going Threshold		1.5		2.0	V	5.0	
V_{T-}	Negative-going Threshold		0.7		1.1	V	5.0	
ΔV_T	Hysteresis ($V_{T+} - V_{T-}$)		0.4			V	5.0	
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current				17.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				18.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil, $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	4.0		10.5	2.0	13.0	3.5	12.0	ns	2–3
t_{PHL}	A_n, B_n to $\overline{O}_n$	5.0		12.5	4.5	16.0	5.0	13.0		

National Semiconductor

54F/74F138
1-of-8 Decoder/Demultiplexer

General Description


The 'F138 is a high-speed 1-of-8 decoder/demultiplexer. This device is ideally suited for high-speed bipolar memory chip select address decoding. The multiple input enables allow parallel expansion to a 1-of-24 decoder using just three 'F138 devices or a 1-of-32 decoder using four 'F138 devices and one inverter.

Features

- Demultiplexing capability
- Multiple input enable for easy expansion
- Active LOW mutually exclusive outputs
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9478–3


IEEE/IEC



TL/F/9478–6


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9478–1

Pin Assignment for LCC



TL/F/9478–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_2	Address Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_1$, $\overline{E}_2$	Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
E_3	Enable Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_7$	Outputs (Active LOW)	50/33.3	−1 mA/20 mA

Functional Description

The 'F138 high-speed 1-of-8 decoder/demultiplexer accepts three binary weighted inputs (A_0, A_1, A_2) and, when enabled, provides eight mutually exclusive active LOW outputs ($\overline{O}_0$–$\overline{O}_7$). The 'F138 features three Enable inputs, two active LOW ($\overline{E}_1$, $\overline{E}_2$) and one active HIGH (E_3). All outputs will be HIGH unless $\overline{E}_1$ and $\overline{E}_2$ are LOW and E_3 is HIGH. This multiple enable function allows easy parallel expansion of the device to a 1-of-32 (5 lines to 32 lines) decoder with just four 'F138 devices and one inverter (See *Figure 1*). The 'F138 can be used as an 8-output demultiplexer by using one of the active LOW Enable inputs as the data input and the other Enable inputs as strobes. The Enable inputs which are not used must be permanently tied to their appropriate active HIGH or active LOW state.

Truth Table


Inputs						Outputs							
$\overline{E}_1$	$\overline{E}_2$	E_3	A_0	A_1	A_2	$\overline{O}_0$	$\overline{O}_1$	$\overline{O}_2$	$\overline{O}_3$	$\overline{O}_4$	$\overline{O}_5$	$\overline{O}_6$	$\overline{O}_7$
H	X	X	X	X	X	H	H	H	H	H	H	H	H
X	H	X	X	X	X	H	H	H	H	H	H	H	H
X	X	L	X	X	X	H	H	H	H	H	H	H	H
L	L	H	L	L	L	L	H	H	H	H	H	H	H
L	L	H	H	L	L	H	L	H	H	H	H	H	H
L	L	H	L	H	L	H	H	L	H	H	H	H	H
L	L	H	H	H	L	H	H	H	L	H	H	H	H
L	L	H	L	L	H	H	H	H	H	L	H	H	H
L	L	H	H	L	H	H	H	H	H	H	L	H	H
L	L	H	L	H	H	H	H	H	H	H	H	L	H
L	L	H	H	H	H	H	H	H	H	H	H	H	L

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

Logic Diagram

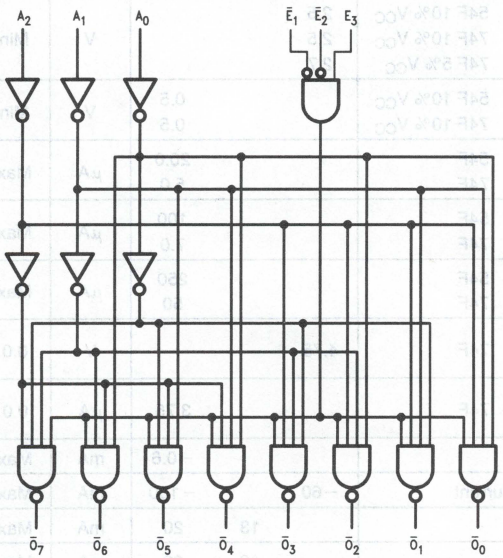

TL/F/9478–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions


Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			13	20	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			13	20	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n to $\overline{O}_n$	3.5 4.0	5.6 6.1	7.5 8.0	3.5 4.0	12.0 9.5	3.5 4.0	8.5 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}_1$ or $\overline{E}_2$ to $\overline{O}_n$	3.5 3.0	5.4 5.3	7.0 7.0	3.5 3.0	11.0 8.0	3.5 3.0	8.0 7.5	ns	2–4
t_{PLH} t_{PHL}	Propagation Delay E_3 to $\overline{O}_n$	4.0 3.5	6.2 5.6	8.0 7.5	4.0 3.5	12.5 8.5	4.0 3.5	9.0 8.5	ns	2–4

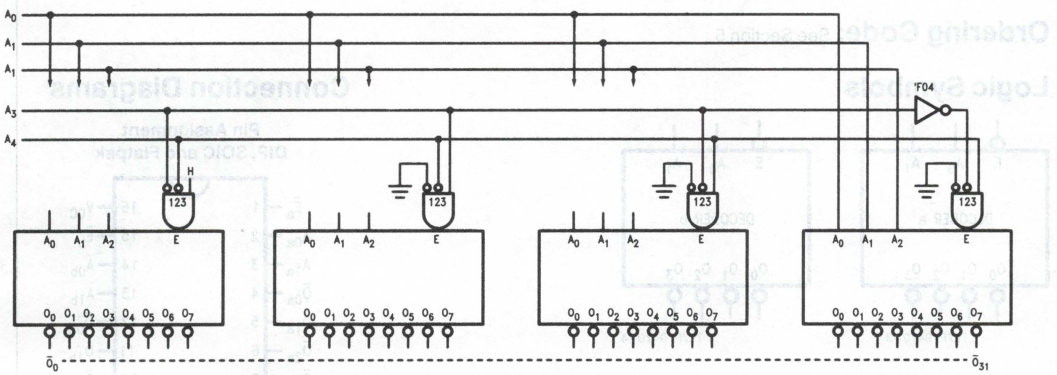

TL/F/9478–5

FIGURE 1. Expansion to 1-of-32 Decoding

National Semiconductor

54F/74F139
Dual 1-of-4 Decoder/Demultiplexer

General Description


The 'F139 is a high-speed, dual 1-of-4 decoder/demultiplexer. The device has two independent decoders, each accepting two inputs and providing four mutually exclusive active LOW outputs. Each decoder has an active LOW Enable input which can be used as a data input for a 4-output demultiplexer. Each half of the 'F139 can be used as a function generator providing all four minterms of two variables.

Features


- Multifunction capability
- Two completely independent 1-of-4 decoders
- Active LOW mutually exclusive outputs
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Logic Symbols




TL/F/9479–3



TL/F/9479–4


IEEE/IEC



TL/F/9479–7


Connection Diagrams

Pin Assignment
DIP, SOIC and Flatpak



TL/F/9479–1

Pin Assignment
for LCC



TL/F/9479–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0, A_1	Address Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}$	Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_3$	Outputs (Active LOW)	50/33.3	−1 mA/20 mA

Functional Description

The 'F139 is a high-speed dual 1-of-4 decoder/demultiplexer. The device has two independent decoders, each of which accepts two binary weighted inputs (A_0–A_1) and provides four mutually exclusive active LOW Outputs ($\overline{O}_0$–$\overline{O}_3$). Each decoder has an active LOW enable ($\overline{E}$). When $\overline{E}$ is HIGH all outputs are forced HIGH. The enable can be used as the data input for a 4-output demultiplexer application. Each half of the 'F139 generates all four minterms of two variables. These four minterms are useful in some applications, replacing multiple gate functions as shown in *Figure 1*, and thereby reducing the number of packages required in a logic network.


Truth Table

Inputs			Outputs			
$\overline{E}$	A_0	A_1	$\overline{O}_0$	$\overline{O}_1$	$\overline{O}_2$	$\overline{O}_3$
H	X	X	H	H	H	H
L	L	L	L	H	H	H
L	H	L	H	L	H	H
L	L	H	H	H	L	H
L	H	H	H	H	H	L

H = HIGH Voltage Level

L = LOW Voltage Level


X = Immaterial

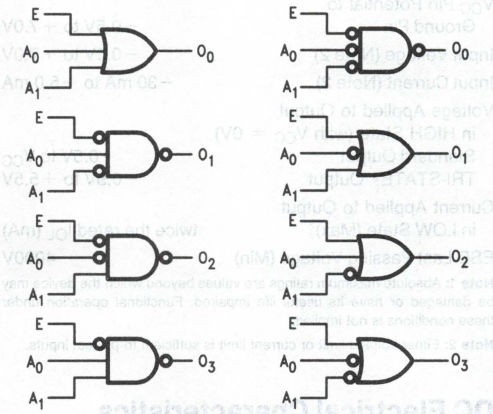

TL/F/9479–6

FIGURE 1. Gate Functions (each half)

Logic Diagram

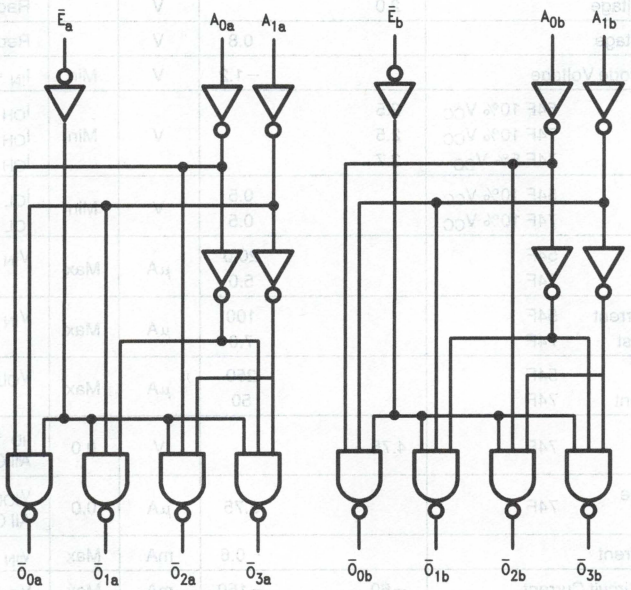

TL/F/9479–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			13	20	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_0 or A_1 to $\overline{O}_n$	3.5 4.0	5.3 6.1	7.5 8.0	2.5 3.5	12.0 9.5	3.0 4.0	8.5 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}_1$ to $\overline{O}_n$	3.5 3.0	5.4 4.7	7.0 6.5	3.0 2.5	9.0 8.0	3.5 3.0	8.0 7.5	ns	2–3

National Semiconductor

54F/74F148
8-Line to 3-Line Priority Encoder

General Description


The 'F148 provides three bits of binary coded output representing the position of the highest order active input, along with an output indicating the presence of any active input. It is easily expanded via input and output enables to provide priority encoding over many bits.

Features

- Encodes eight data lines in priority
- Provides 3-bit binary priority code
- Input enable capability
- Signals when data is present on any input
- Cascadable for priority encoding of n bits


Ordering Code: See Section 5

Logic Symbols



TL/F/9480–3


IEEE/IEC



TL/F/9480–6


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9480–1

Pin Assignment for LCC



TL/F/9480–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{I}_0$	Priority Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{I}_1$–$\overline{I}_7$	Priority Inputs (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$\overline{EI}$	Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{EO}$	Enable Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{GS}$	Group Signal Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{A}_0$–$\overline{A}_2$	Address Outputs (Active LOW)	50/33.3	−1 mA/20 mA

Functional Description

The 'F148 8-input priority encoder accepts data from eight active LOW inputs ($\overline{I}_0$–$\overline{I}_7$) and provides a binary representation on the three active LOW outputs. A priority is assigned to each input so that when two or more inputs are simultaneously active, the input with the highest priority is represented on the output, with input line 7 having the highest priority. A HIGH on the Enable Input ($\overline{EI}$) will force all outputs to the inactive (HIGH) state and allow new data to settle without producing erroneous information at the outputs.


A Group Signal output ($\overline{GS}$) and Enable Output ($\overline{EO}$) are provided along with the three priority data outputs ($\overline{A}_2$, $\overline{A}_1$, $\overline{A}_0$). $\overline{GS}$ is active LOW when any input is LOW: this indicates when any input is active. $\overline{EO}$ is active LOW when all inputs are HIGH. Using the Enable Output along with the Enable Input allows cascading for priority encoding on any number of input signals. Both $\overline{EO}$ and $\overline{GS}$ are in the inactive HIGH state when the Enable Input is HIGH.

Truth Table

Inputs									Outputs			
$\overline{EI}$	$\overline{I}_0$	$\overline{I}_1$	$\overline{I}_2$	$\overline{I}_3$	$\overline{I}_4$	$\overline{I}_5$	$\overline{I}_6$	$\overline{I}_7$	$\overline{GS}$	$\overline{A}_0$	$\overline{A}_1$	$\overline{A}_2$	$\overline{EO}$
H	X	X	X	X	X	X	X	X	H	H	H	H	H
L	H	H	H	H	H	H	H	H	H	H	H	H	L
L	X	X	X	X	X	X	X	L	L	L	L	L	H
L	X	X	X	X	X	X	L	H	L	H	L	L	H
L	X	X	X	X	X	L	H	H	L	L	H	L	H
L	X	X	X	X	L	H	H	H	L	H	H	L	H
L	X	X	X	L	H	H	H	H	L	L	L	H	H
L	X	X	L	H	H	H	H	H	L	H	L	H	H
L	X	L	H	H	H	H	H	H	L	L	H	H	H
L	L	H	H	H	H	H	H	H	L	H	H	H	H

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Logic Diagram

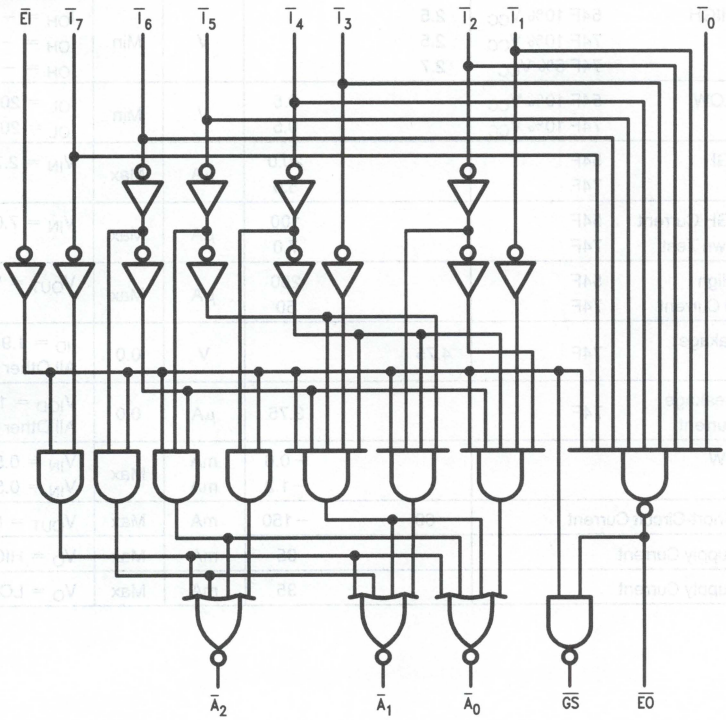

TL/F/9480–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions


Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output High Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V ($\overline{I_0}$, $\overline{EI}$)
					−1.2	mA		V_{IN} = 0.5V ($\overline{I_1}$–$\overline{I_7}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current				35	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				35	mA	Max	V_O = LOW

Application

16-Input Priority Encoder

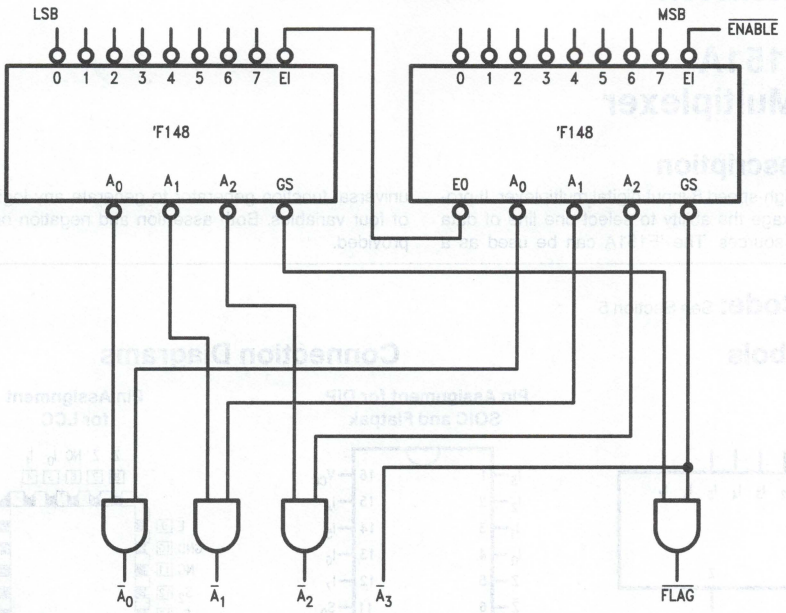

TL/F/9480–5

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay $\overline{I}_n$ to $\overline{A}_n$	3.0 3.0	7.0 8.0	9.0 10.5			3.0 3.0	10.0 12.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{I}_n$ to $\overline{EO}$	2.5 2.5	5.0 5.5	6.5 7.5			2.5 2.5	7.5 8.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{I}_n$ to $\overline{GS}$	2.5 2.5	7.0 6.0	9.0 8.0			2.5 2.5	10.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{EI}$ to $\overline{A}_n$	2.5 2.5	6.5 6.0	8.5 8.0			2.5 2.5	9.5 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{EI}$ to $\overline{GS}$	2.5 2.5	5.0 6.0	7.0 7.5			2.5 2.5	8.0 8.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{EI}$ to $\overline{EO}$	2.5 3.0	5.5 8.0	7.0 10.5			2.5 3.0	8.0 12.0	ns	2–3

National Semiconductor


54F/74F151A
8-Input Multiplexer

General Description

The 'F151A is a high-speed 8-input digital multiplexer. It provides in one package the ability to select one line of data from up to eight sources. The 'F151A can be used as a universal function generator to generate any logic function of four variables. Both assertion and negation outputs are provided.


Ordering Code: See Section 5

Logic Symbols



TL/F/9481–3


IEEE/IEC

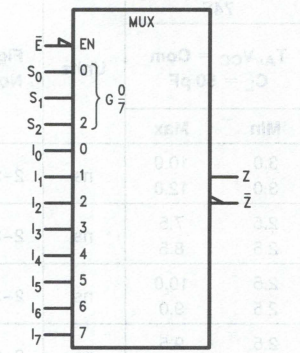

TL/F/9481–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9481–1

Pin Assignment for LCC



TL/F/9481–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_0–I_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
S_0–S_2	Select Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}$	Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
Z	Data Output	50/33.3	−1 mA/20 mA
$\overline{Z}$	Inverted Data Output	50/33.3	−1 mA/20 mA

Functional Description

The 'F151A is a logic implementation of a single pole, 8-position switch with the switch position controlled by the state of three Select inputs, S_0, S_1, S_2. Both assertion and negation outputs are provided. The Enable input ($\overline{E}$) is active LOW. When it is not activated, the negation output is HIGH and the assertion output is LOW regardless of all other inputs. The logic function provided at the output is:

$$Z = \overline{E} \bullet (I_0 \overline{S}_2 \overline{S}_1 \overline{S}_0 + I_1 \overline{S}_2 \overline{S}_1 S_0 + I_2 \overline{S}_2 S_1 \overline{S}_0 + I_3 \overline{S}_2 S_1 S_0 + I_4 S_2 \overline{S}_1 \overline{S}_0 + I_5 S_2 \overline{S}_1 S_0 + I_6 S_2 S_1 \overline{S}_0 + I_7 S_2 S_1 S_0)$$


The 'F151A provides the ability, in one package, to select from eight sources of data or control information. By proper manipulation of the inputs, the 'F151A can provide any logic function of four variables and its negation.

Truth Table

Inputs				Outputs	
$\overline{E}$	S_2	S_1	S_0	$\overline{Z}$	Z
H	X	X	X	H	L
L	L	L	L	$\overline{I}_0$	I_0
L	L	L	H	$\overline{I}_1$	I_1
L	L	H	L	$\overline{I}_2$	I_2
L	L	H	H	$\overline{I}_3$	I_3
L	H	L	L	$\overline{I}_4$	I_4
L	H	L	H	$\overline{I}_5$	I_5
L	H	H	L	$\overline{I}_6$	I_6
L	H	H	H	$\overline{I}_7$	I_7

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Logic Diagram

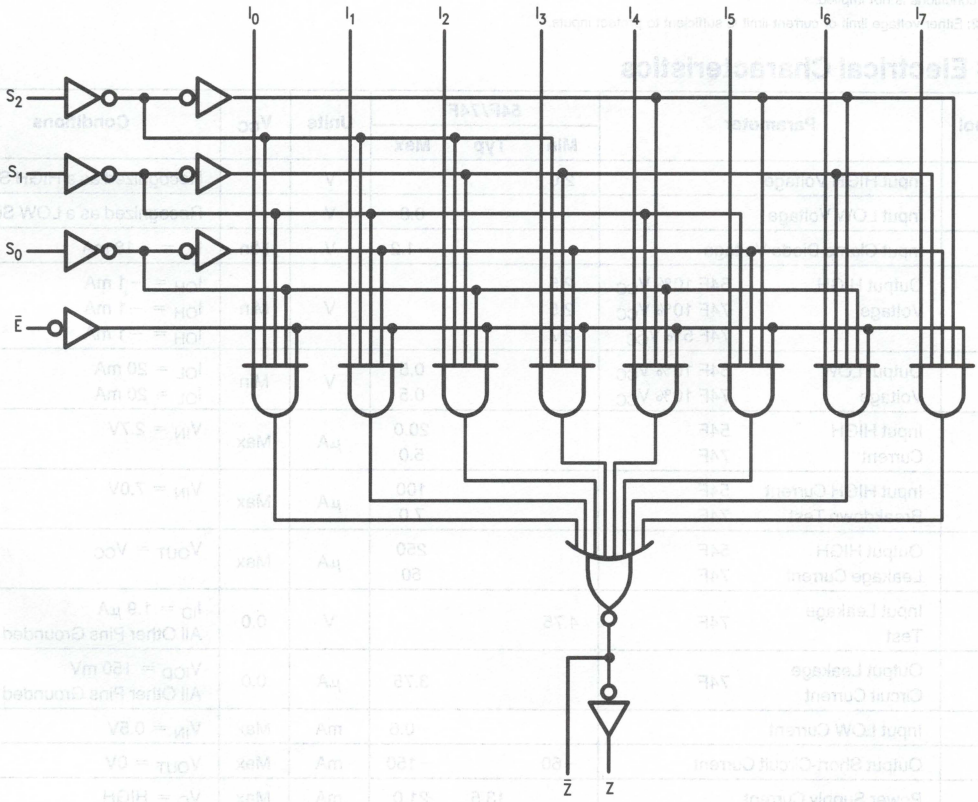

TL/F/9481–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			13.5	21.0	mA	Max	V_O = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay S_n to $\overline{Z}$	4.0 3.2	6.2 5.2	9.0 7.5	3.5 3.0	11.5 8.0	3.5 3.2	9.5 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S_n to Z	4.5 4.0	7.5 6.2	10.5 9.0	4.5 4.0	13.5 9.5	4.5 4.0	12.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}$ to $\overline{Z}$	3.0 3.0	4.7 4.4	6.1 6.0	3.0 2.5	7.5 6.5	3.0 2.5	7.0 6.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}$ to Z	5.0 3.5	7.0 5.3	9.5 7.0	4.0 3.0	12.0 8.0	4.0 3.0	10.5 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to $\overline{Z}$	3.0 1.5	4.8 2.5	6.5 4.0	2.5 1.5	7.5 6.0	3.0 1.5	7.0 5.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to Z	3.0 3.7	4.8 5.5	6.5 7.0	2.5 3.5	8.5 9.0	2.5 3.7	7.5 7.5	ns	2–3

National Semiconductor


54F/74F153
Dual 4-Input Multiplexer

General Description

The 'F153 is a high-speed dual 4-input multiplexer with common select inputs and individual enable inputs for each section. It can select two lines of data from four sources. The two buffered outputs present data in the true (non-inverted) form. In addition to multiplexer operation, the 'F153 can generate any two functions of three variables.


Ordering Code: See Section 5

Logic Symbols



TL/F/9482–3


IEEE/IEC



TL/F/9482–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9482–1

Pin Assignment for LCC



TL/F/9482–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_{0a}–I_{3a}	Side A Data Inputs	1.0/1.0	20 μA/−0.6 mA
I_{0b}–I_{3b}	Side B Data Inputs	1.0/1.0	20 μA/−0.6 mA
S_0, S_1	Common Select Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_a$	Side A Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_b$	Side B Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
Z_a	Side A Output	50/33.3	−1 mA/20 mA
Z_b	Side B Output	50/33.3	−1 mA/20 mA

Functional Description

The 'F153 is a dual 4-input multiplexer. It can select two bits of data from up to four sources under the control of the common Select inputs (S_0, S_1). The two 4-input multiplexer circuits have individual active LOW Enables ($\overline{E}_a$, $\overline{E}_b$) which can be used to strobe the outputs independently. When the Enables ($\overline{E}_a$, $\overline{E}_b$) are HIGH, the corresponding outputs (Z_a, Z_b) are forced LOW. The 'F153 is the logic implementation of a 2-pole, 4-position switch, where the position of the switch is determined by the logic levels supplied to the two Select inputs. The logic equations for the outputs are as follows:

$$Z_a = \overline{E}_a \bullet (I_{0a} \bullet \overline{S}_1 \bullet \overline{S}_0 + I_{1a} \bullet \overline{S}_1 \bullet S_0 + I_{2a} \bullet S_1 \bullet \overline{S}_0 + I_{3a} \bullet S_1 \bullet S_0)$$

$$Z_b = \overline{E}_b \bullet (I_{0b} \bullet \overline{S}_1 \bullet \overline{S}_0 + I_{1b} \bullet \overline{S}_1 \bullet S_0 + I_{2b} \bullet S_1 \bullet \overline{S}_0 + I_{3b} \bullet S_1 \bullet S_0)$$


The 'F153 can be used to move data from a group of registers to a common output bus. The particular register from which the data came would be determined by the state of the Select inputs. A less obvious application is as a function generator. The 'F153 can generate two functions of three variables. This is useful for implementing highly irregular random logic.

Truth Table

Select Inputs		Inputs (a or b)					Output
S_0	S_1	$\overline{E}$	I_0	I_1	I_2	I_3	Z
X	X	H	X	X	X	X	L
L	L	L	L	X	X	X	L
L	L	L	H	X	X	X	H
H	L	L	X	L	X	X	L
H	L	L	X	H	X	X	H
L	H	L	X	X	L	X	L
L	H	L	X	X	H	X	H
H	H	L	X	X	X	L	L
H	H	L	X	X	X	H	H

H = HIGH Voltage Level
L = LOW
X = Immaterial

Logic Diagram

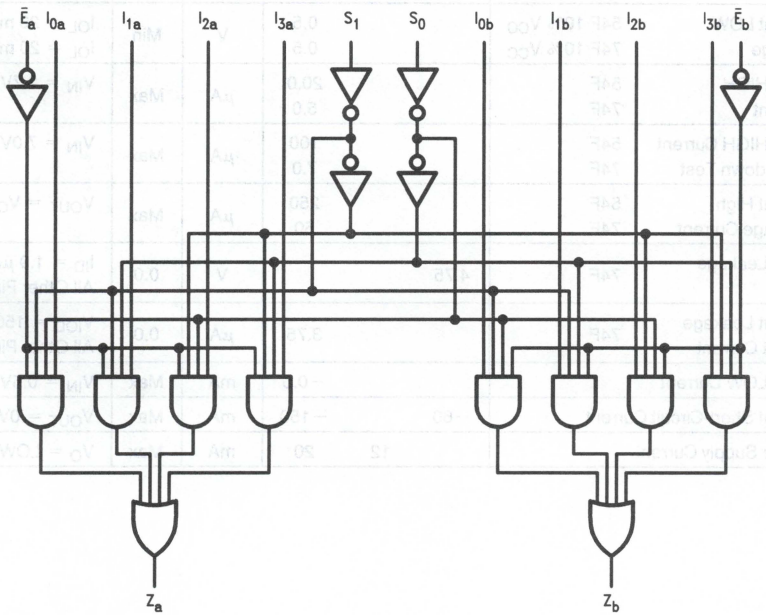

TL/F/9482–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output High Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCL}	Power Supply Current			12	20	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay S_n to Z_n	4.5 3.5	8.1 7.0	10.5 9.0	4.5 3.5	14.0 11.0	4.5 3.5	12.0 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}_n$ to Z_n	4.5 3.0	7.1 5.7	9.0 7.0	4.5 2.5	11.5 9.0	4.5 2.5	10.5 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to Z_n	3.0 2.5	5.3 5.1	7.0 6.5	2.5 2.5	9.0 8.0	3.0 2.5	8.0 7.5	ns	2–3

National Semiconductor

54F/74F157A
Quad 2-Input Multiplexer

General Description


The 'F157A is a high-speed quad 2-input multiplexer. Four bits of data from two sources can be selected using the common Select and Enable inputs. The four outputs present the selected data in the true (non-inverted) form. The 'F157A can also be used to generate any four of the 16 different functions to two variables.

Features

- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9483–3


IEEE/IEC



TL/F/9483–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9483–1

Pin Assignment for LCC



TL/F/9483–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_{0a}–I_{0d}	Source 0 Data Inputs	1.0/1.0	20 μA/−0.6 mA
I_{1a}–I_{1d}	Source 1 Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}$	Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
S	Select Input	1.0/1.0	20 μA/−0.6 mA
Z_a–Z_d	Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 'F157A is a quad 2-input multiplexer. It selects four bits of data from two sources under the control of a common Select input (S). The Enable input ($\overline{E}$) is active LOW. When $\overline{E}$ is HIGH, all of the outputs (Z) are forced LOW regardless of all other inputs. The 'F157A is the logic implementation of a 4-pole, 2-position switch where the position of the switch is determined by the logic levels supplied to the Select input. The logic equations for the outputs are shown below:

$$Z_n = \overline{E} \bullet (I_{1n}\, S + I_{0n}\, \overline{S})$$


A common use of the 'F157A is the moving of data from two groups of registers to four common output busses. The particular register from which the data comes is determined by the state of the Select input. A less obvious use is as a function generator. The 'F157A can generate any four of the 16 different functions of two variables with one variable common. This is useful for implementing highly irregular logic.

Truth Table

Inputs				Output
$\overline{E}$	S	I_0	I_1	Z
H	X	X	X	L
L	H	X	L	L
L	H	X	H	H
L	L	L	X	L
L	L	H	X	H

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Logic Diagram

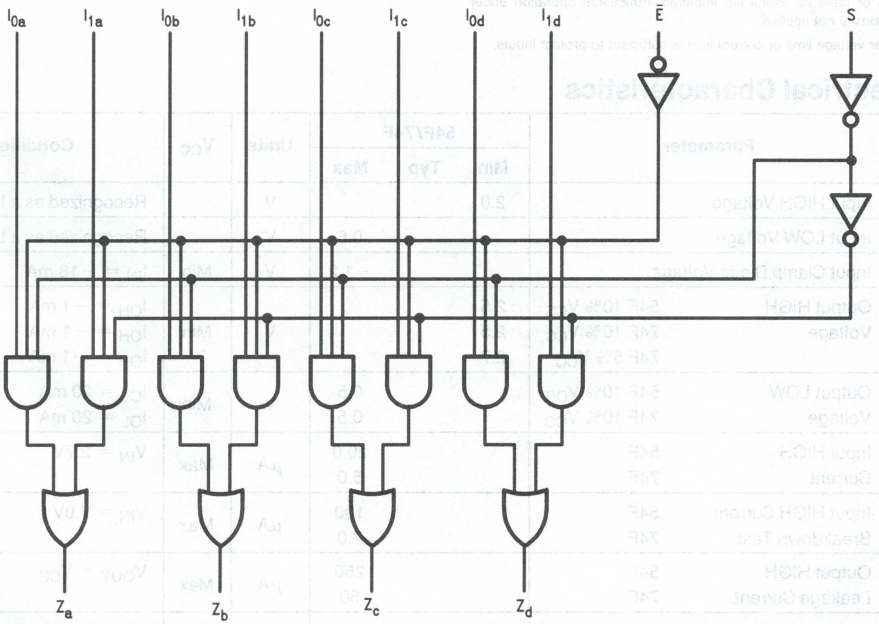

TL/F/9483–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			15	23	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			15	23	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay S to Z_n	4.0 3.0	7.0 5.0	10.0 7.0	4.0 3.0	12.0 9.0	4.0 3.0	11.0 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}$ to Z_n	5.0 2.5	7.0 4.5	9.5 6.5	5.0 2.5	13.0 7.5	5.0 2.5	11.0 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to Z_n	2.5 2.5	4.5 4.0	6.0 5.5	2.5 1.5	7.5 7.5	2.5 2.0	6.5 7.0	ns	2–3

National Semiconductor

54F/74F158A
Quad 2-Input Multiplexer

General Description


The 'F158A is a high speed quad 2-input multiplexer. It selects four bits of data from two sources using the common Select and Enable inputs. The four outputs present the selected data in the inverted form. The 'F158A can also generate any four of the 16 different functions of two variables.

Features

- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9484–3


IEEE/IEC



TL/F/9484–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9484–1

Pin Assignment for LCC



TL/F/9484–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_{0a}–I_{0d}	Source 0 Data Inputs	1.0/1.0	20 μA/−0.6 mA
I_{1a}–I_{1d}	Source 1 Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}$	Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
S	Select Input	1.0/1.0	20 μA/−0.6 mA
$\overline{Z}_a$–$\overline{Z}_d$	Inverted Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 'F158A quad 2-input multiplexer selects four bits of data from two sources under the control of a common Select input (S) and presents the data in inverted form at the four outputs. The Enable input ($\overline{E}$) is active LOW. When $\overline{E}$ is HIGH, all of the outputs ($\overline{Z}$) are forced HIGH regardless of all other inputs. The 'F158A is the logic implementation of a 4-pole, 2-position switch where the position of the switch is determined by the logic levels supplied to the Select input.


A common use of the 'F158A is the moving of data from two groups of registers to four common output busses. The particular register from which the data comes is determined by the state of the Select input. A less obvious use is as a function generator. The 'F158A can generate four functions of two variables with one variable common. This is useful for implementing gating functions.

Truth Table

Inputs				Outputs
$\overline{E}$	S	I_0	I_1	$\overline{Z}$
H	X	X	X	H
L	L	L	X	H
L	L	H	X	L
L	H	X	L	H
L	H	X	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
$\overline{Z}_n = \overline{E} \times (I_{1n}\, S + I_{0n}\, \overline{S})$

Logic Diagram

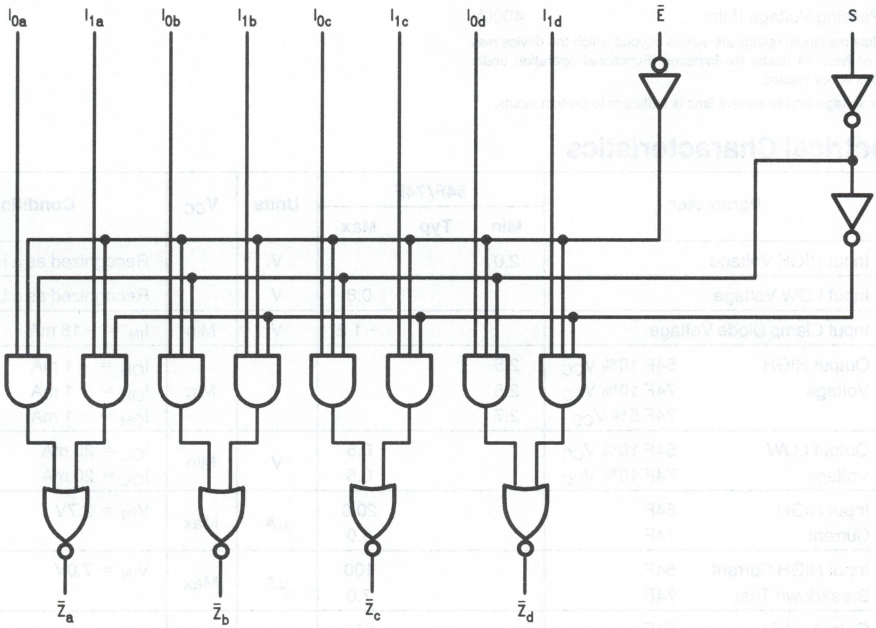

TL/F/9484–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			10	15	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay S to $\overline{Z}_n$	3.0 2.5	5.5 4.5	8.5 6.5	3.0 2.5	10.5 8.0	3.0 2.5	9.5 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}$ to $\overline{Z}_n$	2.5 2.0	4.5 4.0	6.0 6.0	2.5 2.0	8.0 7.0	2.5 2.0	7.0 6.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to $\overline{Z}_n$	2.5 1.5	4.0 2.5	5.9 4.0	2.5 1.0	8.5 5.0	2.5 1.5	7.0 4.5	ns	2–3

National Semiconductor

54F/74F160A • 54F/74F162A
Synchronous Presettable BCD Decade Counter

General Description

The 'F160A and 'F162A are high-speed synchronous decade counters operating in the BCD (8421) sequence. They are synchronously presettable for applications in programmable dividers. There are two types of Count Enable inputs plus a Terminal Count output for versatility in forming synchronous multistage counters. The 'F160A has an asynchronous Master Reset input that overrides all other inputs and forces the outputs LOW. The 'F162A has a Synchronous Reset input that overrides counting and parallel loading and allows all outputs to be simultaneously reset on the rising edge of the clock. The 'F160A and 'F162A are high speed versions of the 'F160 and 'F162.

Features


- Synchronous counting and loading
- High-speed synchronous expansion
- Typical count rate of 120 MHz
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak


'F160A



TL/F/9485–1


Pin Assignment for LCC

'F160A




TL/F/9485–2

'F162A



TL/F/9485–9


'F162A



TL/F/9485–10


Logic Symbols

'F160A



TL/F/9485–3


'F162A



TL/F/9485–8


IEEE/IEC

'F160A

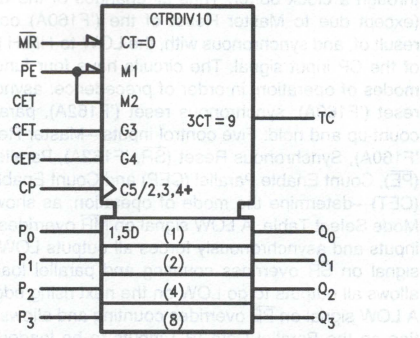

TL/F/9485–6

'F162A

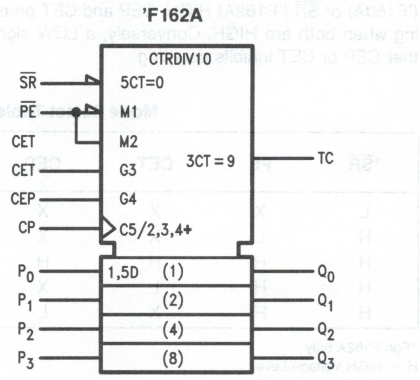

TL/F/9485–7

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
CEP	Count Enable Parallel Input	1.0/1.0	20 μA/−0.6 mA
CET	Count Enable Trickle Input	1.0/2.0	20 μA/−1.2 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$ ('F160A)	Asynchronous Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{SR}$ ('F162A)	Synchronous Reset Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
P_0–P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{PE}$	Parallel Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
Q_0–Q_3	Flip-Flop Outputs	50/33.3	−1 mA/20 mA
TC	Terminal Count Output	50/33.3	−1 mA/20 mA

Functional Description

The 'F160A and 'F162A count modulo-10 in the BCD (8421) sequence. From state 9 (HLLH) they increment to state 0 (LLLL). The clock inputs of all flip-flops are driven in parallel through a clock buffer. Thus all changes of the Q outputs (except due to Master Reset of the ('F160A) occur as a result of, and synchronous with, the LOW-to-HIGH transition of the CP input signal. The circuits have four fundamental modes of operation, in order of precedence: asynchronous reset ('F160A), synchronous reset ('F162A), parallel load, count-up and hold. Five control inputs—Master Reset ($\overline{MR}$, 'F160A), Synchronous Reset ($\overline{SR}$, 'F162A), Parallel Enable ($\overline{PE}$), Count Enable Parallel (CEP) and Count Enable Trickle (CET)—determine the mode of operation, as shown in the Mode Select Table. A LOW signal on $\overline{MR}$ overrides all other inputs and asynchronously forces all outputs LOW. A LOW signal on $\overline{SR}$ overrides counting and parallel loading and allows all outputs to go LOW on the next rising edge of CP. A LOW signal on $\overline{PE}$ overrides counting and allows information on the Parallel Data (P_n) inputs to be loaded into the flip-flops on the next rising edge of CP. With $\overline{PE}$ and $\overline{MR}$ ('F160A) or $\overline{SR}$ ('F162A) HIGH, CEP and CET permit counting when both are HIGH. Conversely, a LOW signal on either CEP or CET inhibits counting.

The 'F160A and 'F162A use D-type edge-triggered flip-flops and changing the $\overline{SR}$, $\overline{PE}$, CEP and CET inputs when the CP is in either state does not cause errors, provided that the recommended setup and hold times, with respect to the rising edge of CP, are observed.

The Terminal Count (TC) output is HIGH when CET is HIGH and counter is in state 9. To implement synchronous multistage counters, the TC outputs can be used with the CEP and CET inputs in two different ways. Please refer to the 'F568 data sheet. The TC output is subject to decoding spikes due to internal race conditions and is therefore not recommended for use as a clock or asynchronous reset for flip-flops, counters or registers. In the 'F160A and 'F162A decade counters, the TC output is fully decoded and can only be HIGH in state 9. If a decade counter is preset to an illegal state, or assumes an illegal state when power is applied, it will return to the normal sequence within two counts, as shown in the State Diagram.

Logic Equations:

$$\text{Count Enable} = \text{CEP} \times \text{CET} \times \overline{\text{PE}}$$


$$\text{TC} = Q_0 \times \overline{Q}_1 \times \overline{Q}_2 \times Q_3 \times \text{CET}$$

Mode Select Table


*$\overline{SR}$	$\overline{PE}$	CET	CEP	Action on the Rising Clock Edge (⌐‾)
L	X	X	X	Reset (Clear)
H	L	X	X	Load ($P_n \rightarrow Q_n$)
H	H	H	H	Count (Increment)
H	H	L	X	No Change (Hold)
H	H	X	L	No Change (Hold)

*For 'F162A only
H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

State Diagram



TL/F/9485–4

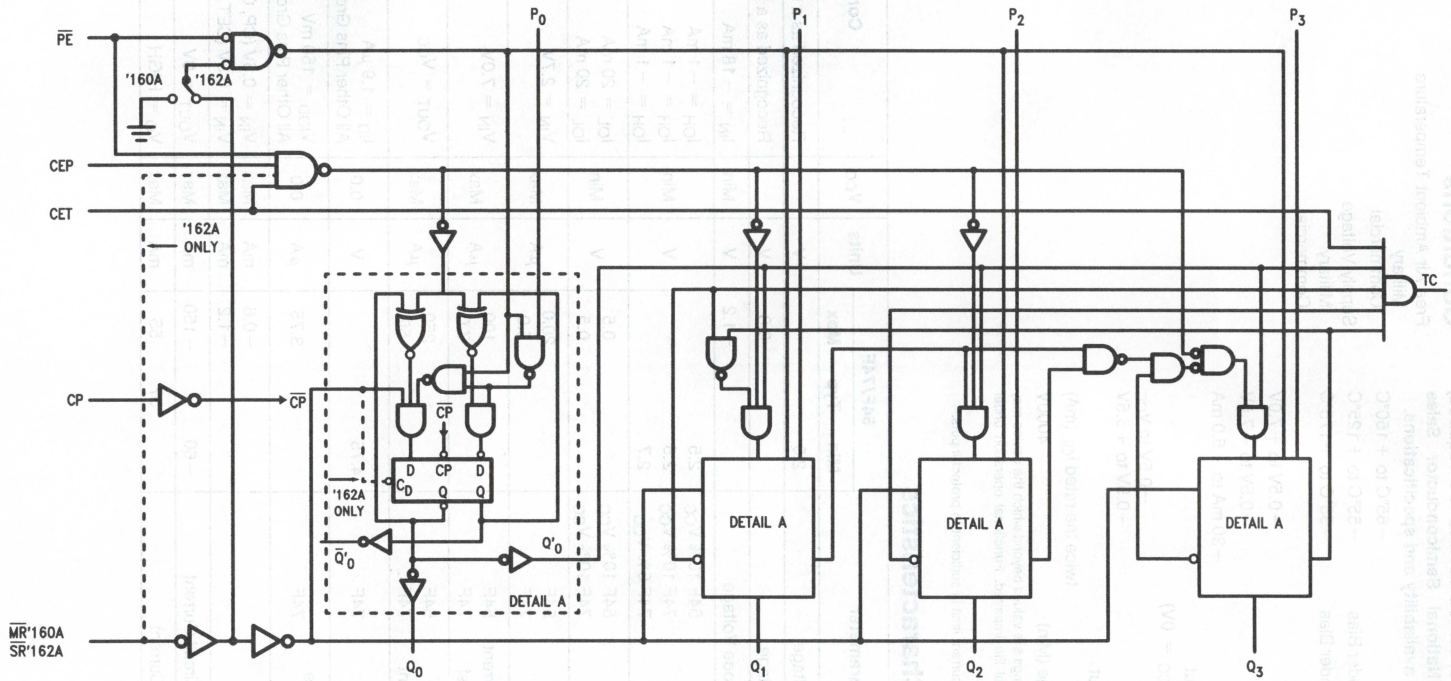

TL/F/9485–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (CP, CEP, P_n, $\overline{MR}$ ('F160A))
					−1.2	mA	Max	V_{IN} = 0.5V (CET, $\overline{SR}$ ('F162A), $\overline{PE}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			37	55	mA	Max	V_O = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Count Frequency	90	120		75		80		MHz	2–1
t_{PLH}	Propagation Delay, Count	3.5	5.5	7.5	3.5	9.0	3.5	8.5	ns	2–3
t_{PHL}	CP to Q_n ($\overline{PE}$ Input HIGH)	3.5	7.5	10.0	3.5	11.5	3.5	11.0		
t_{PLH}	Propagation Delay, Load	4.0	6.0	8.5	4.0	10.0	4.0	9.5	ns	2–3
t_{PHL}	CP to Q_n ($\overline{PE}$ Input LOW)	4.0	6.0	8.5	4.0	10.0	4.0	9.5		
t_{PLH}	Propagation Delay	5.0	10.0	14.0	5.0	16.5	5.0	15.0	ns	2–3
t_{PHL}	CP to TC	5.0	10.0	14.0	5.0	15.5	5.0	15.0		
t_{PLH}	Propagation Delay	2.5	4.5	7.5	2.5	9.0	2.5	8.5	ns	2–3
t_{PHL}	CET to TC	2.5	4.5	7.5	2.5	9.0	2.5	8.5		
t_{PHL}	Propagation Delay $\overline{MR}$ to Q_n ('F160A)	5.5	9.0	12.0	5.5	14.0	5.5	13.0	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to TC ('F160A)	4.5	8.0	10.5	4.5	12.5	4.5	11.5	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to CP ('F160A)	4.0 5.0		5.5 5.5		4.0 5.0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to CP ('F162A)	5.0 5.0		5.5 5.5		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to CP	2.0 2.0		2.5 2.5		2.0 2.0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{PE}$ or $\overline{SR}$ to CP	11.0 8.5		13.5 10.5		11.5 9.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{PE}$ or $\overline{SR}$ to CP	2.0 0		2.0 0		2.0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW CEP or CET to CP	11.0 5.0		13.0 6.0		11.5 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW CEP or CET to CP	0 0		0 0		0 0			
$t_w(H)$ $t_w(L)$	Clock Pulse Width (Load) HIGH or LOW	5.0 5.0		5.0 5.0		5.0 5.0		ns	2–4
$t_w(H)$ $t_w(L)$	Clock Pulse Width (Count) HIGH or LOW	4.0 6.0		5.0 8.0		4.0 7.0		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW ('F160A)	5.0		5.0		5.0			
t_{rec}	Recovery Time $\overline{MR}$ to CP ('F160A)	6.0		6.0		6.0		ns	2–6

National Semiconductor

54F/74F161A • 54F/74F163A
Synchronous Presettable Binary Counter

General Description

The 'F161A and 'F163A are high-speed synchronous modulo-16 binary counters. They are synchronously presettable for application in programmable dividers and have two types of Count Enable inputs plus a Terminal Count output for versatility in forming synchronous multi-stage counters. The 'F161A has an asynchronous Master-Reset input that overrides all other inputs and forces the outputs LOW. The 'F163A has a Synchronous Reset input that overrides counting and parallel loading and allows the outputs to be simultaneously reset on the rising edge of the clock. The 'F161A and 'F163A are high-speed versions of the 'F161 and 'F163.


Features

- Synchronous counting and loading
- High-speed synchronous expansion
- Typical count frequency of 120 MHz
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak 'F161A




TL/F/9486–1

Pin Assignment for LCC 'F161A




TL/F/9486–2

Pin Assignment for DIP, SOIC and Flatpak 'F163A



TL/F/9486–7


Pin Assignment for LCC 'F163A



TL/F/9486–8


Logic Symbols

'F161A




TL/F/9486–3

'F163A




TL/F/9486–9

IEEE/IEC
'F161A



TL/F/9486–6

IEEE/IEC
'F163A



TL/F/9486–10

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
CEP	Count Enable Parallel Input	1.0/1.0	20 μA/−0.6 mA
CET	Count Enable Trickle Input	1.0/2.0	20 μA/−1.2 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$ ('F161A)	Asynchronous Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{SR}$ ('F163A)	Synchronous Reset Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
P_0–P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{PE}$	Parallel Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
Q_0–Q_3	Flip-Flop Outputs	50/33.3	−1 mA/20 mA
TC	Terminal Count Output	50/33.3	−1 mA/20 mA

Functional Description

The 'F161A and 'F163A count in modulo-16 binary sequence. From state 15 (HHHH) they increment to state 0 (LLLL). The clock inputs of all flip-flops are driven in parallel through a clock buffer. Thus all changes of the Q outputs (except due to Master Reset of the 'F161A) occur as a result of, and synchronous with, the LOW-to-HIGH transition of the CP input signal. The circuits have four fundamental modes of operation, in order of precedence: asynchronous reset ('F161A), synchronous reset ('F163A), parallel load, count-up and hold. Five control inputs—Master Reset ($\overline{MR}$, 'F161A), Synchronous Reset ($\overline{SR}$, 'F163A), Parallel Enable ($\overline{PE}$), Count Enable Parallel (CEP) and Count Enable Trickle (CET)—determine the mode of operation, as shown in the Mode Select Table. A LOW signal on $\overline{MR}$ overrides all other inputs and asynchronously forces all outputs LOW. A LOW signal on $\overline{SR}$ overrides counting and parallel loading and allows all outputs to go LOW on the next rising edge of CP. A LOW signal on $\overline{PE}$ overrides counting and allows information on the Parallel Data (P_n) inputs to be loaded into the flip-flops on the next rising edge of CP. With $\overline{PE}$ and $\overline{MR}$ ('F161A) or $\overline{SR}$ ('F163A) HIGH, CEP and CET permit counting when both are HIGH. Conversely, a LOW signal on either CEP or CET inhibits counting.

The 'F161A and 'F163A use D-type edge triggered flip-flops and changing the $\overline{SR}$, $\overline{PE}$, CEP and CET inputs when the CP is in either state does not cause errors, provided that the recommended setup and hold times, with respect to the rising edge of CP, are observed.

The Terminal Count (TC) output is HIGH when CET is HIGH and the counter is in state 15. To implement synchronous multi-stage counters, the TC outputs can be used with the CEP and CET inputs in two different ways. Please refer to the 'F568 data sheet. The TC output is subject to decoding spikes due to internal race conditions and is therefore not recommended for use as a clock or asynchronous reset for flip-flops, counters or registers.

Logic Equations: Count Enable = CEP • CET • $\overline{PE}$


$$TC = Q_0 \bullet Q_1 \bullet Q_2 \bullet Q_3 \bullet CET$$

Mode Select Table

*$\overline{SR}$	$\overline{PE}$	CET	CEP	Action on the Rising Clock Edge (⌐‾)
L	X	X	X	Reset (Clear)
H	L	X	X	Load ($P_n \rightarrow Q_n$)
H	H	H	H	Count (Increment)
H	H	L	X	No Change (Hold)
H	H	X	L	No Change (Hold)


*For 'F163A only
H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

State Diagram

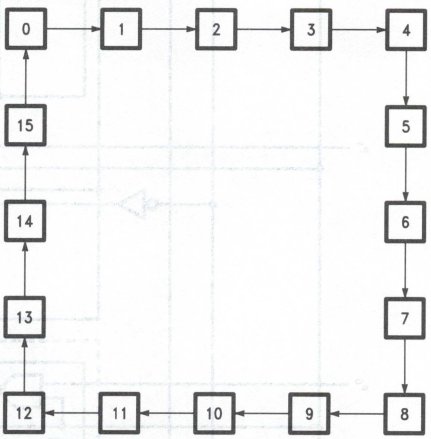

TL/F/9486–5

Block Diagram

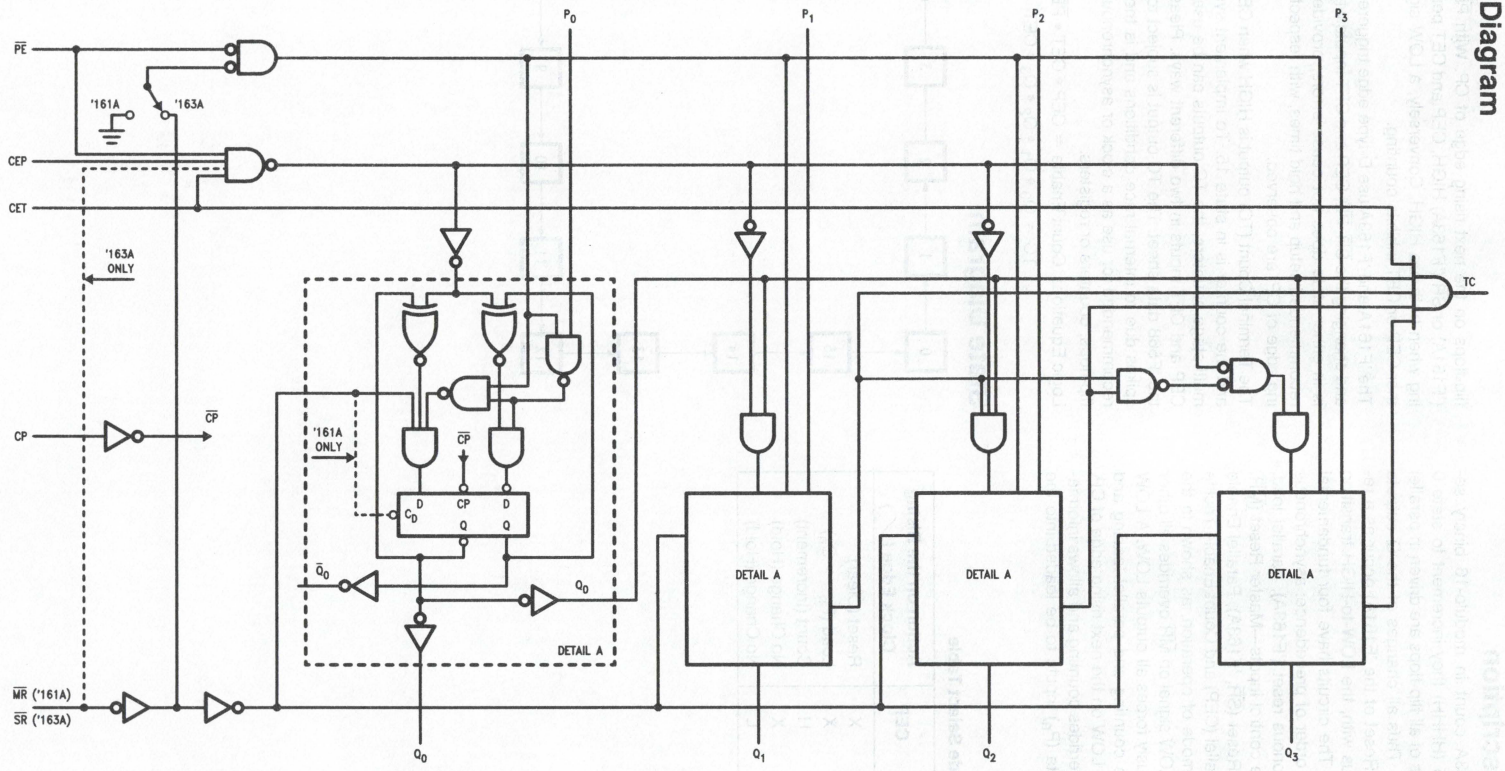

TL/F/9486–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					
		74F 5% V_{CC}	2.7					
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (CEP, CP, $\overline{MR}$, P_0–P_3)
					−1.2	mA	Max	V_{IN} = 0.5V (CET, $\overline{PE}$, $\overline{SR}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			37	55	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$, $C_L = 50$ pF		74F $T_A, V_{CC} = Com$, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Count Frequency	100	120		75		90		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n ($\overline{PE}$ Input HIGH)	3.5 3.5	5.5 7.5	7.5 10.0	3.5 3.5	9.0 11.5	3.5 3.5	8.5 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n ($\overline{PE}$ Input LOW)	4.0 4.0	6.0 6.0	8.5 8.5	4.0 4.0	10.0 10.0	4.0 4.0	9.5 9.5		
t_{PLH} t_{PHL}	Propagation Delay CP to TC	5.0 5.0	10.0 10.0	14.0 14.0	5.0 5.0	16.5 15.5	5.0 5.0	15.0 15.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CET to TC	2.5 2.5	4.5 4.5	7.5 7.5	2.5 2.5	9.0 9.0	2.5 2.5	8.5 8.5	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to Q_n ('F161A)	5.5	9.0	12.0	5.5	14.0	5.5	13.0	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to TC ('F161A)	4.5	8.0	10.5	4.5	12.5	4.5	11.5	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to CP	5.0 5.0		5.5 5.5		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to CP	2.0 2.0		2.5 2.5		2.0 2.0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{PE}$ or $\overline{SR}$ to CP	11.0 8.5		13.5 10.5		11.5 9.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{PE}$ or $\overline{SR}$ to CP	2.0 0		3.6 0		2.0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW CEP or CET to CP	11.0 5.0		13.0 6.0		11.5 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW CEP or CET to CP	0 0		0 0		0 0			
$t_w(H)$ $t_w(L)$	Clock Pulse Width (Load) HIGH or LOW	5.0 5.0		5.0 5.0		5.0 5.0		ns	2–4
$t_w(H)$ $t_w(L)$	Clock Pulse Width (Count) HIGH or LOW	4.0 6.0		5.0 8.0		4.0 7.0		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW ('F161A)	5.0		5.0		5.0		ns	2–4
t_{rec}	Recovery Time $\overline{MR}$ to CP ('F161A)	6.0		6.0		6.0		ns	2–6

National Semiconductor

54F/74F164A
Serial-In, Parallel-Out Shift Register

General Description


The 'F164A is a high-speed 8-bit serial-in/parallel-out shift register. Serial data is entered through a 2-input AND gate synchronous with the LOW-to-HIGH transition of the clock. The device features an asynchronous Master Reset which clears the register, setting all outputs LOW independent of the clock. The 'F164A is a faster version of the 'F164.

Features

- Typical shift frequency of 90 MHz
- Asynchronous Master Reset
- Gated serial data input
- Fully synchronous data transfers
- Guaranteed 4000V min ESD protection
- 'F164A is a faster version of the 'F164


Ordering Code: See Section 5

Logic Symbols



TL/F/10613–1


IEEE/IEC



TL/F/10613–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/10613–2

Pin Assignment for LCC



TL/F/10613–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A, B	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_7	Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 'F164A is an edge-triggered 8-bit shift register with serial data entry and an output from each of the eight stages. Data is entered serially through one of two inputs (A or B); either of these inputs can be used as an active HIGH Enable for data entry through the other input. An unused input must be tied HIGH.


Each LOW-to-HIGH transition on the Clock (CP) input shifts data one place to the right and enters into Q_0 the logical AND of the two data inputs (A • B) that existed before the rising clock edge. A LOW level on the Master Reset ($\overline{MR}$) input overrides all other inputs and clears the register asynchronously, forcing all Q outputs LOW.

Mode Select Table

Operating Mode	Inputs			Outputs	
	$\overline{MR}$	A	B	Q_0	Q_1–Q_7
Reset (Clear)	L	X	X	L	L-L
Shift	H	l	l	L	q_0–q_6
	H	l	h	L	q_0–q_6
	H	h	l	L	q_0–q_6
	H	h	h	H	q_0–q_6

H(h) = HIGH Voltage Levels
L(l) = LOW Voltage Levels
X = Immaterial
q_n = Lower case letters indicate the state of the referenced input or output one setup time prior to the LOW-to-HIGH clock transition.

Logic Diagram

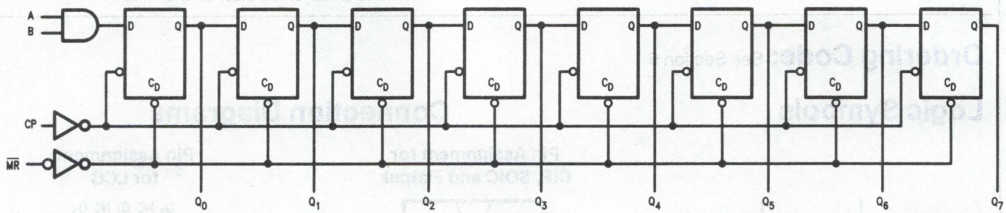

TL/F/10613–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			35	55	mA	Max	CP = HIGH $\overline{MR}$ = GND, A, B = GND

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	80	120				80		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n	3.0 3.5	4.8 5.0	7.5 8.0			3.0 3.5	7.5 8.0	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to Q_n	5.0	7.0	10.0			5.0	10.5	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A or B to CP	4.5 4.0				4.5 4.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A or B to CP	1.0 1.0				1.0 1.0			
$t_w(H)$ $t_w(L)$	CP Pulse Width HIGH or LOW	4.0 7.0				4.0 7.0		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	4.0				4.0		ns	2–4
t_{rec}	Recovery Time $\overline{MR}$ to CP	5.0				5.0		ns	2–6

National Semiconductor

54F/74F168 • 54F/74F169
4-Stage Synchronous Bidirectional Counters

General Description


The 'F168 and 'F169 are fully synchronous 4-stage up/down counters. The 'F168 is a BCD decade counter; the 'F169 is a modulo-16 binary counter. Both feature a preset capability for programmable operation, carry lookahead for easy cascading and a U/$\overline{D}$ input to control the direction of counting. All state changes, whether in counting or parallel loading, are initiated by the LOW-to-HIGH transition of the clock.

Features

- Asynchronous counting and loading
- Built-in lookahead carry capability
- Presettable for programmable operation

Ordering Code: See Section 5


Logic Symbols



TL/F/9488–3


IEEE/IEC

'F168

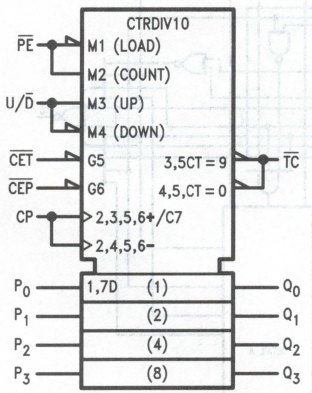

TL/F/9488–8


'F169

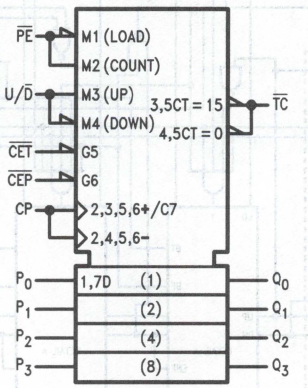

TL/F/9488–9


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9488–1

Pin Assignment for LCC



TL/F/9488–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{CEP}$	Count Enable Parallel Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{CET}$	Count Enable Trickle Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
P_0–P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{PE}$	Parallel Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
U/$\overline{D}$	Up-Down Count Control Input	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_3	Flip-Flop Outputs	50/33.3	−1 mA/20 mA
$\overline{TC}$	Terminal Count Output (Active LOW)	50/33.3	−1 mA/20 mA

Functional Description

The 'F168 and 'F169 use edge-triggered J-K type flip-flops and have no constraints on changing the control or data input signals in either state of the clock. The only requirement is that the various inputs attain the desired state at least a setup time before the rising edge of the clock and remain valid for the recommended hold time thereafter. The parallel load operation takes precedence over other operations, as indicated in the Mode Select Table. When $\overline{PE}$ is LOW, the data on the P_0–P_3 inputs enters the flip-flops on the next rising edge of the clock. In order for counting to occur, both $\overline{CEP}$ and $\overline{CET}$ must be LOW and $\overline{PE}$ must be HIGH; the U/$\overline{D}$ input then determines the direction of counting. The Terminal Count ($\overline{TC}$) output is normally HIGH and goes LOW, provided that $\overline{CET}$ is LOW, when a counter reaches zero in the Count Down mode or reaches 9 (15 for the 'F169) in the Count Up mode. The $\overline{TC}$ output state is not a function of the Count Enable Parallel ($\overline{CEP}$) input level. The $\overline{TC}$ output of the 'F168 decade counter can also be LOW in the illegal states 11, 13, and 15, which can occur when power is turned on or via parallel loading. If an illegal state occurs, the 'F168 will return to the legitimate sequence within two counts. Since the $\overline{TC}$ signal is derived by decoding the flip-flop states, there exists the possibility of decoding spikes on $\overline{TC}$. For this reason the use of $\overline{TC}$ as a clock signal is not recommended (see logic equations below).

1) Count Enable = $\overline{CEP} \bullet \overline{CET} \bullet \overline{PE}$


2) Up: ('F168): $\overline{TC} = Q_0 \bullet \overline{Q}_1 \bullet \overline{Q}_2 \bullet Q_3 \bullet$ (Up) $\bullet \overline{CET}$

('F169): $\overline{TC} = Q_0 \bullet Q_1 \bullet Q_2 \bullet Q_3 \bullet$ (Up) $\bullet \overline{CET}$

3) Down: $\overline{TC} = \overline{Q}_0 \bullet \overline{Q}_1 \bullet \overline{Q}_2 \bullet \overline{Q}_3 \bullet$ (Down) $\bullet \overline{CET}$

Logic Diagram

'F168

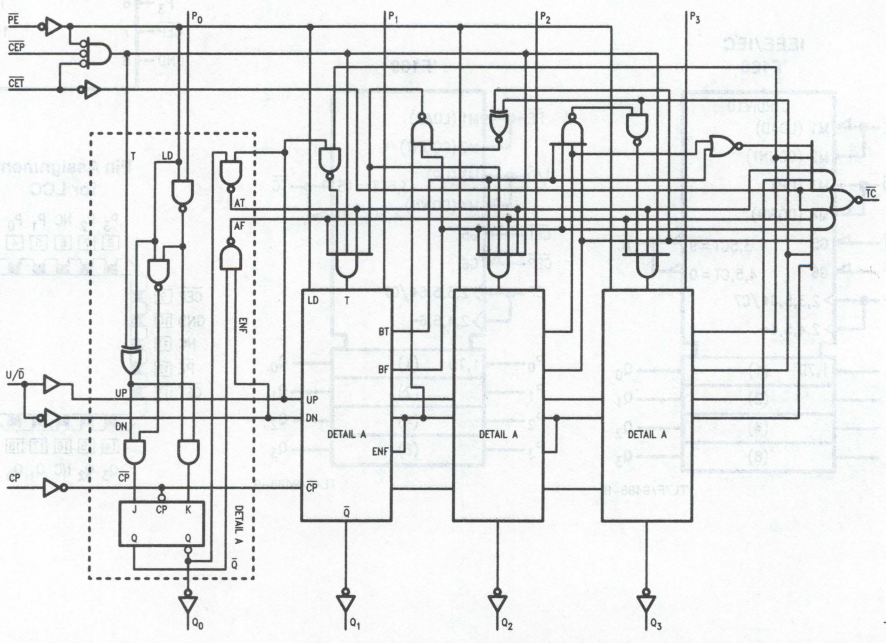


TL/F/9488–4

Please note that these diagrams are provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Logic Diagram (Continued)

'F169

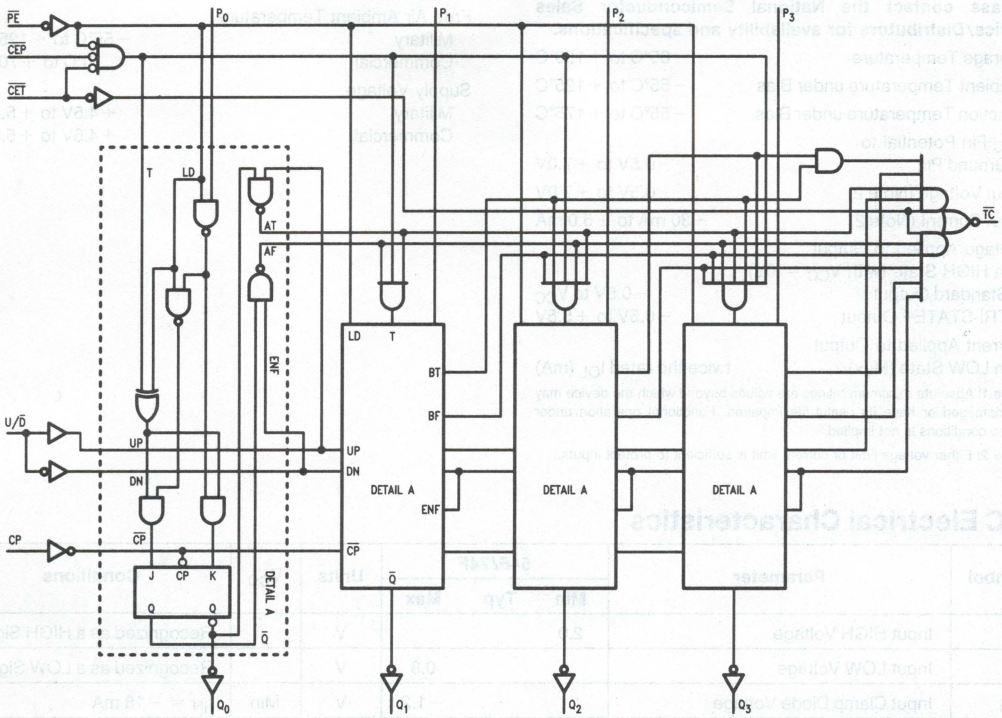

TL/F/9488–5

Please note that these diagrams are provided only for the understanding of logic operations and should not be used to estimate propagation delays.


Mode Select Table

$\overline{PE}$	$\overline{CEP}$	$\overline{CET}$	U/$\overline{D}$	Action on Rising Clock Edge
L	X	X	X	Load ($P_n \rightarrow Q_n$)
H	L	L	H	Count Up (Increment)
H	L	L	L	Count Down (Decrement)
H	H	X	X	No Change (Hold)
H	X	H	X	No Change (Hold)

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial


State Diagrams

'F168



TL/F/9488–6

'F169

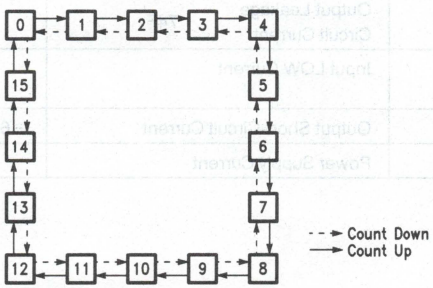

TL/F/9488–7

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (except $\overline{CET}$)
					−1.2			V_{IN} = 0.5V ($\overline{CET}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCL}	Power Supply Current			35	52	mA	Max	V_O = LOW

'F168

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Count Frequency	100	115		6.0		90		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n ($\overline{PE}$ HIGH or LOW)	3.0 4.0	6.5 9.0	8.5 11.5	3.0 4.0	12.0 16.0	3.0 4.0	9.5 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{TC}$	5.5 4.0	12.0 8.5	15.5 11.0	5.5 4.0	20.0 15.0	5.5 4.0	17.0 12.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CET}$ to $\overline{TC}$	2.5 2.5	4.5 6.0	6.0 8.0	2.5 2.5	9.0 12.0	2.5 2.5	7.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay U/$\overline{D}$ to $\overline{TC}$	3.5 4.0	8.5 12.5	11.0 16.0	3.5 4.0	16.0 14.0	3.5 4.0	12.5 18.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to CP	4.0 4.0		4.5 4.5		4.5 4.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to CP	3.0 3.0		3.5 3.5		3.5 3.5		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{CEP}$ or $\overline{CET}$ to CP	5.0 5.0		8.0 8.0		6.0 6.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{CEP}$ or $\overline{CET}$ to CP	0 0		0.0 1.0		0 0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{PE}$ to CP	8.0 8.0		10.0 10.0		9.0 9.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{PE}$ to CP	0 0		1.0 0		0 0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW U/$\overline{D}$ to CP	11.0 16.5		14.0 12.0		12.5 18.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW U/$\overline{D}$ to CP	0 0		0 0		0 0		ns	2–6
$t_w(H)$ $t_w(L)$	CP Pulse Width HIGH or LOW	5.0 5.0		6.0 9.0		5.5 5.5		ns	2–4

'F169

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Count Frequency	90			60		70		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n ($\overline{PE}$ HIGH or LOW)	3.0 4.0	6.5 9.0	8.5 11.5	3.0 4.0	12.0 16.0	3.0 4.0	9.5 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{TC}$	5.5 4.0	12.0 8.5	15.5 12.5	5.5 4.0	20.0 15.0	5.5 4.0	17.5 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CET}$ to $\overline{TC}$	2.5 2.5	4.5 8.5	6.5 11.0	2.5 2.5	9.0 12.0	2.5 2.5	7.0 12.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay U/$\overline{D}$ to $\overline{TC}$	3.5 4.0	8.5 8.0	11.5 12.0	3.5 4.0	16.0 14.0	3.5 4.0	12.5 13.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to CP	4.0 4.0		4.5 4.5		4.5 4.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to CP	3.0 3.0		3.5 3.5		3.5 3.5			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{CEP}$ or $\overline{CET}$ to CP	7.0 5.0		8.0 8.0		8.0 6.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{CEP}$ or $\overline{CET}$ to CP	0 0.5		0 1.0		0 0.5			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{PE}$ to CP	8.0 8.0		10.0 10.0		9.0 9.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{PE}$ to CP	1.0 0		1.0 0		1.0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW U/$\overline{D}$ to CP	11.0 7.0		14.0 12.0		12.5 8.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW U/$\overline{D}$ to CP	0 0		0 0		0 0			
$t_w(H)$ $t_w(L)$	CP Pulse Width HIGH or LOW	4.0 7.0		6.0 9.0		4.5 8.0		ns	2–4

National Semiconductor

54F/74F174 Hex D Flip-Flop with Master Reset

General Description


The 'F174 is a high-speed hex D flip-flop. The device is used primarily as a 6-bit edge-triggered storage register. The information on the D inputs is transferred to storage during the LOW-to-HIGH clock transition. The device has a Master Reset to simultaneously clear all flip-flops.

Features

- Edge-triggered D-type inputs
- Buffered positive edge-triggered clock
- Asynchronous common reset
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5


Logic Symbols



TL/F/9489–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak




TL/F/9489–1

Pin Assignment for LCC



TL/F/9489–2

IEEE/IEC



TL/F/9489–5

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_5	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_5	Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 'F174 consists of six edge-triggered D flip-flops with individual D inputs and Q outputs. The Clock (CP) and Master Reset ($\overline{MR}$) are common to all flip-flops. Each D input's state is transferred to the corresponding flip-flop's output following the LOW-to-HIGH Clock (CP) transition. A LOW input to the Master Reset ($\overline{MR}$) will force all outputs LOW independent of Clock or Data inputs. The 'F174 is useful for applications where the true output only is required and the Clock and Master Reset are common to all storage elements.

Truth Table

Inputs			Outputs
$\overline{MR}$	CP	D_n	Q_n
L	X	X	L
H	⌐	H	H
H	⌐	L	L


H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

⌐ = LOW-to-HIGH Clock Transition

Logic Diagram

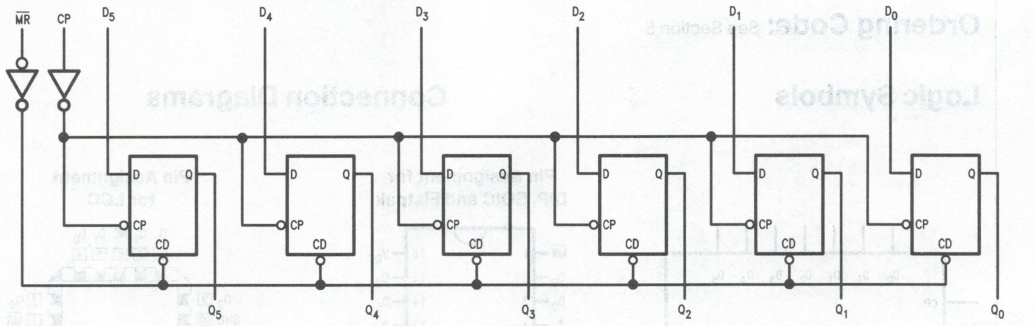

TL/F/9489–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			30	45	mA	Max	CP = ⎍ D_n = $\overline{MR}$ = HIGH
I_{CCL}	Power Supply Current			30	45	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	80			70		80		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n	3.5 4.0	5.5 7.0	8.0 10.0	3.0 4.0	10.0 12.0	3.5 4.0	9.0 11.0	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to Q_n	5.0	10.0	14.0	5.0	16.0	5.0	15.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to CP	4.0 4.0		5.0 5.0		4.0 4.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to CP	0 0		2.0 2.0		0 0			
$t_w(H)$ $t_w(L)$	CP Pulse Width HIGH or LOW	4.0 6.0		5.0 7.5		4.0 6.0		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	5.0		6.5		5.0		ns	2–4
t_{rec}	Recovery Time, $\overline{MR}$ to CP	5.0		6.0		5.0			2–6

National Semiconductor

54F/74F175 Quad D Flip-Flop

General Description

The 'F175 is a high-speed quad D flip-flop. The device is useful for general flip-flop requirements where clock and clear inputs are common. The information on the D inputs is stored during the LOW-to-HIGH clock transition. Both true and complemented outputs of each flip-flop are provided. A Master Reset input resets all flip-flops, independent of the Clock or D inputs, LOW.


Features

- Edge-triggered D-type inputs
- Buffered positive edge-triggered clock
- Asynchronous common reset
- True and complement output


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC




TL/F/9490–5

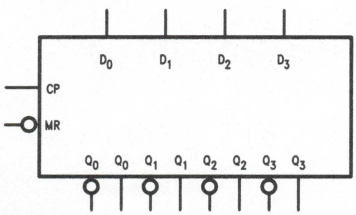

TL/F/9490–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9490–1

Pin Assignment for LCC



TL/F/9490–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_3	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_3	True Outputs	50/33.3	−1 mA/20 mA
$\overline{Q}_0$–$\overline{Q}_3$	Complement Outputs	50/33.3	−1 mA/20 mA

Functional Description


The 'F175 consists of four edge-triggered D flip-flops with individual D inputs and Q and $\overline{Q}$ outputs. The Clock and Master Reset are common. The four flip-flops will store the state of their individual D inputs on the LOW-to-HIGH clock (CP) transition, causing individual Q and $\overline{Q}$ outputs to follow. A LOW input on the Master Reset ($\overline{MR}$) will force all Q outputs LOW and $\overline{Q}$ outputs HIGH independent of Clock or Data inputs. The 'F175 is useful for general logic applications where a common Master Reset and Clock are acceptable.

Truth Table

Inputs			Outputs	
$\overline{MR}$	CP	D_n	Q_n	$\overline{Q}_n$
L	X	X	L	H
H	⌐	H	H	L
H	⌐	L	L	H

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐ = LOW-to-HIGH Clock Transition

Logic Diagram

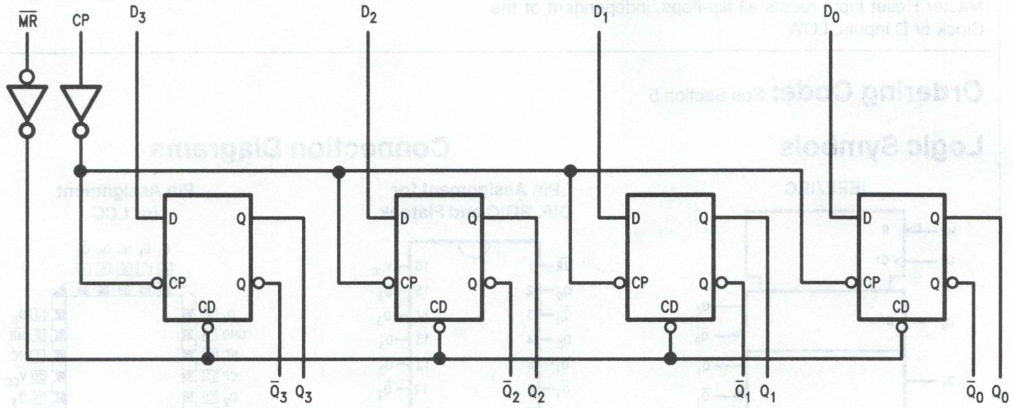

TL/F/9490–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			22.5	34.0	mA	Max	CP = ⎍ D_n = $\overline{MR}$ = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	140		80		100		MHz	2-1
t_{PLH}	Propagation Delay	4.0	5.0	6.5	3.5	8.5	4.0	7.5	ns	2-3
t_{PHL}	CP to Q_n or $\overline{Q}_n$	4.0	6.5	8.5	4.0	10.5	4.0	9.5		
t_{PHL}	Propagation Delay $\overline{MR}$ to Q_n	4.5	9.0	11.5	4.5	15.0	4.5	13.0	ns	2-3
t_{PLH}	Propagation Delay $\overline{MR}$ to $\overline{Q}_n$	4.0	6.5	8.0	4.0	11.0	4.0	9.0	ns	2-3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	3.0		3.0		3.0		ns	2-6
$t_s(L)$	D_n to CP	3.0		4.0		3.0			
$t_h(H)$	Hold Time, HIGH or LOW	1.0		1.0		1.0			
$t_h(L)$	D_n to CP	1.0		2.0		1.0			
$t_w(H)$	CP Pulse Width	4.0		4.0		4.0		ns	2-4
$t_w(L)$	HIGH or LOW	5.0		6.0		5.0			
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	5.0		5.0		5.0		ns	2-4
t_{rec}	Recovery Time, $\overline{MR}$ to CP	5.0		6.0		5.0		ns	2-6

National Semiconductor

54F/74F181
4-Bit Arithmetic Logic Unit

General Description

The 'F181 is a 4-bit Arithmetic logic Unit (ALU) which can perform all the possible 16 logic operations on two variables and a variety of arithmetic operations. It is 40% faster than the Schottky ALU and only consumes 30% as much power.


Features

- Full lookahead for high-speed arithmetic operation on long words
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5


Logic Symbols

Active-HIGH Operands




TL/F/9491–3

Active-LOW Operands



TL/F/9491–4


IEEE/IEC

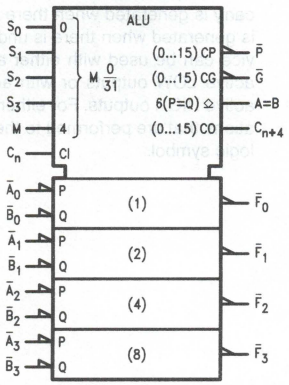

TL/F/9491–10


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9491–1

Pin Assignment for LCC



TL/F/9491–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{A}_0$–$\overline{A}_3$	A Operand Inputs (Active LOW)	1.0/3.0	20 μA/−1.8 mA
$\overline{B}_0$–$\overline{B}_3$	B Operand Inputs (Active LOW)	1.0/3.0	20 μA/−1.8 mA
S_0–S_3	Function Select Inputs	1.0/4.0	20 μA/−2.4 mA
M	Mode Control Input	1.0/1.0	20 μA/−0.6 mA
C_n	Carry Input	1.0/5.0	20 μA/−3.0 mA
$\overline{F}_0$–$\overline{F}_3$	Function Outputs (Active LOW)	50/33.3	−1 mA/20 mA
A = B	Comparator Output	OC*/33.3	*/20 mA
$\overline{G}$	Carry Generate Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{P}$	Carry Propagate Output (Active LOW)	50/33.3	−1 mA/20 mA
C_{n+4}	Carry Output	50/33.3	−1 mA/20 mA

*OC-Open Collector

Functional Description


The 'F181 is a 4-bit high-speed parallel Arithmetic Logic Unit (ALU). Controlled by the four Function Select inputs (S_0–S_3) and the Mode Control input (M), it can perform all the 16 possible logic operations or 16 different arithmetic operations on Active HIGH or Active LOW operands. The Function Table lists these operations.

When the Mode Control input (M) is HIGH, all internal carries are inhibited and the device performs logic operations on the individual bits as listed. When the Mode Control input is LOW, the carries are enabled and the device performs arithmetic operations on the two 4-bit words. The device incorporates full internal carry lookahead and provides for either ripple carry between devices using the C_{n+4} output, or for carry lookahead between packages using the signals $\overline{P}$ (Carry Propagate) and $\overline{G}$ (Carry Generate). In the Add mode, $\overline{P}$ indicates that $\overline{F}$ is 15 or more, while $\overline{G}$ indicates that $\overline{F}$ is 16 or more. In the Subtract mode $\overline{P}$ indicates that $\overline{F}$ is zero or less, while $\overline{G}$ indicates that $\overline{F}$ is less than zero. $\overline{P}$ and $\overline{G}$ are not affected by carry in. When speed requirements are not stringent, the 'F181 can be used in a simple Ripple Carry mode by connecting the Carry output (C_{n+4}) signal to the Carry input (C_n) of the next unit. For high speed operation the device is used in conjunction with a carry lookahead circuit. One carry lookahead package is required for each group of four 'F181 devices. Carry lookahead can be provided at various levels and offers high speed capability over extremely long word lengths.

The A = B output from the device goes HIGH when all four $\overline{F}$ outputs are HIGH and can be used to indicate logic equivalence over four bits when the unit is in the Subtract mode. The A = B output is open collector and can be wired AND with other A = B outputs to give a comparison for more than four bits. The A = B signal can also be used with the C_{n+4} signal to indicate A > B and A < B.

The Function Table lists the arithmetic operations that are performed without a carry in. An incoming carry adds a one to each operation. Thus, select code LHHL generates A minus B minus 1 (2s complement notation) without a carry in and generates A minus B when a carry is applied. Because subtraction is actually performed by complementary addition (1s complement), a carry out means borrow; thus a carry is generated when there is no underflow and no carry is generated when there is underflow. As indicated, this device can be used with either active LOW inputs producing active LOW outputs or with active HIGH inputs producing active HIGH outputs. For either case the table lists the operations that are performed to the operands labeled inside the logic symbol.

Logic Diagram

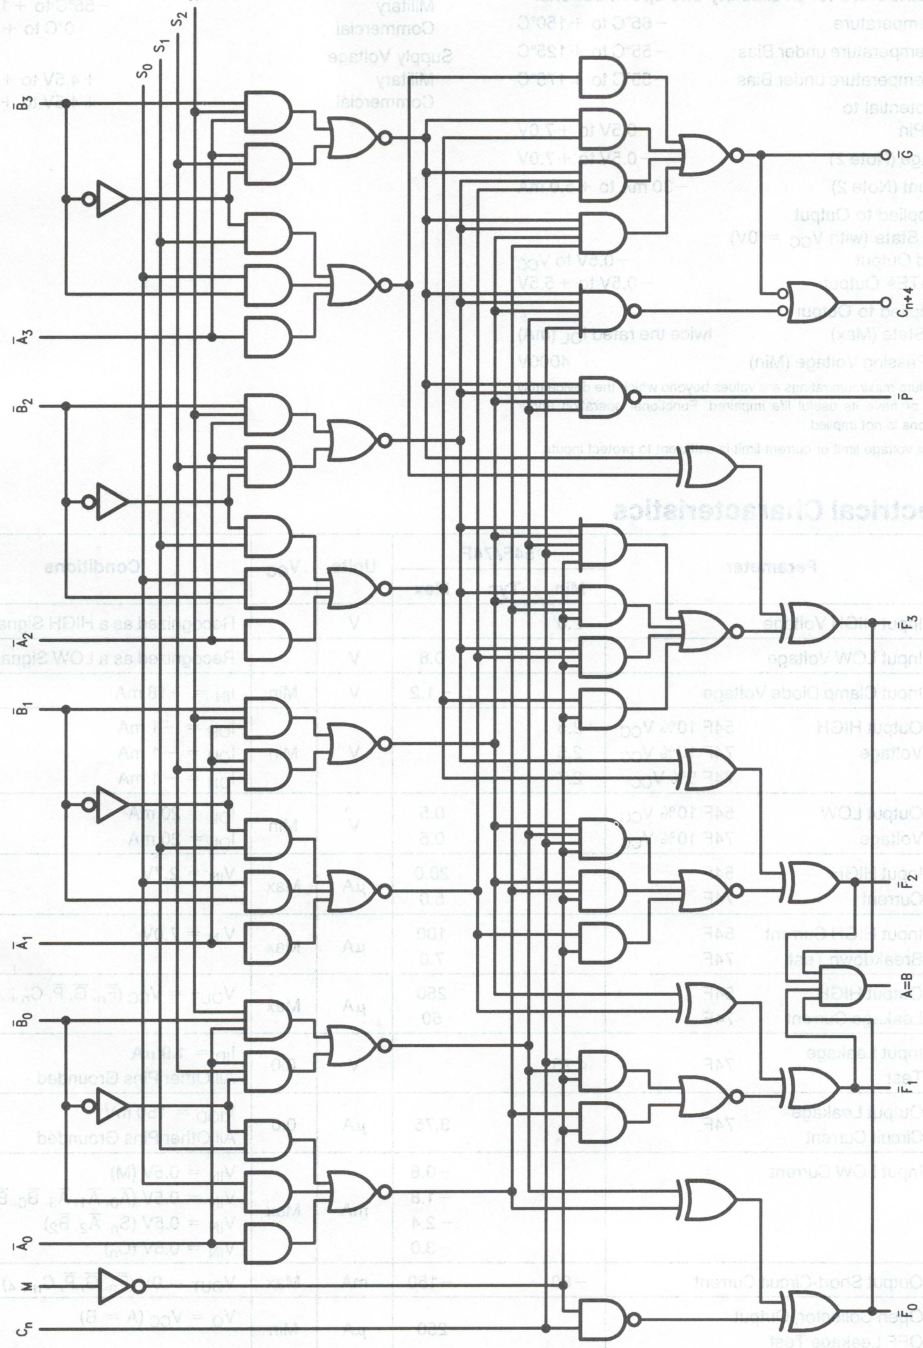

TL/F/9491–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.


Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics


Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC} ($\overline{F}_n$, $\overline{G}$, $\overline{P}$, C_{n+4})
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (M)
					−1.8			V_{IN} = 0.5V ($\overline{A}_0$, $\overline{A}_1$, $\overline{A}_3$, $\overline{B}_0$, $\overline{B}_1$, $\overline{B}_3$)
					−2.4			V_{IN} = 0.5V (S_n, $\overline{A}_2$, $\overline{B}_2$)
					−3.0			V_{IN} = 0.5V (C_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V ($\overline{F}_n$, $\overline{G}$, $\overline{P}$, C_{n+4})
I_{OHC}	Open Collector, Output OFF Leakage Test				250	μA	Min	V_O = V_{CC} (A = B)
I_{CCH}	Power Supply Current			43	65.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			43	65.0	mA	Max	V_O = LOW

Table 5-2 'F181 Operation Tables




a. All Input Data Inverted

S_0	S_1	S_2	S_3	Logic (M = H)	Arithmetic (M = L, C_0 = Inactive)	Arithmetic (M = L, C_0 = Active)
L	L	L	L	$\overline{A}$	A minus 1	A
H	L	L	L	$\overline{A} \bullet \overline{B}$	A • B minus 1	A • B
L	H	L	L	$\overline{A} + B$	A • $\overline{B}$ minus 1	A • $\overline{B}$
H	H	L	L	Logic "1"	minus 1 (2s comp.)	Zero
L	L	H	L	$\overline{A + B}$	A plus (A + $\overline{B}$)	A plus (A + $\overline{B}$) plus 1
H	L	H	L	$\overline{B}$	A • B plus (A + $\overline{B}$)	A • B plus (A + $\overline{B}$) plus 1
L	H	H	L	$\overline{A \oplus B}$	A minus B minus 1	A minus B
H	H	H	L	A + $\overline{B}$	A + $\overline{B}$	A + $\overline{B}$ plus 1
L	L	L	H	$\overline{A} \bullet B$	A plus (A + B)	A plus (A + B plus 1
H	L	L	H	A⊕B	A plus B	A plus B plus 1
L	H	L	H	B	A • $\overline{B}$ plus (A + B)	A • $\overline{B}$ plus (A + B) plus 1
H	H	L	H	A + B	A + B	A + B plus 1
L	L	H	H	Logic "0"	A plus A (2 × A)	A plus A (2 × A) plus 1
H	L	H	H	A • $\overline{B}$	A plus A • B	A plus A • B plus 1
L	H	H	H	A • B	A plus A • $\overline{B}$	A plus A • $\overline{B}$ plus 1
H	H	H	H	A	A	A plus 1




b. All Input Data True

S_0	S_1	S_2	S_3	Logic (M = H)	Arithmetic (M = L, C_0 = Inactive)	Arithmetic (M = L, C_0 = Active)
L	L	L	L	$\overline{A}$	A	A plus 1
H	L	L	L	$\overline{A + B}$	A + B	A + B plus 1
L	H	L	L	$\overline{A} \bullet B$	A + $\overline{B}$	A + $\overline{B}$ plus 1
H	H	L	L	Logic "0"	minus 1 (2s comp.)	Zero
L	L	H	L	$\overline{A} \bullet \overline{B}$	A plus (A • $\overline{B}$)	A plus A • $\overline{B}$ plus 1
H	L	H	L	$\overline{B}$	A • $\overline{B}$ plus (A + B)	A • B plus (A + B) plus 1
L	H	H	L	A ⊕ B	A minus B minus 1	A minus B
H	H	H	L	A • $\overline{B}$	A • $\overline{B}$ minus 1	A • $\overline{B}$
L	L	L	H	$\overline{A}$ + B	A plus A • B	A plus A • B plus 1
H	L	L	H	$\overline{A \oplus B}$	A plus B	A plus B plus 1
L	H	L	H	B	A • B plus (A + $\overline{B}$)	A • B plus (A + $\overline{B}$) plus 1
H	H	L	H	A • B	A • B minus 1	A • B
L	L	H	H	Logic "1"	A plus A (2 × A)	A plus A (2 × A) plus 1
H	L	H	H	A + $\overline{B}$	A plus (A + B)	A plus (A + B) plus 1
L	H	H	H	A + B	A plus (A + $\overline{B}$)	A plus (A + $\overline{B}$) plus 1
H	H	H	H	A	A minus 1	A



c. A Input Data Inverted;
B Input Data True

S_0	S_1	S_2	S_3	Logic (M = H)	Arithmetic (M = L, C_0 = Inactive)	Arithmetic (M = L, C_0 = Active)
L	L	L	L	$\overline{A}$	A minus 1	A
H	L	L	L	$\overline{A} + B$	A • $\overline{B}$ minus 1	A • B
L	H	L	L	$\overline{A} \bullet \overline{B}$	A • B minus 1	A • $\overline{B}$
H	H	L	L	Logic "1"	minus 1 (2s comp.)	Zero
L	L	H	L	$\overline{A} \bullet B$	A plus (A + B)	A plus (A + B) plus 1
H	L	H	L	B	A • $\overline{B}$ plus (A + B)	A • $\overline{B}$ plus (A + B) plus 1
L	H	H	L	A ⊕ B	A plus B	A plus B plus 1
H	H	H	L	A + B	A + B	A + B plus 1
L	L	L	H	$\overline{A + B}$	A plus (A + $\overline{B}$)	A plus (A + $\overline{B}$) plus 1
H	L	L	H	$\overline{A \oplus B}$	A minus B minus 1	A minus B
L	H	L	H	$\overline{B}$	A • B plus (A + $\overline{B}$)	A • B plus (A + $\overline{B}$) plus 1
H	H	L	H	A + $\overline{B}$	A + $\overline{B}$	A + $\overline{B}$ plus 1
L	L	H	H	Logic "0"	A plus A (2 × A)	A plus A (2 × A) plus 1
H	L	H	H	A • B	A plus A • $\overline{B}$	A plus A • $\overline{B}$ plus 1
L	H	H	H	A • $\overline{B}$	A plus A • B	A plus A • B plus 1
H	H	H	H	A	A	A plus 1



d. A Input Data True;
B Input Date Inverted

S_0	S_1	S_2	S_3	Logic (M = H)	Arithmetic (M = L, C_0 = Inactive)	Arithmetic (M = L, C_0 = Active)
L	L	L	L	$\overline{A}$	A	A plus 1
H	L	L	L	$\overline{A} \bullet B$	A + $\overline{B}$	A + $\overline{B}$ plus 1
L	H	L	L	$\overline{A + B}$	A + B	A + B plus 1
H	H	L	L	Logic "0"	minus 1 (2s comp.)	Zero
L	L	H	L	$\overline{A}$ + B	A plus A • B	A plus A • B plus 1
H	L	H	L	B	A • B plus (A + $\overline{B}$)	A • $\overline{B}$ plus (A + B) plus 1
L	H	H	L	$\overline{A \oplus B}$	A plus B	A plus B plus 1
H	H	H	L	A • B	A • B minus 1	A • B
L	L	L	H	$\overline{A} \bullet \overline{B}$	A plus A • $\overline{B}$	A plus A • B plus 1
H	L	L	H	A⊕B	A minus B minus 1	A minus B
L	H	L	H	$\overline{B}$	A • $\overline{B}$ plus (A + B)	A • $\overline{B}$ plus (A + B) plus 1
H	H	L	H	A • $\overline{B}$	A • $\overline{B}$ minus 1	A • $\overline{B}$
L	L	H	H	Logic "1"	A plus A (2 × A)	A plus A (2 × A) plus 1
H	L	H	H	A + B	A plus (A + $\overline{B}$)	A plus (A + $\overline{B}$) plus 1
L	H	H	H	A + $\overline{B}$	A plus (A + B)	A plus (A + B) plus 1
H	H	H	H	A	A minus 1	A

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter		74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
	Path	Mode	Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay C_n to C_{n+4}		3.0 3.0	6.4 6.1	8.5 8.0	3.0 3.0	10.0 9.5	3.0 3.0	9.5 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}$ or $\overline{B}$ to C_{n+4}	Sum	5.0 4.0	10.0 9.4	13.0 12.0	5.0 3.5	15.5 16.5	5.0 4.0	14.0 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}$ or $\overline{B}$ to C_{n+4}	Dif	5.0 5.0	10.8 10.0	14.0 13.0	5.0 4.0	17.0 15.0	5.0 5.0	15.0 14.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay C_n to $\overline{F}$	Any	3.0 3.0	6.7 6.5	8.5 8.5	2.5 2.5	16.0 12.0	3.0 3.0	9.5 9.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}$ or $\overline{B}$ or $\overline{G}$	Sum	3.0 3.0	5.7 5.8	7.5 7.5	2.5 2.5	9.0 9.5	3.0 3.0	8.5 8.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}$ or $\overline{B}$ to $\overline{G}$	Dif	3.0 3.0	6.5 7.3	8.5 9.5	2.5 2.5	11.5 11.0	3.0 3.0	9.5 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}$ or $\overline{B}$ to $\overline{P}$	Sum	3.0 3.0	5.0 5.5	7.0 7.5	2.5 3.0	8.5 9.5	3.0 3.0	8.0 8.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}$ or $\overline{B}$ to $\overline{P}$	Dif	3.0 4.0	5.8 6.5	7.5 8.5	2.5 3.0	11.0 11.0	3.0 4.0	8.5 9.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}_i$ or $\overline{B}_i$ to $\overline{F}_i$	Sum	3.0 3.0	7.0 7.2	9.0 10.0	3.0 3.0	14.5 14.5	3.0 3.0	10.0 10.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}_i$ or $\overline{B}_i$ to $\overline{F}_i$	Dif	3.0 3.0	8.2 5.0	11.0 11.0	3.0 3.0	17.5 14.5	3.0 3.0	12.0 12.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay Any $\overline{A}$ or $\overline{B}$ to Any $\overline{F}$	Sum	4.0 4.0	8.0 7.8	10.5 10.0	3.5 4.0	16.5 13.5	4.0 4.0	11.5 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay Any $\overline{A}$ or $\overline{B}$ to Any $\overline{F}$	Dif	4.5 3.5	9.4 9.4	12.0 12.0	3.5 3.0	17.5 14.0	4.5 3.5	13.0 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}$ or $\overline{B}$ to $\overline{F}$	Logic	4.0 4.0	6.0 6.0	9.0 10.0	3.5 3.0	14.5 15.5	4.0 4.0	10.0 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}$ or $\overline{B}$ to A = B	Dif	11.0 6.0	18.5 9.8	27.0 12.5	8.0 5.5	35.0 21.0	11.0 6.0	29.0 13.5	ns	2–3

National Semiconductor

54F/74F182
Carry Lookahead Generator

General Description

The 'F182 is a high-speed carry lookahead generator. It is generally used with the 'F181 or 'F381 4-bit arithmetic logic units to provide high-speed lookahead over word lengths of more than four bits.


Features

- Provides lookahead carries across a group of four ALUs
- Multi-level lookahead high-speed arithmetic operation over long word lengths
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC




TL/F/9492–6



TL/F/9492–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9492–1

Pin Assignment for LCC



TL/F/9492–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
C_n	Carry Input	1.0/2.0	20 μA/−1.2 mA
$\overline{G}_0$, $\overline{G}_2$	Carry Generate Inputs (Active LOW)	1.0/14.0	20 μA/−8.4 mA
$\overline{G}_1$	Carry Generate Input (Active LOW)	1.0/16.0	20 μA/−9.6 mA
$\overline{G}_3$	Carry Generate Input (Active LOW)	1.0/8.0	20 μA/−4.8 mA
$\overline{P}_0$, $\overline{P}_1$	Carry Propagate Inputs (Active LOW)	1.0/8.0	20 μA/−4.8 mA
$\overline{P}_2$	Carry Propagate Input (Active LOW)	1.0/6.0	20 μA/−3.6 mA
$\overline{P}_3$	Carry Propagate Input (Active LOW)	1.0/4.0	20 μA/−2.4 mA
C_{n+x}−C_{n+z}	Carry Outputs	50/33.3	−1 mA/20 mA
$\overline{G}$	Carry Generate Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{P}$	Carry Propagate Output (Active LOW)	50/33.3	−1 mA/20 mA

Functional Description

The 'F182 carry lookahead generator accepts up to four pairs of Active LOW Carry Propagate ($\overline{P}_0$–$\overline{P}_3$) and Carry Generate ($\overline{G}_0$–$\overline{G}_3$) signals and an Active HIGH Carry input (C_n) and provides anticipated Active HIGH carries (C_{n+x}, C_{n+y}, C_{n+z}) across four groups of binary adders. The 'F182 also has Active LOW Carry Propagate ($\overline{P}$) and Carry Generate ($\overline{G}$) outputs which may be used for further levels of lookahead. The logic equations provided at the outputs are:

$$C_{n+x} = G_0 + P_0C_n$$

$$C_{n+y} = G_1 + P_1G_0 + P_1P_0C_n$$

$$C_{n+z} = G_2 + P_2G_1 + P_2P_1G_0 + P_2P_1P_0C_n$$

$$G = \overline{G_3 + P_3G_2 + P_3P_2G_1 + P_3P_2P_1G_0}$$

$$P = \overline{P_2P_2P_1P_0}$$


Also, the 'F182 can be used with binary ALUs in an active LOW or active HIGH input operand mode. The connections *(Figure 1)* to and from the ALU to the carry lookahead generator are identical in both cases. Carries are rippled between lookahead blocks. The critical speed path follows the circled numbers. There are several possible arrangements for the carry interconnects, but all achieve about the same speed. A 28-bit ALU is formed by dropping the last 'F181 or 'F381.

Truth Table

Inputs									Outputs				
C_n	$\overline{G}_0$	$\overline{P}_0$	$\overline{G}_1$	$\overline{P}_1$	$\overline{G}_2$	$\overline{P}_2$	$\overline{G}_3$	$\overline{P}_3$	C_{n+x}	C_{n+y}	C_{n+z}	$\overline{G}$	$\overline{P}$
X	H	H							L				
L	H	X							L				
X	L	X							H				
H	X	L							H				
X	X	X	H	H						L			
X	H	H	H	X						L			
L	H	X	H	X						L			
X	X	X	L	X						H			
X	L	X	X	L						H			
H	X	L	X	L						H			
X	X	X	X	X	H	H					L		
X	X	X	H	H	H	X					L		
X	H	H	H	X	H	X					L		
L	H	X	H	X	H	X					L		
X	X	X	X	X	L	X					H		
X	X	X	L	X	X	L					H		
X	L	X	X	L	X	L					H		
H	X	L	X	L	X	L					H		
	X		X	X	X	X	H	H				H	
	X		X	X	H	H	H	X				H	
	X		H	H	H	X	H	X				H	
	H		H	X	H	X	H	X				H	
	X		X	X	X	X	L	X				L	
	X		X	X	L	X	X	L				L	
	X		L	X	X	L	X	L				L	
	L		X	L	X	L	X	L				L	
		H		X		X		X					H
		X		H		X		X					H
		X		X		H		X					H
		X		X		X		H					H
		L		L		L		L					L


H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Logic Diagram

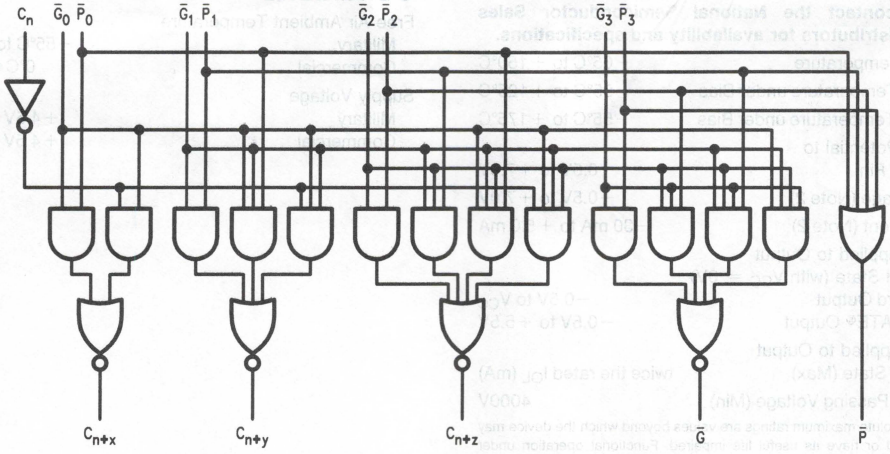

TL/F/9492–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

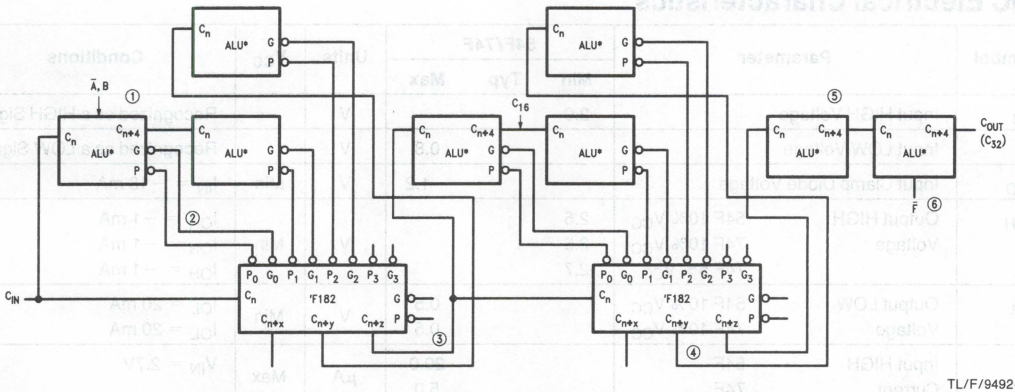

TL/F/9492–5

FIGURE 1. 32-Bit ALU with Rippled Carry between 16-Bit Lookahead ALUs

*ALUs may be either 'F181 or 'F381

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.2	mA	Max	V_{IN} = 0.5V (C_n)
					−2.4			V_{IN} = 0.5V ($\overline{P}_3$)
					−3.6			V_{IN} = 0.5V ($\overline{P}_2$)
					−4.8			V_{IN} = 0.5V ($\overline{G}_3$, $\overline{P}_0$, $\overline{P}_1$)
					−8.4			V_{IN} = 0.5V ($\overline{G}_0$, $\overline{G}_2$)
					−9.6			V_{IN} = 0.5V ($\overline{G}_1$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			18.4	28.0	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			23.5	36.0	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay C_n to C_{n+x}, C_{n+y}, C_{n+z}	3.0 3.0	6.6 6.8	8.5 9.0	3.0 3.0	12.0 11.0	3.0 3.0	9.5 10.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{P}_0$, $\overline{P}_1$, or $\overline{P}_2$ to C_{n+x}, C_{n+y}, or C_{n+z}	2.5 1.5	6.2 3.7	8.0 5.0	2.5 1.0	11.0 7.0	2.5 1.5	9.0 6.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{G}_0$, $\overline{G}_1$, or $\overline{G}_2$ to C_{n+x}, C_{n+y}, or C_{n+z}	2.5 1.5	6.5 3.9	8.5 5.2	2.5 1.0	11.0 7.0	2.5 1.5	9.5 6.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{P}_1$, $\overline{P}_2$, or $\overline{P}_3$ to $\overline{G}$	3.0 3.0	7.9 6.0	10.0 8.0	3.0 2.5	12.0 10.0	3.0 3.0	11.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{G}_n$ to $\overline{G}$	3.0 3.0	8.3 5.7	10.5 7.5	3.0 2.5	12.0 10.0	3.0 3.0	11.5 8.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{P}_n$ to $\overline{P}$	3.0 2.5	5.7 4.1	7.5 5.5	2.5 2.5	10.0 8.0	3.0 2.5	8.5 6.5	ns	2–3

National Semiconductor

54F/74F189 64-Bit Random Access Memory with TRI-STATE® Outputs

General Description


The 'F189 is a high-speed 64-bit RAM organized as a 16-word by 4-bit array. Address inputs are buffered to minimize loading and are fully decoded on-chip. The outputs are TRI-STATE and are in the high impedance state whenever the Chip Select ($\overline{CS}$) input is HIGH. The outputs are active only in the Read mode and the output data is the complement of the stored data.

Features

- TRI-STATE outputs for data bus applications
- Buffered inputs minimize loading
- Address decoding on-chip
- Diode clamped inputs minimize ringing
- Available in SOIC, (300 mil only)


Ordering Code: See Section 5

Logic Symbols



TL/F/9493–1


IEEE/IEC



TL/F/9493–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9493–2

Pin Assignment for LCC



TL/F/9493–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_3	Address Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CS}$	Chip Select Input (Active LOW)	1.0/1.0	20 μA/−1.2 mA
$\overline{WE}$	Write Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
D_0–D_3	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_3$	Inverted Data Outputs	150/40 (33.3)	−3.0 mA/24 mA (20 mA)

Function Table

Inputs		Operation	Condition of Outputs
$\overline{CS}$	$\overline{WE}$		
L	L	Write	High Impedance
L	H	Read	Complement of Stored Data
H	X	Inhibit	High Impedance

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Block Diagram

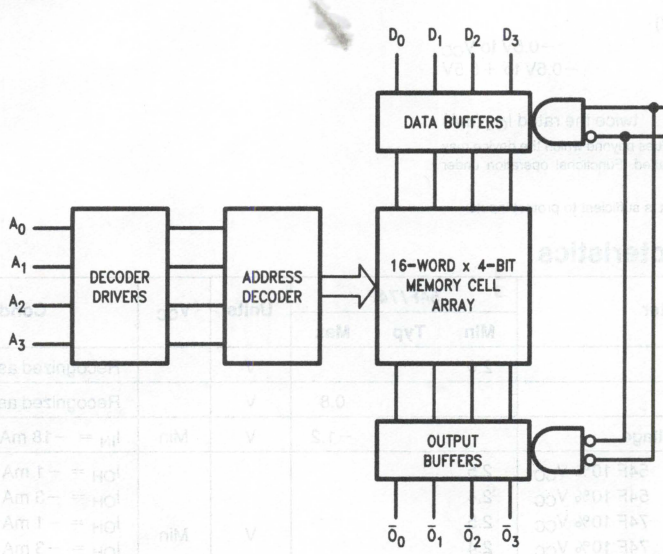

TL/F/9493–5

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (except $\overline{CS}$)
					−1.2			V_{IN} = 0.5V ($\overline{CS}$)
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			37	55	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F *T_A, V_{CC} = Mil $C_L = 50$ pF		74F T_A, V_{CC} = Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Access Time, HIGH or LOW A_n to $\overline{O}_n$	10.0 8.0	18.5 13.5	26.0 19.0	9.0 8.0	32.0 23.0	10.0 8.0	27.0 20.0	ns	2–3
t_{PZH} t_{PZL}	Access Time, HIGH or LOW $\overline{CS}$ to $\overline{O}_n$	3.5 5.0	6.0 9.0	8.5 13.0	3.5 5.0	10.5 15.0	3.5 5.0	9.5 14.0	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time, HIGH or LOW $\overline{CS}$ to $\overline{O}_n$	2.0 3.0	4.0 5.5	6.0 8.0	2.0 2.5	8.0 10.0	2.0 3.0	7.0 9.0	ns	2–5
t_{PZH} t_{PZL}	Write Recovery Time, HIGH or LOW $\overline{WE}$ to $\overline{O}_n$	6.5 6.5	15.0 11.0	28.0 15.5	6.5 6.5	37.5 17.5	6.5 6.5	29.0 16.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time, HIGH or LOW $\overline{WE}$ to $\overline{O}_n$	4.0 5.0	7.0 9.0	10.0 13.0	3.5 5.0	12.0 15.0	4.0 5.0	11.0 14.0	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F *T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A_n to $\overline{WE}$	0 0		0 0		0 0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A_n to $\overline{WE}$	2.0 2.0		2.0 2.0		2.0 2.0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to $\overline{WE}$	10.0 10.0		11.0 11.0		10.0 10.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to $\overline{WE}$	0 0		2.0 2.0		0 0			
$t_s(L)$	Setup Time, LOW $\overline{CS}$ to $\overline{WE}$	0		0		0		ns	2–6
$t_h(L)$	Hold Time, LOW $\overline{CS}$ to $\overline{WE}$	6.0		7.5		6.0			
$t_w(L)$	$\overline{WE}$ Pulse Width, LOW	6.0		5.5		6.0		ns	2–4

*T_A = −40°C to +125°C

National Semiconductor

54F/74F190
Up/Down Decade Counter with Preset and Ripple Clock

General Description


The 'F190 is a reversible BCD (8421) decade counter featuring synchronous counting and asynchronous presetting. The preset feature allows the 'F190 to be used in programmable dividers. The Count Enable input, the Terminal Count output and the Ripple Clock output make possible a variety of methods of implementing multistage counters. In the counting modes, state changes are initiated by the rising edge of the clock.

Features

- High-speed—125 MHz typical count frequency
- Synchronous counting
- Asynchronous parallel load
- Cascadable


Ordering Code: See Section 5

Logic Symbols



TL/F/9494–1


IEEE/IEC



TL/F/9494–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9494–2

Pin Assignment for LCC



TL/F/9494–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{CE}$	Count Enable Input (Active LOW)	1.0/3.0	20 μA/−1.8 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
P_0–P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{PL}$	Asynchronous Parallel Load Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{U}/D$	Up/Down Count Control Input	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_3	Flip-Flop Outputs	50/33.3	−1 mA/20 mA
$\overline{RC}$	Ripple Clock Output (Active LOW)	50/33.3	−1 mA/20 mA
TC	Terminal Count Output (Active HIGH)	50/33.3	−1 mA/20 mA

Functional Description

The 'F190 is a synchronous up/down BCD decade counter containing four edge-triggered flip-flops, with internal gating and steering logic to provide individual preset, count-up and count-down operations. It has an asynchronous parallel load capability permitting the counter to be preset to any desired number. When the Parallel Load ($\overline{PL}$) input is LOW, information present on the Parallel Data inputs (P_0–P_3) is loaded into the counter and appears on the Q outputs. This operation overrides the counting functions, as indicated in the Mode Select Table. A HIGH signal on the $\overline{CE}$ input inhibits counting. When $\overline{CE}$ is LOW, internal state changes are initiated synchronously by the LOW-to-HIGH transition of the clock input. The direction of counting is determined by the $\overline{U}$/D input signal, as indicated in the Mode Select Table. $\overline{CE}$ and $\overline{U}$/D can be changed with the clock in either state, provided only that the recommended setup and hold times are observed.

Two types of outputs are provided as overflow/underflow indicators. The Terminal Count (TC) output is normally LOW and goes HIGH when a circuit reaches zero in the count-down mode or reaches 9 in the count-up mode. The TC output will then remain HIGH until a state change occurs, whether by counting or presetting or until $\overline{U}$/D is changed. The TC output should not be used as a clock signal because it is subject to decoding spikes. The TC signal is also used internally to enable the Ripple Clock ($\overline{RC}$) output. The $\overline{RC}$ output is normally HIGH. When $\overline{CE}$ is LOW and TC is HIGH, the $\overline{RC}$ output will go LOW when the clock next goes LOW and will stay LOW until the clock goes HIGH again. This feature simplifies the design of multistage counters. For a discussion and illustrations of the various methods of implementing multistage counters, please see the 'F191 data sheet.

$\overline{RC}$ Truth Table


Inputs			Output
$\overline{CE}$	TC*	CP	$\overline{RC}$
L	H	⊓	⊓
H	X	X	H
X	L	X	H

*TC is generated internally
H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐ = LOW-to-HIGH Clock Transition
⊓ = LOW Pulse

Mode Select Table


Inputs				Mode
$\overline{PL}$	$\overline{CE}$	$\overline{U}$/D	CP	
H	L	L	⌐	Count Up
H	L	H	⌐	Count Down
L	X	X	X	Preset (Asyn.)
H	H	X	X	No Change (Hold)

State Diagram

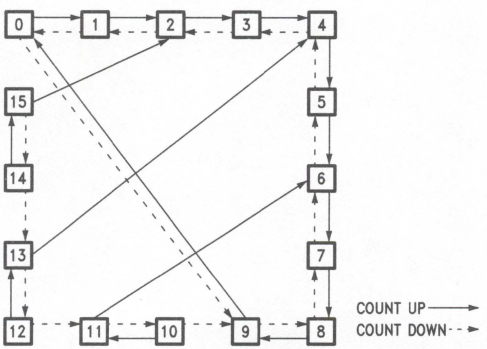

TL/F/9494–5

Logic Diagram

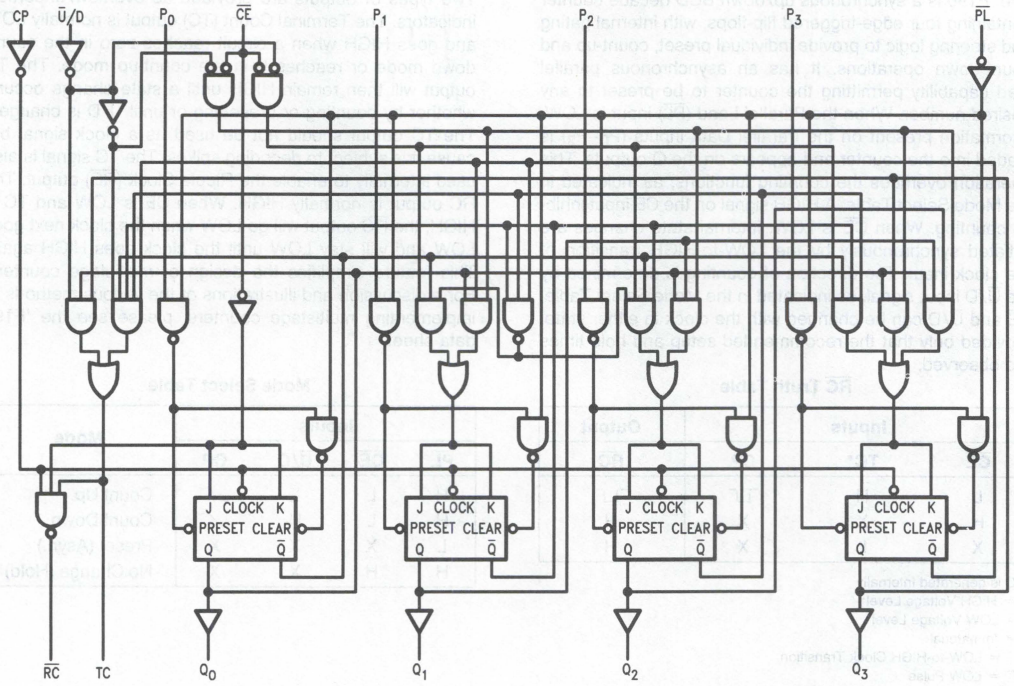

TL/F/9494–6

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V, except $\overline{CE}$
					−1.8			V_{IN} = 0.5V, $\overline{CE}$
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCL}	Power Supply Current			38	55	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	125		75		90		MHz	2–1
t_{PLH}	Propagation Delay	3.0	5.5	7.5	3.0	9.5	3.0	8.5	ns	2–3
t_{PHL}	CP to Q_n	5.0	8.5	11.0	5.0	13.5	5.0	12.0		
t_{PLH}	Propagation Delay	6.0	10.0	13.0	6.0	16.5	6.0	14.0		
t_{PHL}	CP to TC	5.0	8.5	11.0	5.0	13.5	5.0	12.0		
t_{PLH}	Propagation Delay	3.0	5.5	7.5	3.0	9.5	3.0	8.5	ns	2–3
t_{PHL}	CP to $\overline{RC}$	3.0	5.0	7.0	3.0	9.0	3.0	8.0		
t_{PLH}	Propagation Delay	3.0	5.0	7.0	3.0	9.0	3.0	8.0		
t_{PHL}	$\overline{CE}$ to $\overline{RC}$	3.0	5.5	7.0	3.0	9.0	3.0	8.0		
t_{PLH}	Propagation Delay	7.0	11.0	18.0	7.0	22.0	7.0	20.0	ns	2–3
t_{PHL}	$\overline{U}$/D to $\overline{RC}$	5.5	9.0	12.0	5.5	14.0	5.5	13.0		
t_{PLH}	Propagation Delay	4.0	7.0	10.0	4.0	13.5	4.0	11.0		
t_{PHL}	$\overline{U}$/D to $\overline{TC}$	4.0	6.5	10.0	4.0	12.5	4.0	11.0		
t_{PLH}	Propagation Delay	3.0	4.5	7.0	3.0	9.0	3.0	8.0	ns	2–3
t_{PHL}	P_n to Q_n	6.0	10.0	13.0	6.0	16.0	6.0	14.0		
t_{PLH}	Propagation Delay	5.0	8.5	11.0	5.0	13.0	5.0	12.0	ns	2–3
t_{PHL}	$\overline{PL}$ to Q_n	5.5	9.0	12.0	5.5	14.5	5.5	13.0		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	4.5		6.0		5.0		ns	2–6
$t_s(L)$	P_n to $\overline{PL}$	4.5		6.0		5.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0			
$t_h(L)$	P_n to $\overline{PL}$	2.0		2.0		2.0			
$t_s(L)$	Setup Time, LOW $\overline{CE}$ to CP	10.0		10.5		10.0		ns	2–6
$t_h(L)$	Hold Time, LOW $\overline{CE}$ to CP	0		0		0			
$t_s(H)$	Setup Time, HIGH or LOW	12.0		12.0		12.0		ns	2–6
$t_s(L)$	$\overline{U}$/D to CP	12.0		12.0		12.0			
$t_h(H)$	Hold Time, HIGH or LOW	0		0		0			
$t_h(L)$	$\overline{U}$/D to CP	0		0		0			
$t_w(L)$	$\overline{PL}$ Pulse Width, LOW	6.0		8.5		6.0		ns	2–4
$t_w(L)$	CP Pulse Width, LOW	5.0		7.0		5.0		ns	2–4
t_{rec}	Recovery Time $\overline{PL}$ to CP	6.0		7.5		6.0		ns	2–6

National Semiconductor

54F/74F191
Up/Down Binary Counter with Preset and Ripple Clock

General Description


The 'F191 is a reversible modulo-16 binary counter featuring synchronous counting and asynchronous presetting. The preset feature allows the 'F191 to be used in programmable dividers. The Count Enable input, the Terminal Count output and Ripple Clock output make possible a variety of methods of implementing multistage counters. In the counting modes, state changes are initiated by the rising edge of the clock.

Features

- High-Speed—125 MHz typical count frequency
- Synchronous counting
- Asynchronous parallel load
- Cascadable


Ordering Code: See Section 5

Logic Symbols



TL/F/9495–1


IEEE/IEC



TL/F/9495–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9495–2

Pin Assignment for LCC



TL/F/9495–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{CE}$	Count Enable Input (Active LOW)	1.0/3.0	20 μA/−1.8 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
P_0–P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{PL}$	Asynchronous Parallel Load Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{U}$/D	Up/Down Count Control Input	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_3	Flip-Flop Outputs	50/33.3	−1 mA/20 mA
$\overline{RC}$	Ripple Clock Output (Active LOW)	50/33.3	−1 mA/20 mA
TC	Terminal Count Output (Active HIGH)	50/33.3	−1 mA/20 mA

Functional Description

The 'F191 is a synchronous up/down 4-bit binary counter. It contains four edge-triggered flip-flops, with internal gating and steering logic to provide individual preset, count-up and count-down operations.

Each circuit has an asynchronous parallel load capability permitting the counter to be preset to any desired number. When the Parallel Load ($\overline{PL}$) input is LOW, information present on the Parallel Data inputs (P_0–P_3) is loaded into the counter and appears on the Q outputs. This operation overrides the counting functions, as indicated in the Mode Select Table.

A HIGH signal on the $\overline{CE}$ input inhibits counting. When $\overline{CE}$ is LOW, internal state changes are initiated synchronously by the LOW-to-HIGH transition of the clock input. The direction of counting is determined by the $\overline{U}/D$ input signal, as indicated in the Mode Select Table. $\overline{CE}$ and $\overline{U}/D$ can be changed with the clock in either state, provided only that the recommended setup and hold times are observed.

Two types of outputs are provided as overflow/underflow indicators. The Terminal Count (TC) output is normally LOW and goes HIGH when a circuit reaches zero in the count-down mode or reaches 15 in the count-up mode. The TC output will then remain HIGH until a state change occurs, whether by counting or presetting or until $\overline{U}/D$ is changed. The TC output should not be used as a clock signal because it is subject to decoding spikes.

The TC signal is also used internally to enable the Ripple Clock ($\overline{RC}$) output. The $\overline{RC}$ output is normally HIGH. When $\overline{CE}$ is LOW and TC is HIGH, the $\overline{RC}$ output will go LOW when the clock next goes LOW and will stay LOW until the clock goes HIGH again. This feature simplifies the design of multistage counters, as indicated in *Figures 1* and *2*. In *Figure 1*, each $\overline{RC}$ output is used as the clock input for the next higher stage. This configuration is particularly advantageous when the clock source has a limited drive capability, since it drives only the first stage. To prevent counting in all stages it is only necessary to inhibit the first stage, since a HIGH signal on $\overline{CE}$ inhibits the $\overline{RC}$ output pulse, as indicated in the $\overline{RC}$ Truth Table. A disadvantage of this configuration, in some applications, is the timing skew between state changes in the first and last stages. This represents the cumulative delay of the clock as it ripples through the preceding stages.

A method of causing state changes to occur simultaneously in all stages is shown in *Figure 2*. All clock inputs are driven in parallel and the $\overline{RC}$ outputs propagate the carry/borrow signals in ripple fashion. In this configuration the LOW state duration of the clock must be long enough to allow the negative-going edge of the carry/borrow signal to ripple through to the last stage before the clock goes HIGH. There is no such restriction on the HIGH state duration of the clock, since the $\overline{RC}$ output of any device goes HIGH shortly after its CP input goes HIGH.

The configuration shown in *Figure 3* avoids ripple delays and their associated restrictions. The $\overline{CE}$ input for a given stage is formed by combining the TC signals from all the preceding stages. Note that in order to inhibit counting an enable signal must be included in each carry gate. The simple inhibit scheme of *Figures 1* and *2* doesn't apply, because the TC output of a given stage is not affected by its own $\overline{CE}$.

Mode Select Table


Inputs				Mode
$\overline{PL}$	$\overline{CE}$	$\overline{U}/D$	CP	
H	L	L	↗	Count Up
H	L	H	↗	Count Down
L	X	X	X	Preset (Asyn.)
H	H	X	X	No Change (Hold)

$\overline{RC}$ Truth Table

Inputs			Output
$\overline{CE}$	TC*	CP	$\overline{RC}$
L	H	⊓	⊓
H	X	X	H
X	L	X	H


*TC is generated internally
H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
↗ = LOW-to-HIGH Clock Transition
⊓ = LOW Pulse

Logic Diagram

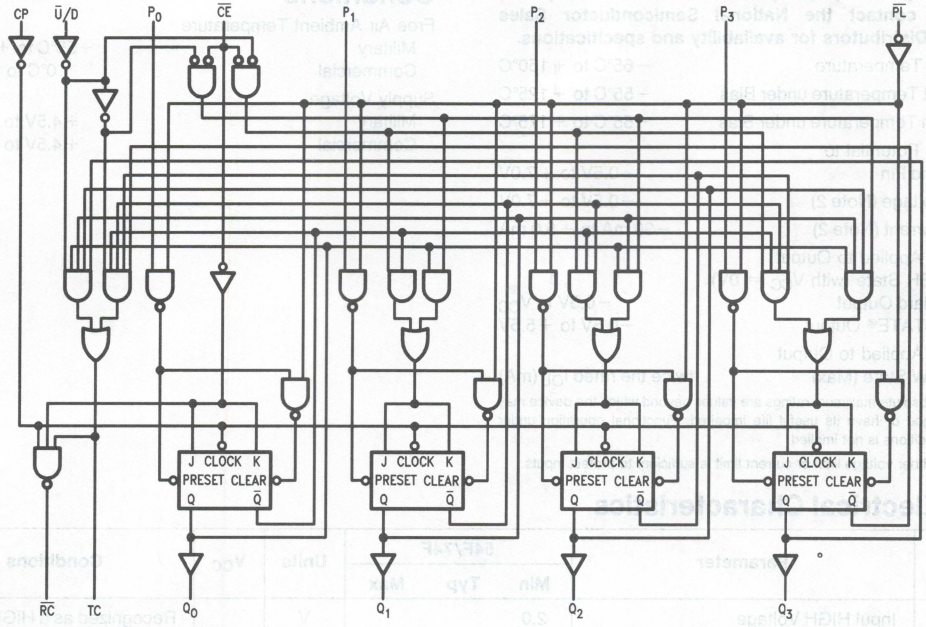


TL/F/9495–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

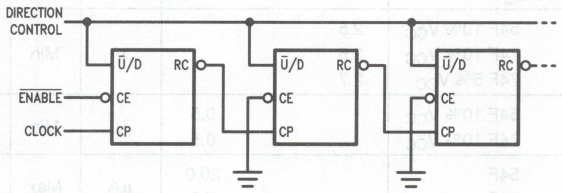


TL/F/9495–6

FIGURE 1. n-Stage Counter Using Ripple Clock

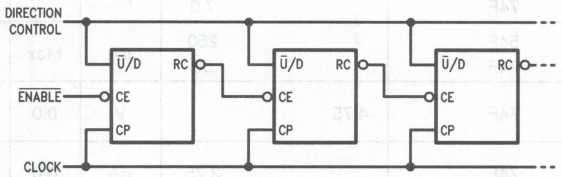

TL/F/9495–7

FIGURE 2. Synchronous n-Stage Counter Using Ripple Carry/Borrow

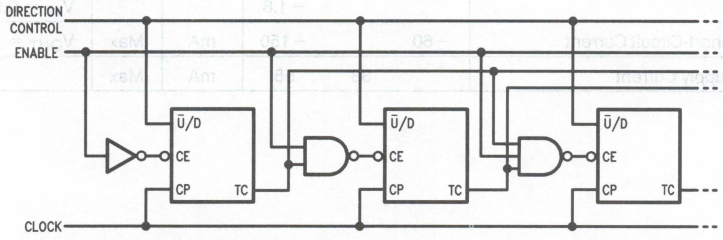

TL/F/9495–8

FIGURE 3. Synchronous n-Stage Counter with Gated Carry/Borrow

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA, All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (except $\overline{CE}$)
					−1.8			V_{IN} = 0.5V ($\overline{CE}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			38	55	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Count Frequency	100	125		75		90		MHz	2-1
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n	3.0 5.0	5.5 8.5	7.5 11.0	3.0 5.0	9.5 13.5	3.0 5.0	8.5 12.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay CP to TC	6.0 5.0	10.0 8.5	13.0 11.0	6.0 5.0	16.5 13.5	6.0 5.0	14.0 12.0		
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{RC}$	3.0 3.0	5.5 5.0	7.5 7.0	3.0 3.0	9.5 9.0	3.0 3.0	8.5 8.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CE}$ to $\overline{RC}$	3.0 3.0	5.0 5.5	7.0 7.0	3.0 3.0	9.0 9.0	3.0 3.0	8.0 8.0		
t_{PLH} t_{PHL}	Propagation Delay $\overline{U}/D$ to $\overline{RC}$	7.0 5.5	11.0 9.0	18.0 12.0	7.0 5.5	22.0 14.0	7.0 5.5	20.0 13.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay $\overline{U}/D$ to TC	4.0 4.0	7.0 6.5	10.0 10.0	4.0 4.0	13.5 12.5	4.0 4.0	11.0 11.0		
t_{PLH} t_{PHL}	Propagation Delay P_n to Q_n	3.0 6.0	4.5 10.0	7.0 13.0	3.0 6.0	9.0 16.0	3.0 6.0	8.0 14.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay $\overline{PL}$ to Q_n	5.0 5.5	8.5 9.0	11.0 12.0	5.0 5.5	13.0 14.5	5.0 5.5	12.0 13.0	ns	2-3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to $\overline{PL}$	4.5 4.5		6.0 6.0		5.0 5.0		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to $\overline{PL}$	2.0 2.0		2.0 2.0		2.0 2.0			
$t_s(L)$	Setup Time LOW $\overline{CE}$ to CP	10.0		10.5		10.0		ns	2-6
$t_h(L)$	Hold Time LOW $\overline{CE}$ to CP	0		0		0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{U}/D$ to CP	12.0 12.0		12.0 12.0		12.0 12.0		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{U}/D$ to CP	0 0		0 0		0 0			
$t_w(L)$	$\overline{PL}$ Pulse Width LOW	6.0		8.5		6.0		ns	2-4
$t_w(L)$	CP Pulse Width LOW	5.0		7.0		5.0		ns	2-4
t_{rec}	Recovery Time $\overline{PL}$ to CP	6.0		7.5		6.0		ns	2-6

National Semiconductor

54F/74F192
Up/Down Decade Counter with Separate Up/Down Clocks


General Description

The 'F192 is an up/down BCD decade (8421) counter. Separate Count Up and Count Down Clocks are used, and in either counting mode the circuits operate synchronously. The outputs change state synchronously with the LOW-to-HIGH transitions on the clock inputs.

Separate Terminal Count Up and Terminal Count Down outputs are used as the clocks for a subsequent stage without extra logic, thus simplifying multistage counter designs. Individual preset inputs allow the circuit to be used as a programmable counter. Both the Parallel Load ($\overline{PL}$) and the Master Reset (MR) inputs asynchronously override the clocks.


Ordering Code: See Section 5

Logic Symbols



TL/F/9496–3


IEEE/IEC



TL/F/9496–6


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9496–1

Pin Assignment for LCC



TL/F/9496–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
CP_U	Count Up Clock Input (Active Rising Edge)	1.0/3.0	20 μA/−1.8 mA
CP_D	Count Down Clock Input (Active Rising Edge)	1.0/3.0	20 μA/−1.8 mA
MR	Asynchronous Master Reset Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{PL}$	Asynchronous Parallel Load Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
P_0–P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_3	Flip-Flop Outputs	50/33.3	−1 mA/20 mA
$\overline{TC}_D$	Terminal Count Down (Borrow) Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{TC}_U$	Terminal Count Up (Carry) Output (Active LOW)	50/33.3	−1 mA/20 mA

Functional Description

The 'F192 is an asynchronously presettable decade counter. It contains four edge-triggered flip-flops, with internal gating and steering logic to provide master reset, individual preset, count up and count down operations.

A LOW-to-HIGH transition on the CP input to each flip-flop causes the output to change state. Synchronous switching, as opposed to ripple counting, is achieved by driving the steering gates of all stages from a common Count Up line and a common Count Down line, thereby causing all state changes to be initiated simultaneously. A LOW-to-HIGH transition on the Count Up input will advance the count by one; a similar transition on the Count Down input will decrease the count by one. While counting with one clock input, the other should be held HIGH, as indicated in the Function Table. Otherwise, the circuit will either count by twos or not at all, depending on the state of the first flip-flop, which cannot toggle as long as either clock input is LOW.

The Terminal Count Up ($\overline{TC}_U$) and Terminal Count Down ($\overline{TC}_D$) outputs are normally HIGH. When the circuit has reached the maximum count state 9, the next HIGH-to-LOW transition of the Count Up Clock will cause $\overline{TC}_U$ to go LOW. $\overline{TC}_U$ will stay LOW until CP_U goes HIGH again, thus effectively repeating the Count Up Clock, but delayed by two gate delays. Similarly, the $\overline{TC}_D$ output will go LOW when the circuit is in the zero state and the Count Down Clock goes LOW. Since the $\overline{TC}$ outputs repeat the clock waveforms, they can be used as the clock input signals to the next higher order circuit in a multistage counter.

$$\overline{TC}_U = Q_0 \bullet Q_3 \bullet \overline{CP}_U$$

$$\overline{TC}_D = \overline{Q}_0 \bullet \overline{Q}_1 \bullet \overline{Q}_2 \bullet \overline{Q}_3 \bullet \overline{CP}_D$$


The 'F192 has an asynchronous parallel load capability permitting the counter to be preset. When the Parallel Load ($\overline{PL}$) and the Master Reset (MR) inputs are LOW, information present on the Parallel Data input (P_0–P_3) is loaded into the counter and appears on the outputs regardless of the conditions of the clock inputs. A HIGH signal on the Master Reset input will disable the preset gates, override both clock inputs, and latch each Q output in the LOW state. If one of the clock inputs is LOW during and after a reset or load operation, the next LOW-to-HIGH transition of that clock will be interpreted as a legitimate signal and will be counted.

Function Table

MR	$\overline{PL}$	CP_U	CP_D	Mode
H	X	X	X	Reset (Asyn.)
L	L	X	X	Preset (Asyn.)
L	H	H	H	No Change
L	H	⎍	H	Count Up
L	H	H	⎍	Count Down


H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⎍ = LOW-to-HIGH Clock Transition

State Diagram

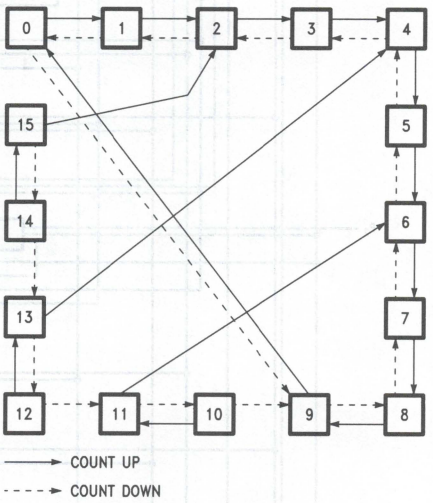

TL/F/9496–4

Logic Diagram

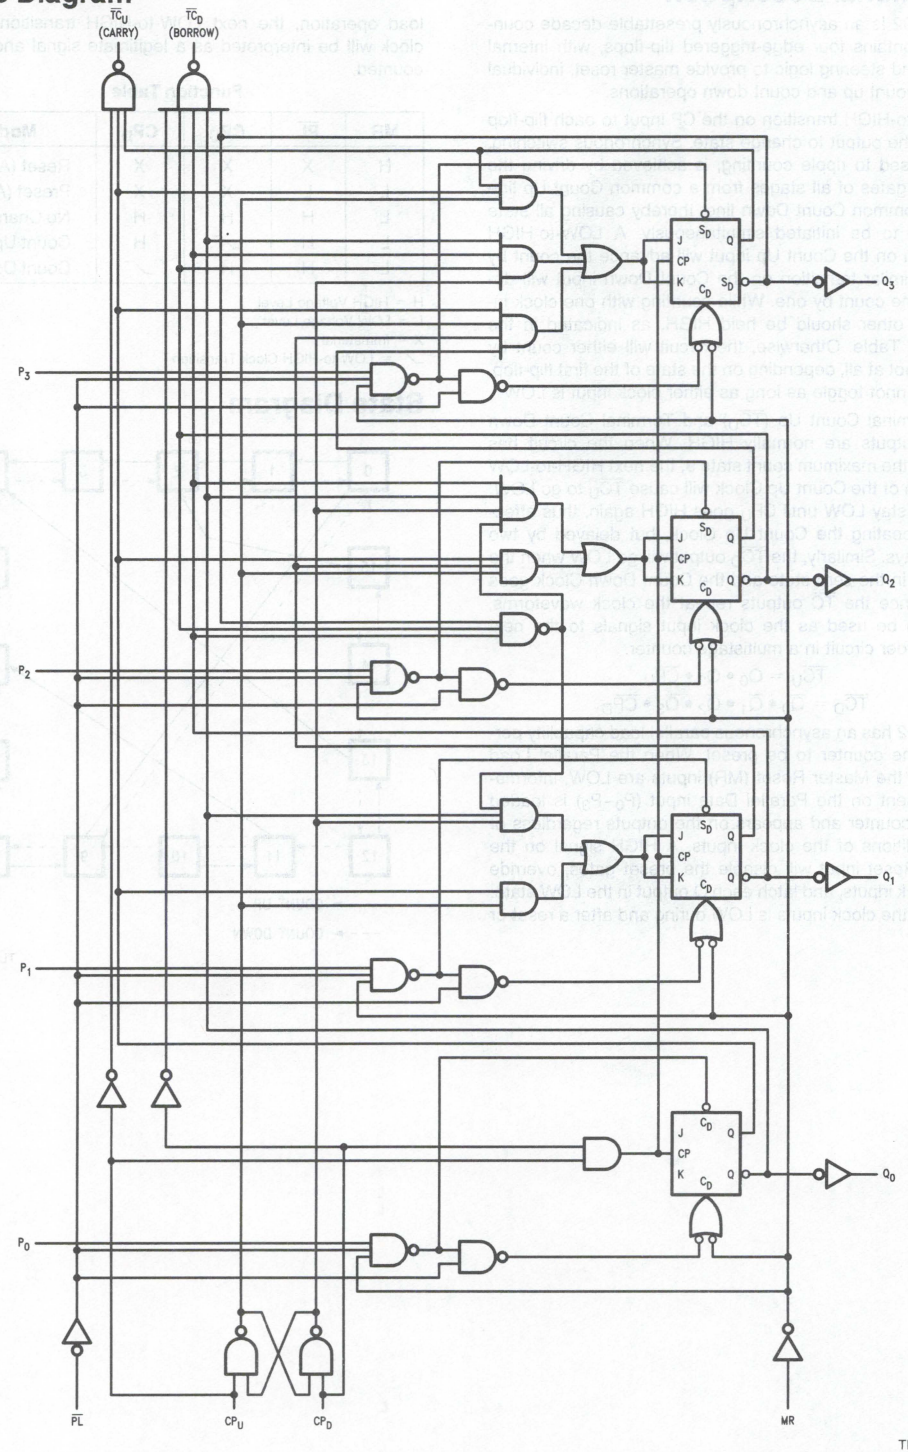

TL/F/9496–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V, Except CP_u, CP_D
					−1.8			V_{IN} = 0.5V, CP_u, CP_D
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCL}	Power Supply Current			38	55	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	125		75		90		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP_U or CP_D to $\overline{TC}_U$ or $\overline{TC}_D$	4.0 3.5	7.0 6.0	9.0 8.0	4.0 3.5	10.5 9.5	4.0 3.5	10.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP_U or CP_D to Q_n	4.0 5.5	6.5 9.5	8.5 12.5	4.0 5.5	10.0 14.0	4.0 5.5	9.5 13.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay P_n to Q_n	3.0 6.0	4.5 11.0	7.0 14.5	3.0 6.0	8.5 16.5	3.0 6.0	8.0 15.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{PL}$ to Q_n	5.0 5.5	8.5 10.0	11.0 13.0	5.0 5.5	13.5 15.0	5.0 5.5	12.0 14.0	ns	2–3
t_{PHL}	Propagation Delay MR to Q_n	6.5	11.0	14.5	6.5	16.0	6.5	15.5	ns	2–3
t_{PLH}	Propagation Delay MR to $\overline{TC}_U$	6.0	10.5	13.5	6.0	15.0	6.0	14.5		
t_{PHL}	Propagation Delay MR to $\overline{TC}_D$	7.0	11.5	14.5	7.0	16.0	7.0	15.5		
t_{PLH} t_{PHL}	Propagation Delay $\overline{PL}$ to $\overline{TC}_U$ or $\overline{TC}_D$	7.0 7.0	12.0 11.5	15.5 14.5	7.0 7.0	18.5 17.5	7.0 7.0	16.5 15.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay P_n to $\overline{TC}_U$ or $\overline{TC}_D$	7.0 6.5	11.5 11.0	14.5 14.0	7.0 6.5	16.5 16.5	7.0 6.5	15.5 15.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to $\overline{PL}$	4.5 4.5		6.0 6.0		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to $\overline{PL}$	2.0 2.0		2.0 2.0		2.0 2.0			
$t_w(L)$	$\overline{PL}$ Pulse Width, LOW	6.0		7.5		6.0		ns	2–4
$t_w(L)$	CP_U or CP_D Pulse Width, LOW	5.0		7.0		5.0		ns	2–4
$t_w(L)$	CP_U or CP_D Pulse Width, LOW (Change of Direction)	10.0		12.0		10.0		ns	2–4
$t_w(H)$	$\overline{MR}$ Pulse Width, HIGH	6.0		6.0		6.0		ns	2–4
t_{rec}	Recovery Time $\overline{PL}$ to CP_U or CP_D	6.0		8.0		6.0		ns	2–6
t_{rec}	Recovery Time MR to CP_U or CP_D	4.0		4.5		4.0		ns	2–6

National Semiconductor

54F/74F193 Up/Down Binary Counter with Separate Up/Down Clocks

General Description

The 'F193 is an up/down modulo-16 binary counter. Separate Count Up and Count Down Clocks are used, and in either counting mode the circuits operate synchronously. The outputs change state synchronously with the LOW-to-HIGH transitions on the clock inputs. Separate Terminal Count Up and Terminal Count Down outputs are provided that are used as the clocks for subsequent stages without extra logic, thus simplifying multi-stage counter designs.


Individual preset inputs allow the circuit to be used as a programmable counter. Both the Parallel Load ($\overline{PL}$) and the Master Reset (MR) inputs asynchronously override the clocks.

Features

- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9497–1


IEEE/IEC



TL/F/9497–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9497–2

Pin Assignment for LCC



TL/F/9497–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
CP_U	Count Up Clock Input (Active Rising Edge)	1.0/3.0	20 μA/−1.8 mA
CP_D	Count Down Clock Input (Active Rising Edge)	1.0/3.0	20 μA/−1.8 mA
MR	Asynchronous Master Reset Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{PL}$	Asynchronous Parallel Load Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
P_0–P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_3	Flip-Flop Outputs	50/33.3	−1 mA/20 mA
$\overline{TC}_D$	Terminal Count Down (Borrow) Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{TC}_U$	Terminal Count Up (Carry) Output (Active LOW)	50/33.3	−1 mA/20 mA

Functional Description

The 'F193 is a 4-bit binary synchronous up/down (reversible) counter. It contains four edge-triggered flip-flops, with internal gating and steering logic to provide master reset, individual preset, count up and count down operations.

A LOW-to-HIGH transition on the CP input to each flip-flop causes the output to change state. Synchronous switching, as opposed to ripple counting, is achieved by driving the steering gates of all stages from a common Count Up line and a common Count Down line, thereby causing all state changes to be initiated simultaneously. A LOW-to-HIGH transition on the Count Up input will advance the count by one; a similar transition on the Count Down input will decrease the count by one. While counting with one clock input, the other should be held HIGH, as indicated in the Function Table.

The Terminal Count Up ($\overline{TC}_U$) and Terminal Count Down ($\overline{TC}_D$) outputs are normally HIGH. When the circuit has reached the maximum count state 15, the next HIGH-to-LOW transition of the Count Up Clock will cause $\overline{TC}_U$ to go LOW. $\overline{TC}_U$ will stay LOW until CP_U goes HIGH again, thus effectively repeating the Count Up Clock, but delayed by two gate delays. Similarly, the $\overline{TC}_D$ output will go LOW when the circuit is in the zero state and the Count Down Clock goes LOW. Since the $\overline{TC}$ outputs repeat the clock waveforms, they can be used as the clock input signals to the next higher order circuit in a multistage counter.

$$\overline{TC}_U = Q_0 \bullet Q_1 \bullet Q_2 \bullet Q_3 \bullet \overline{CP}_U$$

$$\overline{TC}_D = \overline{Q}_0 \bullet \overline{Q}_1 \bullet \overline{Q}_2 \bullet \overline{Q}_3 \bullet \overline{CP}_D$$

The 'F193 has an asynchronous parallel load capability permitting the counter to be preset. When the Parallel Load ($\overline{PL}$) and the Master Reset (MR) inputs are LOW, information present on the Parallel Data input (P_0–P_3) is loaded into the counter and appears on the outputs regardless of the conditions of the clock inputs. A HIGH signal on the Master Reset input will disable the preset gates, override both clock inputs, and latch each Q output in the LOW state.


If one of the clock inputs is LOW during and after a reset or load operation, the next LOW-to-HIGH transition of that clock will be interpreted as a legitimate signal and will be counted.

Function Table

MR	$\overline{PL}$	CP_U	CP_D	Mode
H	X	X	X	Reset (Asyn.)
L	L	X	X	Preset (Asyn.)
L	H	H	H	No Change
L	H	⎍	H	Count Up
L	H	H	⎍	Count Down


H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⎍ = LOW-to-HIGH Clock Transition

State Diagram

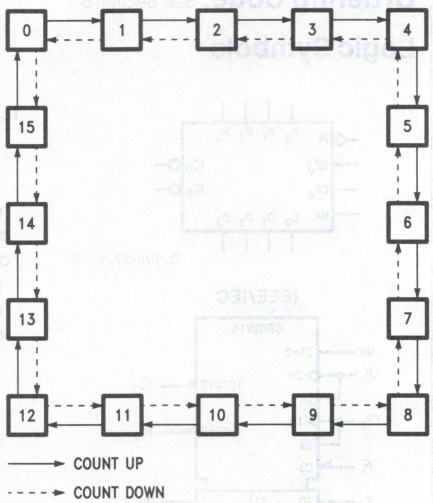

TL/F/9497–5

Logic Diagram

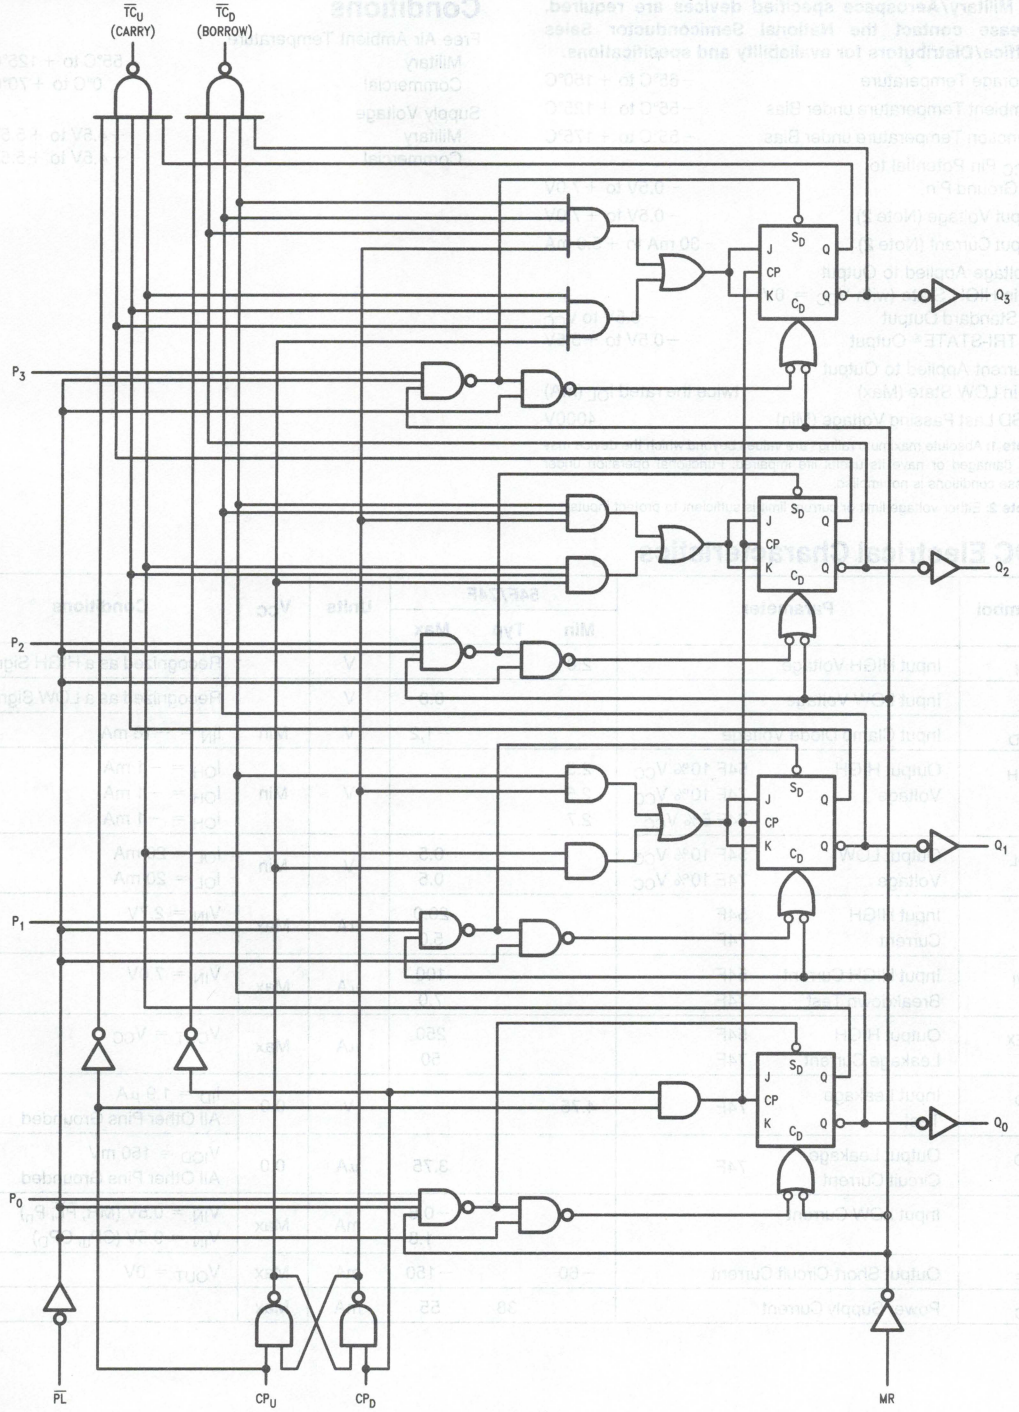

TL/F/9497–6

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (MR, $\overline{PL}$, P_n)
					−1.8			V_{IN} = 0.5V (CP_u, CP_D)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			38	55	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Count Frequency	100	125		75		90		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP_U or CP_D to $\overline{TC}_U$ or $\overline{TC}_D$	4.0 3.5	7.0 6.0	9.0 8.0	4.0 3.5	10.5 9.5	4.0 3.5	10.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP_U or CP_D to Q_n	4.0 5.5	6.5 9.5	8.5 12.5	3.5 5.5	10.0 14.0	4.0 5.5	9.5 13.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay P_n to Q_n	3.0 6.0	4.5 11.0	7.0 14.5	3.0 6.0	8.5 16.5	3.0 6.0	8.0 15.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{PL}$ to Q_n	5.0 5.5	8.5 10.0	11.0 13.0	5.0 5.5	13.5 15.0	5.0 5.5	12.0 14.0	ns	2–3
t_{PHL}	Propagation Delay MR to Q_n	5.5	11.0	14.5	5.0	16.0	5.5	15.5	ns	2–3
t_{PLH}	Propagation Delay MR to $\overline{TC}_U$	6.0	10.5	13.5	5.0	15.0	6.0	14.5		
t_{PHL}	Propagation Delay MR to $\overline{TC}_D$	6.0	11.5	14.5	6.0	16.0	6.0	15.5		
t_{PLH} t_{PHL}	Propagation Delay $\overline{PL}$ to $\overline{TC}_U$ or $\overline{TC}_D$	7.0 7.0	12.0 11.5	15.5 14.5	7.0 6.0	18.5 17.5	7.0 7.0	16.5 15.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay P_n to $\overline{TC}_U$ or $\overline{TC}_D$	7.0 6.5	11.5 11.0	14.5 14.0	6.0 5.0	16.5 16.5	7.0 6.5	15.5 15.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to $\overline{PL}$	4.5 4.5		6.0 6.0		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to $\overline{PL}$	2.0 2.0		2.0 2.0		2.0 2.0			
$t_w(L)$	$\overline{PL}$ Pulse Width, LOW	6.0		7.5		6.0		ns	2–4
$t_w(L)$	CP_U or CP_D Pulse Width, LOW	5.0		7.0		5.0		ns	2–4
$t_w(L)$	CP_U or CP_D Pulse Width, LOW (Change of Direction)	10.0		12.0		10.0		ns	2–4
$t_w(H)$	MR Pulse Width, HIGH	6.0		6.0		6.0		ns	2–4
t_{rec}	Recovery Time $\overline{PL}$ to CP_U or CP_D	6.0		8.0		6.0		ns	2–6
t_{rec}	Recovery Time MR to CP_U or CP_D	4.0		4.5		4.0		ns	2–6

National Semiconductor

54F/74F194
4-Bit Bidirectional Universal Shift Register

General Description

The 'F194 is a high-speed 4-bit bidirectional universal shift register. As a high-speed, multifunctional, sequential building block, it is useful in a wide variety of applications. It may be used in serial-serial, shift left, shift right, serial-parallel, parallel-serial, and parallel-parallel data register transfers. The 'F194 is similar in operation to the 'F195 universal shift register, with added features of shift left without external connections and hold (do nothing) modes of operation.


Features

- Typical shift frequency of 150 MHz
- Asynchronous master reset
- Hold (do nothing) mode
- Fully synchronous serial or parallel data transfers


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC




TL/F/9498–5



TL/F/9498–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9498–1

Pin Assignment for LCC



TL/F/9498–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S_0, S_1	Mode Control Inputs	1.0/1.0	20 μA/−0.6 mA
P_0–P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
D_{SR}	Serial Data Input (Shift Right)	1.0/1.0	20 μA/−0.6 mA
D_{SL}	Serial Data Input (Shift Left)	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Asynchronous Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_3	Parallel Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 'F194 contains four edge-triggered D flip-flops and the necessary interstage logic to synchronously perform shift right, shift left, parallel load and hold operations. Signals applied to the Select (S_0, S_1) inputs determine the type of operation, as shown in the Mode Select Table. Signals on the Select, Parallel data (P_0–P_3) and Serial data (D_{SR}, D_{SL}) inputs can change when the clock is in either state, provided only that the recommended setup and hold times, with respect to the clock rising edge, are observed. A LOW signal on Master Reset ($\overline{MR}$) overrides all other inputs and forces the outputs LOW.

Mode Select Table

Operating Mode	Inputs						Outputs			
	$\overline{MR}$	S_1	S_0	D_{SR}	D_{SL}	P_n	Q_0	Q_1	Q_2	Q_3
Reset	L	X	X	X	X	X	L	L	L	L
Hold	H	l	l	X	X	X	q_0	q_1	q_2	q_3
Shift Left	H	h	l	X	l	X	q_1	q_2	q_3	L
	H	h	l	X	h	X	q_1	q_2	q_3	H
Shift Right	H	l	h	l	X	X	L	q_0	q_1	q_2
	H	l	h	h	X	X	H	q_0	q_1	q_2
Parallel Load	H	h	h	X	X	p_n	p_0	p_1	p_2	p_3


H (h) = High Voltage Level

L (l) = Low Voltage Level

p_n (q_n) = Lower case letters indicate the state of the referenced input (or output) one setup time prior to the LOW-to-HIGH clock transition.

X = Immaterial

Logic Diagram

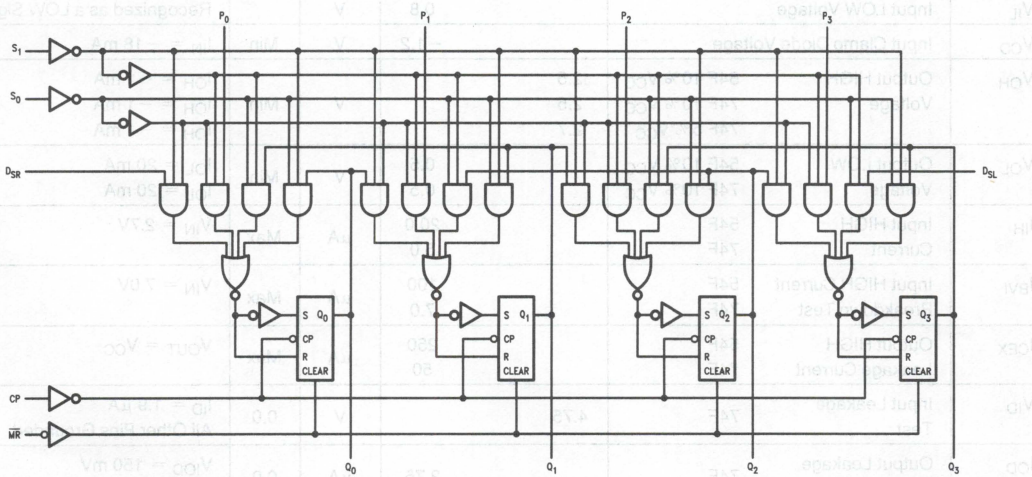

TL/F/9498–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			33	46	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Shift Frequency	105	150		90		90		MHz	2–1
t_{PLH}	Propagation Delay CP to Q_n	3.5	5.2	7.0	3.0	8.5	3.5	8.0	ns	2–3
t_{PHL}		3.5	5.5	7.0	3.0	8.5	3.5	8.0		
t_{PHL}	Propagation Delay $\overline{MR}$ to Q_n	4.5	8.6	12.0	4.5	14.5	4.5	14.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW P_n or D_{SR} or D_{SL} to CP	4.0		6.0		4.0		ns	2–6
$t_s(L)$		4.0		4.0		4.0			
$t_h(H)$	Hold Time, HIGH or LOW P_n or D_{SR} or D_{SL} to CP	1.0		1.5		1.0			
$t_h(L)$		0		1.0		1.0			
$t_s(H)$	Setup Time, HIGH or LOW S_n to CP	10.0		10.5		11.0		ns	2–6
$t_s(L)$		8.0		8.0		8.0			
$t_h(H)$	Hold Time, HIGH or LOW S_n to CP	0		0		0			
$t_h(L)$		0		0		0			
$t_w(H)$	CP Pulse Width, HIGH	5.0		5.5		5.5		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	5.0		5.0		5.0		ns	2–4
t_{rec}	Recovery Time $\overline{MR}$ to CP	9.0		9.0		11.0		ns	2–6

National Semiconductor

54F/74F219
64-Bit Random Access Memory with TRI-STATE® Outputs

General Description


The 'F219 is a high-speed 64-bit RAM organized as a 16-word by 4-bit array. Address inputs are buffered to minimize loading and are fully decoded on-chip. The outputs are TRI-STATE and are in the high-impedance state whenever the Chip Select ($\overline{CS}$) input is HIGH. The outputs are active only in the Read mode. This device is similar to the 'F189 but features non-inverting, rather than inverting, data outputs.

Features

- TRI-STATE outputs for data bus applications
- Buffered inputs minimize loading
- Address decoding on-chip
- Diode clamped inputs minimize ringing
- Available in SOIC (300 mil only)

Ordering Code: See Section 5


Logic Symbol



TL/F/9500–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9500–2

Pin Assignment for LCC



TL/F/9500–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_3	Address Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CS}$	Chip Select Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$\overline{WE}$	Write Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
D_0–D_3	Data Inputs	1.0/1.0	20 μA/−0.6 mA
O_0–O_3	TRI-STATE Data Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Function Table

Inputs		Operation	Condition of Outputs
$\overline{CS}$	$\overline{WE}$		
L	L	Write	High Impedance
L	H	Read	True Stored Data
H	X	Inhibit	High Impedance

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Block Diagram

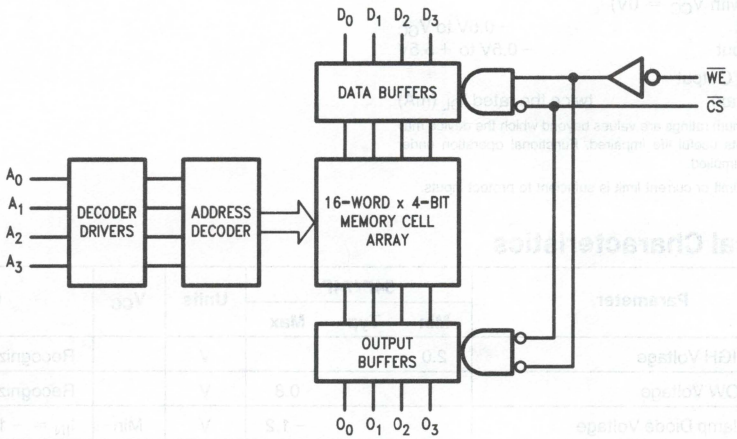

TL/F/9500–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (A_n, $\overline{WE}$, D_n)
					−1.2			V_{IN} = 0.5V ($\overline{CS}$)
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CC}	Power Supply Current			37	55	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Access Time, HIGH or LOW	10.0	18.5	26.0	9.0	32.0	10.0	27.0	ns	2–3
t_{PHL}	A_n to O_n	8.0	13.5	19.0	8.0	23.0	8.0	20.0		
t_{PZH}	Access Time, HIGH or LOW	3.5	6.0	8.5	3.5	10.5	3.5	9.5	ns	2–5
t_{PZL}	$\overline{CS}$ to O_n	5.0	9.0	13.0	5.0	15.0	5.0	14.0		
t_{PHZ}	Disable Time, HIGH or LOW	2.0	4.0	6.0	2.0	8.0	2.0	7.0		
t_{PLZ}	$\overline{CS}$ to O_n	3.0	5.5	8.0	2.5	10.0	3.0	9.0		
t_{PZH}	Write Recovery Time	6.5	20.0	28.0	6.5	37.5	6.5	29.0	ns	2–5
t_{PZL}	HIGH or LOW, $\overline{WE}$ to O_n	6.5	11.0	15.5	6.5	17.5	6.5	16.5		
t_{PHZ}	Disable Time, HIGH or LOW	4.0	7.0	10.0	3.5	12.0	4.0	11.0		
t_{PLZ}	$\overline{WE}$ to O_n	5.0	9.0	13.0	5.0	15.0	5.0	14.0		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	0		0		0		ns	2–6
$t_s(L)$	A_n to $\overline{WE}$	0		0		0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0			
$t_h(L)$	A_n to $\overline{WE}$	2.0		2.0		2.0			
$t_s(H)$	Setup Time, HIGH or LOW	10.0		11.0		10.0		ns	2–6
$t_s(L)$	D_n to $\overline{WE}$	10.0		11.0		10.0			
$t_h(H)$	Hold Time, HIGH or LOW	0		2.0		0			
$t_h(L)$	D_n to $\overline{WE}$	0		2.0		0			
$t_s(L)$	Setup Time, LOW $\overline{CS}$ to $\overline{WE}$	0		0		0		ns	2–6
$t_h(L)$	Hold Time, LOW $\overline{CS}$ to $\overline{WE}$	6.0		7.5		6.0			
$t_w(L)$	$\overline{WE}$ Pulse Width, LOW	6.0		7.5		6.0		ns	2–4

National Semiconductor

54F/74F240•54F/74F241•54F/74F244
Octal Buffers/Line Drivers with TRI-STATE® Outputs

General Description

The 'F240, 'F241 and 'F244 are octal buffers and line drivers designed to be employed as memory and address drivers, clock drivers and bus-oriented transmitters/receivers which provide improved PC and board density.

Features


- TRI-STATE outputs drive bus lines or buffer memory address registers
- Outputs sink 64 mA (48 mA mil)
- 12 mA source current
- Input clamp diodes limit high-speed termination effects
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Connection Diagrams


'F240

Pin Assignment for LCC




TL/F/9501–2

Pin Assignment for DIP, SOIC and Flatpak




TL/F/9501–1

'F241




TL/F/9501-4




TL/F/9501–3

'F244




TL/F/9501–6



TL/F/9501–5


Logic Symbols

IEEE/IEC
'F240

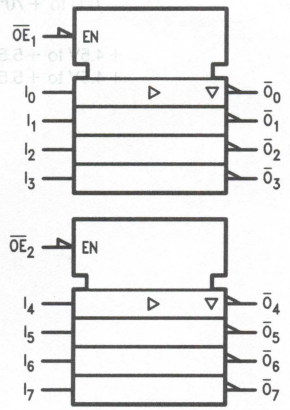


TL/F/9501–7

IEEE/IEC
'F241

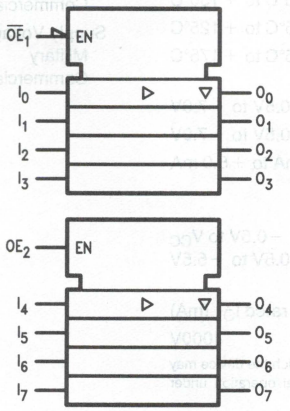

TL/F/9501–8

IEEE/IEC
'F244

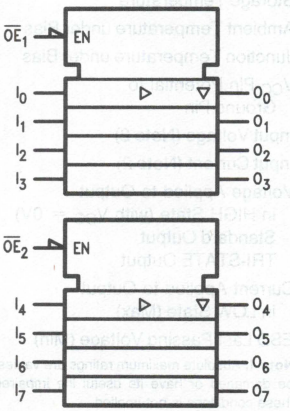

TL/F/9501–9

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}_1$, $\overline{OE}_2$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.667	20 μA/−1 mA
OE_2	TRI-STATE Output Enable Input (Active HIGH)	1.0/1.667	20 μA/−1 mA
I_0–I_7	Inputs ('F240)	1.0/1.667*	20 μA/−1 mA
I_0–I_7	Inputs ('F241, 'F244)	1.0/2.667*	20 μA/−1.6 mA
$\overline{O}_0$–$\overline{O}_7$, O_0–O_7	Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

*Worst-case 'F240 enabled; 'F241, 'F244 disabled

Truth Tables

'F240

$\overline{OE}_1$	D_{1n}	O_{1n}	$\overline{OE}_2$	D_{2n}	O_{2n}
H	X	Z	H	X	Z
L	H	L	L	H	L
L	L	H	L	L	H

'F241

$\overline{OE}_1$	D_{1n}	O_{1n}	OE_2	D_{2n}	O_{2n}
H	X	Z	L	X	Z
L	H	H	H	H	H
L	L	L	H	L	L

'F244

$\overline{OE}_1$	D_{1n}	O_{1n}	$\overline{OE}_2$	D_{2n}	O_{2n}
H	X	Z	H	X	Z
L	H	H	L	H	H
L	L	L	L	L	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	μA	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.0	mA	Max	V_{IN} = 0.5V ($\overline{OE}_1$, $\overline{OE}_2$, OE_2, D_n ('F240))
					−1.6			V_{IN} = 0.5V (D_n ('F241, 'F244))
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{CCH}	Power Supply Current ('F240)		19	29	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F240)		50	75	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F240)		42	63	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F241, 'F244)		40	60	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F241, 'F244)		60	90	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F241, 'F244)		60	90	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F			54F		74F		Units	Fig. No.
		T_A = +25°C, V_{CC} = +5.0V, C_L = 50 pF			T_A, V_{CC} = Mil, C_L = 50 pF		T_A, V_{CC} = Com, C_L = 50 pF			
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay Data to Output ('F240)	3.0 2.0	5.1 3.5	7.0 4.7	3.0 2.0	9.0 6.0	3.0 2.0	8.0 5.7	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time ('F240)	2.0 4.0	3.5 6.9	4.7 9.0	2.0 4.0	6.5 10.5	2.0 4.0	5.7 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time ('F240)	2.0 2.0	4.0 6.0	5.3 8.0	2.0 2.0	6.5 12.5	2.0 2.0	6.3 9.5		
t_{PLH} t_{PHL}	Propagation Delay Data to Output ('F241, 'F244)	2.5 2.5	4.0 4.0	5.2 5.2	2.0 2.0	6.5 7.0	2.5 2.5	6.2 6.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time ('F241, 'F244)	2.0 2.0	4.3 5.4	5.7 7.0	2.0 2.0	7.0 8.5	2.0 2.0	6.7 8.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time ('F241, 'F244)	2.0 2.0	4.5 4.5	6.0 6.0	2.0 2.0	7.0 7.5	2.0 2.0	7.0 7.0		

National Semiconductor

54F/74F243
Quad Bus Transceiver with TRI-STATE® Outputs

General Description

The 'F243 is a quad bus transmitter/receiver designed for 4-line asynchronous 2-way data communications between data busses.


Features

- 2-Way asynchronous data bus communication
- Input clamp diodes limit high-speed termination effects
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Logic Symbol


IEEE/IEC



TL/F/9502–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9502–1

Pin Assignment for LCC



TL/F/9502–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{E}_1$	Enable Input (Active LOW)	1.0/1.67	20 μA/−1 mA
E_2	Enable Input (Active HIGH)	1.0/1.67	20 μA/−1 mA
A_n, B_n	Inputs	3.5/2.67	70 μA/−1.6 mA
	Outputs	600/106.6(80)	−12 mA/64 mA(48 mA)

Truth Table

Inputs		Inputs/Outputs	
$\overline{E}_1$	E_2	A_n	B_n
L	L	Input	B = A
L	H	N/A	N/A
H	L	Z	Z
H	H	A = B	Input

H = HIGH Voltage Level
L = LOW Voltage Level
Z = High Impedance
N/A = Not Allowed

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA (A_n, B_n)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA (A_n, B_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (A_n, B_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n, B_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA (A_n, B_n)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (A_n, B_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V ($\overline{E}_1$, E_2)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.0	mA	Max	V_{IN} = 0.5V ($\overline{E}_1$, E_2)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−1.6	mA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V (A_n, B_n)
I_{CCH}	Power Supply Current			64	80	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			64	90	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			71	90	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n to B_n, B_n to A_n	2.5 2.5	4.0 4.0	5.2 5.2	2.0 2.0	6.5 8.5	2.0 2.0	6.2 6.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{E}_1$ to B_n, E_2 to A_n	2.0 2.0	4.3 5.8	5.7 7.5	2.0 2.0	8.0 10.5	2.0 2.0	6.7 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{E}_1$ to B_n, E_2 to A_n	2.0 2.0	4.5 4.5	6.0 6.0	1.5 2.0	7.5 8.5	1.5 2.0	7.0 7.0	ns	2–5

National Semiconductor

54F/74F245
Octal Bidirectional Transceiver with TRI-STATE® Outputs

General Description


The 'F245 contains eight non-inverting bidirectional buffers with TRI-STATE outputs and is intended for bus-oriented applications. Current sinking capability is 24 mA (20 mA Mil) at the A ports and 64 mA (48 mA Mil) at the B ports. The Transmit/Receive ($T/\overline{R}$) input determines the direction of data flow through the bidirectional transceiver. Transmit (active HIGH) enables data from A ports to B ports; Receive (active LOW) enables data from B ports to A ports. The Output Enable input, when HIGH, disables both A and B ports by placing them in a High Z condition.

Features

- Non-inverting buffers
- Bidirectional data path
- A outputs sink 24 mA (20 mA Mil)
- B outputs sink 64 mA (48 mA Mil)
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9503–3


IEEE/IEC



TL/F/9503–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9503–1

Pin Assignment for LCC



TL/F/9503–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$T/\overline{R}$	Transmit/Receive Input	1.0/2.0	20 μA/−1.2 mA
A_0–A_7	Side A Inputs or	3.5/1.083	70 μA/−0.65 mA
	TRI-STATE Outputs	150/40(38.3)	−3 mA/24 mA (20 mA)
B_0–B_7	Side B Inputs or	3.5/1.083	70 μA/−0.65 mA
	TRI-STATE Outputs	600/106.6(80)	−12 mA/64 mA (48 mA)

Truth Table

Inputs		Output
$\overline{OE}$	$T/\overline{R}$	
L	L	Bus B Data to Bus A
L	H	Bus A Data to Bus B
H	X	High Z State

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA (A_n)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (B_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (A_n)
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA (B_n)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (A_n)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (B_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V ($\overline{OE}$, T/$\overline{R}$)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5 V (A_n, B_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC} (A_n, B_n)
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.2	mA	Max	V_{IN} = 0.5V (T/$\overline{R}$, $\overline{OE}$)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{OS}	Output Short-Circuit Current	−60 −100		−150 −225	mA	Max	V_{OUT} = 0V (A_n) V_{OUT} = 0V (B_n)
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V(A_n, B_n)
I_{CCH}	Power Supply Current		70	90	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		95	120	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		85	110	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F T_A = +25°C V_{CC} = +5.0V C_L = 50 pF			54F T_A, V_{CC} = Mil C_L = 50 pF		74F T_A, V_{CC} = Com C_L = 50 pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n to B_n or B_n to A_n	2.5 2.5	4.2 4.2	6.0 6.0	2.0 2.0	7.5 7.5	2.0 2.0	7.0 7.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time	3.0 3.5	5.3 6.0	7.0 8.0	2.5 3.0	9.0 10.0	2.5 3.0	8.0 9.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time	2.0 2.0	5.0 5.0	6.5 6.5	2.0 2.0	9.0 10.0	2.0 2.0	7.5 7.5		

National Semiconductor

54F/74F251A
8-Input Multiplexer with TRI-STATE® Outputs

General Description


The 'F251A is a high-speed 8-input digital multiplexer. It provides, in one package, the ability to select one bit of data from up to eight sources. It can be used as a universal function generator to generate any logic function of four variables. Both assertion and negation outputs are provided.

Features

- Multifunctional capability
- On-chip select logic decoding
- Inverting and non-inverting TRI-STATE outputs


Ordering Code: See Section 5

Logic Symbols



TL/F/9504–3


IEEE/IEC

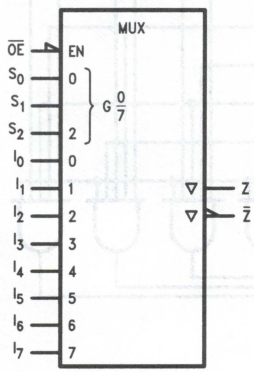

TL/F/9504–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9504–1

Pin Assignment for LCC



TL/F/9504–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S_0–S_2	Select Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
I_0–I_7	Multiplexer Inputs	1.0/1.0	20 μA/−0.6 mA
Z	TRI-STATE Multiplexer Output	150/40 (33.3)	−3 mA/24 mA (20 mA)
$\overline{Z}$	Complementary TRI-STATE Multiplexer Output	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description

This device is a logical implementation of a single-pole, 8-position switch with the switch position controlled by the state of three Select inputs, S_0, S_1, S_2. Both assertion and negation outputs are provided. The Output Enable input ($\overline{OE}$) is active LOW. When it is activated, the logic function provided at the output is:

$$Z = \overline{OE} \bullet (I_0 \bullet \overline{S}_0 \bullet \overline{S}_1 \bullet \overline{S}_2 + I_1 \bullet S_0 \bullet \overline{S}_1 \bullet \overline{S}_2 + I_2 \bullet \overline{S}_0 \bullet S_1 \bullet \overline{S}_2 + I_3 \bullet S_0 \bullet S_1 \bullet \overline{S}_2 + I_4 \bullet \overline{S}_0 \bullet \overline{S}_1 \bullet S_2 + I_5 \bullet S_0 \bullet \overline{S}_1 \bullet S_2 + I_6 \bullet \overline{S}_0 \bullet S_1 \bullet S_2 + I_7 \bullet S_0 \bullet S_1 \bullet S_2)$$


When the Output Enable is HIGH, both outputs are in the high impedance (High Z) state. This feature allows multiplexer expansion by tying the outputs of up to 128 devices together. When the outputs of the TRI-STATE devices are tied together, all but one device must be in the high impedance state to avoid high currents that would exceed the maximum ratings. The Output Enable signals should be designed to ensure there is no overlap in the active LOW portion of the enable voltages.

Truth Table

Inputs				Outputs	
$\overline{OE}$	S_2	S_1	S_0	$\overline{Z}$	Z
H	X	X	X	Z	Z
L	L	L	L	$\overline{I}_0$	I_0
L	L	L	H	$\overline{I}_1$	I_1
L	L	H	L	$\overline{I}_2$	I_2
L	L	H	H	$\overline{I}_3$	I_3
L	H	L	L	$\overline{I}_4$	I_4
L	H	L	H	$\overline{I}_5$	I_5
L	H	H	L	$\overline{I}_6$	I_6
L	H	H	H	$\overline{I}_7$	I_7

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram

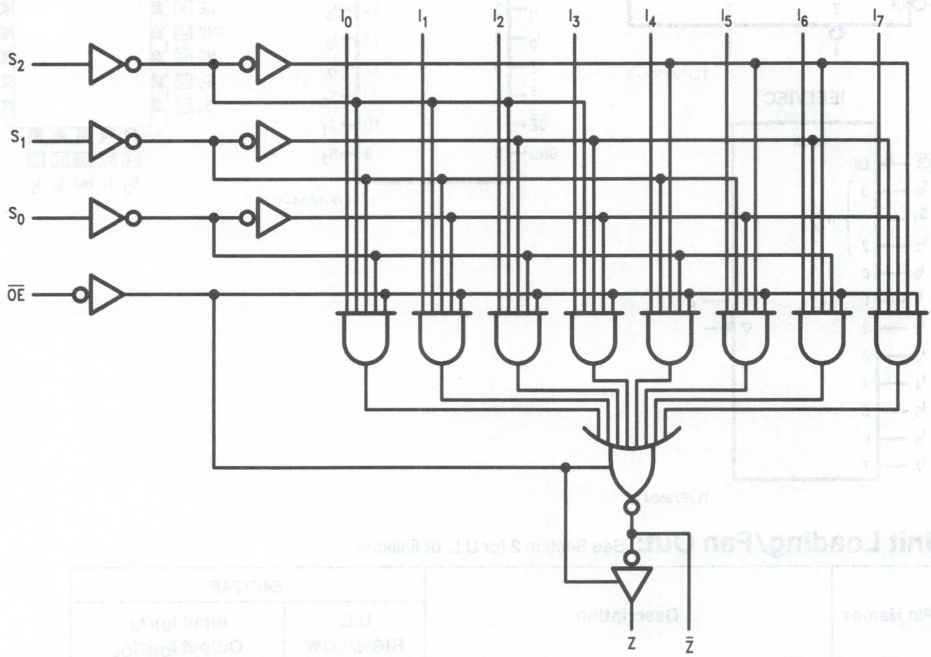

TL/F/9504–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCL}	Power Supply Current			15	22	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			16	24	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay S_n to $\overline{Z}$	3.5 3.2	6.0 5.0	9.0 7.5	3.5 3.2	11.5 8.0	3.5 3.2	9.5 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S_n to Z	4.5 4.0	7.5 6.0	10.5 8.5	3.5 3.0	14.0 10.5	4.5 4.0	12.5 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to $\overline{Z}$	3.0 1.5	5.0 2.5	6.5 4.0	2.5 1.5	8.0 6.0	3.0 1.5	7.0 5.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to Z	3.5 3.5	5.0 5.5	7.0 7.0	2.5 3.5	9.0 9.0	2.5 3.5	8.0 7.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to $\overline{Z}$	2.5 2.5	4.3 4.3	6.0 6.0	2.0 2.5	7.0 7.5	2.5 2.5	7.0 6.5	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to $\overline{Z}$	2.5 1.5	4.0 3.0	5.5 4.5	2.5 1.5	6.0 5.0	2.5 1.5	6.0 4.5		
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to Z	3.5 3.5	5.0 5.5	7.0 7.5	3.0 3.5	8.5 9.0	3.0 3.5	7.5 8.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to Z	2.0 1.5	3.8 3.0	5.5 4.5	2.0 1.5	5.5 5.5	2.0 1.5	5.5 4.5		

National Semiconductor

54F/74F253
Dual 4-Input Multiplexer with TRI-STATE® Outputs

General Description


The 'F253 is a dual 4-input multiplexer with TRI-STATE® outputs. It can select two bits of data from four sources using common select inputs. The output may be individually switched to a high impedance state with a HIGH on the respective Output Enable ($\overline{OE}$) inputs, allowing the outputs to interface directly with bus oriented systems.

Features

- Multifunction capability
- Non-inverting TRI-STATE outputs
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9505–3


IEEE/IEC

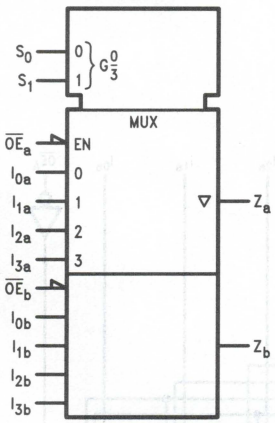

TL/F/9505–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9505–1

Pin Assignment for LCC



TL/F/9505–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_{0a}–I_{3a}	Side A Data Inputs	1.0/1.0	20 μA/−0.6 mA
I_{0b}–I_{3b}	Side B Data Inputs	1.0/1.0	20 μA/−0.6 mA
S_0–S_1	Common Select Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}_a$	Side A Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}_b$	Side B Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
Z_a, Z_b	TRI-STATE Outputs	150/40(33.3)	−3 mA/24 mA (20 mA)

Functional Description

This device contains two identical 4-input multiplexers with TRI-STATE outputs. They select two bits from four sources selected by common Select inputs (S_0, S_1). The 4-input multiplexers have individual Output Enable ($\overline{OE}_a$, $\overline{OE}_b$) inputs which, when HIGH, force the outputs to a high impedance (High Z) state. This device is the logic implementation of a 2-pole, 4-position switch, where the position of the switch is determined by the logic levels supplied to the two select inputs. The logic equations for the outputs are shown below:

$$Z_a = \overline{OE}_a \bullet (I_{0a} \bullet \overline{S}_1 \bullet \overline{S}_0 + I_{1a} \bullet \overline{S}_1 \bullet S_0 + I_{2a} \bullet S_1 \bullet \overline{S}_0 + I_{3a} \bullet S_1 \bullet S_0)$$

$$Z_b = \overline{OE}_b \bullet (I_{0b} \bullet \overline{S}_1 \bullet \overline{S}_0 + I_{1b} \bullet \overline{S}_1 \bullet S_0 + I_{2b} \bullet S_1 \bullet S_0 + I_{3b} \bullet S_1 \bullet S_0)$$


If the outputs of TRI-STATE devices are tied together, all but one device must be in the high impedance state to avoid high currents that would exceed the maximum ratings. Designers should ensure that Output Enable signals to TRI-STATE devices whose outputs are tied together are designed so that there is no overlap.

Truth Table

Select Inputs		Data Inputs				Output Enable	Output
S_0	S_1	I_0	I_1	I_2	I_3	$\overline{OE}$	$\overline{Z}$
X	X	X	X	X	X	H	Z
L	L	L	X	X	X	L	L
L	L	H	X	X	X	L	H
H	L	X	L	X	X	L	L
H	L	X	H	X	X	L	H
L	H	X	X	L	X	L	L
L	H	X	X	H	X	L	H
H	H	X	X	X	L	L	L
H	H	X	X	X	H	L	H

Address inputs S_0 and S_1 are common to both sections.
H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram

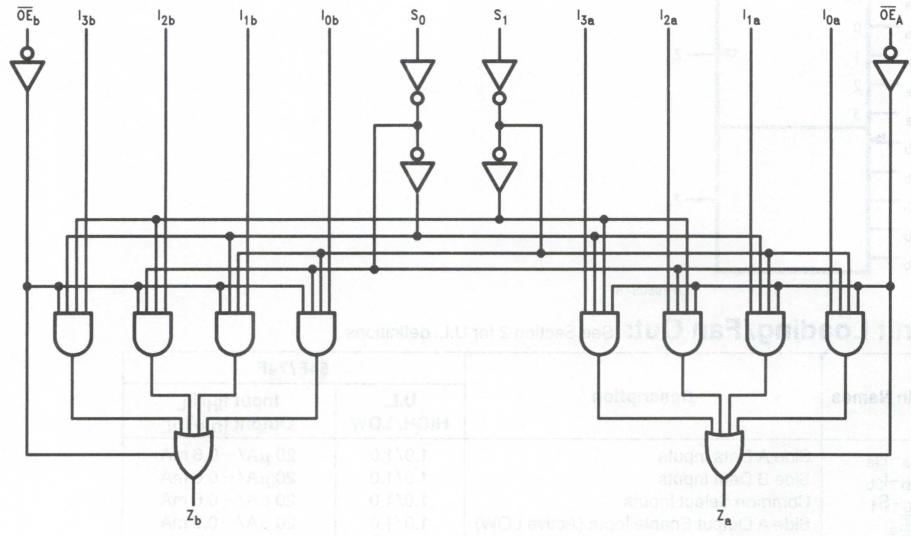

TL/F/9505–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
			−100		−225			V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = V_{CC}
I_{CCH}	Power Supply Current			11.5	16	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			16	23	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			16	23	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	4.5	8.5	11.5	3.5	15.0	4.5	13.0	ns	2–3
t_{PHL}	S_n to Z_n	3.0	6.5	9.0	2.5	11.0	3.0	10.0		
t_{PLH}	Propagation Delay	3.0	5.5	7.0	2.5	9.0	3.0	8.0	ns	2–3
t_{PHL}	I_n to Z_n	2.5	4.5	6.0	2.5	8.0	2.5	7.0		
t_{PZH}	Output Enable Time	3.0	6.0	8.0	2.5	10.0	3.0	9.0	ns	2–5
t_{PZL}		3.0	6.0	8.0	2.5	10.0	3.0	9.0		
t_{PHZ}	Output Disable Time	2.0	3.7	5.0	2.0	6.5	2.0	6.0		
t_{PLZ}		2.0	4.4	6.0	2.0	8.0	2.0	7.0		

National Semiconductor

54F/74F257A
Quad 2-Input Multiplexer with TRI-STATE® Outputs

General Description


The 'F257A is a quad 2-input multiplexer with TRI-STATE outputs. Four bits of data from two sources can be selected using a Common Data Select input. The four outputs present the selected data in true (non-inverted) form. The outputs may be switched to a high impedance state with a HIGH on the common Output Enable ($\overline{OE}$) input, allowing the outputs to interface directly with bus-oriented systems.

Features

- Multiplexer expansion by tying outputs together
- Non-inverting TRI-STATE outputs
- Input clamp diodes limit high-speed termination effects
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9507–3


IEEE/IEC



TL/F/9507–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9507–1

Pin Assignment for LCC



TL/F/9507–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S	Common Data Select Input	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
I_{0a}–I_{0d}	Data Inputs from Source 0	1.0/1.0	20 μA/−0.6 mA
I_{1a}–I_{1d}	Data Inputs from Source 1	1.0/1.0	20 μA/−0.6 mA
Z_a–Z_d	TRI-STATE Multiplexer Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description

The 'F257A is a quad 2-input multiplexer with TRI-STATE outputs. It selects four bits of data from two sources under control of a Common Data Select input. When the Select input is LOW, the I_{0x} inputs are selected and when Select is HIGH, the I_{1x} inputs are selected. The data on the selected inputs appears at the outputs in true (non-inverted) form. The device is the logic implementation of a 4-pole, 2-position switch where the position of the switch is determined by the logic levels supplied to the Select input. The logic equation for the outputs is shown below:

$$Z_n = \overline{OE} \bullet (I_n \bullet S + I_{on} \bullet \overline{S})$$


When the Output Enable input ($\overline{OE}$) is HIGH, the outputs are forced to a high impedance OFF state. If the outputs are tied together, all but one device must be in the high impedance state to avoid high currents that would exceed the maximum ratings. Designers should ensure the Output Enable signals to TRI-STATE devices whose outputs are tied together are designed so there is no overlap.

Truth Table

Output Enable	Select Input	Data Inputs		Output
$\overline{OE}$	S	I_0	I_1	Z
H	X	X	X	Z
L	H	X	L	L
L	H	X	H	H
L	L	L	X	L
L	L	H	X	H

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram

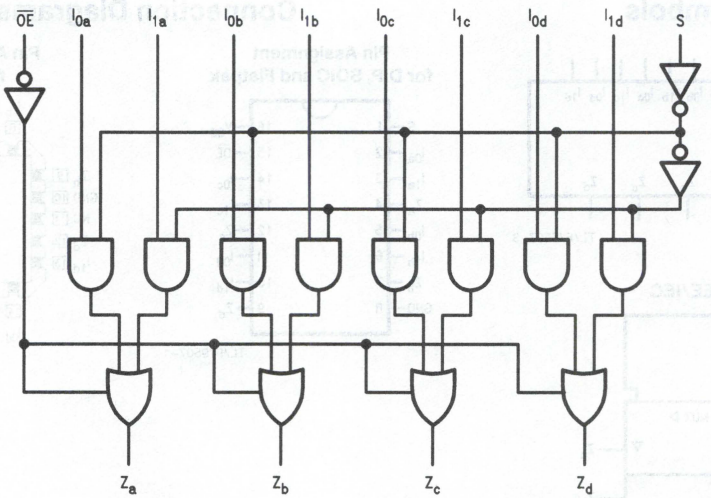

TL/F/9507–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			9.0	15	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			14.5	22	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			15	23	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil, $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay I_n to Z_n	2.5 2.0	4.5 4.2	5.5 5.5	2.0 1.5	7.0 7.0	2.0 2.0	6.0 6.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S to Z_n	4.0 2.5	5.0 6.5	9.5 7.0	3.5 2.5	11.5 9.0	3.5 2.5	10.5 8.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time	2.0 2.5	5.9 5.5	6.0 7.0	2.0 2.5	8.0 9.0	2.0 2.5	7.0 8.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time	2.0 2.0	4.3 4.5	6.0 6.0	2.0 2.0	7.0 8.5	2.0 2.0	7.0 7.0		

National Semiconductor

54F/74F258A
Quad 2-Input Multiplexer with TRI-STATE® Outputs

General Description


The 'F258A is a quad 2-input multiplexer with TRI-STATE outputs. Four bits of data from two sources can be selected using a common data select input. The four outputs present the selected data in the complement (inverted) form. The outputs may be switched to a high impedance state with a HIGH on the common Output Enable ($\overline{OE}$) input, allowing the outputs to interface directly with bus-oriented systems.

Features

- Multiplexer expansion by tying outputs together
- Inverting TRI-STATE outputs
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9508–3


IEEE/IEC

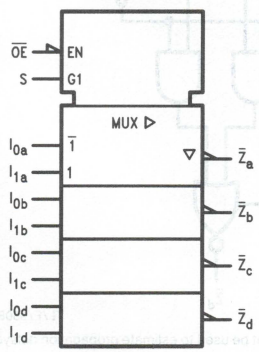

TL/F/9508–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9508–1

Pin Assignment for LCC



TL/F/9508–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S	Common Data Select Input	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
I_{0a}–I_{0d}	Data Inputs from Source 0	1.0/1.0	20 μA/−0.6 mA
I_{1a}–I_{1d}	Data Inputs from Source 1	1.0/1.0	20 μA/−0.6 mA
$\overline{Z}_a$–$\overline{Z}_d$	TRI-STATE Inverting Data Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description

The 'F258A is a quad 2-input multiplexer with TRI-STATE outputs. It selects four bits of data from two sources under control of a common Select input (S). When the Select input is LOW, the I_{0x} inputs are selected and when Select is HIGH, the I_{1x} inputs are selected. The data on the selected inputs appears at the outputs in inverted form. The 'F258A is the logic implementation of a 4-pole, 2-position switch where the position of the switch is determined by the logic levels supplied to the Select input. The logic equation for the outputs is shown below:

$$\overline{Z}_n = \overline{OE} \bullet (I_{1n} \bullet S + I_{0n} \bullet \overline{S})$$


When the Output Enable input ($\overline{OE}$) is HIGH, the outputs are forced to a high impedance OFF state. If the outputs of the TRI-STATE devices are tied together, all but one device must be in the high impedance state to avoid high currents that would exceed the maximum ratings. Designers should ensure that Output Enable signals to TRI-STATE devices whose outputs are tied together are designed so there is no overlap.

Truth Table

Output Enable	Select Input	Data Inputs		Output
$\overline{OE}$	S	I_0	I_1	$\overline{Z}$
H	X	X	X	Z
L	H	X	L	H
L	H	X	H	L
L	L	L	X	H
L	L	H	X	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram

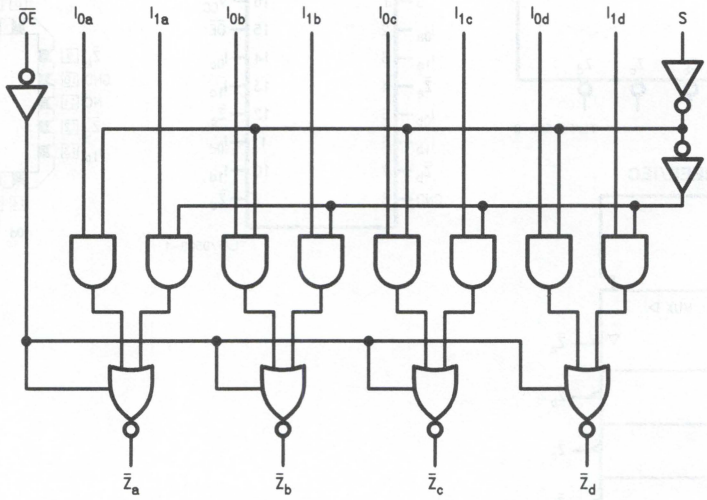

TL/F/9508–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = V_{CC}
I_{CCH}	Power Supply Current			6.2	9.5	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			15.1	23	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			11.3	17	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay I_n to $\overline{Z}_n$	2.5 1.0		5.3 4.0	2.0 1.0	7.5 6.0	2.0 1.0	6.0 5.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S to $\overline{Z}_n$	3.0 2.5		7.5 7.0	3.0 2.5	9.5 9.0	3.0 2.5	8.5 8.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time	2.0 2.5		6.0 7.0	2.0 2.5	8.0 9.0	2.0 2.5	7.0 8.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time	2.0 2.0		6.0 6.0	1.5 2.0	7.0 8.5	2.0 2.0	7.0 7.0		

National Semiconductor

54F/74F269
8-Bit Bidirectional Binary Counter

General Description


The 'F269 is a fully synchronous 8-stage up/down counter featuring a preset capability for programmable operation, carry lookahead for easy cascading and a U/$\overline{D}$ input to control the direction of counting. All state changes, whether in counting or parallel loading, are initiated by the rising edge of the clock.

Features

- Synchronous counting and loading
- Built-in lookahead carry capability
- Count frequency 100 MHz
- Supply current 113 mA typ
- 300 mil slimline package


Ordering Code: See Section 5

Logic Symbols



TL/F/9510–1


IEEE/IEC

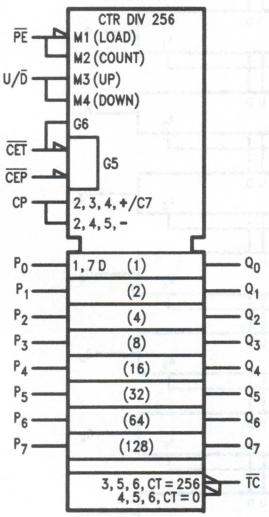

TL/F/9510–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

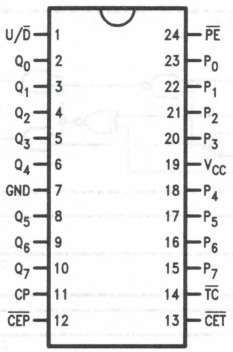

TL/F/9510–2

Pin Assignment for LCC



TL/F/9510–3

Function Table


PE	CEP	CET	U/D	CP	Function
L	X	X	X	⌐	Parallel Load All Flip-Flops
H	H	X	X	⌐	Hold
H	X	H	X	⌐	Hold ($\overline{TC}$ Held HIGH)
H	L	L	H	⌐	Count Up
H	L	L	L	⌐	Count Down

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐ = Transition LOW-to-HIGH

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
P_0-P_7	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{PE}$	Parallel Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$U/\overline{D}$	Up-Down Count Control Input	1.0/1.0	20 μA/−0.6 mA
$\overline{CEP}$	Count Enable Parallel Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{CET}$	Count Enable Trickle Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
CP	Clock Input	1.0/1.0	20 μA/−0.6 mA
$\overline{TC}$	Terminal Count Output (Active LOW)	5.0/33.3	−1 mA/20 mA
Q_0-Q_7	Flip-Flop Outputs	50/33.3	−1 mA/20 mA

Logic Diagram

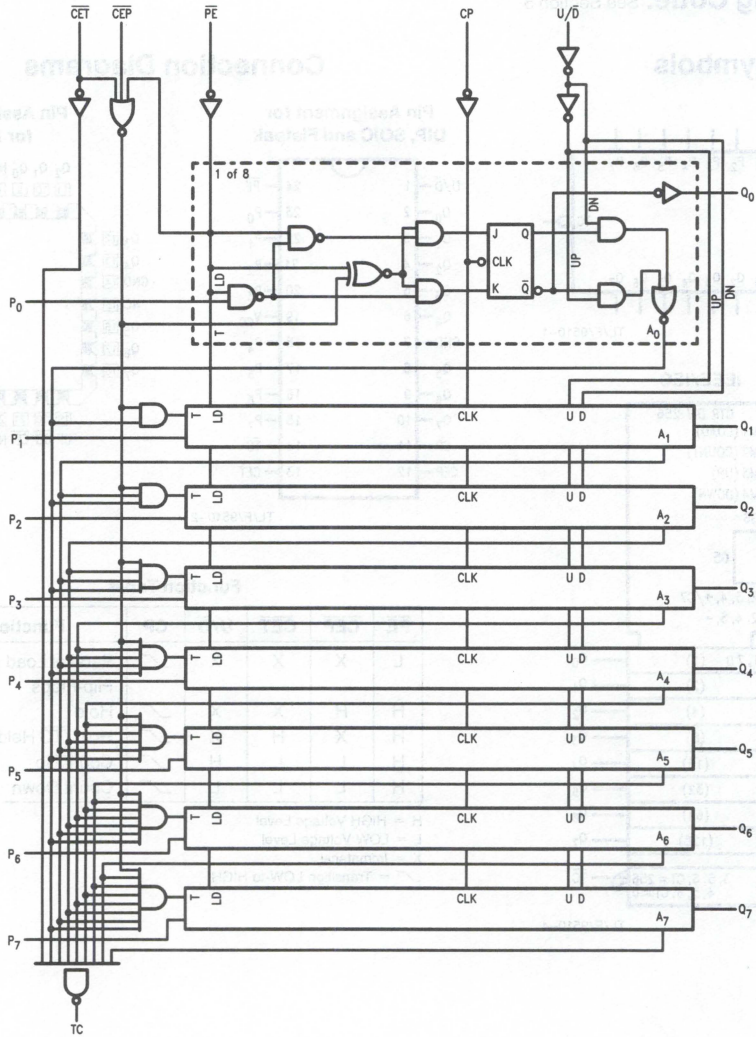

TL/F/9510–6

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA, All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			104	125	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			113	135	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100					85		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n (Count-Up)	3.5 4.5		8.0 10.5			3.5 4.5	9.0 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay U/$\overline{D}$ to $\overline{TC}$	3.5 4.5		9.5 9.5			3.5 4.5	10.0 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CET}$ to $\overline{TC}$	3.5 3.0		9.0 10.5			3.5 3.0	10.5 11.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{TC}$	4.5 5.0		10.0 10.0			4.5 4.5	10.5 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n (Count-Down)	3.5 4.5		10.5 10.5			3.5 4.5	11.0 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to Q_n (Load)	3.5 4.0		9.0 9.0			3.5 4.0	10.0 9.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW Data to CP	3.5 3.0				4.0 3.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW Data to CP	1.0 1.0				2.0 1.0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{PE}$ to CP	5.5 5.5				6.5 6.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{PE}$ to CP	0 0				0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{CET}$ or $\overline{CEP}$ to CP	6.0 8.0				6.5 9.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{CET}$ or $\overline{CEP}$ to CP	0 0				0 0			
$t_w(H)$ $t_w(L)$	Clock Pulse Width, HIGH or LOW	3.5 3.5				3.5 4.0		ns	2–4
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW U/$\overline{D}$ to CP	8.0 6.0				9.5 7.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW U/$\overline{D}$ to CP	0.0 0.0				0.0 0.0		ns	2–6

National Semiconductor

54F/74F273
Octal D Flip-Flop

General Description

The 'F273 has eight edge-triggered D-type flip-flops with individual D inputs and Q outputs. The common buffered Clock (CP) and Master Reset ($\overline{MR}$) inputs load and reset (clear) all flip-flops simultaneously.

The register is fully edge-triggered. The state of each D input, one setup time before the LOW-to-HIGH clock transition, is transferred to the corresponding flip-flop's Q output.


All outputs will be forced LOW independently of Clock or Data inputs by a LOW voltage level on the $\overline{MR}$ input. The device is useful for applications where the true output only is required and the Clock and Master Reset are common to all storage elements.

Features

- Ideal buffer for MOS microprocessor or memory
- Eight edge-triggered D flip-flops
- Buffered common clock
- Buffered, asynchronous Master Reset
- See 'F377 for clock enable version
- See 'F373 for transparent latch version
- See 'F374 for TRI-STATE® version
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9511–3


IEEE/IEC



TL/F/9511–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9511–1

Pin Assignment for LCC



TL/F/9511–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0-D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Master Reset (Active LOW)	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
Q_0-Q_7	Data Outputs	50/33.3	−1 mA/20 mA

Mode Select-Function Table

Operating Mode	Inputs			Output
	$\overline{MR}$	CP	D_n	Q_n
Reset (Clear)	L	X	X	L
Load '1'	H	⌐	h	H
Load '0'	H	⌐	l	L

H = HIGH Voltage Level steady state
h = HIGH Voltage Level one setup time prior to the LOW-to-HIGH clock transition
L = LOW Voltage Level steady state
l = LOW Voltage Level one setup time prior to the LOW-to-HIGH clock transition
X = Immaterial
⌐ = LOW-to-HIGH clock transition

Logic Diagram

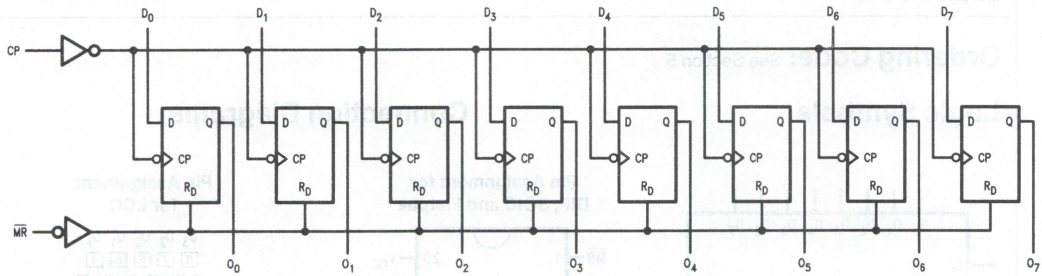

TL/F/9511–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	Mil 10% V_{CC} 5% V_{CC}	2.5 2.5 2.7			V	Min	I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	Mil 10% V_{CC} 5% V_{CC}			0.5 0.5 0.5	V	Min	I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F 74F			20.0 5.0	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test	54F 74F			100 7.0	μA	Max	V_{IN} = 7.0V
I_{CEX}	Output HIGH Leakage Current	54F 74F			250 50	μA	Max	V_{OUT} = V_{CC}
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH} I_{CCL}	Power Supply Current				44 56	mA	Max	CP = ⌐ D_n = $\overline{MR}$ = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	160			9.5		130		MHz	2–1
t_{PLH}	Propagation Delay	3.0		7.0	2.5	9.5	2.5	7.5	ns	2–4
t_{PHL}	Clock to Output	4.0		9.00	3.0	11.0	3.5	9.0		
t_{PLH}	Propagation Delay	4.5		9.5	3.0	11.0	4.0	10.0	ns	2–4
t_{PHL}	$\overline{MR}$ to Output									

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	3.0		3.5		3.0		ns	2–6
$t_s(L)$	Data to CP	3.5		4.0		3.5			
$t_h(H)$	Hold Time, HIGH or LOW	0.5		1.0		0.5			
$t_h(L)$	Data to CP	1.0		1.0		1.0			
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	6.0		4.0		6.0		ns	2–4
$t_w(H)$	CP Pulse Width	6.0		5.0		6.0		ns	2–4
$t_w(L)$	HIGH or LOW	6.0		5.0		6.0			
t_{rec}	Recovery Time, $\overline{MR}$ to CP	3.0		4.5		3.5		ns	2–4

National Semiconductor

54F/74F280
9-Bit Parity Generator/Checker

General Description


The 'F280 is a high-speed parity generator/checker that accepts nine bits of input data and detects whether an even or an odd number of these inputs is HIGH. If an even number of inputs is HIGH, the Sum Even output is HIGH. If an odd number is HIGH, the Sum Even output is LOW. The Sum Odd output is the complement of the Sum Even output.

Features

- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5


Logic Symbols



TL/F/9512-3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak




TL/F/9512-1

Pin Assignment for LCC



TL/F/9512-2

IEEE/IEC



TL/F/9512-5

Unit Loading/Fan Out: See Section 2 for U.L. Definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_0–I_8	Data Inputs	1.0/1.0	20 μA/−0.6 mA
Σ_O	Odd Parity Output	50/33.3	−1 mA/20 mA
Σ_E	Even Parity Output	50/33.3	−1 mA/20 mA

Truth Table

Number of HIGH Inputs I_0–I_8	Outputs	
	Σ Even	Σ Odd
0, 2, 4, 6, 8	H	L
1, 3, 5, 7, 9	L	H

H = HIGH Voltage Level
L = LOW Voltage Level

Logic Diagram

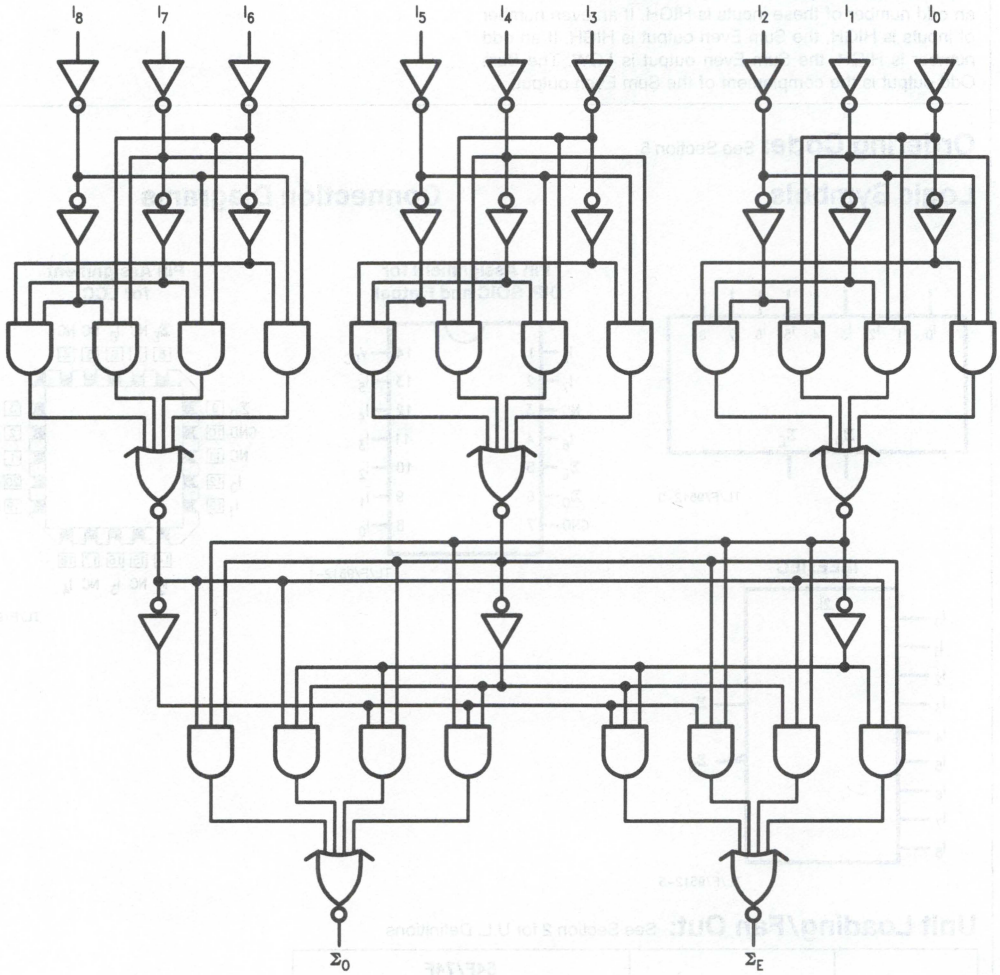

TL/F/9512–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			25	38	mA	Max	V_O = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay I_n to Σ_E	6.5 6.5	10.0 11.0	15.0 16.0	6.5 6.5	20.0 21.0	6.5 6.5	16.0 17.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to Σ_O	6.0 6.5	10.0 11.0	15.0 16.0	6.0 6.5	20.0 21.0	6.0 6.5	16.0 17.0	ns	2–3

National Semiconductor

54F/74F283
4-Bit Binary Full Adder with Fast Carry

General Description


The 'F283 high-speed 4-bit binary full adder with internal carry lookahead accepts two 4-bit binary words (A_0–A_3, B_0–B_3) and a Carry input (C_0). It generates the binary Sum outputs (S_0–S_3) and the Carry output (C_4) from the most significant bit. The 'F283 will operate with either active HIGH or active LOW operands (positive or negative logic).

Features

- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9513–1


IEEE/IEC



TL/F/9513–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9513–2

Pin Assignment for LCC



TL/F/9513–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_3	A Operand Inputs	1.0/2.0	20 μA/−1.2 mA
B_0–B_3	B Operand Inputs	1.0/2.0	20 μA/−1.2 mA
C_0	Carry Input	1.0/1.0	20 μA/−0.6 mA
S_0–S_3	Sum Outputs	50/33.3	−1 mA/20 mA
C_4	Carry Output	50/33.3	−1 mA/20 mA

Functional Description

The 'F283 adds two 4-bit binary words (A plus B) plus the incoming Carry (C_0). The binary sum appears on the Sum (S_0–S_3) and outgoing carry (C_4) outputs. The binary weight of the various inputs and outputs is indicated by the subscript numbers, representing powers of two.

$$2^0 (A_0 + B_0 + C_0) + 2^1 (A_1 + B_1) + 2^2 (A_2 + B_2) + 2^3 (A_3 + B_3) = S_0 + 2S_1 + 4S_2 + 8S_3 + 16C_4$$

Where (+) = plus


Interchanging inputs of equal weight does not affect the operation. Thus C_0, A_0, B_0 can be arbitrarily assigned to pins 5, 6 and 7 for DIPS, and 7, 8 and 9 for chip carrier packages. Due to the symmetry of the binary add function, the 'F283 can be used either with all inputs and outputs active HIGH (positive logic) or with all inputs and outputs active LOW (negative logic). See *Figure 1*. Note that if C_0 is not used it must be tied LOW for active HIGH logic or tied HIGH for active LOW logic.

Due to pin limitations, the intermediate carries of the 'F283 are not brought out for use as inputs or outputs. However, other means can be used to effectively insert a carry into, or bring a carry out from, an intermediate stage. *Figure 2* shows how to make a 3-bit adder. Tying the operand inputs of the fourth adder (A_3, B_3) LOW makes S_3 dependent only on, and equal to, the carry from the third adder. Using somewhat the same principle, *Figure 3* shows a way of dividing the 'F283 into a 2-bit and a 1-bit adder. The third stage adder (A_2, B_2, S_2) is used merely as a means of getting a carry (C_{10}) signal into the fourth stage (via A_2 and B_2) and bringing out the carry from the second stage on S_2. Note that as long as A_2 and B_2 are the same, whether HIGH or LOW, they do not influence S_2. Similarly, when A_2 and B_2 are the same the carry into the third stage does not influence the carry out of the third stage. *Figure 4* shows a method of implementing a 5-input encoder, where the inputs are equally weighted. The outputs S_0, S_1 and S_2 present a binary number equal to the number of inputs I_1–I_5 that are true. *Figure 5* shows one method of implementing a 5-input majority gate. When three or more of the inputs I_1–I_5 are true, the output M_5 is true.

	C_0	A_0	A_1	A_2	A_3	B_0	B_1	B_2	B_3	S_0	S_1	S_2	S_3	C_4
Logic Levels	L	L	H	L	H	H	L	L	H	H	H	L	L	H
Active HIGH	0	0	1	0	1	1	0	0	1	1	1	0	0	1
Active LOW	1	1	0	1	0	0	1	1	0	0	0	1	1	0


Active HIGH: 0 + 10 + 9 = 3 + 16 Active LOW: 1 + 5 + 6 = 12 + 0

FIGURE 1. Active HIGH versus Active LOW Interpretation

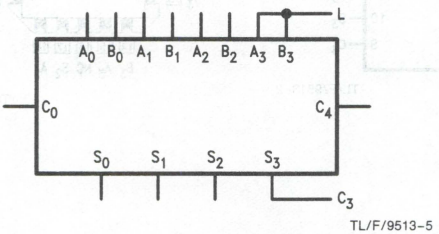


TL/F/9513–5

FIGURE 2. 3-Bit Adder

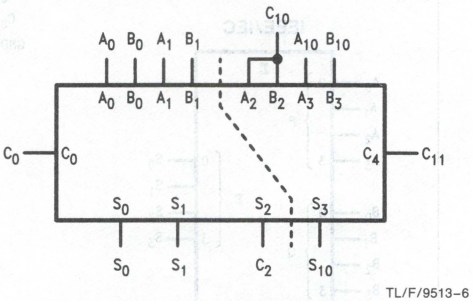


TL/F/9513–6

FIGURE 3. 2-Bit and 1-Bit Adders

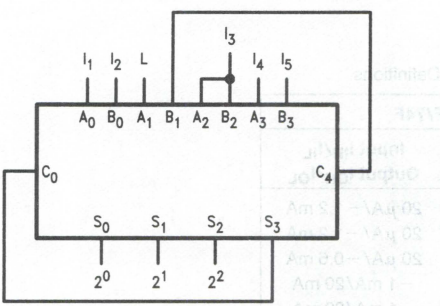

TL/F/9513–7


FIGURE 4. 5-Input Encoder

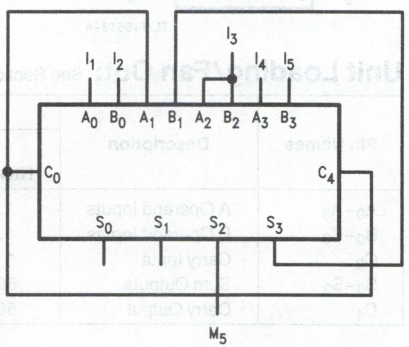

TL/F/9513–8

FIGURE 5. 5-Input Majority Gate

Logic Diagram

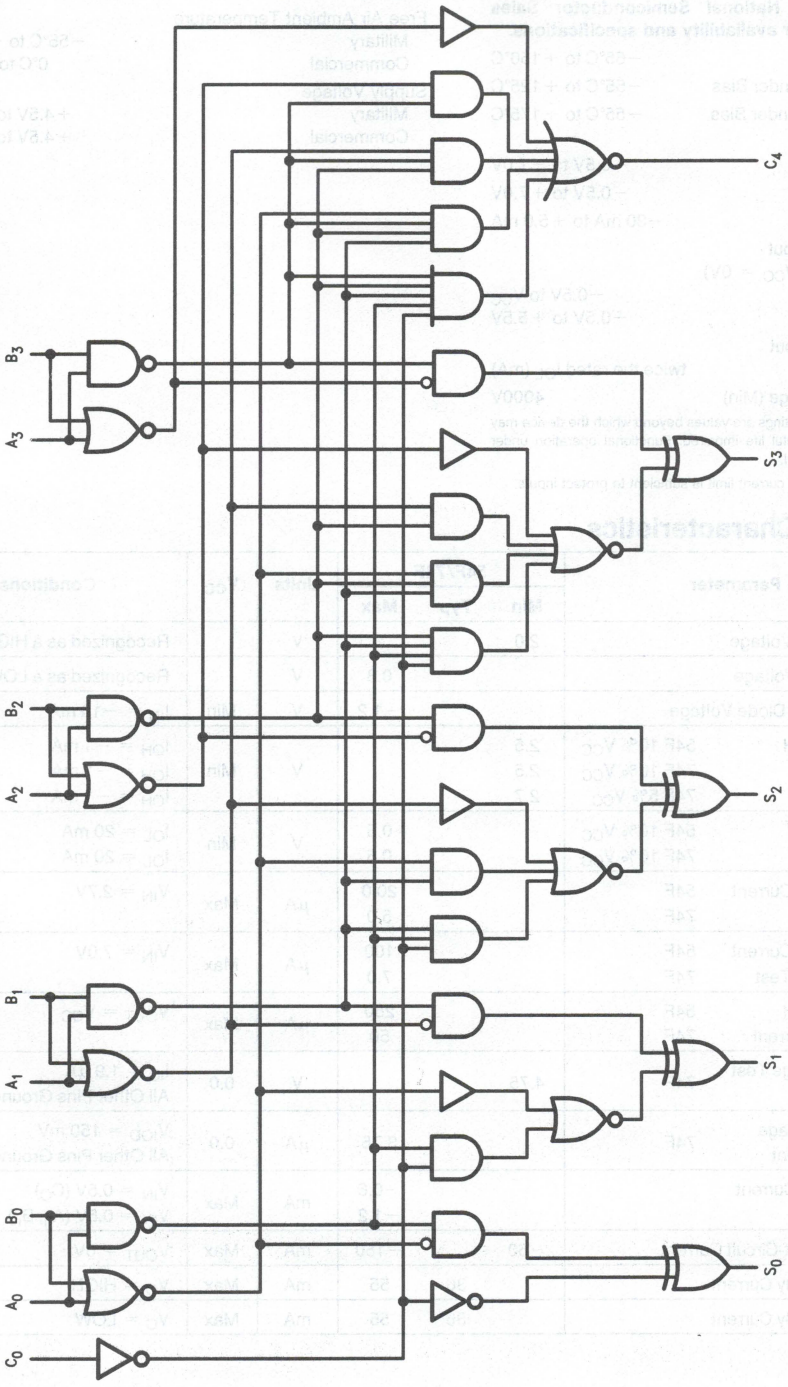

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (C_O)
					−1.2			V_{IN} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			36	55	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			36	55	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	3.5	7.0	9.5	3.5	14.0	3.5	11.0	ns	2–3
t_{PHL}	C_0 to S_n	3.0	7.0	9.5	3.0	14.0	3.0	11.0		
t_{PLH}	Propagation Delay	3.0	7.0	9.5	3.0	17.0	3.0	13.0	ns	2–3
t_{PHL}	A_n or B_n to S_n	3.0	7.0	9.5	3.0	14.0	3.0	11.5		
t_{PLH}	Propagation Delay	3.0	5.7	7.5	3.0	10.5	3.0	8.5	ns	2–3
t_{PHL}	C_0 to C_4	3.0	5.4	7.0	2.5	10.0	3.0	8.0		
t_{PLH}	Propagation Delay	3.0	5.7	7.5	3.0	10.5	3.0	8.5	ns	2–3
t_{PHL}	A_n or B_n to C_4	2.5	5.3	7.0	2.5	10.0	2.5	8.0		

National Semiconductor

54F/74F299 Octal Universal Shift/Storage Register with Common Parallel I/O Pins

General Description


The 'F299 is an 8-bit universal shift/storage register with TRI-STATE® outputs. Four modes of operation are possible: hold (store), shift left, shift right and load data. The parallel load inputs and flip-flop outputs are multiplexed to reduce the total number of package pins. Additional outputs, Q_0–Q_7, are provided to allow easy serial cascading. A separate active LOW Master Reset is used to reset the register.

Features

- Common parallel I/O for reduced pin count
- Additional serial inputs and outputs for expansion
- Four operating modes: shift left, shift right, load and store
- TRI-STATE outputs for bus-oriented applications
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9515–1


IEEE/IEC

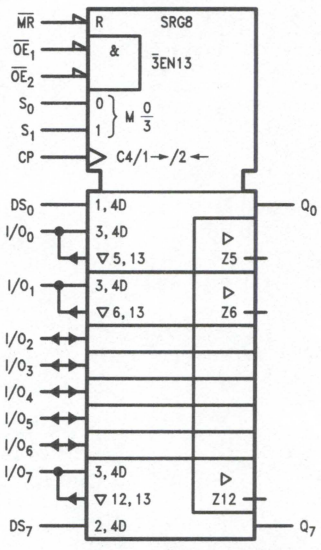

TL/F/9515–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9515–2

Pin Assignment for LCC



TL/F/9515–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
DS_0	Serial Data Input for Right Shift	1.0/1.0	20 μA/−0.6 mA
DS_7	Serial Data Input for Left Shift	1.0/1.0	20 μA/−0.6 mA
S_0, S_1	Mode Select Inputs	1.0/2.0	20 μA/−1.2 mA
$\overline{MR}$	Asynchronous Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}_1$, $\overline{OE}_2$	TRI-STATE Output Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
I/O_0–I/O_7	Parallel Data Inputs or	3.5/1.083	70 μA/−0.65 mA
	TRI-STATE Parallel Outputs	150/40(33.3)	−3 mA/24 mA (20 mA)
Q_0, Q_7	Serial Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 'F299 contains eight edge-triggered D-type flip-flops and the interstage logic necessary to perform synchronous shift left, shift right, parallel load and hold operations. The type of operation is determined by S_0 and S_1, as shown in the Mode Select Table. All flip-flop outputs are brought out through TRI-STATE buffers to separate I/O pins that also serve as data inputs in the parallel load mode. Q_0 and Q_7 are also brought out on other pins for expansion in serial shifting of longer words.

A LOW signal on $\overline{MR}$ overrides the Select and CP inputs and resets the flip-flops. All other state changes are initiated by the rising edge of the clock. Inputs can change when the clock is in either state provided only that the recommended setup and hold times, relative to the rising edge of CP, are observed.


A HIGH signal on either $\overline{OE}_1$ or $\overline{OE}_2$ disables the TRI-STATE buffers and puts the I/O pins in the high impedance state. In this condition the shift, hold, load and reset operations can still occur. The TRI-STATE outputs are also disabled by HIGH signals on both S_0 and S_1 in preparation for a parallel load operation.

Mode Select Table

Inputs				Response
$\overline{MR}$	S_1	S_0	CP	
L	X	X	X	Asynchronous Reset; Q_0–Q_7 = LOW
H	H	H	⌐	Parallel Load; $I/O_n \rightarrow Q_n$
H	L	H	⌐	Shift Right; $DS_0 \rightarrow Q_0$, $Q_0 \rightarrow Q_1$, etc.
H	H	L	⌐	Shift Left; $DS_7 \rightarrow Q_7$, $Q_7 \rightarrow Q_6$, etc.
H	L	L	X	Hold

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐ = LOW-to-HIGH Clock Transition

Logic Diagram

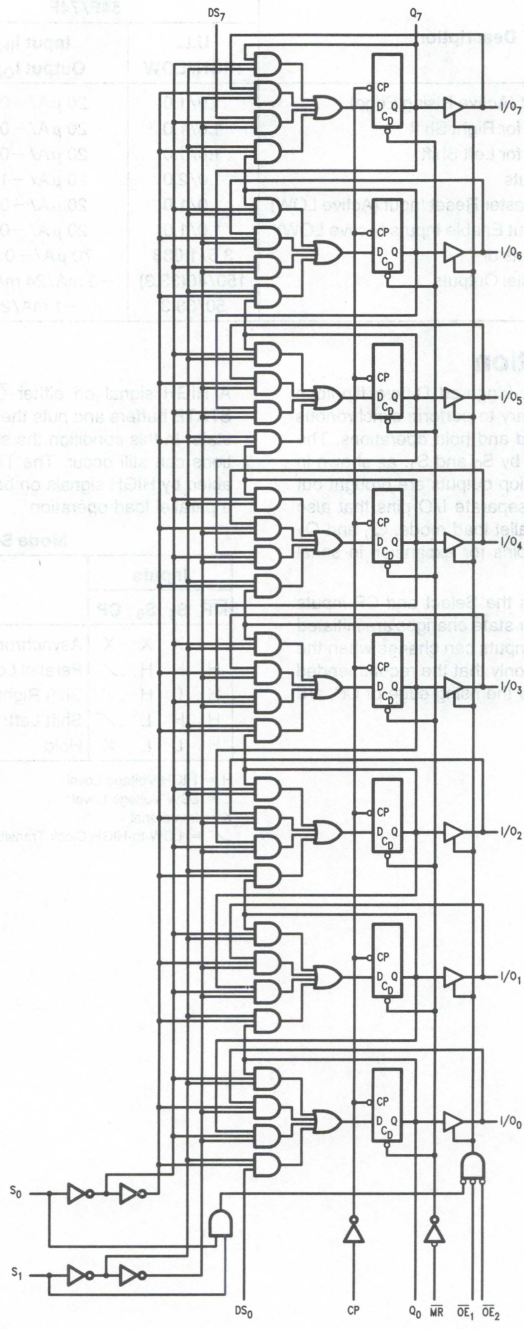

TL/F/9515–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (Q_0, Q_7, I/O_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (I/O_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (Q_0, Q_7, I/O_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (I/O_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (Q_0, Q_7, I/O_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (I/O_n)
V_{OL}	Output LOW Voltage	54 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74 10% V_{CC}			0.5			I_{OL} = 20 mA (Q_0, Q_7)
		74 10% V_{CC}			0.5			I_{OL} = 24 mA (I/O_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V ($\overline{CP}$, $\overline{DS_0}$, $\overline{DS_7}$, S_0, S_1, $\overline{MR}$, $\overline{OE_1}$, $\overline{OE_2}$)
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V ($\overline{CP}$, $\overline{DS_0}$, $\overline{DS_7}$, S_0, S_1, $\overline{MR}$, $\overline{OE_1}$, $\overline{OE_2}$)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (I/O_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V ($\overline{CP}$, $\overline{DS_0}$, $\overline{DS_7}$, $\overline{MR}$, $\overline{OE_1}$, $\overline{OE_2}$)
					−1.2			V_{IN} = 0.5V (S_0, S_1)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	$V_{I/O}$ = 2.7V (I/O_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	$V_{I/O}$ = 0.5V (I/O_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			68	95	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			68	95	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			68	95	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Input Frequency	70	100				70		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to Q_0 or Q_7	4.0 4.5	7.0 6.5	8.0 8.0			4.0 4.5	8.5 8.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to I/O_n	3.5 4.0	7.0 8.5	9.0 9.0			3.5 4.0	10.0 10.0		
t_{PHL}	Propagation Delay $\overline{MR}$ to Q_0 or Q_7	5.5	7.5	9.5			5.5	10.5	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to I/O_n	5.5	11.0	10.0			5.5	10.5		
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to I/O_n	3.5 4.0	6.0 7.0	8.0 10.0			3.5 4.0	9.0 11.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to I/O_n	2.0 1.0	4.5 4.0	6.0 5.5			2.0 1.0	7.0 6.5		
t_{PZH} t_{PZL}	Output Enable Time S_n to I/O_n	3.5 4.0		9.0 10.0			3.5 4.0	10.0 11.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time S_n to I/O_n	2.5 1.5		6.0 5.5			2.5 1.5	7.0 6.5	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW S_0 or S_1 to CP	8.5 8.5				8.5 8.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW S_0 or S_1 to CP	0 0				0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW I/O_n, DS_0 or DS_7 to CP	5.0 5.0				5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW I/O_n, DS_0 or DS_7 to CP	2.0 2.0				2.0 2.0			
$t_w(H)$ $t_w(L)$	CP Pulse Width HIGH or LOW	5.0 5.0				5.0 5.0		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	5.0				5.0		ns	2–4
t_{rec}	Recovery Time, $\overline{MR}$ to CP	7.0				7.0		ns	2–6

National Semiconductor

54F/74F322
Octal Serial/Parallel Register with Sign Extend

General Description


The 'F322 is an 8-bit shift register with provision for either serial or parallel loading and with TRI-STATE® parallel outputs plus a bi-state serial output. Parallel data inputs and parallel outputs are multiplexed to minimize pin count. State changes are initiated by the rising edge of the clock. Four synchronous modes of operation are possible: hold (store), shift right with serial entry, shift right with sign extend and parallel load. An asynchronous Master Reset ($\overline{MR}$) input overrides clocked operation and clears the register.

Features

- Multiplexed parallel I/O ports
- Separate serial input and output
- Sign extend function
- TRI-STATE outputs for bus applications


Ordering Code: See Section 5

Logic Symbols



TL/F/9516–3


IEEE/IEC

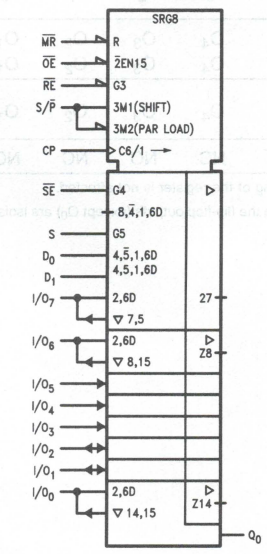

TL/F/9516–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9516–1

Pin Assignment for LCC



TL/F/9516–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{RE}$	Register Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$S/\overline{P}$	Serial (HIGH) or Parallel (LOW) Mode Control Input	1.0/1.0	20 μA/−0.6 mA
$\overline{SE}$	Sign Extend Input (Active LOW)	1.0/3.0	20 μA/−1.8 mA
S	Serial Data Select Input	1.0/2.0	20 μA/−1.2 mA
D_0, D_1	Serial Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Asynchronous Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
Q_0	Bi-State Serial Output	50/33.3	−1 mA/−20 mA
I/O_0–I/O_7	Multiplexed Parallel Data Inputs or	3.5/1.083	70 μA/−0.65 mA
	TRI-STATE Parallel Data Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description

The 'F322 contains eight D-type edge triggered flip-flops and the interstage gating required to perform right shift and the intrastage gating necessary for hold and synchronous parallel load operations. A LOW signal on $\overline{RE}$ enables shifting or parallel loading, while a HIGH signal enables the hold mode. A HIGH signal on $S/\overline{P}$ enables shift right, while a LOW signal disables the TRI-STATE output buffers and enables parallel loading. In the shift right mode a HIGH signal on $\overline{SE}$ enables serial entry from either D_0 or D_1, as determined by the S input. A LOW signal on $\overline{SE}$ enables shift right but Q_7 reloads its contents, thus performing the sign extend function required for the 'F384 Twos Complement Multiplier. A HIGH signal on $\overline{OE}$ disables the TRI-STATE output buffers, regardless of the other control inputs. In this condition the shifting and loading operations can still be performed.

Mode Select Table

Mode	Inputs							Outputs								Q_0
	$\overline{MR}$	$\overline{RE}$	$S/\overline{P}$	$\overline{SE}$	S	$\overline{OE}$*	CP	I/O_7	I/O_6	I/O_5	I/O_4	I/O_3	I/O_2	I/O_1	I/O_0	
Clear	L	X	X	X	X	L	X	L	L	L	L	L	L	L	L	L
	L	X	X	X	X	H	X	Z	Z	Z	Z	Z	Z	Z	Z	L
Parallel Load	H	L	L	X	X	X	⌐	I_7	I_6	I_5	I_4	I_3	I_2	I_1	I_0	I_0
Shift Right	H	L	H	H	L	L	⌐	D_0	O_7	O_6	O_5	O_4	O_3	O_2	O_1	O_1
	H	L	H	H	H	L	⌐	D_1	O_7	O_6	O_5	O_4	O_3	O_2	O_1	O_1
Sign Extend	H	L	H	L	X	L	⌐	O_7	O_7	O_6	O_5	O_4	O_3	O_2	O_1	O_1
Hold	H	H	X	X	X	L	⌐	NC	NC	NC	NC	NC	NC	NC	NC	NC

*When the $\overline{OE}$ input is HIGH all I/O_n terminals are at the high impedance state; sequential operation or clearing of the register is not affected.


Note 1: I_7–I_0 = The level of the steady-state input at the respective I/O terminal is loaded into the flip-flop while the flip-flop outputs (except Q_0) are isolated from the I/O terminal.

Note 2: D_0, D_1 = The level of the steady-state inputs to the serial multiplexer input.

Note 3: O_7–O_0 = The level of the respective Q_n flip-flop prior to the last Clock LOW-to-HIGH transition.

H = HIGH Voltage Level
L = LOW Voltage Level
Z = High Impedance Output State
⌐ = LOW-to-HIGH Transition
NC = No Change

Logic Diagram

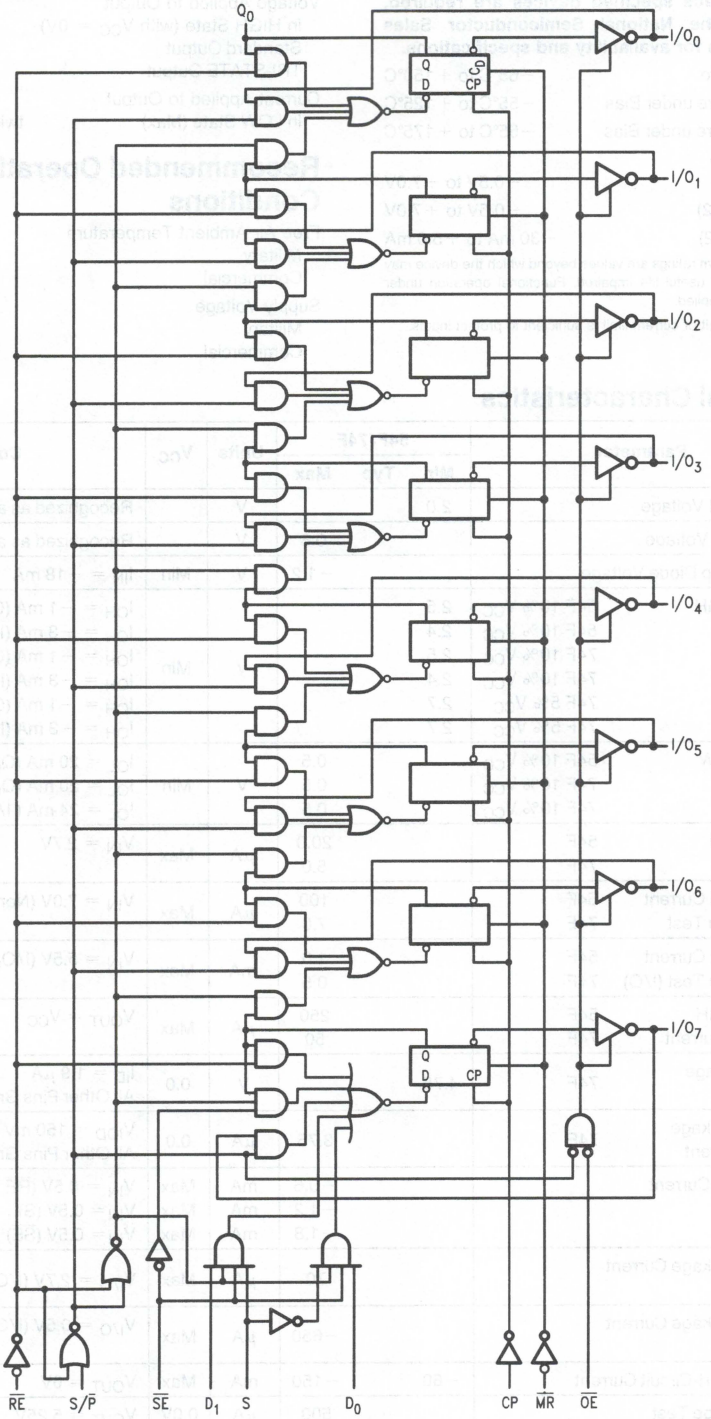

TL/F/9516–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (Q_0, I/O_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (I/O_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (Q_0, I/O_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (I/O_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (Q_0, I/O_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (I/O_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (Q_0, I/O_n)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA (Q_0)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (I/O_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V (Non-I/O Inputs)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (I/O_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1,9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V ($\overline{RE}$, S/$\overline{P}$, D_n, CP, $\overline{MR}$, $\overline{OE}$)
					−1.2	mA	Max	V_{IN} = 0.5V (S)
					−1.8	mA	Max	V_{IN} = 0.5V ($\overline{SE}$)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	$V_{I/O}$ = 2.7V (I/O_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	$V_{I/O}$ = 0.5V (I/O_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CC}	Power Supply Current			60	90	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	70	90		50		70		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to I/O_n	3.5 5.0	7.0 8.5	7.5 11.0	3.5 3.5	9.5 10.0	3.5 5.0	8.5 12.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to Q_0	3.5 3.5	7.0 7.0	9.0 8.0	3.5 3.5	11.0 10.0	3.5 3.5	10.0 9.0		
t_{PHL}	Propagation Delay $\overline{MR}$ to I/O_n	6.0	10.0	13.0	6.0	15.0	6.0	14.0	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to Q_0	5.5	7.5	12.0	5.5	14.0	5.5	13.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to I/O_n	3.0 4.0	6.5 8.5	9.0 11.0	3.0 4.0	12.5 14.5	3.0 4.0	10.0 12.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to I/O_n	2.0 2.0	4.5 5.0	6.0 7.0	2.0 2.0	8.0 10.0	2.0 2.0	7.0 8.0		
t_{PZH} t_{PZL}	Output Enable Time S/$\overline{P}$ to I/O_n	4.5 5.5	8.0 10.0	10.5 14.0	4.5 5.5	13.5 17.0	4.5 5.5	11.5 15.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time S/$\overline{P}$ to I/O_n	5.0 6.0	9.0 12.0	11.5 15.5	5.0 6.0	16.5 19.5	5.0 6.0	12.5 16.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{RE}$ to CP	6.0 14.0		14.0 18.0		7.0 16.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{RE}$ to CP	0 0		0 0		0 0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_0, D_1 or I/O_n to CP	6.5 6.5		8.5 8.5		7.5 7.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_0, D_1 or I/O_n to CP	2.0 2.0		3.0 3.0		3.0 3.0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{SE}$ to CP	7.0 2.5		9.0 11.0		8.0 3.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{SE}$ to CP	2.0 0.0		2.0 1.0		2.0 0.0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW S/$\overline{P}$ to CP	11.0 13.5		13.0 21.0		12.0 15.5		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW S to CP	6.5 9.0		8.5 11.0		7.5 10.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW S or S/$\overline{P}$ to CP	0 0		1.0 0		0 0		ns	2–6
$t_w(H)$ $t_w(L)$	CP Pulse Width, HIGH or LOW	7.0		8.0		7.0		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	5.5		7.5		6.5			2–4
t_{rec}	Recovery Time $\overline{MR}$ to CP	8.0		12.0		8.0		ns	2–6

National Semiconductor

54F/74F323 Octal Universal Shift/Storage Register with Synchronous Reset and Common I/O Pins

General Description


The 'F323 is an 8-bit universal shift/storage register with TRI-STATE® outputs. Its function is similar to the 'F299 with the exception of Synchronous Reset. Parallel load inputs and flip-flop outputs are multiplexed to minimize pin count. Separate serial inputs and outputs are provided for Q_0 and Q_7 to allow easy cascading. Four operation modes are possible: hold (store), shift left, shift right and parallel load.

Features

- Common parallel I/O for reduced pin count
- Additional serial inputs and outputs for expansion
- Four operating modes: shift left, shift right, load and store
- TRI-STATE outputs for bus-oriented applications
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9517–1


IEEE/IEC

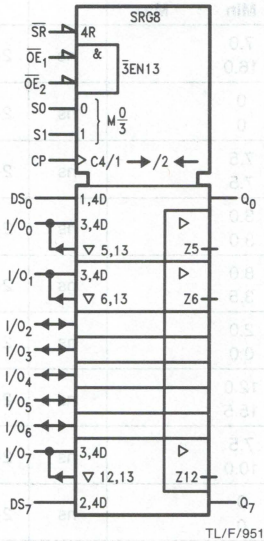

TL/F/9517–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9517–2

Pin Assignment for LCC



TL/F/9517–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
DS_0	Serial Data Input for Right Shift	1.0/1.0	20 μA/−0.6 mA
DS_7	Serial Data Input for Left Shift	1.0/1.0	20 μA/−0.6 mA
S_0, S_1	Mode Select Inputs	1.0/2.0	20 μA/−1.2 mA
$\overline{SR}$	Synchronous Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}_1$, $\overline{OE}_2$	TRI-STATE Output Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
I/O_0–I/O_7	Multiplexed Parallel Data Inputs	3.5/1.083	70 μA/−0.65 mA
	TRI-STATE Parallel Data Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
Q_0, Q_7	Serial Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 'F323 contains eight edge-triggered D-type flip-flops and the interstage logic necessary to perform synchronous reset, shift left, shift right, parallel load and hold operations. The type of operation is determined by S_0 and S_1 as shown in the Mode Select Table. All flip-flop outputs are brought out through TRI-STATE buffers to separate I/O pins that also serve as data inputs in the parallel load mode. Q_0 and Q_7 are also brought out on other pins for expansion in serial shifting of longer words.

A LOW signal on $\overline{SR}$ overrides the Select inputs and allows the flip-flops to be reset by the next rising edge of CP. All other state changes are also initiated by the LOW-to-HIGH CP transition. Inputs can change when the clock is in either state provided only that the recommended setup and hold times, relative to the rising edge of CP, are observed.


A HIGH signal on either $\overline{OE}_1$ or $\overline{OE}_2$ disables the TRI-STATE buffers and puts the I/O pins in the high impedance state. In this condition the shift, load, hold and reset operations can still occur. The TRI-STATE buffers are also disabled by HIGH signals on both S_0 and S_1 in preparation for a parallel load operation.

Mode Select Table

Inputs				Response
$\overline{SR}$	S_1	S_0	CP	
L	X	X	↗	Synchronous Reset; Q_0–Q_7 = LOW
H	H	H	↗	Parallel Load; $I/O_n \rightarrow Q_n$
H	L	H	↗	Shift Right; $DS_0 \rightarrow Q_0$, $Q_0 \rightarrow Q_1$, etc.
H	H	L	↗	Shift Left; $DS_7 \rightarrow Q_7$, $Q_7 \rightarrow Q_6$, etc.
H	L	L	X	Hold

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
↗ = LOW-to-HIGH transition

Logic Diagram

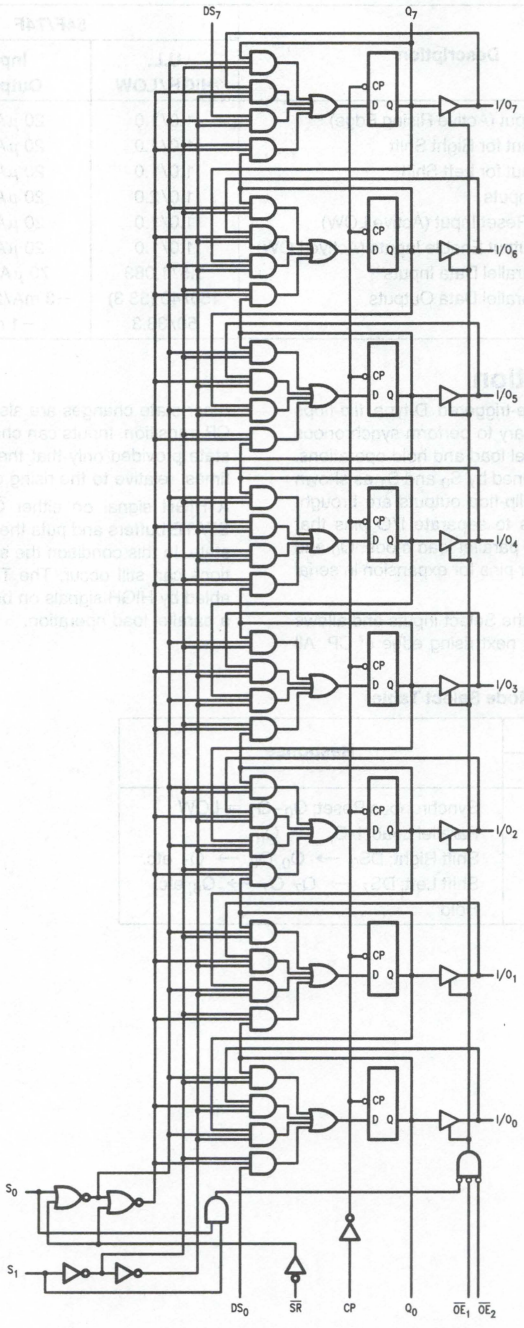

TL/F/9517–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	Typ	Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (Q_0, Q_7)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (I/O_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (Q_0, Q_7)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (I/O_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (Q_0, Q_7)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (I/O_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (I/O_n, Q_0, Q_7)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA (Q_0, Q_7)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (I/O_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V (Non I/O Inputs)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (I/O Inputs)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (CP, DS_0, DS_7, $\overline{SR}$, $\overline{OE_1}$, $\overline{OE_2}$)
					−1.2	mA	Max	V_{IN} = 0.5V (S_0, S_1)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			68	95	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			68	95	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			68	95	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Input Frequency	70	100				70		MHz	2–1
t_{PLH}	Propagation Delay	4.0	7.0	8.0			4.0	8.5	ns	2–3
t_{PHL}	CP to Q_0 or Q_7	4.5	6.5	8.0			4.5	8.5		
t_{PLH}	Propagation Delay	3.5	7.0	9.0			3.5	10.0		
t_{PHL}	CP to I/O_n	4.0	8.5	9.0			4.0	10.0		
t_{PZH}	Output Enable Time	3.5	6.0	8.0			3.5	9.0	ns	2–5
t_{PZL}		4.0	7.0	10.0			4.0	11.0		
t_{PHZ}	Output Disable Time	2.0	4.5	6.0			2.0	7.0		
t_{PLZ}		1.0	4.0	5.5			1.0	6.5		
t_{PZH}	Output Enable Time	3.5		9.0			3.5	10.0	ns	2–5
t_{PZL}	S_n to I/O_n	4.0		10.0			4.0	11.0		
t_{PHZ}	Output Disable Time	2.5		6.0			2.5	7.0	ns	2–5
t_{PLZ}	S_n to I/O_n	1.0		5.5			1.5	6.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	8.5				8.5		ns	2–6
$t_s(L)$	S_0 or S_1 to CP	8.5				8.5			
$t_h(H)$	Hold Time, HIGH or LOW	0				0			
$t_h(L)$	S_0 or S_1 to CP	0				0			
$t_s(H)$	Setup Time, HIGH or LOW	5.0				5.0		ns	2–6
$t_s(L)$	I/O_n, DS_0, DS_7 to CP	5.0				5.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0				2.0			
$t_h(L)$	I/O_n, DS_0, DS_7 to CP	2.0				2.0			
$t_s(H)$	Setup Time, HIGH or LOW	10.0				10.0		ns	2–6
$t_s(L)$	$\overline{SR}$ to CP	10.0				10.0			
$t_h(H)$	Hold Time, HIGH or LOW	0				0			
$t_h(L)$	$\overline{SR}$ to CP	0				0			
$t_w(H)$	CP Pulse Width	5.0				5.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0				5.0			

National Semiconductor

54F/74F350
4-Bit Shifter with TRI-STATE® Outputs

General Description


The 'F350 is a specialized multiplexer that accepts a 4-bit word and shifts it 0, 1, 2 or 3 places, as determined by two Select (S_0, S_1) inputs. For expansion to longer words, three linking inputs are provided for lower-order bits; thus two packages can shift an 8-bit word, four packages a 16-bit word, etc. Shifting by more than three places is accomplished by paralleling the TRI-STATE outputs of different packages and using the Output Enable ($\overline{OE}$) inputs as a third Select level. With appropriate interconnections, the 'F350 can perform zero-backfill, sign-extend or end-around (barrel) shift functions.

Features

- Linking inputs for word expansion
- TRI-STATE outputs for extending shift range


Ordering Code: See Section 5

Logic Symbols



TL/F/9518–3


IEEE/IEC

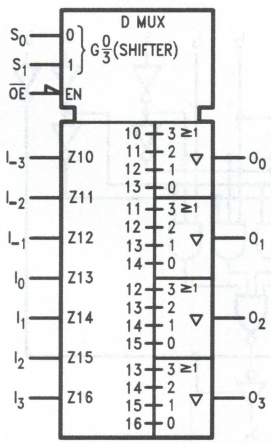

TL/F/9518–8


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9518–1

Pin Assignment for LCC



TL/F/9518–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S_0, S_1	Select Inputs	1.0/2.0	20 μA/−1.2 mA
I_{-3}–I_3	Data Inputs	1.0/2.0	20 μA/−1.2 mA
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
O_0–O_3	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description

The 'F350 is operationally equivalent to a 4-input multiplexer with the inputs connected so that the select code causes successive one-bit shifts of the data word. This internal connection makes it possible to perform shifts of 0, 1, 2 or 3 places on words of any length.

A 4-bit data word is introduced at the I_n inputs and is shifted according to the code applied to the select inputs S_0, S_1. Outputs O_0–O_3 are TRI-STATE, controlled by an active LOW output enable ($\overline{OE}$). When $\overline{OE}$ is LOW, data outputs will follow selected data inputs; when HIGH, the data outputs will be forced to the high impedance state. This feature allows shifters to be cascaded on the same output lines or to a common bus. The shift function can be logical, with zeros pulled in at either or both ends of the shifting field; arithmetic, where the sign bit is repeated during a shift down; or end around, where the data word forms a continuous loop.

Logic Equations


$$O_0 = \overline{S}_0\overline{S}_1I_0 + S_0\overline{S}_1I_{-1} + \overline{S}_0S_1I_{-2} + S_0S_1I_{-3}$$
$$O_1 = \overline{S}_0\overline{S}_1I_1 + S_0\overline{S}_1I_0 + \overline{S}_0S_1I_{-1} + S_0S_1I_{-2}$$
$$O_2 = \overline{S}_0\overline{S}_1I_2 + S_0\overline{S}_1I_1 + \overline{S}_0S_1I_0 + S_0S_1I_{-1}$$
$$O_3 = \overline{S}_0\overline{S}_1I_3 + S_0\overline{S}_1I_2 + \overline{S}_0S_1I_1 + S_0S_1I_0$$

Truth Table

Inputs			Outputs			
$\overline{OE}$	S_1	S_0	O_0	O_1	O_2	O_3
H	X	X	Z	Z	Z	Z
L	L	L	I_0	I_1	I_2	I_3
L	L	H	I_{-1}	I_0	I_1	I_2
L	H	L	I_{-2}	I_{-1}	I_0	I_1
L	H	H	I_{-3}	I_{-2}	I_{-1}	I_0

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram

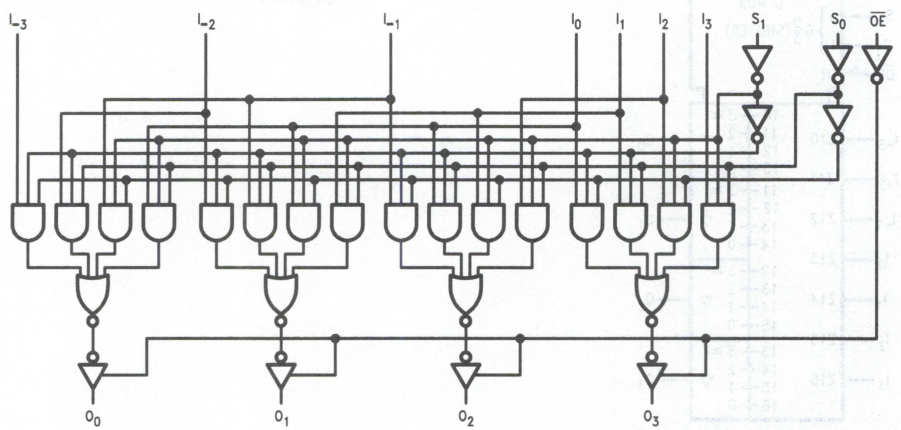


TL/F/9518–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Applications

16-Bit Shift-Up 0 to 3 Places, Zero Backfill

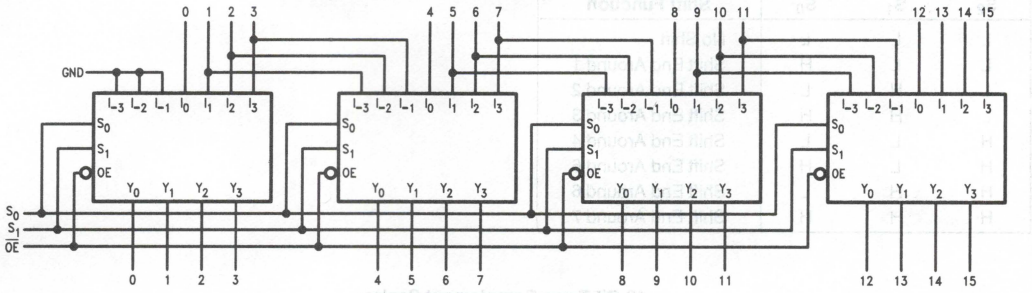


TL/F/9518–5

Function Table

S_1	S_0	Shift Function
L	L	No Shift
L	H	Shift 1 Place
H	L	Shift 2 Places
H	H	Shift 3 Places

8-Bit End Around Shift 0 to 7 Places

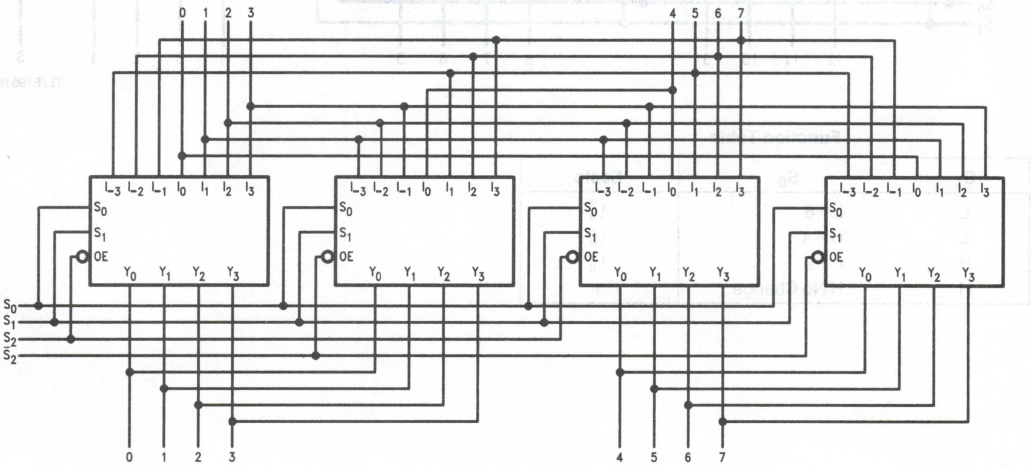


TL/F/9518–6

Applications (Continued)

Function Table

S_2	S_1	S_0	Shift Function
L	L	L	No Shift
L	L	H	Shift End Around 1
L	H	L	Shift End Around 2
L	H	H	Shift End Around 3
H	L	L	Shift End Around 4
H	L	H	Shift End Around 5
H	H	L	Shift End Around 6
H	H	H	Shift End Around 7

13-Bit Twos Complement Scaler

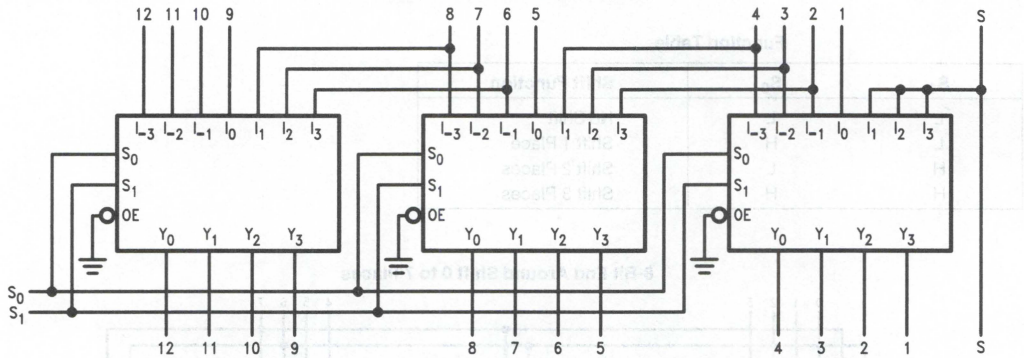

TL/F/9518–7

Function Table

S_1	S_0	Scale
L	L ÷ 8	1/8
L	H ÷ 4	1/4
H	L ÷ 2	1/2
H	H No Change	1

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 10% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.2	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			34	42	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			40	57	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			40	57	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	3.0	4.5	6.0			3.0	7.0	ns	2–3
t_{PHL}	I_n to O_n	2.5	4.0	5.5			2.5	6.5		
t_{PLH}	Propagation Delay	4.0	7.8	10.0			4.0	13.5	ns	2–3
t_{PHL}	S_n to O_n	3.0	6.5	8.5			3.0	9.5		
t_{PZH}	Output Enable Time	2.5	5.0	7.0			2.5	8.0	ns	2–5
t_{PZL}		4.0	7.0	9.0			4.0	10.0		
t_{PHZ}	Output Disable Time	2.0	3.9	5.5			2.0	6.5		
t_{PLZ}		2.0	4.0	5.5			2.0	7.5		

National Semiconductor

54F/74F352
Dual 4-Input Multiplexer

General Description


The 'F352 is a very high-speed dual 4-input multiplexer with common Select inputs and individual Enable inputs for each section. It can select two bits of data from four sources. The two buffered outputs present data in the inverted (complementary) form. The 'F352 is the functional equivalent of the 'F153 except with inverted outputs.

Features

- Inverted version of 'F153
- Separate enables for each multiplexer
- Input clamp diode limits high speed termination effects


Ordering Code: See Section 5

Logic Symbols



TL/F/9519–3


IEEE/IEC

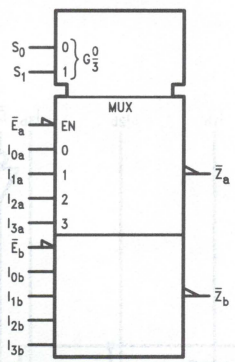

TL/F/9519–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9519–1

Pin Assignment for LCC



TL/F/9519–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_{0a}–I_{3a}	Side A Data Inputs	1.0/1.0	20 μA/−0.6 mA
I_{0b}–I_{3b}	Side B Data Inputs	1.0/1.0	20 μA/−0.6 mA
S_0–S_1	Common Select Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_a$	Side A Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_b$	Side B Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{Z}_a$, $\overline{Z}_b$	Multiplexer Outputs (Inverted)	50/33.3	−1 mA/20 mA

Functional Description

The 'F352 is a dual 4-input multiplexer. It selects two bits of data from up to four sources under the control of the common Select inputs (S_0, S_1). The two 4-input multiplexer circuits have individual active LOW Enables ($\overline{E}_a$, $\overline{E}_b$) which can be used to strobe the outputs independently. When the Enables ($\overline{E}_a$, $\overline{E}_b$) are HIGH, the corresponding outputs ($\overline{Z}_a$, $\overline{Z}_b$) are forced HIGH.

The logic equations for the outputs are shown below:

$$\overline{Z}_a = \overline{E}_a \bullet (I_{0a} \bullet \overline{S}_1 \bullet \overline{S}_0 + I_{1a} \bullet \overline{S}_1 \bullet S_0 + I_{2a} \bullet S_1 \bullet S_0 + I_{3a} \bullet S_1 \bullet S_0)$$

$$\overline{Z}_b = \overline{E}_b \bullet (I_{0b} \bullet \overline{S}_1 \bullet \overline{S}_0 + I_{1b} \bullet \overline{S}_1 \bullet S_0 + I_{2b} \bullet S_1 \bullet S_0 + I_{3b} \bullet S_1 \bullet S_0)$$


The 'F352 can be used to move data from a group of registers to a common output bus. The particular register from which the data came would be determined by the state of the Select inputs. A less obvious application is as a function generator. The 'F352 can generate two functions of three variables. This is useful for implementing highly irregular random logic.

Truth Table

Select Inputs		Inputs (a or b)					Output
S_0	S_1	$\overline{E}$	I_0	I_1	I_2	I_3	$\overline{Z}$
X	X	H	X	X	X	X	H
L	L	L	L	X	X	X	H
L	L	L	H	X	X	X	L
H	L	L	X	L	X	X	H
H	L	L	X	H	X	X	L
L	H	L	X	X	L	X	H
L	H	L	X	X	H	X	L
H	H	L	X	X	X	L	H
H	H	L	X	X	X	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Logic Diagram

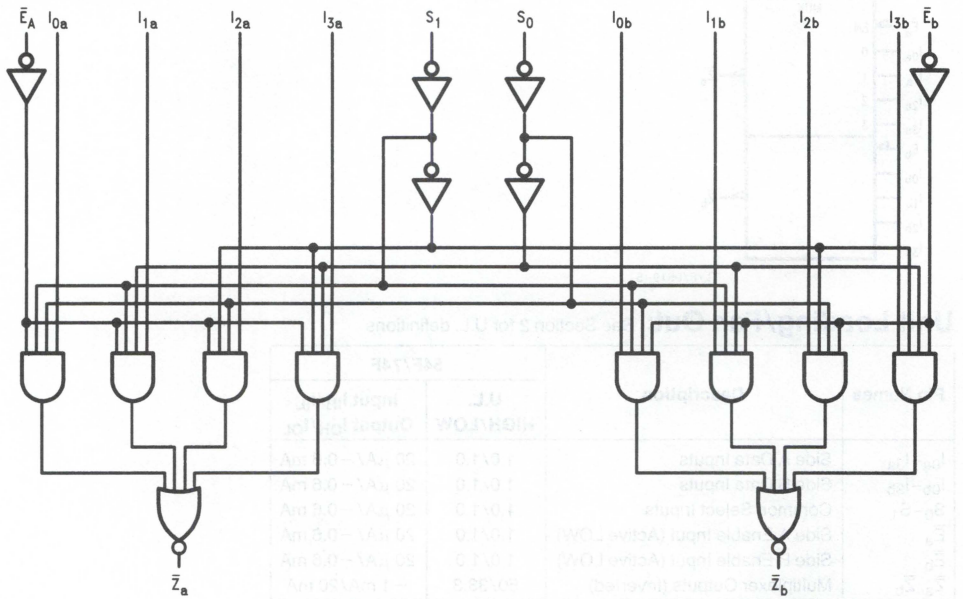

TL/F/9519–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			9.3	14	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			13.3	20	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay S_n to $\overline{Z}_n$	4.0 3.5	8.0 6.5	11.0 8.5	3.5 3.0	14.0 11.0	3.5 3.0	12.5 9.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}_n$ to $\overline{Z}_n$	3.0 3.0	4.5 5.0	6.0 7.0	2.5 2.5	8.0 9.0	2.5 2.5	7.0 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to $\overline{Z}_n$	2.0 1.3	5.2 2.5	7.0 4.0	2.0 1.0	9.0 5.0	2.0 1.0	8.0 4.5	ns	2–3

National Semiconductor

54F/74F353
Dual 4-Input Multiplexer with TRI-STATE® Outputs

General Description


The 'F353 is a dual 4-input multiplexer with TRI-STATE outputs. It can select two bits of data from four sources using common Select inputs. The outputs may be individually switched to a high impedance state with a HIGH on the respective Output Enable ($\overline{OE}$) inputs, allowing the outputs to interface directly with bus-oriented systems.

Features

- Inverted version of 'F253
- Multifunction capability
- Separate enables for each multiplexer


Ordering Code: See Section 5

Logic Symbols



TL/F/9520–3


IEEE/IEC



TL/F/9520–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9520–1

Pin Assignment for LCC



TL/F/9520–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
I_{0a}–I_{3a}	Side A Data Inputs	1.0/1.0	20 μA/−0.6 mA
I_{0b}–I_{3b}	Side B Data Inputs	1.0/1.0	20 μA/−0.6 mA
S_0, S_1	Common Select Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}_a$	Side A Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}_b$	Side B Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{Z}_a$, $\overline{Z}_b$	TRI-STATE Outputs (Inverted)	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description

The 'F353 contains two identical 4-input multiplexers with TRI-STATE outputs. They select two bits from four sources selected by common Select inputs (S_0, S_1). The 4-input multiplexers have individual Output Enable ($\overline{OE}_a$, $\overline{OE}_b$) inputs which, when HIGH, force the outputs to a high impedance (High Z) state. The logic equations for the outputs are shown below:

$$\overline{Z}_a = \overline{OE}_a \bullet (I_{0a} \bullet \overline{S}_1 \bullet \overline{S}_0 + I_{1a} \bullet \overline{S}_1 \bullet S_0 + I_{2a} \bullet S_1 \bullet \overline{S}_0 + I_{3a} \bullet S_1 \bullet S_0)$$

$$\overline{Z}_b = \overline{OE}_b \bullet (I_{0b} \bullet \overline{S}_1 \bullet \overline{S}_0 + I_{1b} \bullet \overline{S}_1 \bullet S_0 + I_{2b} \bullet S_1 \bullet \overline{S}_0 + I_{3b} \bullet S_1 \bullet S_0)$$


If the outputs of TRI-STATE devices are tied together, all but one device must be in the high impedance state to avoid high currents that would exceed the maximum ratings. Designers should ensure that Output Enable signals to TRI-STATE devices whose outputs are tied together are designed so that there is no overlap.

Truth Table

Select Inputs		Data Inputs				Output Enable	Output
S_0	S_1	I_0	I_1	I_2	I_3	$\overline{OE}$	$\overline{Z}$
X	X	X	X	X	X	H	Z
L	L	L	X	X	X	L	H
L	L	H	X	X	X	L	L
H	L	X	L	X	X	L	H
H	L	X	H	X	X	L	L
L	H	X	X	L	X	L	H
L	H	X	X	H	X	L	L
H	H	X	X	X	L	L	H
H	H	X	X	X	H	L	L

Address inputs S_0 and S_1 are common to both sections.
H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram

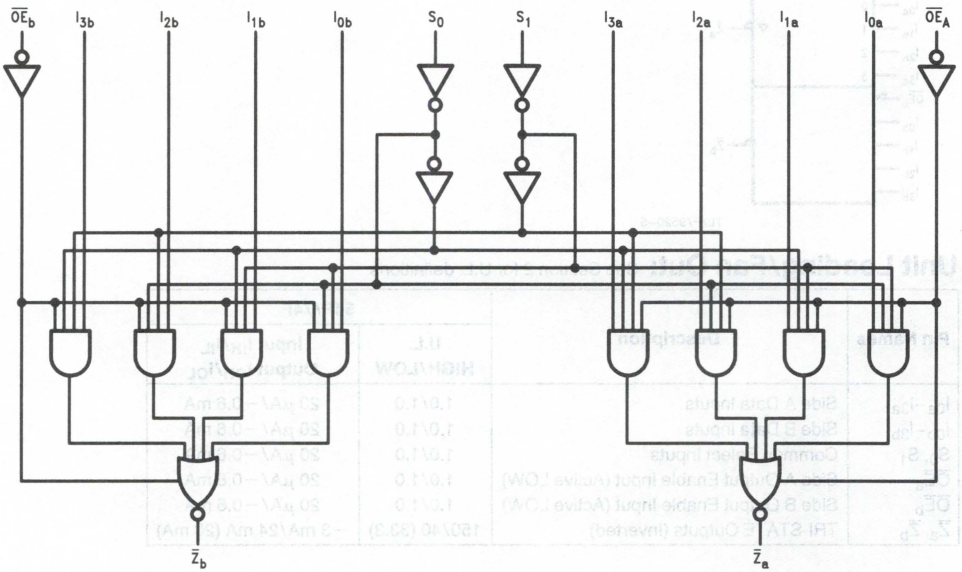

TL/F/9520–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			9.3	14	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			13.3	20	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			15.0	23	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay S_n to $\overline{Z}_n$	4.0 3.5	8.0 6.5	11.0 8.5	3.5 3.0	14.0 11.0	3.5 3.0	12.5 9.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I_n to $\overline{Z}_n$	3.0 1.3	5.2 2.5	7.0 4.0	3.0 1.0	9.0 5.0	3.0 1.0	8.0 4.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time	2.5 3.0	5.5 6.0	8.0 8.0	2.0 2.5	10.5 10.5	2.0 2.5	9.0 9.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time	2.0 2.0	3.7 4.4	5.0 6.0	2.0 2.0	7.0 8.0	2.0 2.0	6.0 7.0		

National Semiconductor

54F/74F365
Hex Buffer/Driver with TRI-STATE® Outputs

General Description


The 'F365 is a hex buffer and line driver designed to be employed as a memory and address driver, clock driver and bus-oriented transmitter/receiver.

Features

- TRI-STATE buffer outputs
- Outputs sink 64 mA
- Bus-oriented


Ordering Code: See Section 5

Logic Symbol

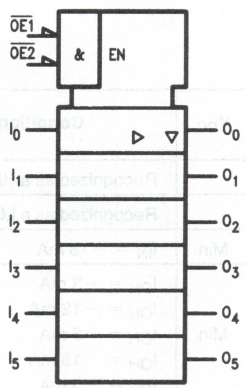


TL/F/9522–4

Connection Diagrams



TL/F/9522–1



TL/F/9522–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}_1$, $\overline{OE}_2$	Output Enable Input (Active LOW)	1.0/0.033	20 μA/20 μA
I_n	Inputs	1.0/0.033	20 μA/20 μA
O_n	Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

Function Table

Inputs			Output
$\overline{OE}_1$	$\overline{OE}_2$	I	O
L	L	L	L
L	L	H	H
X	H	X	Z
H	X	X	Z

L = LOW Voltage Level
H = HIGH Voltage Level
X = Immaterial
Z = High Impedance

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current				20	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test				100	μA	0.0	V_{IN} = 7.0V
I_{IL}	Input LOW Current				−20	μA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{CEX}	Output HIGH Leakage Current				250	μA	Max	V_{OUT} = V_{CC}
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			25	35	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			44	62	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			35	48	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.5	4.6	6.5	2.0	7.0	2.0	7.0	ns	2–3
t_{PHL}	I_n to O_n	2.5	4.9	7.0	2.0	7.0	2.0	7.5		
t_{PZH}	Enable Time	2.5	5.1	9.5	2.0	8.5	2.5	10.0	ns	2–5
t_{PZL}		2.5	5.7	9.0	2.0	8.5	2.5	9.5		
t_{PHZ}	Disable Time	2.0	3.6	6.5	1.5	6.5	2.0	7.0	ns	2–5
t_{PLZ}		2.0	4.4	6.5	1.5	9.0	2.0	7.0		

National Semiconductor

54F/74F366•54F/74F368
Hex Inverter Buffer with TRI-STATE® Outputs

Features


- TRI-STATE buffer outputs sink 64 mA
- High-speed
- Bus-oriented
- High impedance npn base inputs for reduced loading

Ordering Code: See Section 5

Connection Diagrams


'F366

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9521–2


Pin Assignment for LCC



TL/F/9521–1


'F368

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9521–4


Pin Assignment for LCC



TL/F/9521–3


Logic Symbols

IEEE/IEC
'F366

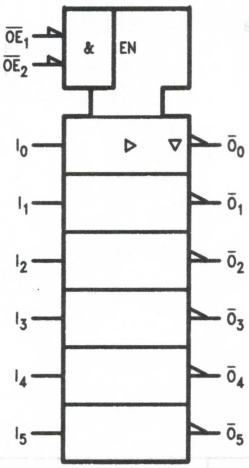

TL/F/9521–5

IEEE/IEC
'F368

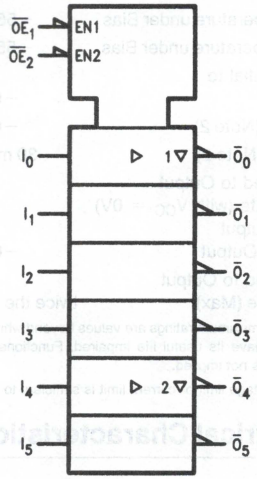

TL/F/9521–6

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}_1$, $\overline{OE}_2$	Output Enable Input (Active LOW)	1.0/0.033	20 μA/−20 μA
I_n	Input	1.0/0.033	20 μA/−20 μA
O_n, $\overline{O}_n$	Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

Function Tables

'F366

Inputs			Output
$\overline{OE}_1$	$\overline{OE}_2$	I	$\overline{O}$
L	L	L	H
L	L	H	L
X	H	X	Z
H	X	X	Z

'F368

Inputs		Output
$\overline{OE}$	I	$\overline{O}$
L	L	H
L	H	L
H	X	Z

L = LOW Voltage Level
H = HIGH Voltage Level
X = Immaterial
Z = High Impedance

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
V_{IH}	Input HIGH Voltage	2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage			0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage			−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage 54F 10% V_{CC}	2.0			V	Min	I_{OH} = −12 mA
	Output HIGH Voltage 74F 10% V_{CC}	2.0					I_{OH} = −15 mA
V_{OL}	Output LOW Voltage 54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
	Output LOW Voltage 74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current			20	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test			100	μA	Max	V_{IN} = 7.0V
I_{IL}	Input LOW Current			−20	μA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current			50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current			−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current	−100		−225	mA	Max	V_{OUT} = 0V
I_{CEX}	Output HIGH Leakage Current			250	μA	Max	V_{OUT} = V_{CC}
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current		20	25	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		49	62	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		35	48	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay	2.5 1.0	4.0 1.8	6.5 5.0			2.0 1.0	7.5 5.5	ns	2–3
t_{PZH} t_{PZL}	Enable Time ('F366)	2.5 2.5	4.2 4.2	9.5 9.0			2.5 2.5	10.0 9.5	ns	2–5
t_{PZH} t_{PZL}	Enable Time ('F368)	2.5 3.0	4.2 5.6	7.5 8.5			2.0 3.0	8.5 9.0	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time	2.0 2.0	3.3 4.1	6.5 6.5			2.0 2.0	7.0 7.0	ns	2–5

National Semiconductor

54F/74F373
Octal Transparent Latch with TRI-STATE® Outputs

General Description

The 'F373 consists of eight latches with TRI-STATE outputs for bus organized system applications. The flip-flops appear transparent to the data when Latch Enable (LE) is HIGH. When LE is LOW, the data that meets the setup times is latched. Data appears on the bus when the Output Enable ($\overline{OE}$) is LOW. When $\overline{OE}$ is HIGH the bus output is in the high impedance state.


Features

- Eight latches in a single package
- TRI-STATE outputs for bus interfacing
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC




TL/F/9523–4



TL/F/9523–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9523–2

Pin Assignment for LCC



TL/F/9523–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	TRI-STATE Latch Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description


The 'F373 contains eight D-type latches with TRI-STATE output buffers. When the Latch Enable (LE) input is HIGH, data on the D_n inputs enters the latches. In this condition the latches are transparent, i.e., a latch output will change state each time its D input changes. When LE is LOW, the latches store the information that was present on the D inputs a setup time preceding the HIGH-to-LOW transition of LE. The TRI-STATE buffers are controlled by the Output Enable ($\overline{OE}$) input. When $\overline{OE}$ is LOW, the buffers are in the bi-state mode. When $\overline{OE}$ is HIGH the buffers are in the high impedance mode but this does not interfere with entering new data into the latches.

Truth Table

Inputs			Output
LE	$\overline{OE}$	D_n	O_n
H	L	H	H
H	L	L	L
L	L	X	O_n (no change)
X	H	X	Z

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance State

Logic Diagram

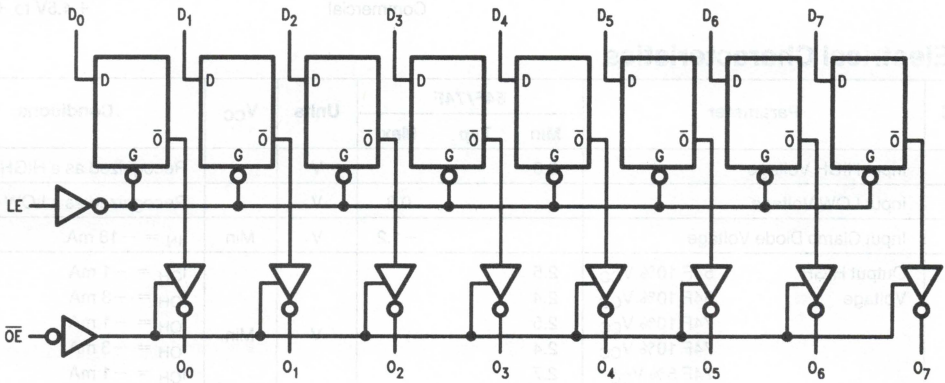

TL/F/9523–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			38	55	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay D_n to O_n	3.0 2.0	5.3 3.7	7.0 5.0	3.0 2.0	8.5 7.0	3.0 2.0	8.0 6.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay LE to O_n	5.0 3.0	9.0 5.2	11.5 7.0	5.0 3.0	15.0 8.5	5.0 3.0	13.0 8.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time	2.0 2.0	5.0 5.6	11.0 7.5	2.0 2.0	13.5 10.0	2.0 2.0	12.0 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time	1.5 1.5	4.5 3.8	6.5 5.0	1.5 1.5	10.0 7.0	1.5 1.5	7.5 6.0	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to LE	2.0 2.0		2.0 2.0		2.0 2.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to LE	3.0 3.0		3.0 4.0		3.0 3.0			
$t_w(H)$	LE Pulse Width, HIGH	6.0		6.0		6.0		ns	2–4

National Semiconductor

54F/74F374
Octal D-Type Flip-Flop with TRI-STATE® Outputs

General Description


The 'F374 is a high-speed, low-power octal D-type flip-flop featuring separate D-type inputs for each flip-flop and TRI-STATE outputs for bus-oriented applications. A buffered Clock (CP) and Output Enable ($\overline{OE}$) are common to all flip-flops.

Features

- Edge-triggered D-type inputs
- Buffered positive edge-triggered clock
- TRI-STATE outputs for bus-oriented applications
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9524–1


IEEE/IEC



TL/F/9524–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9524–2

Pin Assignment for LCC



TL/F/9524–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description


The 'F374 consists of eight edge-triggered flip-flops with individual D-type inputs and TRI-STATE true outputs. The buffered clock and buffered Output Enable are common to all flip-flops. The eight flip-flops will store the state of their individual D inputs that meet the setup and hold time requirements on the LOW-to-HIGH Clock (CP) transition. With the Output Enable ($\overline{OE}$) LOW, the contents of the eight flip-flops are available at the outputs. When the $\overline{OE}$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}$ input does not affected the state of the flip-flops.

Truth Table

Inputs			Internal Register	Output
D_n	CP	$\overline{OE}$		O_n
H	⌐⌐	L	H	H
L	⌐⌐	L	L	L
X	X	H	X	Z

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance
⌐⌐ = LOW-to-HIGH Clock Transition

Logic Diagram

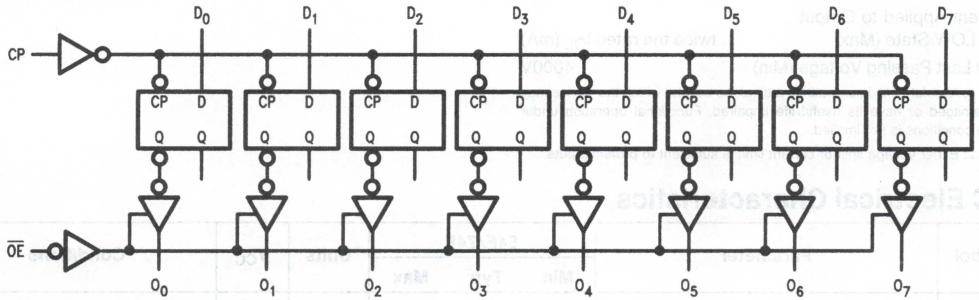

TL/F/9524–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			55	86	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	140		60		70		MHz	2–1
t_{PLH}	Propagation Delay	4.0	6.5	8.5	4.0	10.5	4.0	10.0	ns	2–3
t_{PHL}	CP to O_n	4.0	6.5	8.5	4.0	11.0	4.0	10.0		
t_{PZH}	Output Enable Time	2.0	9.0	11.5	2.0	14.0	2.0	12.5	ns	2–5
t_{PZL}		2.0	5.8	7.5	2.0	10.0	2.0	8.5		
t_{PHZ}	Output Disable Time	2.0	5.3	7.0	2.0	8.0	2.0	8.0		
t_{PLZ}		1.5	4.3	5.5	1.5	7.5	1.5	6.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	2.0		2.5		2.0		ns	2–6
$t_s(L)$	D_n to CP	2.0		2.0		2.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0			
$t_h(L)$	D_n to CP	2.0		2.5		2.0			
$t_w(H)$	CP Pulse Width	7.0		7.0		7.0		ns	2–4
$t_w(L)$	HIGH or LOW	6.0		6.0		6.0			

National Semiconductor

54F/74F377
Octal D Flip-Flop with Clock Enable

General Description

The 'F377 has eight edge-triggered, D-type flip-flops with individual D inputs and Q outputs. The common buffered Clock (CP) input loads all flip-flops simultaneously, when the Clock Enable ($\overline{CE}$) is LOW.


The register is fully edge-triggered. The state of each D input, one setup time before the LOW-to-HIGH clock transition, is transferred to the corresponding flip-flop's Q output. The $\overline{CE}$ input must be stable only one setup time prior to the LOW-to-HIGH clock transition for predictable operation.

Features

- Ideal for addressable register applications
- Clock enable for address and data synchronization applications
- Eight edge-triggered D flip-flops
- Buffered common clock
- See 'F273 for master reset version
- See 'F373 for transparent latch version
- See 'F374 for TRI-STATE® version
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9525–1


IEEE/IEC



TL/F/9525–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9525–2

Pin Assignment for LCC



TL/F/9525–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CE}$	Clock Enable (Active LOW)	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_7	Data Outputs	50/33.3	−1 mA/20 mA

Mode Select-Function Table

Operating Mode	Inputs			Output
	CP	$\overline{CE}$	D_n	Q_n
Load "1"	⎍	l	h	H
Load "0"	⎍	l	l	L
Hold	⎍	h	X	No Change
(Do Nothing)	X	H	X	No Change

H = HIGH Voltage Level
h = HIGH Voltage Level one setup time prior to the LOW-to-HIGH Clock Transition
L = LOW Voltage Level
l = LOW Voltage Level one setup time prior to the LOW-to-HIGH Clock Transition
X = Immaterial
⎍ = LOW-to-HIGH Clock Transition

Logic Diagram

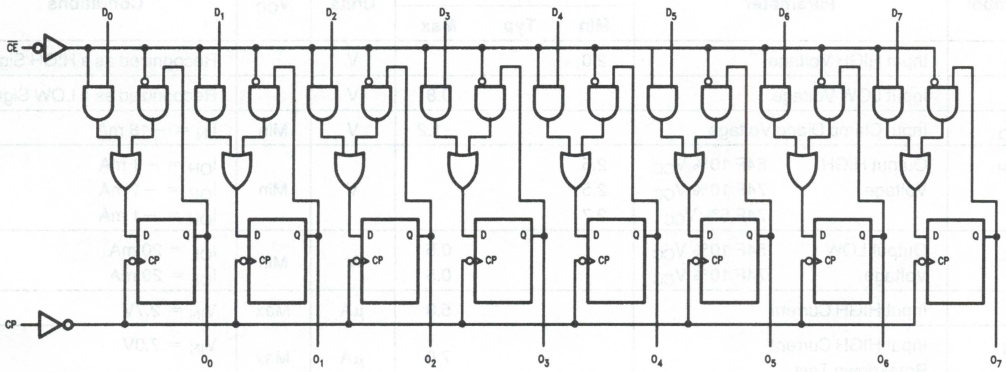

TL/F/9525–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current				5.0	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test				7.0	μA	Max	V_{IN} = 7.0V
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CEX}	Output HIGH Leakage Current				50	μA	Max	V_{OUT} = V_{CC}
V_{ID}	Input Leakage Test		4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current				3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{CCH}	Power Supply Current			35	46	mA	Max	CP = ⌐
I_{CCL}				44	56			D_n = $\overline{MR}$ = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{Max}	Maximum Clock Frequency	130			85		105		MHz	2–1
t_{PLH}	Propagation Delay	3.0		7.0	2.0	8.5	2.5	7.5	ns	2–4
t_{PHL}	CP to Q_n	4.0		9.0	3.0	10.5	3.5	9.0		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	3.0		3.5		3.0		ns	2–6
$t_s(L)$	D_n to CP	3.5		4.0		3.5			
$t_h(H)$	Hold Time, HIGH or LOW	0.5		1.0		0.5		ns	2–6
$t_h(L)$	D_n to CP	1.0		1.0		1.0			
$t_s(H)$	Setup Time, HIGH or LOW	4.1		4.0		4.1		ns	2–6
$t_s(L)$	$\overline{CE}$ to CP	3.5		5.0		4.0			
$t_h(H)$	Hold Time, HIGH to LOW	0.5		1.5		0.5		ns	2–6
$t_h(L)$	$\overline{CE}$ to CP	2.0		2.5		2.0			
$t_w(H)$	Clock Pulse Width,	6.0		5.0		6.0		ns	2–4
$t_w(L)$	HIGH or LOW	6.0		5.0		6.0			

National Semiconductor

54F/74F378
Parallel D Register with Enable

General Description


The 'F378 is a 6-bit register with a buffered common Enable. This device is similar to the 'F174, but with common Enable rather than common Master Reset.

Features

- 6-bit high-speed parallel register
- Positive edge-triggered D-type inputs
- Fully buffered common clock and enable inputs
- Input clamp diodes limit high-speed termination effects
- Full TTL and CMOS compatible


Ordering Code: See Section 5

Logic Symbols



TL/F/9526–1


IEEE/IEC



TL/F/9526–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9526–2

Pin Assignment for LCC



TL/F/9526–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{E}$	Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
D_0–D_5	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_5	Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 'F378 consists of six edge-triggered D-type flip-flops with individual D inputs and Q inputs. The Clock (CP) and Enable ($\overline{E}$) inputs are common to all flip-flops.


When the $\overline{E}$ input is LOW, new data is entered into the register on the LOW-to-HIGH transition of the CP input. When the $\overline{E}$ input is HIGH the register will retain the present data independent of the CP input.

Truth Table

Inputs			Output
$\overline{E}$	CP	D_n	Q_n
H	⌐	X	No Change
L	⌐	H	H
L	⌐	L	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐ = LOW-to-HIGH Clock Transition

Logic Diagram

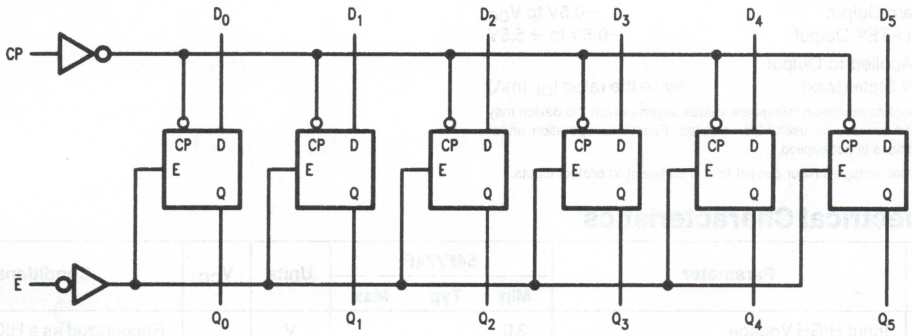

TL/F/9526–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter			54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage			2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage					0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage					−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F	10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F	10% V_{CC}	2.5					I_{OH} = −1 mA
		74F	5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F	10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F	10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F				20.0	μA	Max	V_{IN} = 2.7V
		74F				5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F				100	μA	Max	V_{IN} = 7.0V
		74F				7.0			
I_{CEX}	Output HIGH Leakage Current	54F				250	μA	Max	V_{OUT} = V_{CC}
		74F				50			
V_{ID}	Input Leakage Test	74F		4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F				3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current					−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current			−60		−150	mA	Max	V_{OUT} = 0V
I_{CCL}	Power Supply Current				30	45	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Input Frequency	80	100		70		80		MHz	2–1
t_{PLH}	Propagation Delay	3.0	5.5	7.5	3.0	10.0	3.0	8.5	ns	2–3
t_{PHL}	CP to Q_n	3.5	6.0	8.5	3.5	10.5	3.5	9.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	4.0		5.0		4.0		ns	2–6
$t_s(L)$	D_n to CP	4.0		5.0		4.0			
$t_h(H)$	Hold Time, HIGH or LOW	0		2.0		0			
$t_h(L)$	D_n to CP	0		2.0		0			
$t_s(H)$	Setup Time, HIGH or LOW	6.0		4.5		6.0		ns	2–6
$t_s(L)$	$\overline{E}$ to CP	10.0		13.0		10.0			
$t_h(H)$	Hold Time, HIGH or LOW	0		0		0			
$t_h(L)$	$\overline{E}$ to CP	0		0		0			
$t_w(H)$	CP Pulse Width	4.0		5.0		4.0		ns	2–4
$t_w(L)$	HIGH or LOW	6.0		7.5		6.0			

National Semiconductor

54F/74F379
Quad Parallel Register with Enable

General Description

The 'F379 is a 4-bit register with buffered common Enable. This device is similar to the 'F175 but features the common Enable rather than common Master Reset.


Features

- Edge triggered D-type inputs
- Buffered positive edge-triggered clock
- Buffered common enable input
- True and complement outputs
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC




TL/F/9527–5



TL/F/9527–3


Connection Diagrams

Pin Assignment
DIP, SOIC and Flatpak



TL/F/9527–1

Pin Assignment
for LCC



TL/F/9527–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{E}$	Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
D_0–D_3	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_3	Flip-Flop Outputs	50/33.3	−1 mA/20 mA
$\overline{Q}_0$–$\overline{Q}_3$	Complement Outputs	50/33.3	−1 mA/20 mA

Functional Description


The 'F379 consists of four edge-triggered D-Type flip-flops with individual D inputs and Q and $\overline{Q}$ outputs. The Clock (CP) and Enable ($\overline{E}$) inputs are common to all flip-flops. When the $\overline{E}$ is input HIGH, the register will retain the present data independent of the CP input. The D_n and $\overline{E}$ inputs can change when the clock is in either state, provided that the recommended setup and hold times are observed.

Truth Table

Inputs			Outputs	
$\overline{E}$	CP	D_n	Q_n	$\overline{Q}_n$
H	⎍	X	NC	NC
L	⎍	H	H	L
L	⎍	L	L	H

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⎍ = LOW-to-HIGH Transition
NC = No Change

Logic Diagram

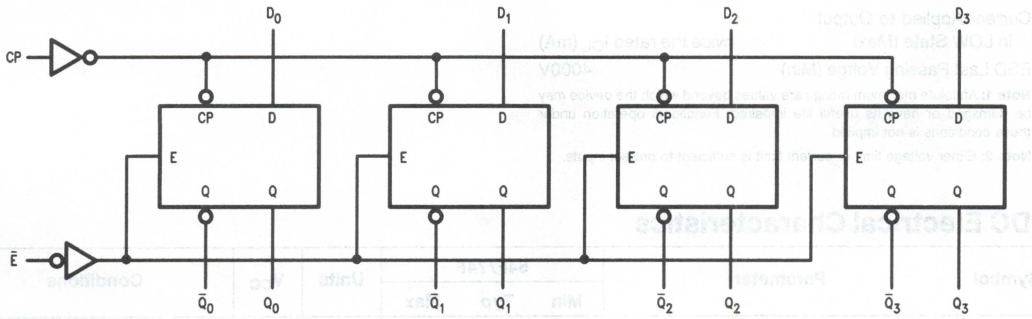

TL/F/9527–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltge (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCL}	Power Supply Current			28	40	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	140		75		100		MHz	2–1
t_{PLH}	Propagation Delay	3.5	5.0	6.5	3.0	8.5	4.0	7.5	ns	2–3
t_{PHL}	CP to Q_n, $\overline{Q}_n$	5.0	6.5	8.5	4.0	10.0	5.0	9.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	3.0		4.0			3.0	ns	2–6
$t_s(L)$	D_n to CP	3.0		4.0			3.0		
$t_h(H)$	Hold Time, HIGH or LOW	1.0		2.0			1.0		
$t_h(L)$	D_n to CP	1.0		2.0			1.0		
$t_s(H)$	Setup Time, HIGH or LOW	6.0		8.0			6.0	ns	2–6
$t_s(L)$	$\overline{E}$ to CP	6.0		8.0			6.0		
$t_h(H)$	Hold Time, HIGH or LOW	0		0			0		
$t_h(L)$	$\overline{E}$ to CP	0		0			0		
$t_w(H)$	CP Pulse Width	4.0		5.0			4.0	ns	2–4
$t_w(L)$	HIGH or LOW	5.0		7.0			5.0		

National Semiconductor

54F/74F381
4-Bit Arithmetic Logic Unit

General Description


The 'F381 performs three arithmetic and three logic operations on two 4-bit words, A and B. Two additional select input codes force the function outputs LOW or HIGH. Carry propagate and generate outputs are provided for use with the 'F182 carry lookahead generator for high-speed expansion to longer word lengths. For ripple expansion, refer to the 'F382 ALU data sheet.

Features

- Low input loading minimizes drive requirements
- Performs six arithmetic and logic functions
- Selectable LOW (clear) and HIGH (preset) functions
- Carry generate and propagate outputs for use with carry lookahead generator


Ordering Code: See Section 5

Logic Symbols



TL/F/9528–3


IEEE/IEC

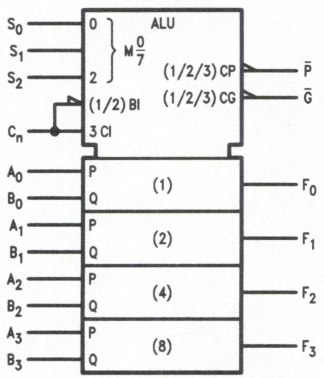

TL/F/9528–6


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9528–1

Pin Assignment for LCC



TL/F/9528–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F U.L. HIGH/LOW	54F/74F Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0-A_3	A Operand Inputs	1.0/3.0	20 μA/−1.8 mA
B_0-B_3	B Operand Inputs	1.0/3.0	20 μA/−1.8 mA
S_0-S_2	Function Select Inputs	1.0/1.0	20 μA/−0.6 mA
C_n	Carry Input	1.0/4.0	20 μA/−2.4 mA
$\overline{G}$	Carry Generate Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{P}$	Carry Propagate Output (Active LOW)	50/33.3	−1 mA/20 mA
F_0-F_3	Function Outputs	50/33.3	−1 mA/20 mA

Functional Description

Signals applied to the Select inputs S_0-S_2 determine the mode of operation, as indicated in the Function Select Table. An extensive listing of input and output levels is shown in the Truth Table. The circuit performs the arithmetic functions for either active HIGH or active LOW operands, with output levels in the same convention. In the Subtract operating modes, it is necessary to force a carry (HIGH for active HIGH operands, LOW for active LOW operands) into the C_n input of the least significant package.

The Carry Generate ($\overline{G}$) and Carry Propagate ($\overline{P}$) outputs supply input signals to the 'F182 carry lookahead generator for expansion to longer word length, as shown in *Figure 1*. Note that an 'F382 ALU is used for the most significant package. Typical delays for *Figure 1* are given in *Figure 2*.


Function Select Table

Select S_0	Select S_1	Select S_2	Operation
L	L	L	Clear
H	L	L	B Minus A
L	H	L	A Minus B
H	H	L	A Plus B
L	L	H	A⊕B
H	L	H	A + B
L	H	H	AB
H	H	H	Preset

H = HIGH Voltage Level
L = LOW Voltage Level

FIGURE 2. 16-Bit Delay Tabulation


Path Segment	Toward F	Output $C_n + 4$, OVR
A_i or B_i to $\overline{P}$	7.2 ns	7.2 ns
$\overline{P}_i$ to $C_n + j$ ('F182)	6.2 ns	6.2 ns
C_n to F	8.1 ns	—
C_n or $C_n + 4$, OVR	—	8.0 ns
Total Delay	21.5 ns	21.4 ns

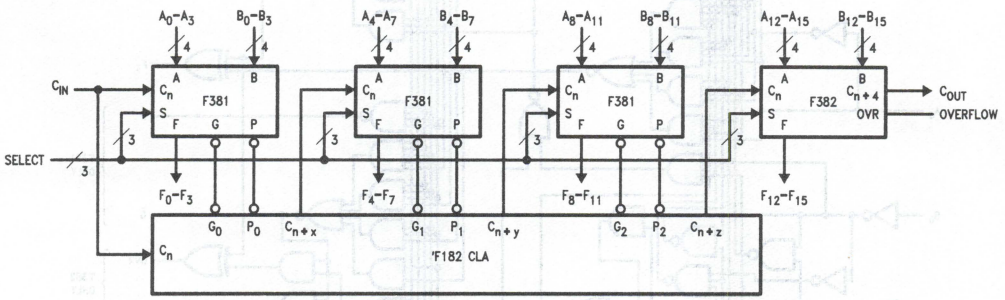

TL/F/9528–4

FIGURE 1. 16-Bit Lookahead Carry ALU Expansion

Logic Diagram

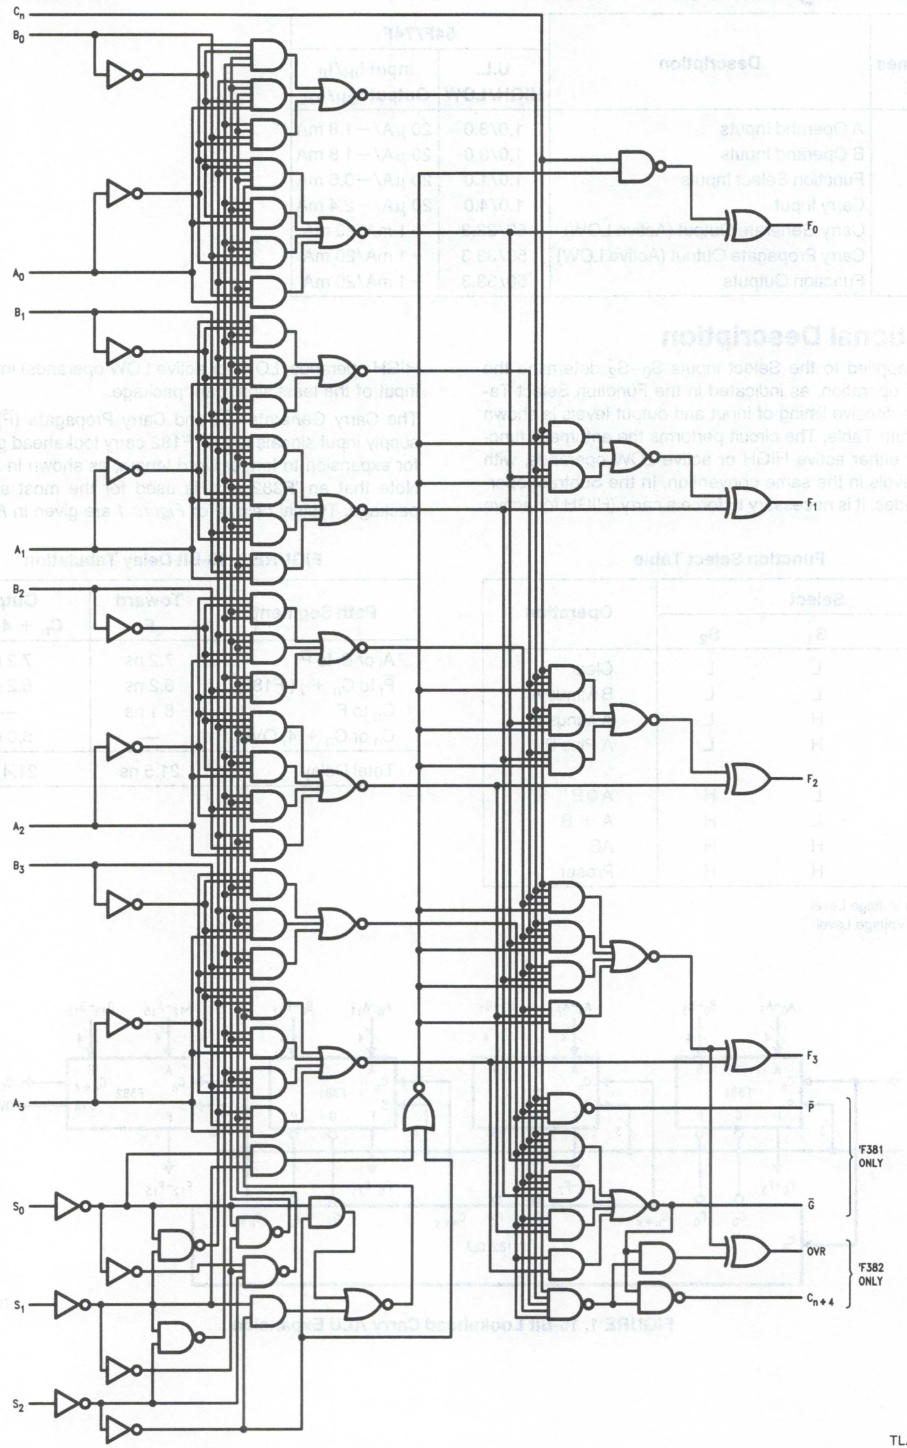

TL/F/9528–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Truth Table

	Inputs						Outputs					
Function	S_0	S_1	S_2	C_n	A_n	B_n	F_0	F_1	F_2	F_3	$\overline{G}$	$\overline{P}$
CLEAR	L	L	L	X	X	X	L	L	L	L	L	L
B Minus A	H	L	L	L	L	L	H	H	H	H	H	L
				L	L	H	L	H	H	H	L	L
				L	H	L	L	L	L	L	H	H
				L	H	H	H	H	H	H	H	L
				H	L	L	L	L	L	L	H	L
				H	L	H	H	H	H	H	L	L
				H	H	L	H	L	L	L	H	H
				H	H	H	L	L	L	L	H	L
A Minus B	L	H	L	L	L	L	H	H	H	H	H	L
				L	L	H	L	L	L	L	H	H
				L	H	L	L	H	H	H	L	L
				L	H	H	H	H	H	H	H	L
				H	L	L	L	L	L	L	H	L
				H	L	H	H	L	L	L	H	H
				H	H	L	H	H	H	H	L	L
				H	H	H	L	L	L	L	H	L
A Plus B	H	H	L	L	L	L	L	L	L	L	H	H
				L	L	H	H	H	H	H	H	L
				L	H	L	H	H	H	H	H	L
				L	H	H	L	H	H	H	L	L
				H	L	L	H	L	L	L	H	H
				H	L	H	L	L	L	L	H	L
				H	H	L	L	L	L	L	H	L
				H	H	H	H	H	H	H	L	L
A ⊕ B	L	L	H	X	L	L	L	L	L	L	H	H
				X	L	H	H	H	H	H	H	H
				X	H	L	H	H	H	H	H	L
				X	H	H	L	L	L	L	L	L
A + B	H	L	H	X	L	L	L	L	L	L	H	H
				X	L	H	H	H	H	H	H	H
				X	H	L	H	H	H	H	H	H
				X	H	H	H	H	H	H	H	L
AB	L	H	H	X	L	L	L	L	L	L	L	L
				X	L	H	L	L	L	L	H	H
				X	H	L	L	L	L	L	L	L
				X	H	H	H	H	H	H	H	L
PRESET	H	H	H	X	L	L	H	H	H	H	H	H
				X	L	H	H	H	H	H	H	H
				X	H	L	H	H	H	H	H	H
				X	H	H	H	H	H	H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (S_n)
					−1.8	mA	Max	V_{IN} = 0.5V (A_n, B_n)
					−2.4	mA	Max	V_{IN} = 0.5V (C_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			59	89	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay C_n to F_i	2.5 2.5	8.1 5.7	12.0 8.0			2.5 2.5	13.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay Any A or B to Any F	4.0 3.5	10.4 8.2	15.0 11.0			4.0 3.5	16.0 12.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S_i to F_i	4.5 4.0	8.3 8.2	20.5 15.0			4.5 4.0	21.5 16.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A_i or B_i to $\overline{G}$	3.5 3.5	6.4 6.8	10.0 10.0			3.5 3.0	11.0 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A_i or B_i to $\overline{P}$	2.5 3.5	7.2 6.5	10.5 9.5			2.5 3.5	11.5 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S_i to $\overline{G}$ or $\overline{P}$	4.0 4.5	7.8 10.2	12.0 13.5			4.0 4.5	13.0 14.5	ns	2–3

National Semiconductor

54F/74F382
4-Bit Arithmetic Logic Unit

General Description

The 'F382 performs three arithmetic and three logic operations on two 4-bit words, A and B. Two additional Select input codes force the Function outputs LOW or HIGH. An Overflow output is provided for convenience in twos complement arithmetic. A Carry output is provided for ripple expansion. For high-speed expansion using a Carry Lookahead Generator, refer to the 'F381 data sheet.


Features

- Performs six arithmetic and logic functions
- Selectable LOW (clear) and HIGH (preset) functions
- LOW input loading minimizes drive requirements
- Carry output for ripple expansion
- Overflow output for twos complement arithmetic


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC

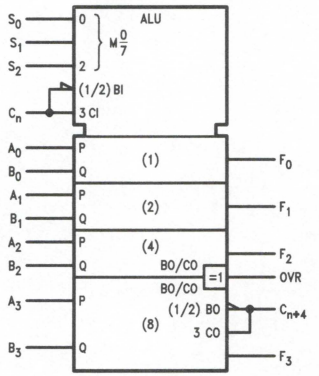


TL/F/9529–6



TL/F/9529–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9529–1

Pin Assignment for LCC



TL/F/9529–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F U.L. HIGH/LOW	54F/74F Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0-A_3	A Operand Inputs	1.0/4.0	20 μA/−2.4 mA
B_0-B_3	B Operand Inputs	1.0/4.0	20 μA/−2.4 mA
S_0-S_2	Function Select Inputs	1.0/1.0	20 μA/−0.6 mA
C_n	Carry Input	1.0/5.0	20 μA/−3.0 mA
C_{n+4}	Carry Output	50/33.3	−1 mA/20 mA
OVR	Overflow Output	50/33.3	−1 mA/20 mA
F_0-F_3	Function Outputs	50/33.3	−1 mA/20 mA


Functional Description

Signals applied to the Select inputs S_0-S_2 determine the mode of operation, as indicated in the Function Select Table. An extensive listing of input and output levels is shown in the Truth Table. The circuit performs the arithmetic functions for either active HIGH or active LOW operands, with output levels in the same convention. In the Subtract operating modes, it is necessary to force a carry (HIGH for active HIGH operands, LOW for active LOW operands) into the C_n input of the least significant package. Ripple expansion is illustrated in *Figure 1*. The overflow output OVR is the Exclusive-OR of C_{n+3} and C_{n+4}; a HIGH signal on OVR indicates overflow in twos complement operation. Typical delays for *Figure 1* are given in *Figure 2*.

Function Select Table

Select S_0	Select S_1	Select S_2	Operation
L	L	L	Clear
H	L	L	B Minus A
L	H	L	A Minus B
H	H	L	A Plus B
L	L	H	A ⊕ B
H	L	H	A + B
L	H	H	AB
H	H	H	Preset

H = HIGH Voltage Level
L = LOW Voltage Level

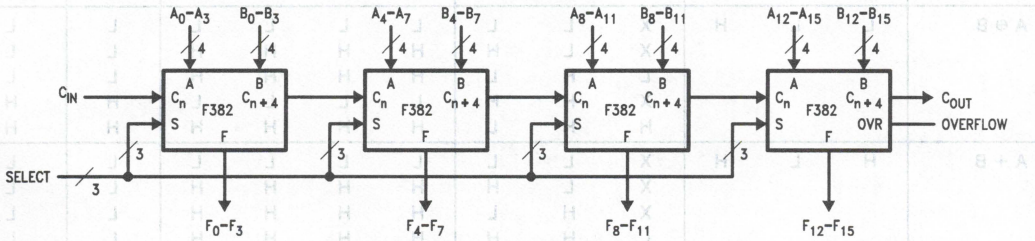

TL/F/9529–5

FIGURE 1. 16-Bit Ripply Carry ALU Expansion

Path Segment	Toward F	Output C_{n+4}, OVR
A_i or B_i to C_{n+4}	6.5 ns	6.5 ns
C_n to C_{n+4}	6.3 ns	6.3 ns
C_n to C_{n+4}	6.3 ns	6.3 ns
C_n to F	8.1 ns	—
C_n to C_{n+4}, OVR	—	8.0 ns
Total Delay	27.2 ns	27.1 ns


FIGURE 2. 16-Bit Delay Tabulation

Truth Table

	Inputs						Outputs					
Function	S_0	S_1	S_2	C_n	A_n	B_n	F_0	F_1	F_2	F_3	OVR	C_{n+4}
CLEAR	L	L	L	L	X	X	L	L	L	L	H	H
				H	X	X	L	L	L	L	H	H
B MINUS A	H	L	L	L	L	L	H	H	H	H	L	L
				L	L	H	L	H	H	H	L	H
				L	H	L	L	L	L	L	L	L
				L	H	H	H	H	H	H	L	L
				H	L	L	L	L	L	L	L	H
				H	L	H	H	H	H	H	L	H
				H	H	L	H	L	L	L	L	L
				H	H	H	L	L	L	L	L	H
A MINUS B	L	H	L	L	L	L	H	H	H	H	L	L
				L	L	H	L	L	L	L	L	L
				L	H	L	L	H	H	H	L	H
				L	H	H	H	H	H	H	L	L
				H	L	L	L	L	L	L	L	H
				H	L	H	H	L	L	L	L	L
				H	H	L	H	H	H	H	L	H
				H	H	H	L	L	L	L	L	H
A PLUS B	H	H	L	L	L	L	L	L	L	L	L	L
				L	L	H	H	H	H	H	L	L
				L	H	L	H	H	H	H	L	L
				L	H	H	L	H	H	H	L	H
				H	L	L	H	L	L	L	L	L
				H	L	H	L	L	L	L	L	H
				H	H	L	L	L	L	L	L	H
				H	H	H	H	H	H	H	L	H
A ⊕ B	L	L	H	X	L	L	L	L	L	L	L	L
				X	L	H	H	H	H	H	L	L
				L	H	L	H	H	H	H	L	L
				X	H	H	L	L	L	L	H	H
				H	H	L	H	H	H	H	H	H
A + B	H	L	H	X	L	L	L	L	L	L	L	L
				X	L	H	H	H	H	H	L	L
				X	H	L	H	H	H	H	L	L
				L	H	H	H	H	H	H	L	L
				H	H	H	H	H	H	H	H	H
AB	L	H	H	X	L	L	L	L	L	L	H	H
				X	L	H	L	L	L	L	L	L
				X	H	L	L	L	L	L	H	H
				L	H	H	H	H	H	H	L	L
				H	H	H	H	H	H	H	H	H
PRESET	H	H	H	X	L	L	H	H	H	H	L	L
				X	L	H	H	H	H	H	L	L
				X	H	L	H	H	H	H	L	L
				L	H	H	H	H	H	H	L	L
				H	H	H	H	H	H	H	H	H

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Logic Diagram

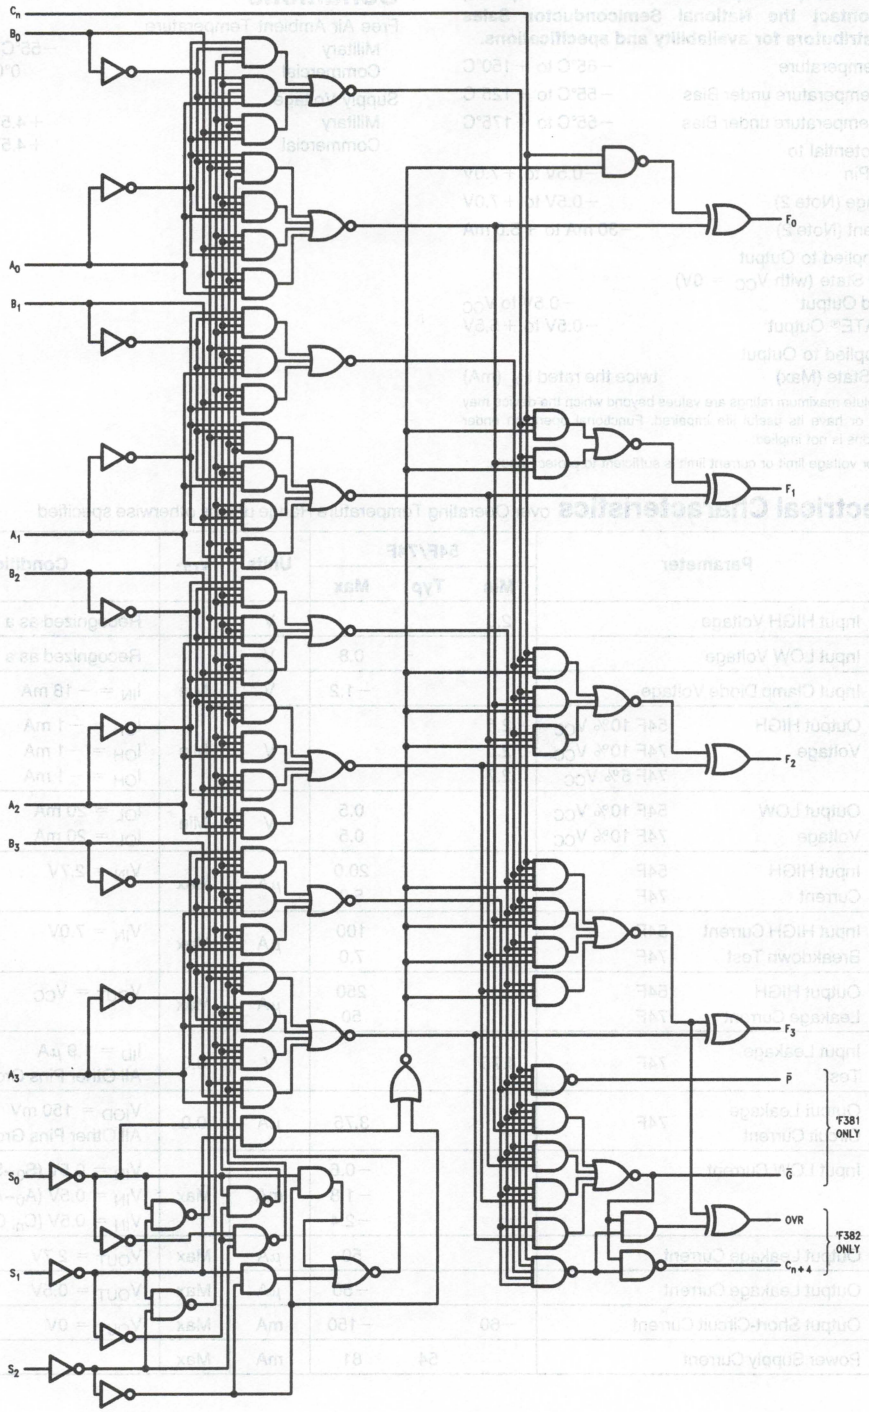

TL/F/9529–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics over Operating Temperature Range unless otherwise specified

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (S_0–S_2)
					−1.8			V_{IN} = 0.5V (A_0–A_3, B_0–B_3)
					−2.4			V_{IN} = 0.5V (C_n, C_{n+4})
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			54	81	mA	Max	

AC Electrical Characteristics: See Section 2 for U.L. definitions

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay C_n to F_i	3.0 2.5	8.1 5.7	12.0 8.0			3.0 2.5	13.0 9.0	ns	2–4
t_{PLH} t_{PHL}	Propagation Delay Any A or B to Any F	4.0 3.0	10.4 8.2	15.0 11.0			3.5 2.5	17.0 12.0	ns	2–4
t_{PLH} t_{PHL}	Propagation Delay S_i to F_i	6.5 4.0	11.0 8.2	20.5 15.0			5.5 4.0	21.5 17.5	ns	2–4
t_{PLH} t_{PHL}	Propagation Delay A_i or B_i to C_{n+4}	3.5 3.5	6.0 6.5	8.5 9.0			3.5 3.5	11.0 10.5	ns	2–4
t_{PLH} t_{PHL}	Propagation Delay S_i to OVR or C_{n+4}	7.0 5.0	12.5 9.0	16.5 12.0			7.0 5.0	17.5 14.5	ns	2–4
t_{PLH} t_{PHL}	Propagation Delay C_n to C_{n+4}	2.5 3.5	5.6 6.3	8.0 9.0			2.0 2.0	9.0 10.0	ns	2–4
t_{PLH} t_{PHL}	Propagation Delay C_n to OVR	3.5 2.5	8.0 7.1	11.0 10.0			3.5 2.5	13.0 11.0	ns	2–4
t_{PLH} t_{PHL}	Propagation Delay A_i or B_i to OVR	7.0 3.0	11.5 8.0	15.5 10.5			7.0 3.0	16.5 11.5	ns	2–4

National Semiconductor

54F/74F384
8-Bit Serial/Parallel Twos Complement Multiplier

General Description

The 'F384 is an 8-bit by 1-bit sequential logic element that multiplies two numbers represented in twos complement notation. The device implements Booth's algorithm internally to produce a twos complement product that needs no subsequent correction. Parallel inputs accept and store an 8-bit multiplicand (X_0–X_7). The multiplier word is then applied to the Y input in a serial bit stream, least significant bit first. The product is clocked out at the SP output, least significant bit first.


The K input is used for expansion to longer X words, using two or more 'F384 devices by connecting the output (SP) of one device to the K input of the other device. The Mode Control (M) input is used to establish the most significant device. An asynchronous Parallel Load ($\overline{PL}$) input clears the internal flip-flops to the start condition and enables the X latches to accept new multiplicand data. The Parallel Load ($\overline{PL}$) also clears the output (SP).

Features

- Twos complement multiplication
- 8-bit by 1-bit sequential logic element
- Parallel inputs accept and store an 8-bit multiplicand (X_0–X_7)
- K input is used for expansion to longer X words
- Functionally and pin compatible to the Am25LS14A

Ordering Code: See Section 5


Logic Symbol



TL/F/10217–1


Connection Diagrams

Pin Assignment for DIP and SOIC



TL/F/10217–2

Pin Assignment for LCC



TL/F/10217–3

Input Loading/Fan-Out: See Section 2 For U.L. Definitions

Pin Names	Description	54F/74F (U.L.) High/Low	I_{IH}/I_{IL} I_{OH}/I_{OL}
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
K	Serial Expansion Input	1.0/1.0	20 μA/−0.6 mA
M	Mode Control Input	1.0/1.0	20 μA/−0.6 mA
$\overline{PL}$	Asynchronous Parallel Load Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
X_0–X_7	Multiplicand Data Inputs	1.0/1.0	20 μA/−0.6 mA
Y	Serial Multiplier Input	1.0/1.0	20 μA/−0.6 mA
SP	Serial X•Y Product Output	50/33.3	−1 mA/20 mA

Functional Description


Referring to the Logic Diagram and *Figure A*, the multiplicand (X_0–X_7) latches are enabled to receive new data when $\overline{PL}$ is LOW. Data that meet the setup/hold time requirements are stored when $\overline{PL}$ goes HIGH. The LOW signal on $\overline{PL}$ clears the output (SP) as well as the internal flip-flops.

New multiplicand data enter the X latches during bit time T_0. It is assumed that $\overline{PL}$ goes LOW shortly after the CP rising edge that marks the beginning of T_0 and goes HIGH again one recovery time before the beginning of T_1. The LSB (Y_0) of the multiplier is applied to the Y input during T_0 and must be held one hold time after the beginning of T_1. One propagation delay after the beginning of T_1, the LSB (S_0) of the product appears at the output (SP). This multiplication process is continued by applying Y_1–Y_6 to the Y input causing S_1–S_6 of the product to appear at the output (SP).

The MSB Y_7 (the sign bit) of the multiplier is first applied to the Y input during T_7 and must be held through T_{16} causing S_7–S_{15} of the product to appear at the output (SP). This extension of the sign bit is a necessary adjunct to the implementation of Booth's algorithm. This is a built-in feature of the 'F322 Shift Register (See *Figure B*).

Figure C shows the method of using two F384's to perform a 12 x n bit multiplication. Notice that the sign of X is effectively extended by connecting X_{11} to X_4–X_7 of the most significant package. Whereas the 8 x 8 multiplication required 17 clock periods (m + n to form the product terms plus T_0 to clear the multiplier), the arrangement of *Figure C* requires 12 + n + 1 bits to form the product terms.

Logic Diagram

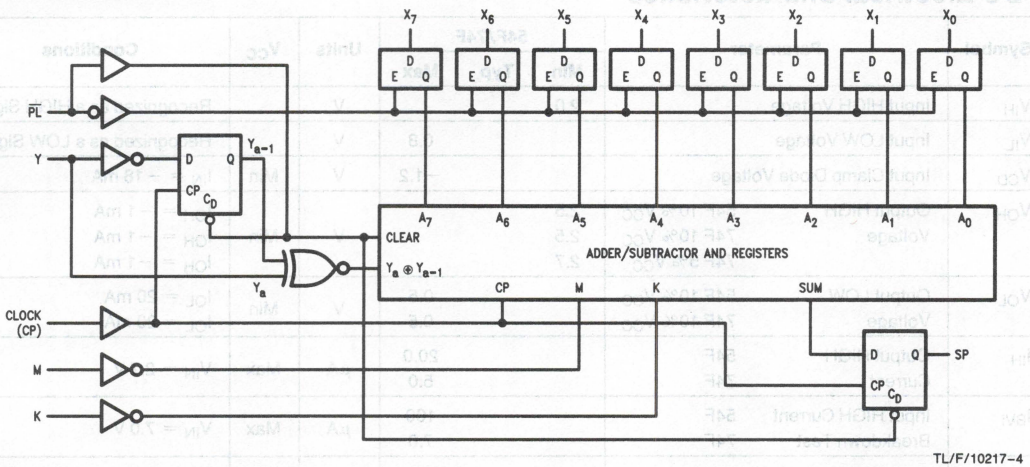

TL/F/10217–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Function Table

Inputs						Internal	Output	Function
$\overline{PL}$	CP	K	M	X_i	Y	Y_{a-1}	SP	
X	X	L	L	X	X	X	X	Most Significant Multiplier Device
X	X	CS	H	X	X	X	X	Devices Cascaded in Multiplier String
L	X	X	X	OP	X	L	L	Load New Multiplicand and Clear Internal Sum and Carry Registers
H	X	X	X	X	X	X	X	Device Enabled
H	↑	X	X	X	L	L	AR	Shift Sum Register
H	↑	X	X	X	L	H	AR	Add Multiplicand to Sum Register and Shift
H	↑	X	X	X	H	L	AR	Subtract Multiplicand from Sum Register and Shift
H	↑	X	X	X	H	H	AR	Shift Sum Register

H = HIGH Voltage Level
L = LOW Voltage Level
↑ = LOW-to-HIGH Transition
CS = Connected to SP output of high order device
OP = X_i latches open for new data (i = 0–7)
AR = Output as required per Booth's algorithm
X = Immaterial

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics


Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Output HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7 V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0 V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Except $\overline{PL}$)
					−1.2	mA	Max	V_{IN} = 0.5V ($\overline{PL}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			60	90	mA	Max	V_O = HIGH

AC Electrical Characteristics : See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	54F/74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	50					50		MHz	2-1
t_{PLH}	Propagation Delay	3.5	6.5	9.0			3.5	10.0	ns	2-3
t_{PHL}	CP to SP	3.5	6.5	9.0			3.5	10.0		
t_{PHL}	Propagation Delay $\overline{PL}$ to SP	6.0	10.0	13.0			6.0	14.0	ns	2-3


AC Operating Requirements : See Section 2 for Waveforms

Symbol	Parameter	54F/74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	9.0				10.0		ns	2-6
$t_s(L)$	K to CP	9.0				10.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0				2.0			
$t_h(L)$	K to CP	2.0				2.0			
$t_s(H)$	Setup Time, HIGH or LOW	15.0				15.0		ns	2-6
$t_s(L)$	Y to CP	15.0				15.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0				2.0			
$t_h(L)$	Y to CP	2.0				2.0			
$t_s(H)$	Setup Time, HIGH or LOW	3.0				4.0		ns	2-6
$t_s(L)$	X_n to $\overline{PL}$	6.0				7.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0				2.0			
$t_h(L)$	X_n to $\overline{PL}$	4.0				4.0			
$t_w(H)$	CP Pulse Width	7.0				7.0		ns	2-4
$t_w(L)$	HIGH or LOW	7.0				7.0			
$t_w(L)$	$\overline{PL}$ Pulse Width, LOW	6.5				7.0		ns	2-4
t_{rec}	Recovery Time $\overline{PL}$ to CP	6.0				10.0		ns	2-6

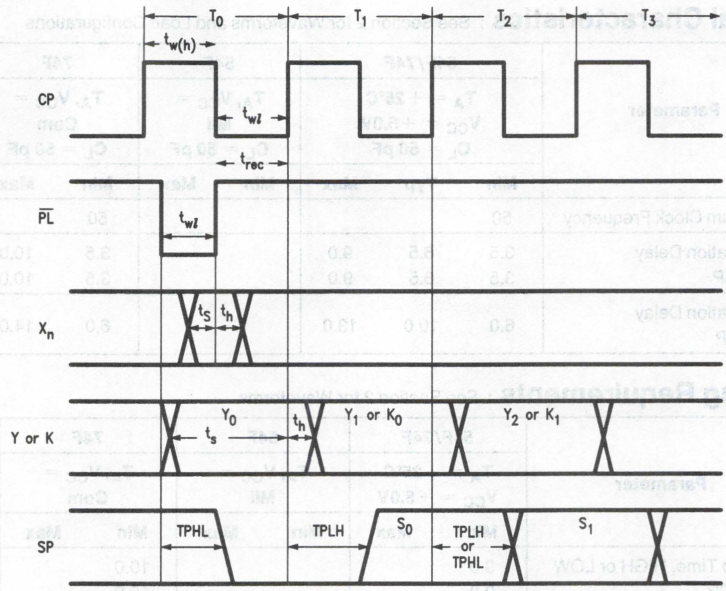

TL/F/10217–5

FIGURE A. Timing Diagram

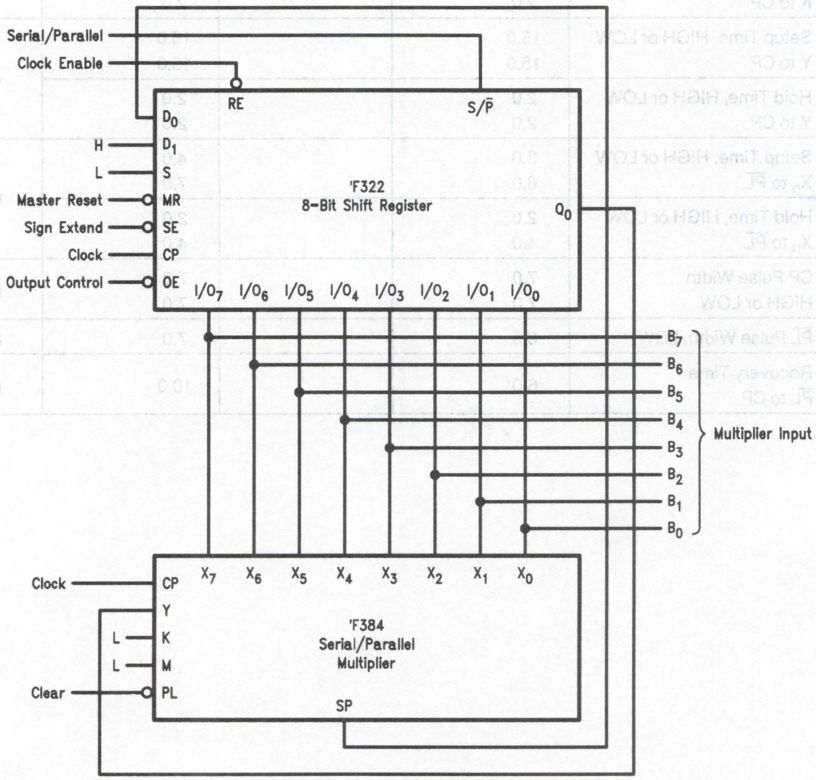

TL/F/10217–7

FIGURE B. 8-Bit by 8-Bit Multiplier, Bus Organized, with 8-Bit Truncated Product

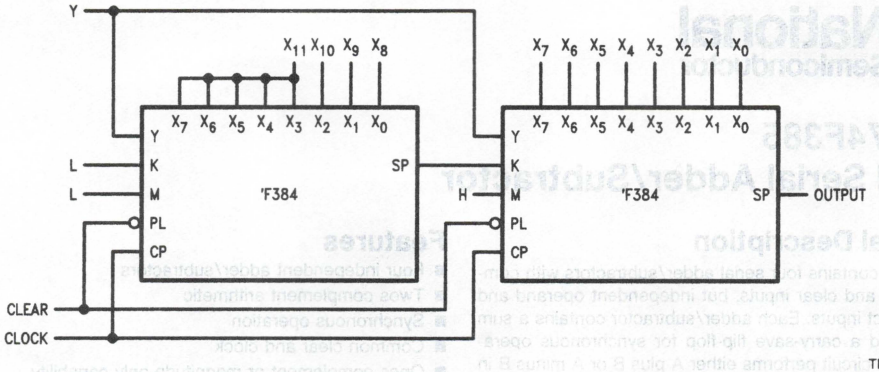


FIGURE C. 12-Bit by n-Bit Twos Complement Multiplier

National Semiconductor

54F/74F385
Quad Serial Adder/Subtractor

General Description


The 'F385 contains four serial adder/subtractors with common clock and clear inputs, but independent operand and mode select inputs. Each adder/subtractor contains a sum flip-flop and a carry-save flip-flop for synchronous operations. Each circuit performs either A plus B or A minus B in twos complement notation, but can also be used for magnitude-only or ones complement operation. The 'F385 is designed for use with the 'F384 and 'F784 serial multipliers in implementing digital filters or butterfly networks in fast Fourier transforms.

Features

- Four independent adder/subtractors
- Twos complement arithmetic
- Synchronous operation
- Common clear and clock
- Ones complement or magnitude-only capability


Ordering Code: See Section 5

Logic Symbols



TL/F/9531–1


IEEE/IEC

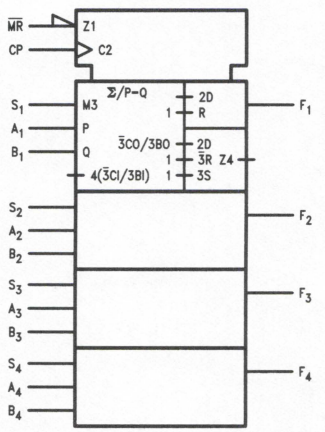

TL/F/9531–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9531–2

Pin Assignment for LCC



TL/F/9531–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_1-A_4	A Operand Inputs	1.0/1.0	20 μA/−0.6 mA
B_1-B_4	B Operand Inputs	1.0/1.0	20 μA/−0.6 mA
S_1-S_4	Function Select Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Asynchronous Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
F_1-F_4	Sum or Difference Outputs	50/33.3	−1 mA/20 mA

Functional Description

Each adder contains two edge-triggered flip-flops to store the sum and carry, as shown in the Logic Diagram. Flip-flop state changes occur on the rising edge of the Clock Pulse (CP) input signal. The Select (S) input should be LOW for the Add (A plus B) mode and HIGH for the Subtract (A minus B) mode. A LOW signal on the asynchronous Master Reset ($\overline{MR}$) input clears the sum flip-flop and resets the carry flip-flop to zero in the Add mode or presets it to one in the Subtract mode.


In the Subtract mode, the B operand is internally complemented. Presetting the carry flip-flop to one completes the twos complement transformation by adding one to "A plus $\overline{B}$" during the first (LSB) operation after $\overline{MR}$ is released. For ones complement subtraction, the carry flip-flop can be set to zero by making S LOW during the reset, then making S HIGH after the reset but before the next clock.

Truth Table

Inputs*				Internal Carry		Output*	Function
$\overline{MR}$	S	A	B	C	C_1	F	
L	L	X	X	L	L	L	Clear
L	H	X	X	H	H	L	
H	L	L	L	L	L	L	Add
H	L	L	L	H	L	H	
H	L	L	H	L	L	H	
H	L	L	H	H	H	L	
H	L	H	L	L	L	H	
H	L	H	L	H	H	L	
H	L	H	H	L	H	L	
H	L	H	H	H	H	H	
H	H	L	L	L	L	H	Subtract
H	H	L	L	H	H	L	
H	H	L	H	L	L	L	
H	H	L	H	H	L	H	
H	H	H	L	L	H	L	
H	H	H	L	H	H	H	
H	H	H	H	L	L	H	
H	H	H	H	H	H	L	

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
* = Inputs before CP transition, output after C
C_1 = Carry flip-flop state before (C) and after (C_1) clock transition

Logic Diagram

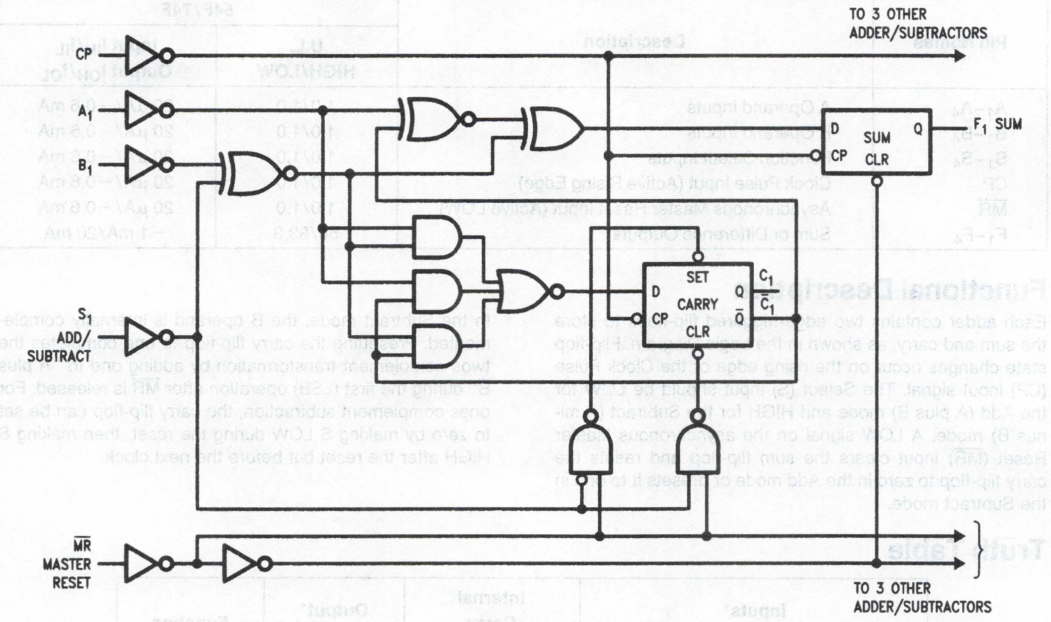

TL/F/9531–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			68	92*	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			68	92*	mA	Max	V_O = LOW

*95 mA for 54F

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	70	100		65		70		MHz	2-1
t_{PLH}	Propagation Delay	3.5	6.0	8.0	3.0	10.0	3.5	9.0	ns	2-3
t_{PHL}	CP to F_n	4.0	7.0	9.0	3.5	11.0	4.0	10.0		
t_{PHL}	Propagation Delay $\overline{MR}$ to F_n	5.5	9.0	12.0	5.0	14.0	5.5	13.0	ns	2-3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	15.0		17.5		15.0		ns	2-6
$t_s(L)$	A_n to CP	15.0		17.5		15.0			
$t_h(H)$	Hold Time, HIGH or LOW	0		0		0			
$t_h(L)$	A_n to CP	0		0		0			
$t_s(H)$	Setup Time, HIGH or LOW	15.0		17.5		15.0		ns	2-6
$t_s(L)$	B_n or S_n to CP	15.0		17.5		15.0			
$t_h(H)$	Hold Time, HIGH or LOW	0		0		0			
$t_h(L)$	B_n or S_n to CP	0		0		0			
$t_w(H)$	CP Pulse Width	6.0		7.0		6.0		ns	2-4
$t_w(L)$	HIGH or LOW	6.0		7.0		6.0			
$t_w(L)$	$\overline{MR}$ Width, LOW	6.0		6.5		6.0		ns	2-4
t_{rec}	Recovery Time, $\overline{MR}$ to CP	8.5		10.0		9.5		ns	2-6

National Semiconductor

54F/74F398 • 54F/74F399
Quad 2-Port Register

General Description

The 'F398 and 'F399 are the logical equivalents of a quad 2-input multiplexer feeding into four edge-triggered flip-flops. A common Select input determines which of the two 4-bit words is accepted. The selected data enters the flip-flops on the rising edge of the clock. The 'F399 is the 16-pin version of the 'F398, with only the Q outputs of the flip-flops available.

Features


- Select inputs from two data sources
- Fully positive edge-triggered operation
- Both true and complement outputs—'F398
- Guaranteed 4000V minimum ESD protection—'F399

Ordering Code: See Section 5

Connection Diagrams


'F398

Pin Assignment for LCC




TL/F/9533–5

Pin Assignment for DIP, SOIC and Flatpak




TL/F/9533–6

'F399



TL/F/9533–7




TL/F/9533–8

4


Logic Symbols

'F398



TL/F/9533–2


'F399



TL/F/9533–4


IEEE/IEC

'F398



TL/F/9533–1

'F399



TL/F/9533–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S	Common Select Input	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
I_{0a}–I_{0d}	Data Inputs from Source 0	1.0/1.0	20 μA/−0.6 mA
I_{1a}–I_{1d}	Data Inputs from Source 1	1.0/1.0	20 μA/−0.6 mA
Q_a–Q_d	Register True Outputs	50/33.3	−1 mA/20 mA
$\overline{Q}_a$–$\overline{Q}_d$	Register Complementary Outputs ('F398)	50/33.3	−1 mA/20 mA

Functional Description


The 'F398 and 'F399 are high-speed quad 2-port registers. They select four bits of data from either of two sources (Ports) under control of a common Select input (S). The selected data is transferred to a 4-bit output register synchronous with the LOW-to-HIGH transition of the Clock input (CP). The 4-bit D-type output register is fully edge-triggered. The Data inputs (I_{0x}, I_{1x}) and Select input (S) must be stable only a setup time prior to and hold time after the LOW-to-HIGH transition of the Clock input for predictable operation. The 'F398 has both Q and $\overline{Q}$ outputs.

Function Table

Inputs			Outputs	
S	I_0	I_1	Q	$\overline{Q}$*
l	l	X	L	H
l	h	X	H	L
h	X	l	L	H
h	X	h	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
h = HIGH Voltage Level one setup time prior to the LOW-to-HIGH clock transition
l = LOW Voltage Level one setup time prior to the LOW-to-HIGH clock transition
X = Immaterial
*'F398 only

Logic Diagram

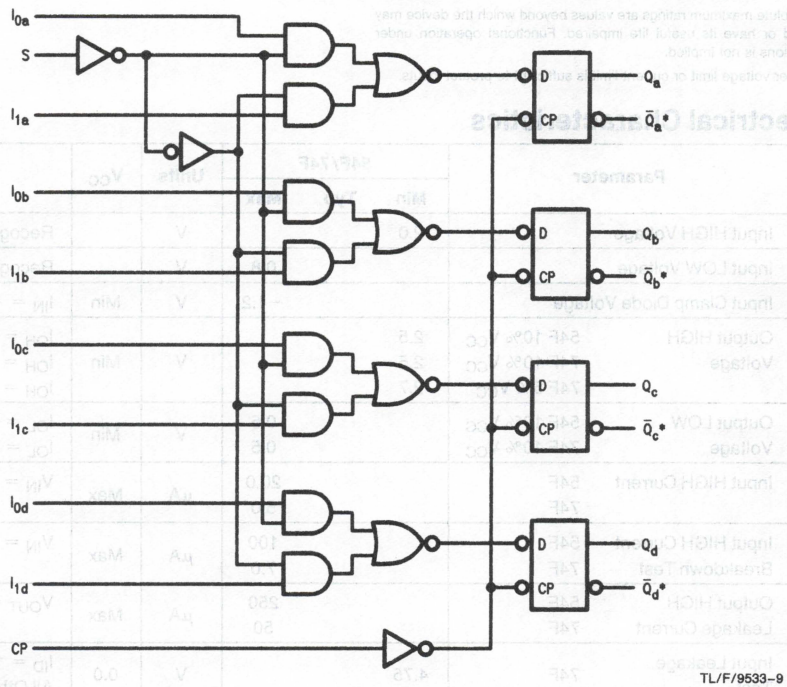

TL/F/9533–9

*'F398 Only

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)—'F399	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current ('F398)			25	38	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F398)			25	38	mA	Max	V_O = LOW
I_{CCH}	Power Supply Current ('F399)			22	34	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F399)			22	34	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Input Clock Frequency	100	140		80		100		MHz	2–1
t_{PLH}	Propagation Delay	3.0*	5.7	7.5	3.0	9.5	3.0	8.5	ns	2–3
t_{PHL}	CP to Q or $\overline{Q}$	3.0	6.8	9.0	3.0	11.5	3.0	10.0		

*'F398 3.3 ns

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	3.0		4.5		3.0		ns	2–6
$t_s(L)$	I_n to CP	3.0		4.5		3.0			
$t_h(H)$	Hold Time, HIGH or LOW	1.0		1.5		1.0			
$t_h(L)$	I_n to CP	1.0		1.5		1.0			
$t_s(H)$	Setup Time, HIGH or LOW	7.5		10.5		8.5		ns	2–6
$t_s(L)$	S to CP ('F398)	7.5		10.5		8.5			
$t_s(H)$	Setup Time, HIGH or LOW	7.5		9.5		8.5			
$t_s(L)$	S to CP ('F399)	7.5		9.5		8.5			
$t_h(H)$	Hold Time, HIGH or LOW	0		0		0			
$t_h(L)$	S to CP	0		0		0			
$t_w(H)$	CP Pulse Width	4.0		4.0		4.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0		7.0		5.0			

4

National Semiconductor

54F/74F401
CRC Generator/Checker

General Description


The 'F401 Cycle Redundancy Check (CRC) Generator/Checker provides an advanced tool for implementing the most widely used error detection scheme in serial digital data handling systems. A 3-bit control input selects one-of-eight generator polynomials. The list of polynomials includes CRC-16 and CRC-CCITT as well as their reciprocals (reverse polynomials). Automatic right justification is incorporated for polynomials of degree less than 16. Separate clear and preset inputs are provided for floppy disk and other applications. The Error output indicates whether or not a transmission error has occurred. Another control input inhibits its feedback during check word transmission. The 'F401 is fully compatible with all TTL families.

Features

- Eight selectable polynomials
- Error indicator
- Separate preset and clear controls
- Automatic right justification
- Fully compatible with all TTL logic families
- 14-pin package
- 9401 equivalent
- Typical applications:
  - Floppy and other disk storage systems
  - Digital cassette and cartridge systems
  - Data communication systems

Ordering Code: See Section 5


Logic Symbol



TL/F/9534–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9534–1

Pin Assignment for LCC



TL/F/9534–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S_0–S_2	Polynomial Select Inputs	1.0/1.0	20 μA/−0.6 mA
D	Data Input	1.0/1.0	20 μA/−0.6 mA
$\overline{CP}$	Clock Input (Operates on HIGH-to-LOW Transition)	1.0/1.0	20 μA/−0.6 mA
CWE	Check Word Enable Input	1.0/1.0	20 μA/−0.6 mA
$\overline{P}$	Preset (Active LOW) Input	1.0/1.0	20 μA/−0.6 mA
MR	Master Reset (Active HIGH) Input	1.0/1.0	20 μA/−0.6 mA
Q	Data Output	50/33.3	−1 mA/20 mA
ER	Error Output	50/33.3	−1 mA/20 mA

Functional Description

The 'F401 is a 16-bit programmable device which operates on serial data streams and provides a means of detecting transmission errors. Cyclic encoding and decoding schemes for error detection are based on polynomial manipulation in modulo arithmetic. For encoding, the data stream (message polynomial) is divided by a selected polynomial. This division results in a remainder which is appended to the message as check bits. For error checking, the bit stream containing both data and check bits is divided by the same selected polynomial. If there are no detectable errors, this division results in a zero remainder. Although it is possible to choose many generating polynomials of a given degree, standards exist that specify a small number of useful polynomials. The 'F401 implements the polynomials listed in Table I by applying the appropriate logic levels to the select pins S_0, S_1 and S_2.

The 'F401 consists of a 16-bit register, a Read Only Memory (ROM) and associated control circuitry as shown in the block diagram. The polynomial control code presented at inputs S_0, S_1 and S_2 is decoded by the ROM, selecting the desired polynomial by establishing shift mode operation on the register with Exclusive OR gates at appropriate inputs. To generate the check bits, the data stream is entered via the Data inputs (D), using the HIGH-to-LOW transition of the Clock input ($\overline{CP}$). This data is gated with the most significant output (Q) of the register, and controls the Exclusive OR gates *(Figure 1)*. The Check Word Enable (CWE) must be held HIGH while the data is being entered. After the last data bit is entered, the CWE is brought LOW and the check bits are shifted out of the register and appended to the data bits using external gating *(Figure 2)*.


To check an incoming message for errors, both the data and check bits are entered through the D input with the CWE input held HIGH. The 'F401 is not in the data path, but only monitors the message. The Error Output becomes valid after the last check bit has been entered into the 'F401 by a HIGH-to-LOW transition of $\overline{CP}$. If no detectable errors have occurred during the data transmission, the resultant internal register bits are all LOW and the Error Output (ER) is LOW. If a detectable error has occurred, ER is HIGH.

A HIGH on the Master Reset input (MR) asynchronously clears the register. A LOW on the Preset input ($\overline{P}$) asynchronously sets the entire register if the control code inputs specify a 16-bit polynomial; in the case of 12- or 8-bit check polynomials only the most significant 12 or 8 register bits are set and the remaining bits are cleared.


TABLE I

Select Code			Polynomial	Remarks
S_2	S_1	S_0		
L	L	L	$X^{16} + X^{15} + X^2 + 1$	CRC-16
L	L	H	$X^{16} + X^{14} + X + 1$	CRC-16 REVERSE
L	H	L	$X^{16} + X^{15} + X^{13} + X^7 + X^4 + X^2 + X^1 + 1$	
L	H	H	$X^{12} + X^{11} + X^3 + X^2 + X + 1$	CRC-12
H	L	L	$X^8 + X^7 + X^5 + X^4 + X + 1$	
H	L	H	$X^8 + 1$	LRC-8
H	H	L	$X^{16} + X^{12} + X^5 + 1$	CRC-CCITT
H	H	H	$X^{16} + X^{11} + X^4 + 1$	CRC-CCITT REVERSE

Block Diagram

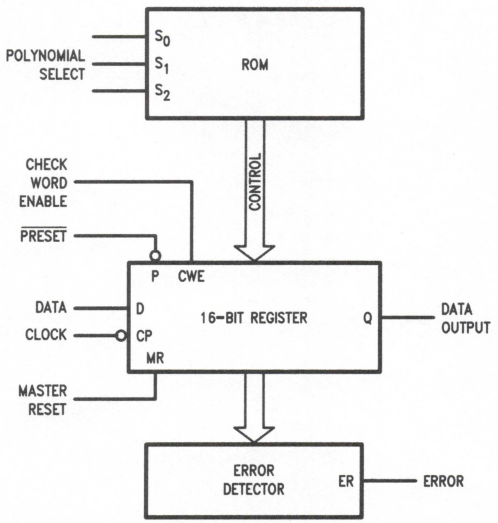


TL/F/9534–5

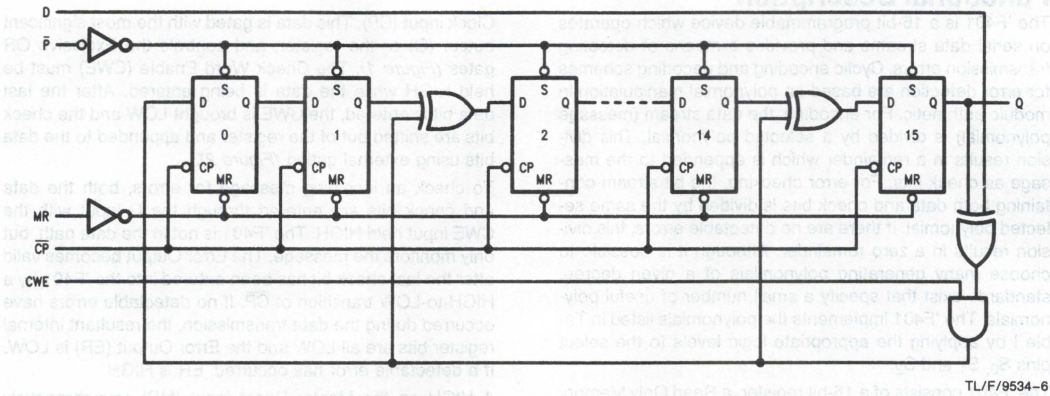

TL/F/9534–6

FIGURE 1. Equivalent Circuit for $X^{16} + X^{15} + X^2 + 1$

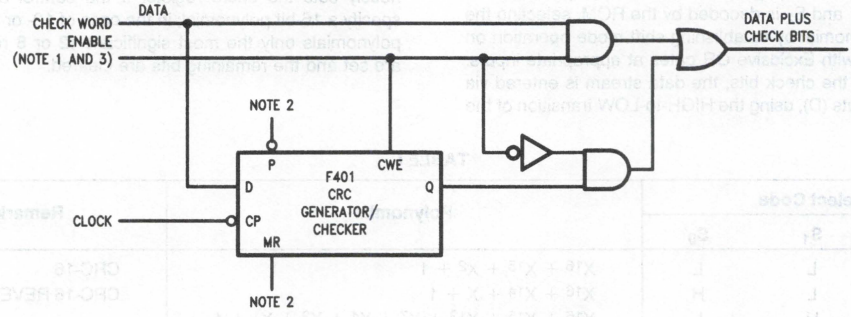

TL/F/9534–7

FIGURE 2. Check Word Generation

Note 1: Check word Enable is HIGH while data is being clocked, LOW while transmission of check bits.

Note 2: 'F401 must be reset or preset before each computation.

Note 3: CRC check bits are generated and appended to data bits.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			70	105	mA	Max	V_O = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100					85		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay $\overline{CP}$ to Q	4.5 4.0		11.5 10.0			4.5 4.0	13.5 11.0	ns	2–3
t_{PHL}	Propagation Delay MR to Q	3.0		7.5			3.0	8.0	ns	2–3
t_{PLH}	Propagation Delay $\overline{P}$ to Q	3.0		8.5			3.0	9.5	ns	2–3
t_{PHL}	Propagation Delay MR to ER	3.5		11.0			3.5	12.0	ns	2–3
t_{PLH}	Propagation Delay $\overline{P}$ to ER	3.0		8.5			3.0	10.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CP}$ to ER	5.0 4.5		13.0 11.5			5.0 4.5	14.5 12.5	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Set-up Time, HIGH or LOW D to $\overline{CP}$	5.0 5.0				5.5 5.5		ns	2–6
$t_s(H)$ $t_s(L)$	Set-up Time, HIGH or LOW CWE to $\overline{CP}$	4.0 4.0				4.5 4.5			
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D and CWE to $\overline{CP}$	2.0 2.0				2.0 2.0			
$t_w(L)$	$\overline{P}$ Pulse Width, LOW	7.0				8.0		ns	2–4
$t_w(H)$ $t_w(L)$	Clock Pulse Width, HIGH or LOW	5.0 5.0				6.0 6.0		ns	2–4
$t_w(H)$	MR Pulse Width, HIGH	5.0				5.5		ns	2–4
t_{rec}	Recovery Time MR to $\overline{CP}$	4.0				4.5		ns	2–6
t_{rec}	Recovery Time $\overline{P}$ to $\overline{CP}$	2.0				2.0		ns	2–6

National Semiconductor

54F/74F402 Serial Data Polynomial Generator/Checker

General Description


The 'F402 expandable Serial Data Polynomial generator/checker is an expandable version of the 'F401. It provides an advanced tool for the implementation of the most widely used error detection scheme in serial digital handling systems. A 4-bit control input selects one-of-six generator polynomials. The list of polynomials includes CRC-16, CRC-CCITT and Ethernet®, as well as three other standard polynomials (56th order, 48th order, 32nd order). Individual clear and preset inputs are provided for floppy disk and other applications. The Error output indicates whether or not a transmission error has occurred. The CWG Control input inhibits feedback during check word transmission. The 'F402 is compatible with FAST® devices and with all TTL families.

Features

- Guaranteed 30 MHz data rate
- Six selectable polynomials
- Other polynomials available
- Separate preset and clear controls
- Expandable
- Automatic right justification
- Error output open collector
- Typical applications:
  Floppy and other disk storage systems
  Digital cassette and cartridge systems
  Data communication systems
- Available in SOIC, (300 mil only)

Ordering Code: See Section 5


Logic Symbol

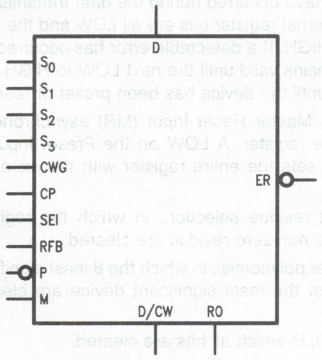

TL/F/9535–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9535–1

Pin Assignment for LCC



TL/F/9535–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S_0-S_3	Polynomial Select Inputs	1.0/0.67	20 μA/−0.4 mA
CWG	Check Word Generate Input	1.0/0.67	20 μA/−0.4 mA
D/CW	Serial Data/Check Word	285(100)/13.3(6.7)	−5.7 mA(−2 mA)/8 mA (4 mA)
D	Data Input	1.0/0.67	20 μA/−0.4 mA
$\overline{ER}$	Error Output	*/26.7(13.3)	*/16 mA (8 mA)
RO	Register Output	285(100)/13.3(6.7)	−5.7 mA(−2 mA)/8 mA (4 mA)
CP	Clock Pulse	1.0/0.67	20 μA/−0.4 mA
SEI	Serial Expansion Input	1.0/0.67	20 μA/−0.4 mA
RFB	Register Feedback	1.0/0.67	20 μA/−0.4 mA
MR	Master Reset	1.0/0.67	20 μA/−0.4 mA
$\overline{P}$	Preset	1.0/0.67	20 μA/−0.4 mA

*Open Collector

Functional Description

The 'F402 Serial Data Polynomial Generator/Checker is an expandable 16-bit programmable device which operates on serial data streams and provides a means of detecting transmission errors. Cyclic encoding and decoding schemes for error detection are based on polynomial manipulation in modulo arithmetic. For encoding, the data stream (message polynomial) is divided by a selected polynomial. This division results in a remainder (or residue) which is appended to the message as check bits. For error checking, the bit stream containing both data and check bits is divided by the same selected polynomial. If there are no detectable errors, this division results in a zero remainder. Although it is possible to choose many generating polynomials of a given degree, standards exist that specify a small number of useful polynomials. The 'F402 implements the polynomials listed in Table I by applying the appropriate logic levels to the select pins S_0, S_1, S_2 and S_3.

The 'F402 consists of a 16-bit register, a Read Only Memory (ROM) and associated control circuitry as shown in the Block Diagram. The polynomial control code presented at inputs S_0, S_1, S_2 and S_3 is decoded by the ROM, selecting the desired polynomial or part of a polynomial by establishing shift mode operation on the register with Exclusive OR (XOR) gates at appropriate inputs. To generate the check bits, the data stream is entered via the Data Inputs (D), using the LOW-to-HIGH transition of the Clock Input (CP). This data is gated with the most significant Register Output (RO) via the Register Feedback Input (RFB), and controls the XOR gates. The Check Word Generate (CWG) must be held HIGH while the data is being entered. After the last data bit is entered, the CWG is brought LOW and the check bits are shifted out of the register(s) and appended to the data bits (no external gating is needed).

To check an incoming message for errors, both the data and check bits are entered through the D Input with the CWG Input held HIGH. The Error Output becomes valid after the last check bit has been entered into the 'F402 by a LOW-to-HIGH transition of CP, with the exception of the Ethernet polynomial (see Applications paragraph). If no detectable errors have occurred during the data transmission, the resultant internal register bits are all LOW and the Error Output ($\overline{ER}$) is HIGH. If a detectable error has occurred, $\overline{ER}$ is LOW. $\overline{ER}$ remains valid until the next LOW-to-HIGH transition of CP or until the device has been preset or reset.

A HIGH on the Master Reset Input (MR) asynchronously clears the entire register. A LOW on the Preset Input ($\overline{P}$) asynchronously sets the entire register with the exception of:

1 The Ethernet residue selection, in which the registers containing the non-zero residue are cleared;


2 The 56th order polynomial, in which the 8 least significant register bits of the least significant device are cleared; and,

3 Register S = 0, in which all bits are cleared.

TABLE I

Hex	Select Code S_3	S_2	S_1	S_0	Polynomial	Remarks
0	L	L	L	L	0	S=0
C	H	H	L	L	$X^{32}+X^{26}+X^{23}+X^{22}+X^{16}+$	Ethernet
D	H	H	L	H	$X^{12}+X^{11}+X^{10}+X^{8}+X^{7}+X^{5}+X^{4}+X^{2}+X+1$	Polynomial
E	H	H	H	L	$X^{32}+X^{31}+X^{27}+X^{26}+X^{25}+X^{19}+X^{16}+$	Ethernet
F	H	H	H	H	$X^{15}+X^{13}+X^{12}+X^{11}+X^{9}+X^{7}+X^{6}+X^{5}+X^{4}+X^{2}+X+1$	Residue
7	L	H	H	H	$X^{16}+X^{15}+X^{2}+1$	CRC-16
B	H	L	H	H	$X^{16}+X^{12}+X^{5}+1$	CRC-CCITT
3	L	L	H	H	$X^{56}+X^{55}+X^{49}+X^{45}+X^{41}+$	
2	L	L	H	L	$X^{39}+X^{38}+X^{37}+X^{36}+X^{31}+$	56th
4	L	H	L	L	$X^{22}+X^{19}+X^{17}+X^{16}+X^{15}+X^{14}+X^{12}+X^{11}+X^{9}+$	Order
8	H	L	L	L	$X^{5}+X+1$	
5	L	H	L	H	$X^{48}+X^{36}+X^{35}+$	
9	H	L	L	H	$X^{23}+X^{21}+$	48th Order
1	L	L	L	H	$X^{15}+X^{13}+X^{8}+X^{2}+1$	
6	L	H	H	L	$X^{32}+X^{23}+X^{21}+$	32nd
A	H	L	H	L	$X^{11}+X^{2}+1$	Order

Block Diagram

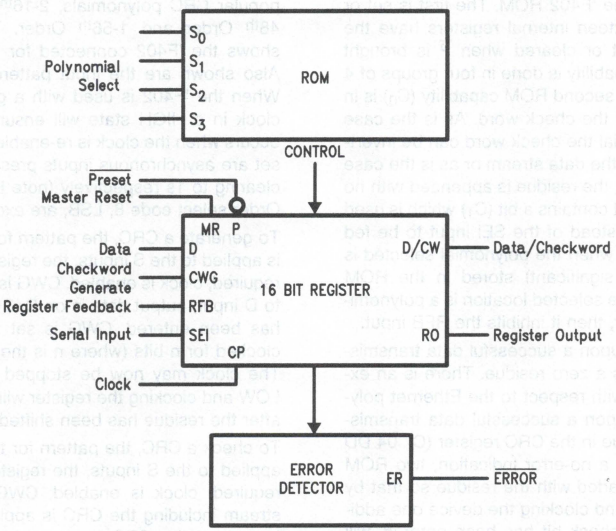

TL/F/9535–5

TABLE II

Select Code	P_3	P_2	P_1	P_0	C_2	C_1	C_0	Polynomial
0	0	0	0	0	1	0	0	S=0
C	1	1	1	1	1	0	1	Ethernet
D	1	1	1	1	1	0	1	Polynomial
E	0	0	0	0	0	0	0	Ethernet
F	0	0	0	0	0	1	0	Residue
7	1	1	1	1	1	0	0	CRC-16
B	1	1	1	1	1	0	0	CRC-CCITT
3	1	1	1	1	1	0	0	
2	1	1	1	1	1	0	0	56th
4	1	1	1	1	1	0	0	Order
8	0	0	1	1	1	0	0	
5	1	1	1	1	1	0	0	48th
9	1	1	1	1	1	0	0	Order
1	1	1	1	1	1	0	0	
6	1	1	1	1	1	0	0	32nd
A	1	1	1	1	1	0	0	Order

Applications

In addition to polynomial selection there are four other capabilities provided for in the 'F402 ROM. The first is set or clear selectability. The sixteen internal registers have the capability to be either set or cleared when $\overline{P}$ is brought LOW. This set or clear capability is done in four groups of 4 (see Table II, P_0–P_3). The second ROM capability (C_0) is in determining the polarity of the check word. As is the case with the Ethernet polynomial the check word can be inverted when it is appended to the data stream or as is the case with the other polynomials, the residue is appended with no inversion. Thirdly, the ROM contains a bit (C_1) which is used to select the RFB input instead of the SEI input to be fed into the LSB. This is used when the polynomial selected is actually a residue (least significant) stored in the ROM which indicates whether the selected location is a polynomial or a residue. If the latter, then it inhibits the RFB input.

As mentioned previously, upon a successful data transmission, the CRC register has a zero residue. There is an exception to this, however, with respect to the Ethernet polynomial. This polynomial, upon a successful data transmission, has a non-zero residue in the CRC register (C7 04 DD 7B)$_{16}$. In order to provide a no-error indication, two ROM locations have been preloaded with the residue so that by selecting these locations and clocking the device one additional time, after the last check bit has been entered, will result in zeroing the CRC register. In this manner a no-error indication is achieved.

With the present mix of polynomials, the largest is 56th order requiring four devices while the smallest is 16th order requiring just one device. In order to accommodate multiplexing between high order polynomials (X 16th order) and lower order polynomials, a location of all zeros is provided. This allows the user to choose a lower order polynomial even if the system is configured for a higher order one.


The 'F402 expandable CRC generator checker contains 6 popular CRC polynomials, 2-16th Order, 2-32nd Order, 1-48th Order and 1-56th Order. The application diagram shows the 'F402 connected for a 56th Order polynomial. Also shown are the input patterns for other polynomials. When the 'F402 is used with a gated clock, disabling the clock in a HIGH state will ensure no erroneous clocking occurs when the clock is re-enabled. Preset and Master Reset are asynchronous inputs presetting the register to S or clearing to 1s respectively (note Ethernet residue and 56th Order select code 8, LSB, are exceptions to this).

To generate a CRC, the pattern for the selected polynomial is applied to the S inputs, the register is preset or cleared as required, clock is enabled, CWG is set HIGH, data is applied to D input, output data is on D/CW. When the last data bit has been entered, CWG is set LOW and the register is clocked for n bits (where n is the order of the polynomial). The clock may now be stopped if desired (holding CWG LOW and clocking the register will output zeros from D/CW after the residue has been shifted out).

To check a CRC, the pattern for the selected polynomial is applied to the S inputs, the register is preset or cleared as required, clock is enabled, CWG is set HIGH, the data stream including the CRC is applied to D input. When the last bit of the CRC has been entered, the $\overline{ER}$ output is checked: HIGH = error free data, LOW = corrupt data. The clock may now be stopped if desired.

To implement polynomials of lower order than 56th, select the number of packages required for the order of polynomial and apply the pattern for the selected polynomial to the S inputs (0000 on S inputs disables the package from the feedback chain).

Applications (Continued)

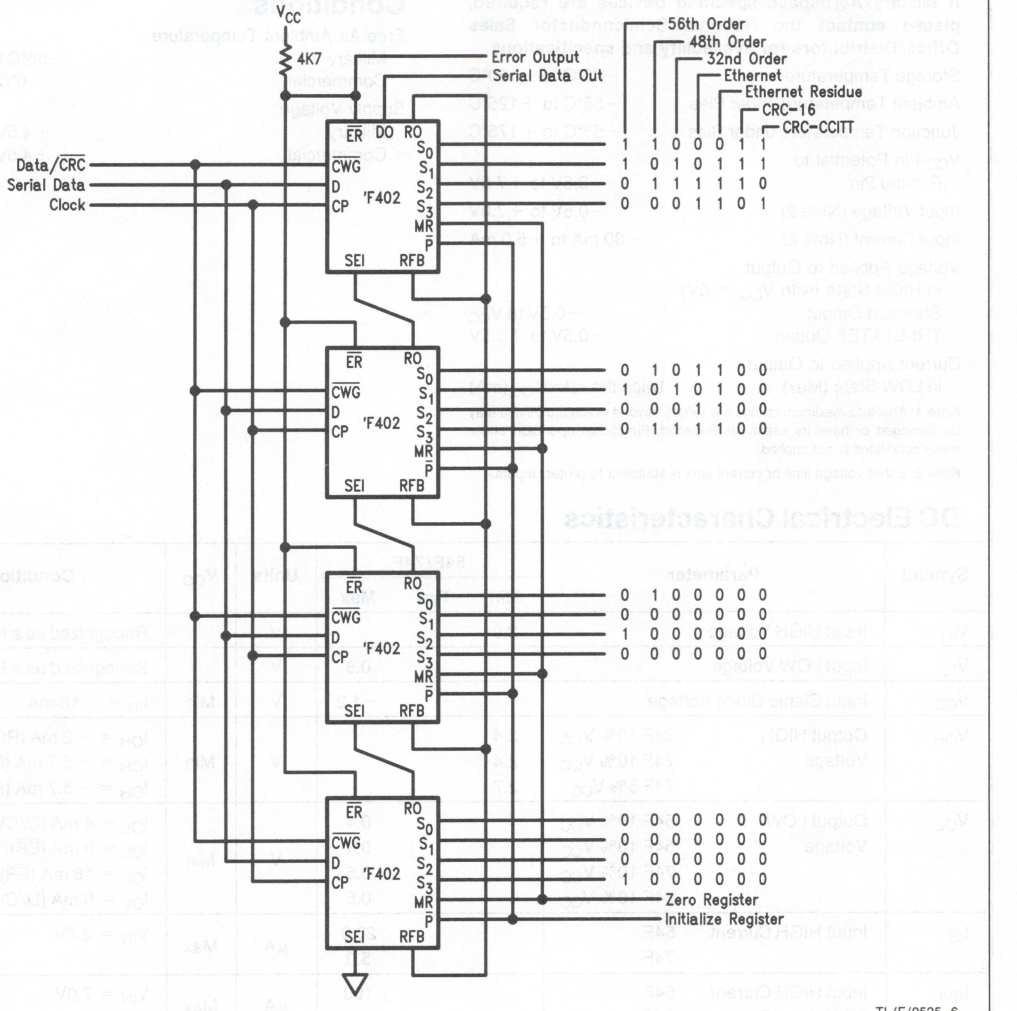

TL/F/9535-6

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −2 mA (RO, D/CW)
		74F 10% V_{CC}	2.4					I_{OH} = −5.7 mA (RO, D/CW)
		74F 5% V_{CC}	2.7					I_{OH} = −5.7 mA (RO, D/CW)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.4	V	Min	I_{OL} = 4 mA (D/CW, RO)
		54F 10% V_{CC}			0.4			I_{OL} = 8 mA ($\overline{ER}$)
		74F 10% V_{CC}			0.5			I_{OL} = 16 mA ($\overline{ER}$)
		74F 10% V_{CC}			0.5			I_{OL} = 8 mA (D/CW, RO)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.4	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−20		−130	mA	Max	V_{OUT} = 0V (D/CW, RO)
I_{OHC}	Open Collector, Output OFF Leakage Test				250	μA	Min	V_{OUT} = V_{CC} ($\overline{ER}$)
I_{CC}	Power Supply Current			110	165	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	30	45		30		30		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to D/CW	8.5 10.5	15.0 18.0	19.0 23.0	7.5 9.5	26.5 26.5	7.5 9.5	21.0 25.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to RO	8.0 8.0	13.5 14.0	17.0 18.0	7.0 7.0	26.0 22.5	7.0 7.0	19.0 20.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{ER}$	15.5 8.5	26.0 14.5	33.0 18.5	14.0 7.5	38.5 23.5	14.0 7.5	35.0 20.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{P}$ to D/CW	11.0 11.5	18.5 19.5	23.5 24.5	10.0 10.5	31.0 32.0	10.0 10.5	25.5 26.5	ns	2–3
t_{PLH}	Propagation Delay $\overline{P}$ to RO	9.5	16.0	20.5	8.5	31.5	8.5	22.5	ns	2–3
t_{PLH}	Propagation Delay $\overline{P}$ to $\overline{ER}$	10.0	17.0	21.5	9.0	26.0	9.0	23.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay MR to D/CW	10.5 11.0	18.0 19.0	23.0 24.0	9.5 10.0	29.0 28.5	9.5 10.0	25.5 26.0	ns	2–3
t_{PHL}	Propagation Delay MR to RO	9.0	15.5	19.5	8.0	23.5	8.0	21.5	ns	2–3
t_{PLH}	Propagation Delay MR to $\overline{ER}$	16.5	28.0	35.5	14.5	39.0	14.5	37.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay D to D/CW	6.0 7.5	10.5 12.0	13.5 16.0	5.0 6.5	19.5 20.0	5.0 6.5	15.0 18.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CWG to D/CW	6.5 7.0	11.0 12.0	14.0 15.5	5.5 6.0	21.5 21.5	5.5 6.0	15.5 17.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S_n to D/CW	11.5 9.5	19.5 16.0	24.5 20.0	9.0 8.5	29.0 25.0	10.5 8.5	26.5 22.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ Min	74F $T_A = +25°C$ $V_{CC} = +5.0V$ Max	54F T_A, V_{CC} = Mil Min	54F T_A, V_{CC} = Mil Max	74F T_A, V_{CC} = Com Min	74F T_A, V_{CC} = Com Max	Units	Fig. No.
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW SEI to CP	4.5 4.5		6.0 6.0		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW SEI to CP	0 0		1.0 1.0		0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW RFB to CP	11.0 11.0		14.0 14.0		12.5 12.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW RFB to CP	0 0		0 0		0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW S_1 to CP	13.5 13.0		16.0 15.5		15.0 14.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW S_1 to CP	0 0		0 0		0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D to CP	9.0 9.0		11.5 11.5		10.0 10.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D to CP	0 0		0 0		0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW CWG to CP	7.0 5.5		9.0 8.0		8.0 6.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW CWG to CP	0 0		0 0		0 0			
$t_w(H)$ $t_w(L)$	Clock Pulse Width HIGH or LOW	4.0 4.0		7.0 5.0		4.5 4.5		ns	2–4
$t_w(H)$	MR Pulse Width, HIGH	4.0		7.0		4.5		ns	2–4
$t_w(L)$	$\overline{P}$ Pulse Width, LOW	4.0		5.0		4.5		ns	2–4
t_{rec}	Recovery Time MR to CP	3.0		4.0		3.5		ns	2–6
t_{rec}	Recovery Time $\overline{P}$ to CP	5.0		6.5		6.0			

National Semiconductor

54F/74F403A
First-In First-Out (FIFO) Buffer Memory

General Description

The 'F403A is an expandable fall-through type high-speed First-In First-Out (FIFO) Buffer Memory optimized for high-speed disk or tape controllers and communication buffer applications. It is organized as 16-words by 4-bits and may be expanded to any number of words or any number of bits in multiples of four. Data may be entered or extracted asynchronously in serial or parallel, allowing economical implementation of buffer memories.

The 'F403A has TRI-STATE® outputs which provide added versatility and is fully compatible with all TTL families.


Features

- Serial or parallel input
- Serial or parallel output
- Expandable without external logic
- TRI-STATE outputs
- Fully compatible with all TTL families
- Slim 24-pin package
- 9403A replacement
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5


Connection Diagrams

Pin Assignment for DIP and SOIC

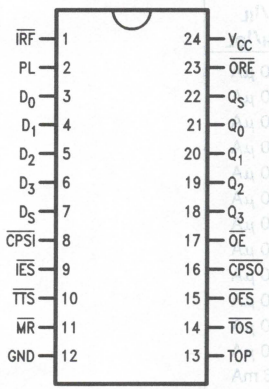


TL/F/9536–2

Pin Assignment for PCC

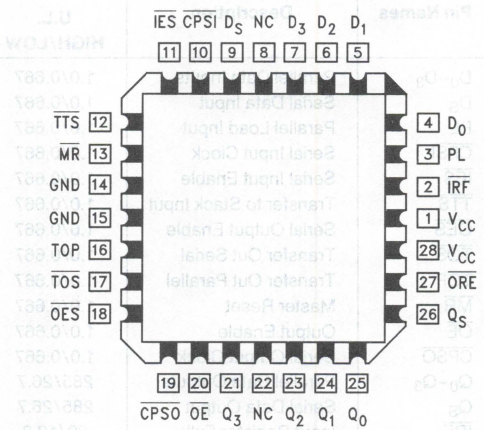

TL/F/9536–3

Logic Symbol

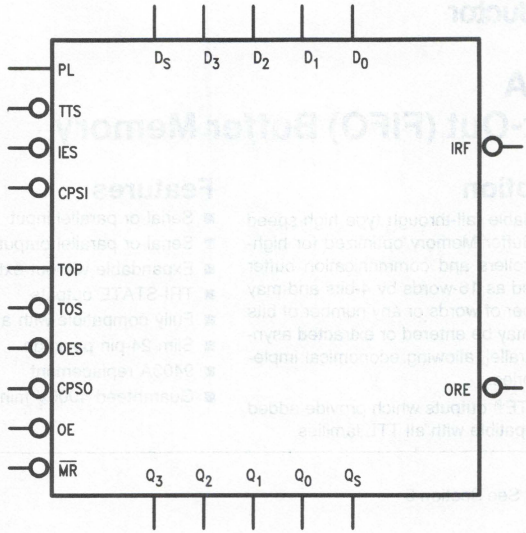


TL/F/9536–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_3	Parallel Data Inputs	1.0/0.667	20 μA/400 μA
D_S	Serial Data Input	1.0/0.667	20 μA/400 μA
PL	Parallel Load Input	1.0/0.667	20 μA/400 μA
$\overline{CPSI}$	Serial Input Clock	1.0/0.667	20 μA/400 μA
$\overline{IES}$	Serial Input Enable	1.0/0.667	20 μA/400 μA
$\overline{TTS}$	Transfer to Stack Input	1.0/0.667	20 μA/400 μA
$\overline{OES}$	Serial Output Enable	1.0/0.667	20 μA/400 μA
$\overline{TOS}$	Transfer Out Serial	1.0/0.667	20 μA/400 μA
TOP	Transfer Out Parallel	1.0/0.667	20 μA/400 μA
$\overline{MR}$	Master Reset	1.0/0.667	20 μA/400 μA
$\overline{OE}$	Output Enable	1.0/0.667	20 μA/400 μA
$\overline{CPSO}$	Serial Output Clock	1.0/0.667	20 μA/400 μA
Q_0–Q_3	Parallel Data Outputs	285/26.7	5.7 mA/16 mA
Q_S	Serial Data Output	285/26.7	5.7 mA/16 mA
$\overline{IRF}$	Input Register Full	20/13.3	−400 μA/8 mA
$\overline{ORE}$	Output Register Empty	20/13.3	−400 μA/8 mA

Block Diagram

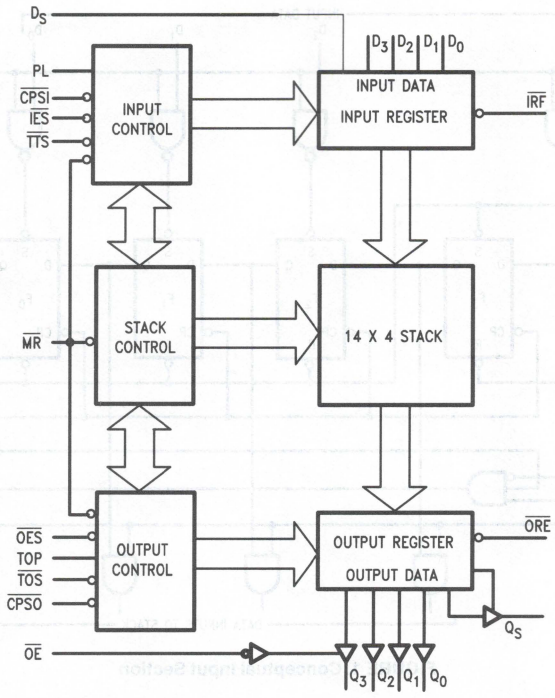

TL/F/9536–4

Functional Description

As shown in the block diagram the 'F403A consists of three sections:

1. An Input Register with parallel and serial data inputs as well as control inputs and outputs for input handshaking and expansion.
2. A 4-bit wide, 14-word deep fall-through stack with self-contained control logic.
3. An Output Register with parallel and serial data outputs as well as control inputs and outputs for output handshaking and expansion.

Since these three sections operate asynchronously and almost independently, they will be described separately below.

INPUT REGISTER (DATA ENTRY)

The Input Register can receive data in either bit-serial or in 4-bit parallel form. It stores this data until it is sent to the fall-through stack and generates the necessary status and control signals.


Figure 1 is a conceptual logic diagram of the input section. As described later, this 5-bit register is initialized by setting the F_3 flip-flop and resetting the other flip-flops. The $\overline{Q}$ output of the last flip-flop (FC) is brought out as the 'Input Register Full' output ($\overline{IRF}$). After initialization this output is HIGH.

Parallel Entry—A HIGH on the PL input loads the D_0–D_3 inputs into the F_0–F_3 flip-flops and sets the FC flip-flop. This forces the $\overline{IRF}$ output LOW indicating that the input register is full. During parallel entry, the $\overline{CPSI}$ input must be LOW. If parallel expansion is not being implemented, $\overline{IES}$ must be LOW to establish row mastership (see Expansion section).

Serial Entry—Data on the D_S input is serially entered into the F_3, F_2, F_1, F_0, FC shift register on each HIGH-to-LOW transition of the $\overline{CPSI}$ clock input, provided $\overline{IES}$ and PL are LOW.


After the fourth clock transition, the four data bits are located in the four flip-flops, F_0–F_3. The FC flip-flop is set, forcing the $\overline{IRF}$ output LOW and internally inhibiting $\overline{CPSI}$ clock pulses from affecting the register, *Figure 2* illustrates the final positions in a 'F403A resulting from a 64-bit serial bit train. B_0 is the first bit, B_{63} the last bit.

Functional Description (Continued)

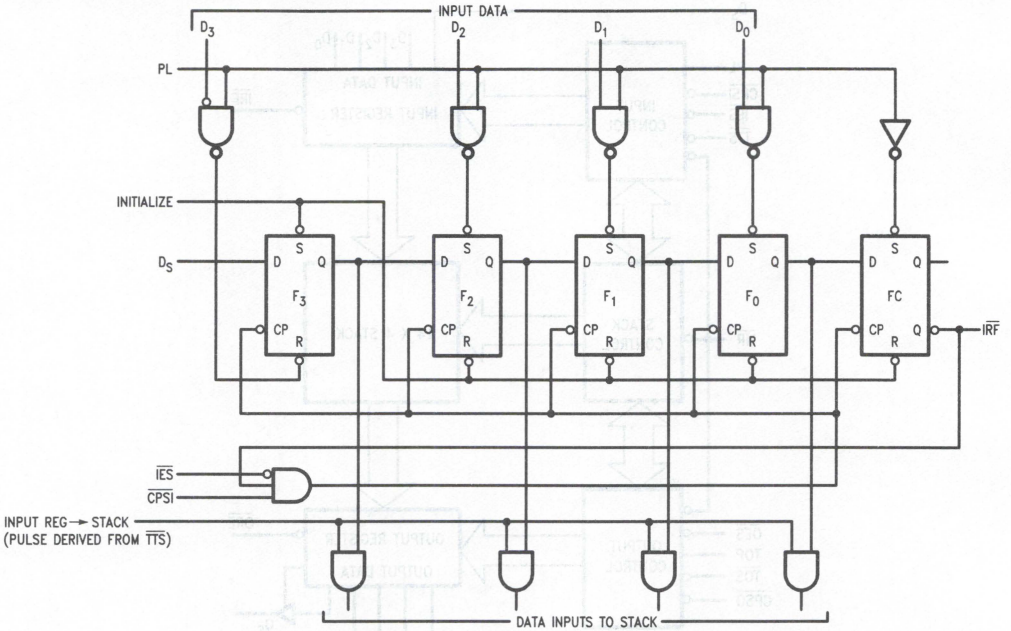

TL/F/9536–5

FIGURE 1. Conceptual Input Section

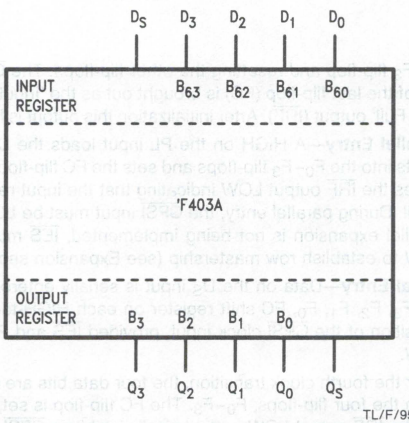

TL/F/9536–6

FIGURE 2. Final Positions in a 'F403A Resulting from a 64-Bit Serial Train


Transfer to the Stack—The outputs of Flip-Flops F_0–F_3 feed the stack. A LOW level on the $\overline{TTS}$ input initiates a 'fall-through' action. If the top location of the stack is empty, data is loaded into the stack and the input register is re-initialized. Note that this initialization is postponed until PL is LOW again. Thus, automatic FIFO action is achieved by connecting the $\overline{IRF}$ output to the $\overline{TTS}$ input.

An RS Flip-Flop (the Request Initialization Flip-Flop shown in *Figure 10*) in the control section records the fact that data has been transferred to the stack. This prevents multiple entry of the same word into the stack despite the fact the $\overline{IRF}$ and $\overline{TTS}$ may still be LOW. The Request Initialization Flip-Flop is not cleared until PL goes LOW. Once in the stack, data falls through the stack automatically, pausing only when it is necessary to wait for an empty next location. In the 'F403A as in most modern FIFO designs, the $\overline{MR}$ input only initializes the stack control section and does not clear the data.

OUTPUT REGISTER (DATA EXTRACTION)

The Output Register receives 4-bit data words from the bottom stack location, stores it and outputs data on a TRI-STATE 4-bit parallel data bus or on a TRI-STATE serial data bus. The output section generates and receives the necessary status and control signals. *Figure 3* is a conceptual logic diagram of the output section.

Functional Description (Continued)

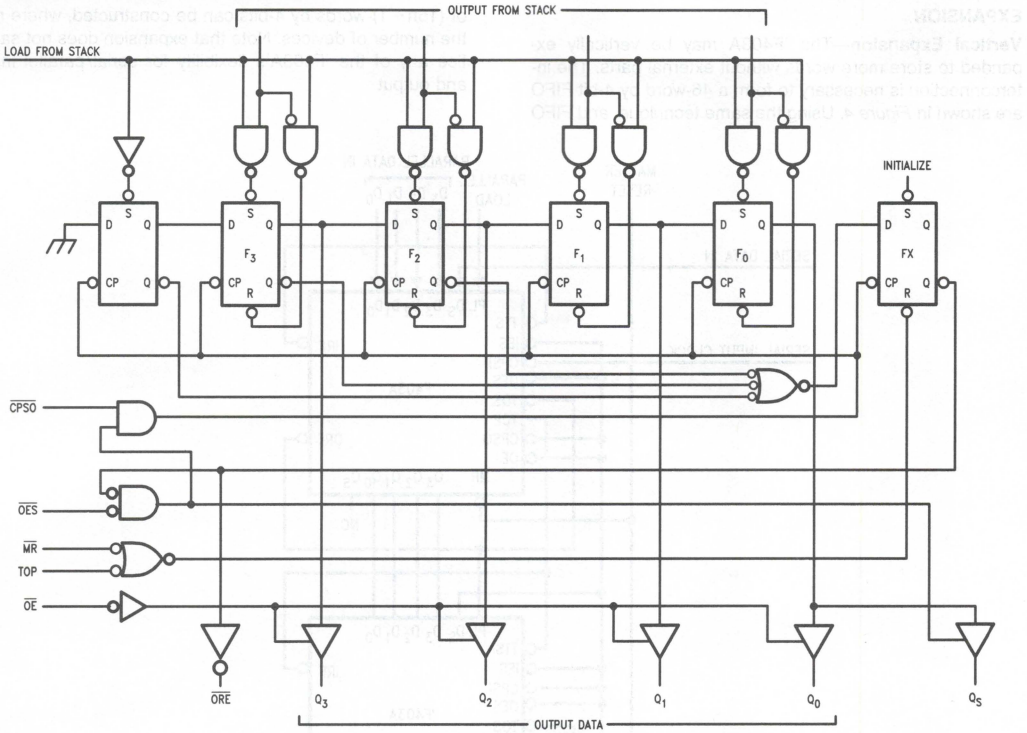

TL/F/9536–7

FIGURE 3. Conceptual Output Section

Parallel Data Extraction—When the FIFO is empty after a LOW pulse is applied to $\overline{MR}$, the Output Register Empty ($\overline{ORE}$) output is LOW. After data has been entered into the FIFO and has fallen through to the bottom stack location, it is transferred into the Output Register provided the 'Transfer Out Parallel' (TOP) input is HIGH. As a result of the data transfer $\overline{ORE}$ goes HIGH, indicating valid data on the data outputs (provided the TRI-STATE buffer is enabled). TOP can now be used to clock out the next word. When TOP goes LOW, $\overline{ORE}$ will go LOW indicating that the output data has been extracted, but the data itself remains on the output bus until the next HIGH level at TOP permits the transfer of the next word (if available) into the Output Register. During parallel data extraction $\overline{CPSO}$ should be LOW. TOS should be grounded for single slice operation or connected to the appropriate $\overline{ORE}$ for expanded operation (see Expansion section).


TOP is not edge triggered. Therefore, if TOP goes HIGH before data is available from the stack, but data does become available before TOP goes LOW again, that data will be transferred into the Output Register. However, internal control circuitry prevents the same data from being transferred twice. If TOP goes HIGH and returns to LOW before data is available from the stack, $\overline{ORE}$ remains LOW indicating that there is no valid data at the outputs.

Serial Data Extraction—When the FIFO is empty after a LOW pulse is applied to $\overline{MR}$, the Output Register Empty ($\overline{ORE}$) output is LOW. After data has been entered into the FIFO and has fallen through to the bottom stack location, it is transferred into the Output Register provided $\overline{TOS}$ is LOW and TOP is HIGH. As a result of the data transfer $\overline{ORE}$ goes HIGH indicating valid data in the register. The TRI-STATE Serial Data Output, Q_S, is automatically enabled and puts the first data bit on the output bus. Data is serially shifted out on the HIGH-to-LOW transition of $\overline{CPSO}$. To prevent false shifting, $\overline{CPSO}$ should be LOW when the new word is being loaded into the Output Register. The fourth transition empties the shift register, forces $\overline{ORE}$ output LOW and disables the serial output, Q_S (refer to *Figure 3*). For serial operation the $\overline{ORE}$ output may be tied to the $\overline{TOS}$ input, requesting a new word from the stack as soon as the previous one has been shifted out.

Functional Description (Continued)

EXPANSION

Vertical Expansion—The 'F403A may be vertically expanded to store more words without external parts. The interconnection is necessary to form a 46-word by 4-bit FIFO are shown in *Figure 4*. Using the same technique, and FIFO of (15n + 1)-words by 4-bits can be constructed, where n is the number of devices. Note that expansion does not sacrifice any of the 'F403A's flexibility for serial/parallel input and output.

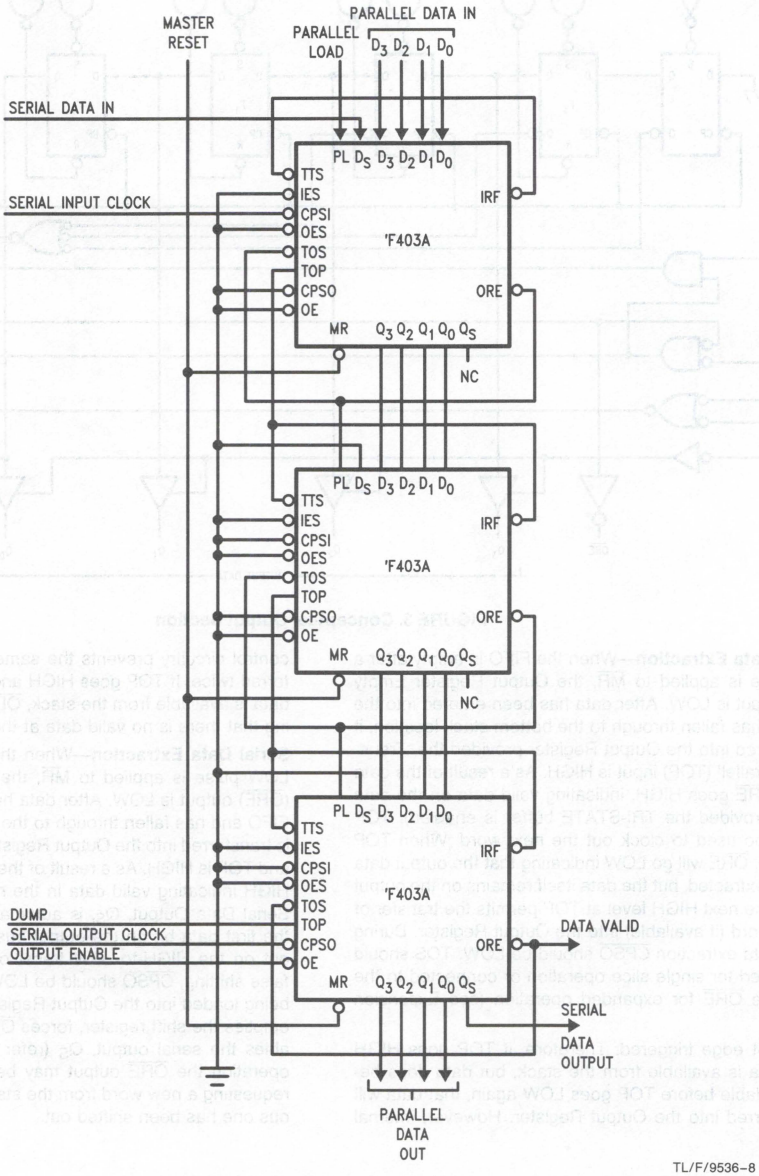

TL/F/9536–8

FIGURE 4. A Vertical Expansion Scheme

Functional Description (Continued)

Horizontal and Vertical Expansion—The 'F403A can be expanded in both the horizontal and vertical directions without any external parts and without sacrificing any of its FIFO's flexibility for serial/parallel input and output. The interconnections necessary to form a 31-word by 16-bit FIFO are shown in *Figure 6*. Using the same technique, any FIFO of (15m + 1)-words by (4n)-bits can be constructed, where m is the number of devices in a column and n is the number of devices in a row. *Figures 7* and *8* show the timing diagrams for serial data entry and extraction for the 31-word by 16-bit FIFO shown in *Figure 6*. The final position of data after serial insertion of 496 bits into the FIFO array of *Figure 6* is shown in *Figure 9*.


Interlocking Circuitry—Most conventional FIFO designs provide status signals analogous to $\overline{IRF}$ and $\overline{ORE}$. However, when these devices are operated in arrays, variations in unit to unit operating speed require external gating to assure all devices have completed an operation. The 'F403A incorporates simple but effective 'master/slave' interlocking circuitry to eliminate the need for external gating.

In the 'F403A array of *Figure 6* devices 1 and 5 are defined as 'row masters' and the other devices are slaves to the master in their row. No slave in a given row will initialize its Input Register until it has received LOW on its $\overline{IES}$ input from a row master or a slave of higher priority.

In a similar fashion, the $\overline{ORE}$ outputs of slaves will not go HIGH until their $\overline{OES}$ inputs have gone HIGH. This interlocking scheme ensures that new input data may be accepted by the array when the $\overline{IRF}$ output of the final slave in that row goes HIGH and that output data for the array may be extracted when the $\overline{ORE}$ of the final slave in the output row goes HIGH.

The row master is established by connecting its $\overline{IES}$ input to ground while a slave receives its $\overline{IES}$ input from the $\overline{IRF}$ output of the next higher priority device. When an array of 'F403A FIFOs is initialized with a LOW on the $\overline{MR}$ inputs of all devices, the $\overline{IRF}$ outputs of all devices will be HIGH. Thus, only the row master receives a LOW on the $\overline{IES}$ input during initialization. *Figure 10* is a conceptual logic diagram of the internal circuitry which determines master/slave operation. Whenever $\overline{MR}$ and $\overline{IES}$ are LOW, the Master Latch is set. Whenever $\overline{TTS}$ goes LOW the Request Initialization Flip-Flop will be set. If the Master Latch is HIGH, the Input Register will be immediately initialized and the Request Initialization Flip-Flop reset. If the Master Latch is reset, the Input Register is not initialized until $\overline{IES}$ goes LOW. In array operation, activating the $\overline{TTS}$ initiates a ripple input register initialization from the row master to the last slave.

A similar operation takes place for the output register. Either a $\overline{TOS}$ or TOP input initiates a load-from-stack operation and sets the $\overline{ORE}$ Request Flip-Flop. If the Master Latch is set, the last Output Register Flip-Flop is set and $\overline{ORE}$ goes HIGH. If the Master Latch is reset, the $\overline{ORE}$ output will be LOW until an $\overline{OES}$ input is received.

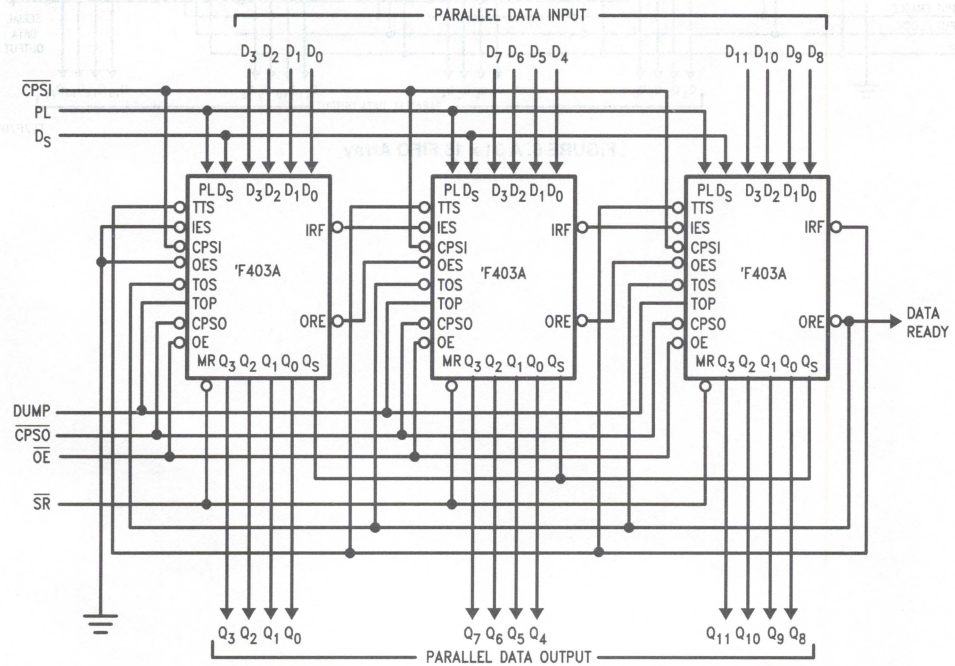

TL/F/9536–9

FIGURE 5. A Horizontal Expansion Scheme

Functional Description (Continued)


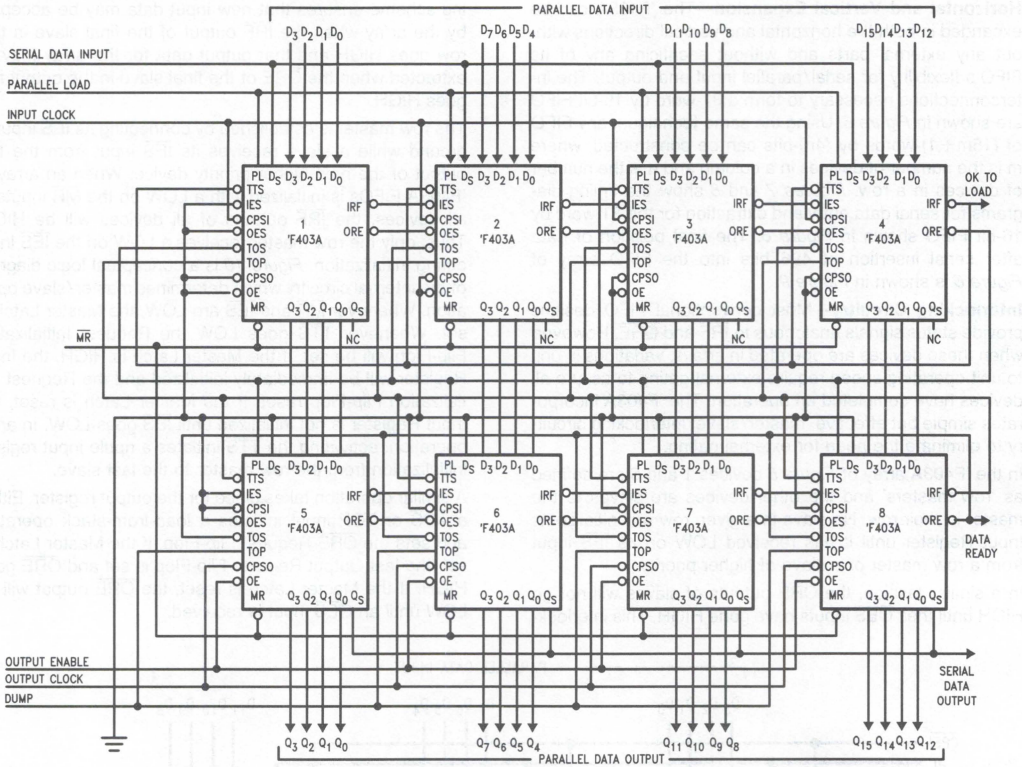



FIGURE 6. A 31 x 16 FIFO Array

Functional Description (Continued)

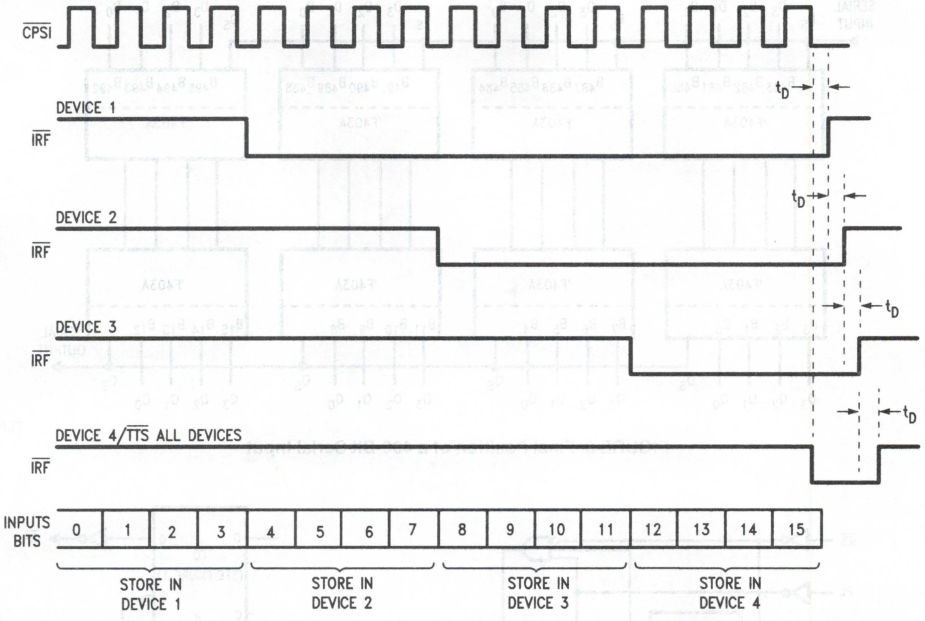

TL/F/9536–11


FIGURE 7. Serial Data Entry for Array of *Figure 6*

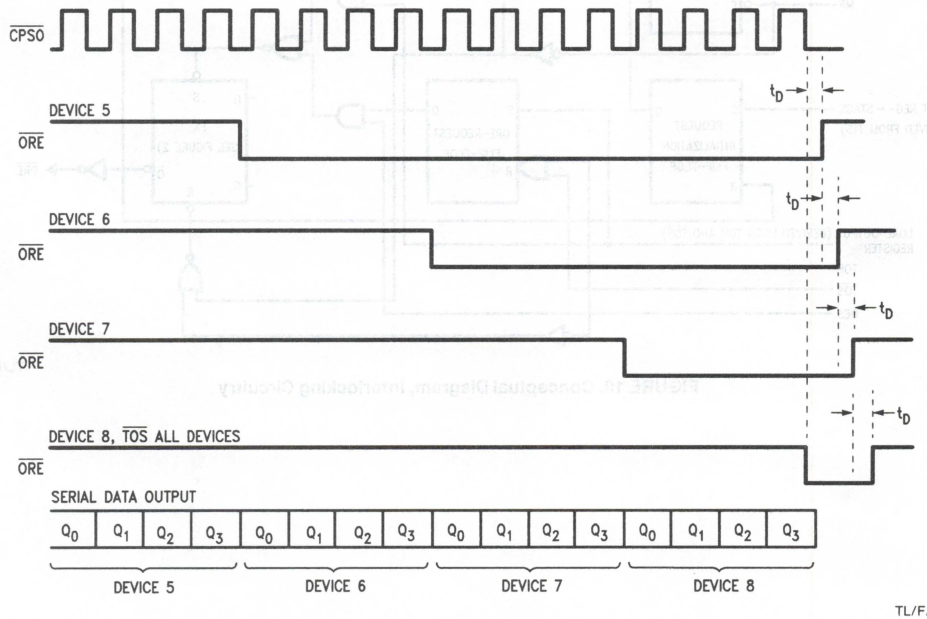

TL/F/9536–12


FIGURE 8. Serial Data Extraction for Array of *Figure 6*

Functional Description (Continued)

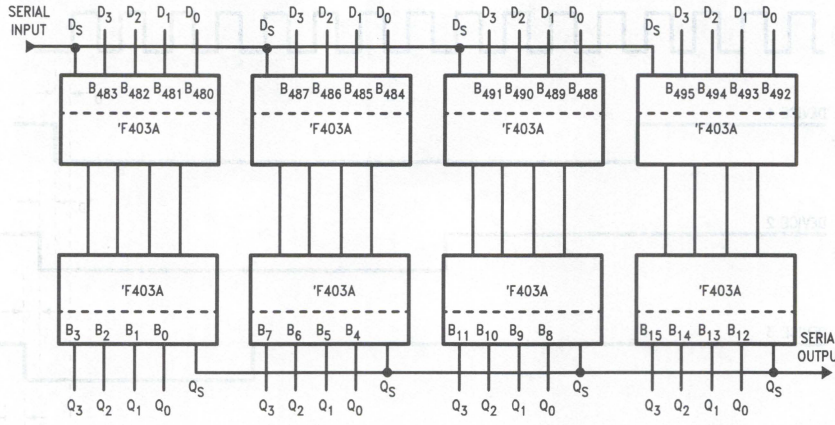

TL/F/9536–13

FIGURE 9. Final Position of a 496-Bit Serial Input

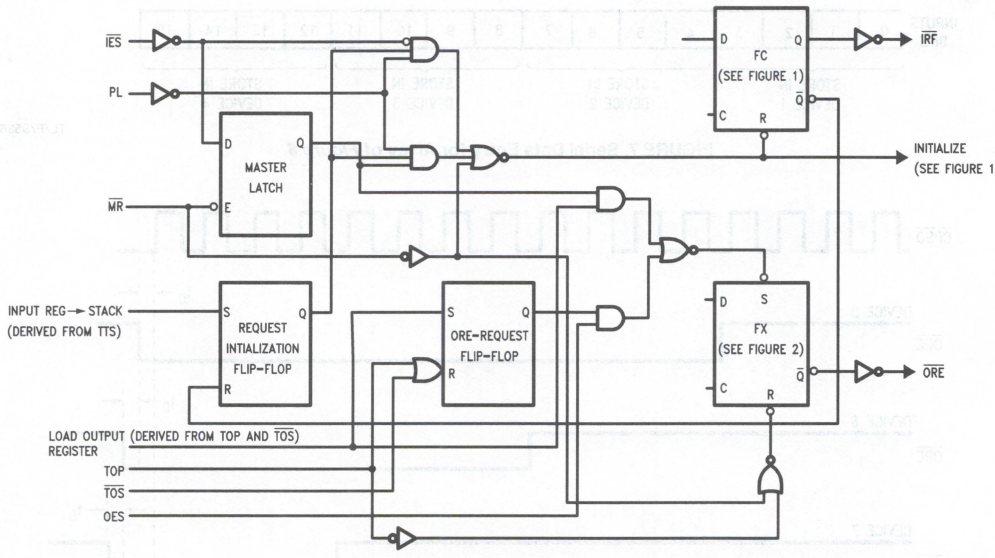

TL/F/9536–14

FIGURE 10. Conceptual Diagram, Interlocking Circuitry

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.5	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −400 μA ($\overline{IRF}$, $\overline{ORE}$)
		54F 10% V_{CC}	2.4					I_{OH} = −2.0 mA (Q_n, Q_s)
		74F 10% V_{CC}	2.5					I_{OH} = −400 μA ($\overline{IRF}$, $\overline{ORE}$)
		74F 10% V_{CC}	2.5					I_{OH} = −5.7 mA (Q_n, Q_s)
		74F 5% V_{CC}	2.7					I_{OH} = −400 μA ($\overline{IRF}$, $\overline{ORE}$)
		74F 5% V_{CC}	2.7					I_{OH} = −5.7 mA (Q_n, Q_s)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.4	V	Min	I_{OL} = 4 mA ($\overline{IRF}$, $\overline{ORE}$)
		54F 10% V_{CC}			0.4			I_{OL} = 8 mA (Q_n, Q_s)
		74F 10% V_{CC}			0.5			I_{OL} = 8 mA ($\overline{IRF}$, $\overline{ORE}$)
		74F 10% V_{CC}			0.5			I_{OL} = 16 mA (Q_n, Q_s)
I_{IH}	Input HIGH Current				20	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test				100	μA	Max	V_{IN} = 7.0V
I_{IL}	Input LOW Current				−0.4	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−20		−130	mA	Max	V_{OUT} = 0V
I_{CEX}	Output HIGH Leakage Current				250	μA	Max	V_{OUT} = V_{CC}
I_{CCL}	Power Supply Current				170	mA	Max	V_O = LOW

AC Electrical Characteristics

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$		54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_{PHL}	Propagation Delay, Negative-Going $\overline{CPSI}$ to $\overline{IRF}$ Output	7.5	14.0			7.0	15.0	ns	*403-a, b*
t_{PLH}	Propagation Delay, Negative-Going $\overline{TTS}$ to $\overline{IRF}$	11.0	20.5			10.0	22.5		
t_{PLH} t_{PHL}	Propagation Delay, Negative-Going $\overline{CPSO}$ to Q_S Output	8.5 8.0	17.0 14.5			7.5 7.0	18.5 15.5	ns	*403-c, d*
t_{PLH} t_{PHL}	Propagation Delay, Positive-Going TOP to Outputs Q_0–Q_3	10.0 8.5	18.0 15.5			9.0 8.0	20.0 16.5	ns	403-e
t_{PHL}	Propagation Delay, Negative-Going $\overline{CPSO}$ to $\overline{ORE}$	9.5	17.5			9.0	19.0	ns	*403-c, d*
t_{PHL}	Propagation Delay, Negative-Going TOP to $\overline{ORE}$	8.0	15.0			7.5	16.5	ns	*403-e*
t_{PLH}	Propagation Delay, Positive-Going TOP to $\overline{ORE}$	12.5	22.0			11.5	25.0		
t_{PLH}	Propagation Delay, Negative-Going $\overline{TOS}$ to Positive Going $\overline{ORE}$	12.5	22.0			11.0	25.0	ns	*403-c, d*
t_{PHL}	Propagation Delay, Positive-Going PL to Negative-Going $\overline{IRF}$	7.0	13.0			6.5	14.0	ns	*403-g, h*
t_{PLH}	Propagation Delay, Negative-Going PL to Positive-Going $\overline{IRF}$	9.5	17.0			8.5	19.5		


AC Electrical Characteristics (Continued)

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF		54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay, Positive-Going $\overline{OES}$ to $\overline{ORE}$	10.0	18.0			9.0	20.5	ns	
t_{PLH}	Propagation Delay, Positive-Going $\overline{IES}$ to Positive-Going $\overline{IRF}$	8.5	15.5			7.5	17.5	ns	*403-h*
t_{PLH}	Propagation Delay, $\overline{MR}$ to $\overline{IRF}$	8.0	15.0			7.5	17.0	ns	
t_{PHL}	Propagation Delay, $\overline{MR}$ to $\overline{ORE}$	9.0	16.0			8.0	17.5	ns	
t_{PZH} t_{PZL}	Propagation Delay, $\overline{OE}$ to Q_0, Q_1, Q_2, Q_3	2.5 2.5	6.5 7.5			2.0 2.0	8.0 8.5	ns	
t_{PHZ} t_{PLZ}	Propagation Delay, $\overline{OE}$ to Q_0, Q_1, Q_2, Q_3	2.5 2.5	6.5 7.5			2.0 2.0	8.0 8.0		
t_{PZH} t_{PZL}	Propagation Delay, Negative-Going $\overline{OES}$ to Q_S	5.5 5.5	12.0 14.0			5.0 5.0	15.0 15.0	ns	
t_{PHZ} t_{PLZ}	Propagation Delay, Negative-Going $\overline{OES}$ to Q_S	5.5 5.5	12.0 14.5			5.0 5.0	14.0 16.0		
t_{PZH} t_{PZL}	Turn On Time $\overline{TOS}$ to Q_S	8.5 8.5	21.0 20.0			8.0 8.0	24.0 21.0	ns	
t_{DFT}	Fall Through Time	45.0	80.0			35.0	95.0	ns	*403-f*
t_{AP}	Parallel Appearance Time, $\overline{ORE}$ to Q_0–Q_3	−10.0	−1.0			−10.0	−1.0	ns	
t_{AS}	Serial Appearance Time, $\overline{ORE}$ to Q_S	−10.0	2.0			−10.0	2.0		

AC Operating Requirements

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Set-up Time HIGH or LOW D_s to Negative $\overline{CPSI}$	1.0 1.0				1.0 1.0		ns	*403-a, b*
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_s to $\overline{CPSI}$	3.5 3.5				3.5 3.5			
$t_s(L)$	Set-up Time, LOW $\overline{TTS}$ to $\overline{IRF}$ Serial or Parallel Mode	0				0		ns	403-a, b, *g, h*
$t_s(L)$	Set-up Time, LOW Negative-Going $\overline{ORE}$ to Negative-Going $\overline{TOS}$	0				0		ns	*403-c, d*
$t_s(L)$	Set-up Time, LOW Negative-Going $\overline{IES}$ to $\overline{CPSI}$	3.0				4.0		ns	*403-b*
$t_s(L)$	Set-up Time, LOW Negative-Going $\overline{TTS}$ to $\overline{CPSI}$	14.0				15.5		ns	*403-b*
$t_s(H)$ $t_s(L)$	Set-up Time, HIGH or LOW Parallel Inputs to PL	0 0				0 0		ns	
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW Parallel Inputs to PL	2.0 2.0				2.5 2.5			
$t_w(H)$ $t_w(L)$	$\overline{CPSI}$ Pulse Width HIGH or LOW	5.0 3.0				6.0 5.0		ns	*403-a, b*
$t_w(H)$	PL Pulse Width, HIGH	4.0				5.0		ns	*403-g, h*
$t_w(L)$	$\overline{TTS}$ Pulse Width, LOW Serial or Parallel Mode	3.5				4.0		ns	*403-a, b, c, d*
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	3.5				4.0		ns	*403-f*
$t_w(H)$ $t_w(L)$	TOP Pulse Width HIGH or LOW	4.5 3.5				5.5 4.0		ns	*403-e*
$t_w(H)$ $t_w(L)$	$\overline{CPSO}$ Pulse Width HIGH or LOW	4.5 3.0				5.5 4.0		ns	*403-c, d*
t_{rec}	Recovery Time $\overline{MR}$ to Any Input	5.0				5.5		ns	*403-f*


Timing Waveforms

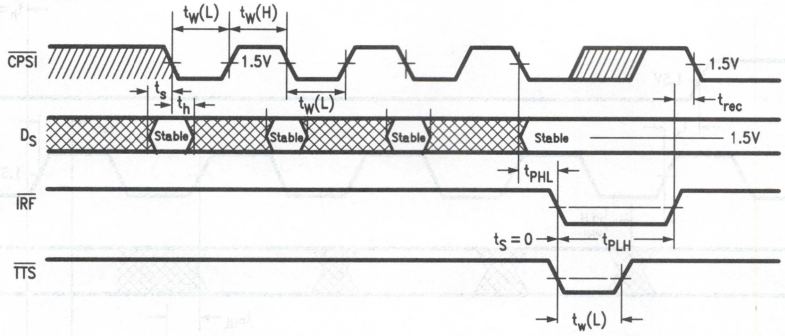

TL/F/9536–15

Conditions: stack not full, $\overline{IES}$, PL LOW


FIGURE 403-a. Serial Input, Unexpanded or Master Operation

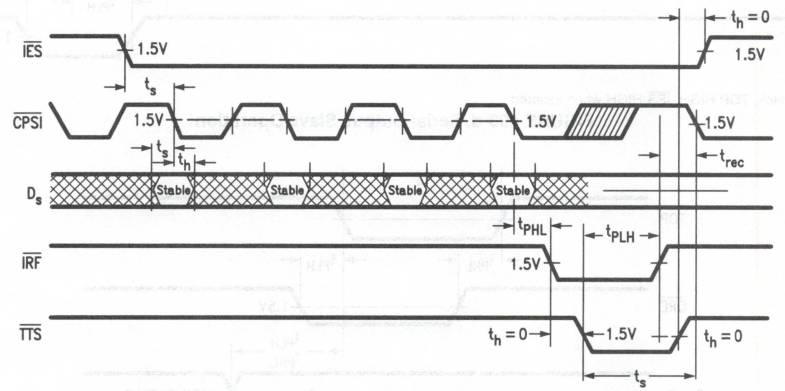

TL/F/9536–16

Conditions: stack not full, $\overline{IES}$ HIGH when initiated, PL LOW

FIGURE 403-b. Serial Input, Expanded Slave Operation

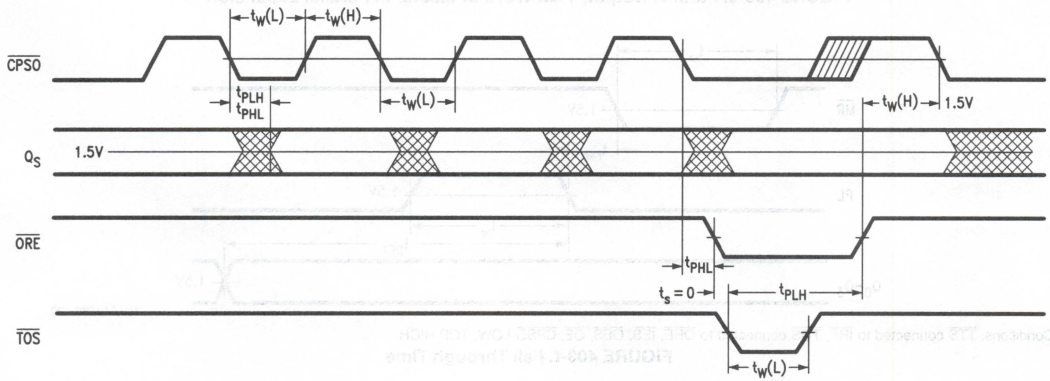


TL/F/9536–17

Conditions: data in stack, TOP HIGH, $\overline{IES}$ LOW when initiated, $\overline{OES}$ LOW

FIGURE 403-c. Serial Output, Unexpanded or Master Operation


Timing Waveforms (Continued)

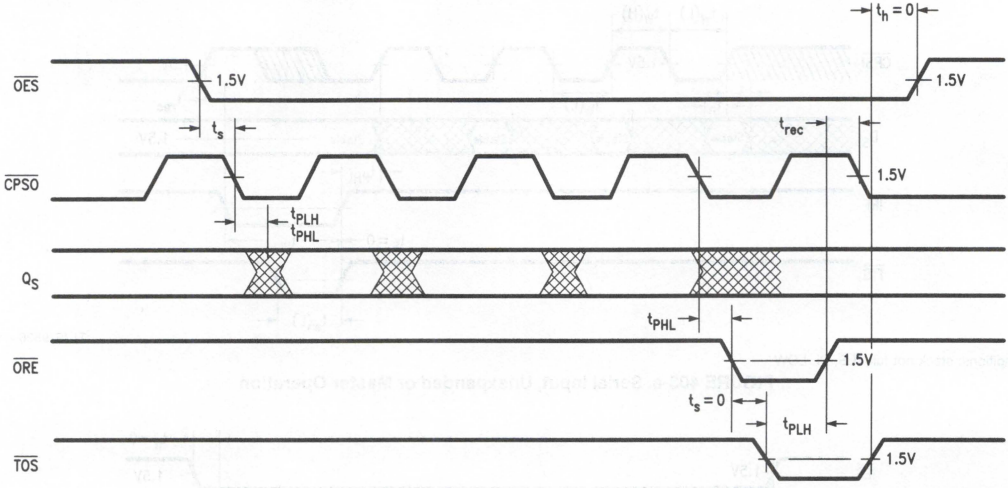

TL/F/9536–18

Conditions: data in stack, TOP HIGH, $\overline{IES}$ HIGH when initiated


FIGURE 403-d. Serial Output, Slave Operation

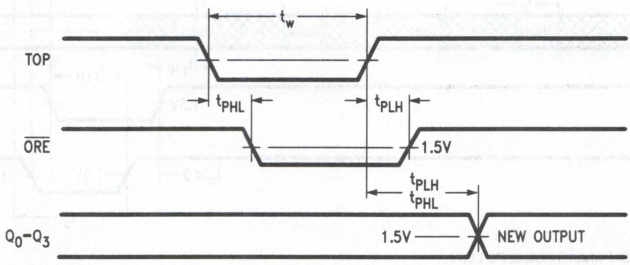

TL/F/9536–19

Conditions: $\overline{IES}$ LOW when initiated, $\overline{OE}$, $\overline{CPSO}$ LOW; data available in stack

FIGURE 403-e. Parallel Output, 4-Bit Word or Master in Parallel Expansion

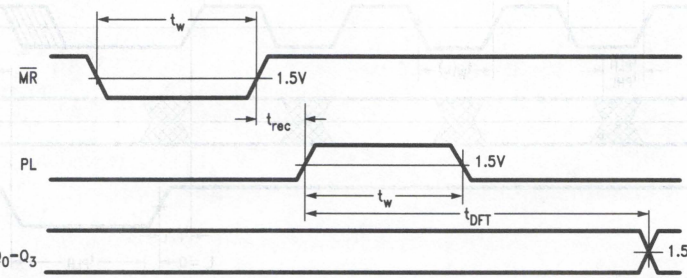


TL/F/9536–20

Conditions: $\overline{TTS}$ connected to $\overline{IRF}$, $\overline{TOS}$ connected to $\overline{ORE}$, $\overline{IES}$, $\overline{OES}$, $\overline{OE}$, $\overline{CPSO}$ LOW, TOP HIGH

FIGURE 403-f. Fall Through Time


Timing Waveforms (Continued)

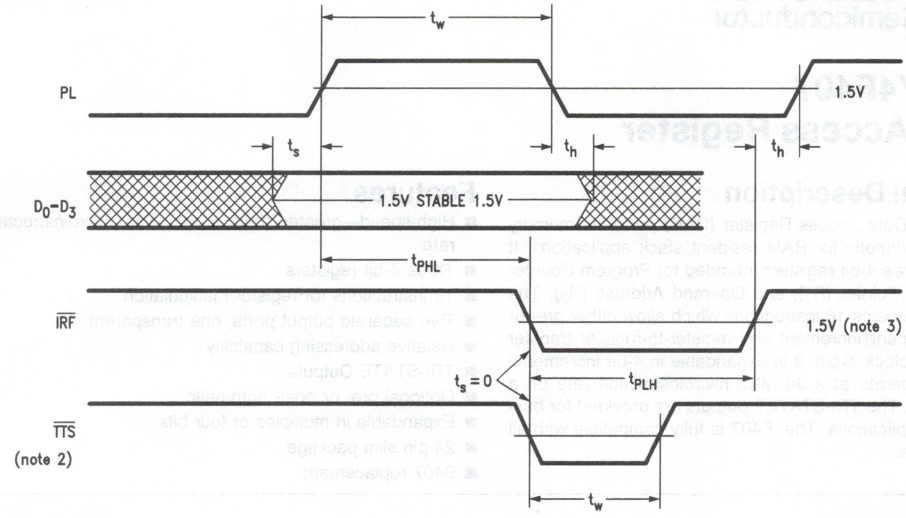

TL/F/9536–21

Conditions: stack not full, $\overline{IES}$ LOW when initialized

FIGURE 403-g. Parallel Load Mode, 4-Bit Word (Unexpanded) or Master in Parallel Expansion

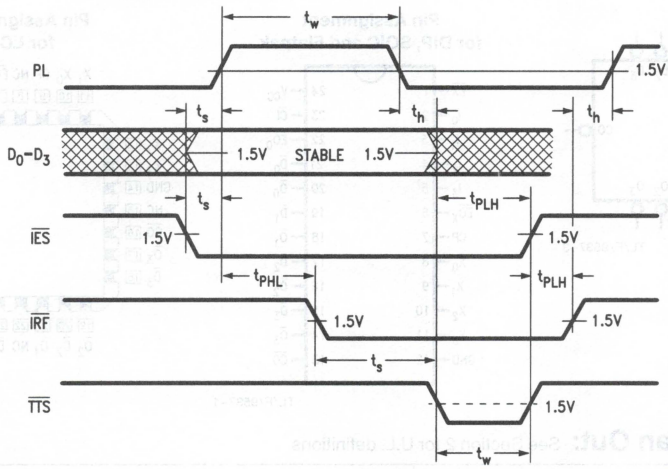

TL/F/9536–22

Conditions: stack not full, device initialized (Note 1) with $\overline{IES}$ HIGH

FIGURE 403-h. Parallel Load, Slave Mode

Note 1: Initialization requires a master reset to occur after power has been applied.

Note 2: $\overline{TTS}$ normally connected to $\overline{IRF}$.

Note 3: If stack is full, $\overline{IRF}$ will stay LOW.

National Semiconductor

54F/74F407
Data Access Register

General Description


The 'F407 Data Access Register (DAR) performs memory address arithmetic for RAM resident stack applications. It contains three 4-bit registers intended for Program Counter (R_0), Stack Pointer (R_1), and Operand Address (R_2). The 'F407 implements 16 instructions which allow either pre- or post-decrement/increment and register-to-register transfer in a single clock cycle. It is expandable in 4-bit increments and can operate at a 30 MHz microinstruction rate on a 16-bit word. The TRI-STATE® outputs are provided for bus-oriented applications. The 'F407 is fully compatible with all TTL families.

Features

- High-speed—greater than a 30 MHz microinstruction rate
- Three 4-bit registers
- 16 instructions for register manipulation
- Two separate output ports, one transparent
- Relative addressing capability
- TRI-STATE Outputs
- Optional pre- or post- arithmetic
- Expandable in multiples of four bits
- 24-pin slim package
- 9407 replacement

Ordering Code: See Section 5


Logic Symbol



TL/F/9537–3


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9537–1

Pin Assignment for LCC



TL/F/9537–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{D}_0$–$\overline{D}_3$	Data Inputs (Active LOW)	1.0/0.67	20 μA/−0.4 mA
I_0–I_3	Instruction Word Inputs	1.0/0.67	20 μA/−0.4 mA
$\overline{CI}$	Carry Input (Active LOW)	1.0/0.67	20 μA/−0.4 mA
$\overline{CO}$	Carry Output (Active LOW)	20/13.3 (0.67)	0.4 mA/8 mA (4 mA)
CP	Clock Input (L-H Edge-Triggered)	1.0/0.67	20 μA/−0.4 mA
$\overline{EX}$	Execute Input (Active LOW)	1.0/0.67	20 μA/−0.4 mA
$\overline{EO}_X$	Address Output Enable Input (Active LOW)	1.0/0.67	20 μA/−0.4 mA
$\overline{EO}_0$	Data Output Enable Input (Active LOW)	1.0/0.67	20 μA/−0.4 mA
X_0–X_3	Address Outputs	284 (100)/26.7 (13.3)	−5.7 mA (2 mA)/16 mA (8 mA)
$\overline{O}_0$–$\overline{O}_3$	Data Outputs (Active LOW)	284 (100)/26.7 (13.3)	−5.7 mA (2 mA)/16 mA (8 mA)

Functional Description

The 'F407 contains a 4-bit slice of three Registers (R_0–R_2), a 4-bit Adder, a TRI-STATE Address Output Buffer (X_0–X_3) and a separate Output Register with TRI-STATE buffers ($\overline{O}_0$–$\overline{O}_3$), allowing output of the register contents on the data bus (refer to the Block Diagram). The DAR performs sixteen instructions, selected by I_0–I_3, as listed in the Function Table.

The 'F407 operates on a single clock. CP and $\overline{EX}$ are inputs to a 2-input, active LOW AND gate. For normal operation $\overline{EX}$ is brought LOW while CP is HIGH. A microcycle starts as the clock goes HIGH. Data inputs $\overline{D}_0$–$\overline{D}_3$ are applied to the Adder as one of the operands. Three of the four instruction lines (I_1–I_2–I_3) select which of the three registers, if any, is to be used as the other operand. The LOW-to-HIGH CP transition writes the result from the Adder into a register (R_0–R_2) and into the output register provided $\overline{EX}$ is LOW. If the I_0 instruction input is HIGH, the multiplexer routes the result from the Adder to the TRI-STATE Buffer controlling the address bus (X_0–X_3), independent of $\overline{EX}$ and CP. The 'F407 is organized as a 4-bit register slice. The active LOW $\overline{CI}$ and $\overline{CO}$ lines allow ripple-carry expansion over longer word lengths.


In a typical application, the register utilization in the DAR may be as follows: R_0 is the Program Counter (PC), R_1 is the Stack Pointer (SP) for memory resident stacks and R_2 contains the operand address. For an instruction Fetch, PC can be gated on the X-Bus while it is being incremented (i.e., D-Bus = 1). If the fetched instruction calls for an effective address for execution, which is displaced from the PC, the displacement can be added to the PC and loaded into R_2 during the next microcycle.

Function Table

Instruction				Combinatorial Function Available on the X-Bus	Sequential Function Occurring on the Next Rising CP Edge
I_3	I_2	I_1	I_0		
L	L	L	L	R_0	R_0 Plus D Plus CI → R_0 and 0-Register
L	L	L	H	R_0 Plus D Plus CI	
L	L	H	L	R_0	R_0 Plus D Plus CI → R_1 and 0-Register
L	L	H	H	R_0 Plus D Plus CI	
L	H	L	L	R_0	R_0 Plus D Plus CI → R_2 and 0-Register
L	H	L	H	R_0 Plus D Plus CI	
L	H	H	L	R_1	R_1 Plus D Plus CI → R_1 and 0-Register
L	H	H	H	R_1 Plus D Plus CI	
H	L	L	L	R_2	D Plus CI → R_2 and 0-Register
H	L	L	H	D Plus CI	
H	L	H	L	R_0	D Plus CI → R_0 and 0-Register
H	L	H	H	D Plus CI	
H	H	L	L	R_2	R_2 Plus D Plus CI → R_2 and 0-Register
H	H	L	H	R_2 Plus D Plus CI	
H	H	H	L	R_1	D Plus CI → R_1 and 0-Register
H	H	H	H	D Plus CI	

H = HIGH Voltage Level
L = LOW Voltage Level

Block Diagram

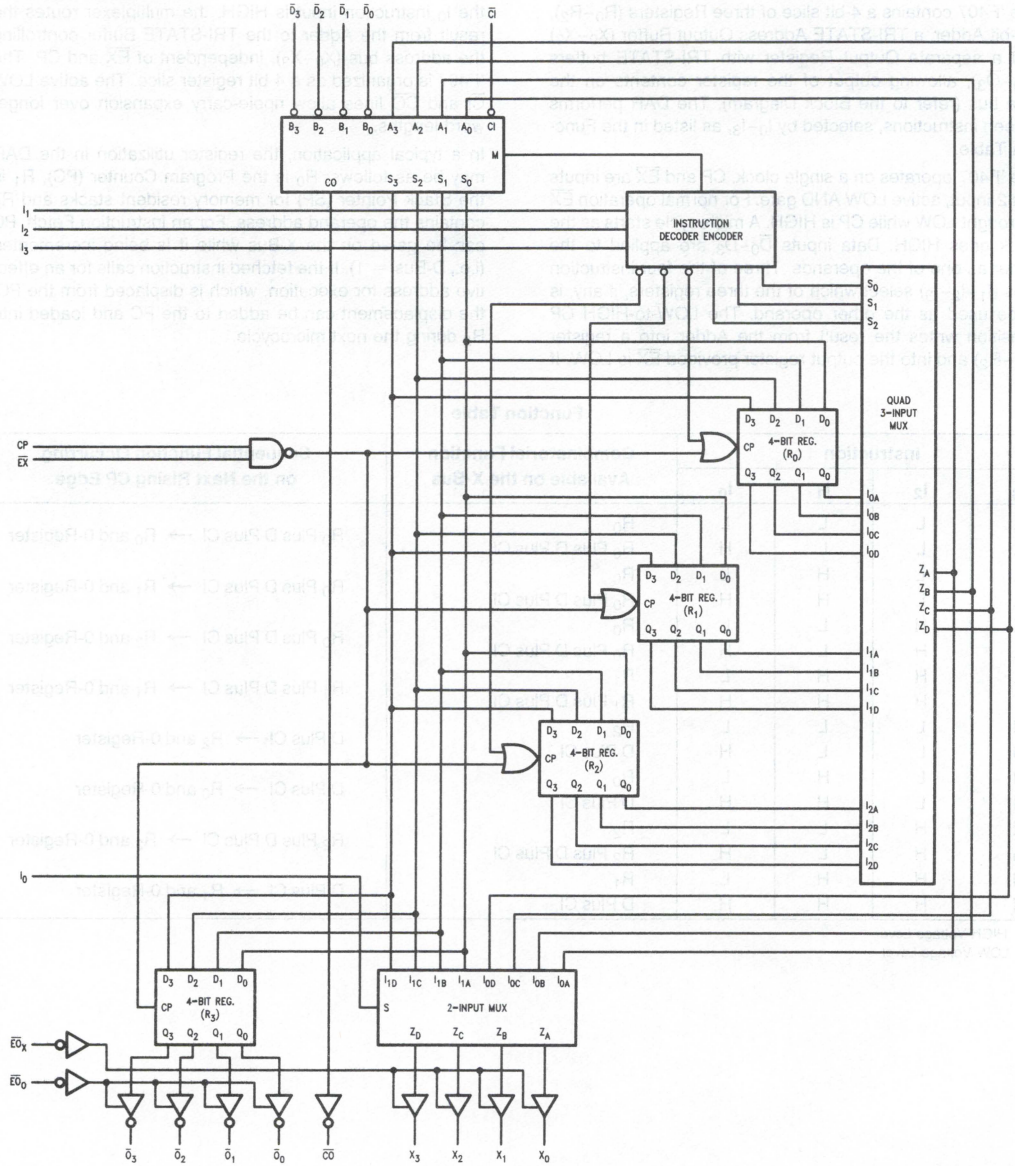


TL/F/9537–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Timing Diagrams


$\overline{EO}_x$ = LOW

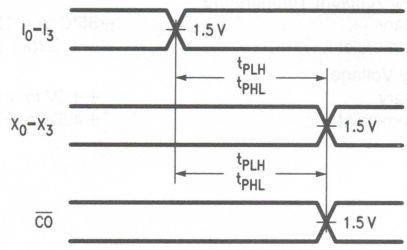

TL/F/9537–7

FIGURE 407-a


$\overline{EO}_x$ = LOW

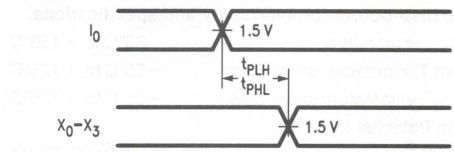

TL/F/9537–8

FIGURE 407-b


$\overline{EO}_0$ = LOW

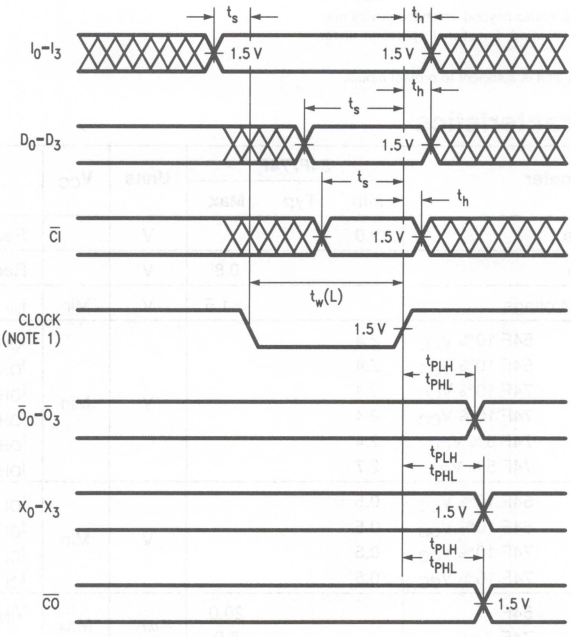

TL/F/9537–9

FIGURE 407-c


$\overline{EO}_x$ = LOW, I_0 = HIGH

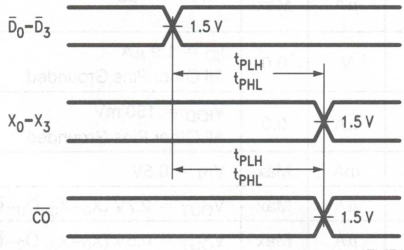

TL/F/9537–5

FIGURE 407-d

$\overline{EO}_x$ = LOW, I_0 = HIGH

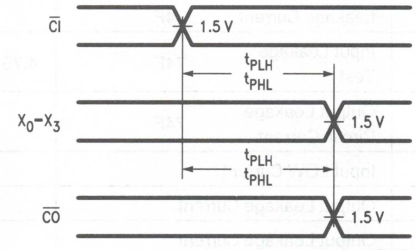

TL/F/9537–6

FIGURE 407-e

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.5	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −0.4 mA ($\overline{CO}$)
		54F 10% V_{CC}	2.4					I_{OH} = −2 mA (X_0–X_3, $\overline{O}_0$–$\overline{O}_3$)
		74F 10% V_{CC}	2.4					I_{OH} = −0.4 mA ($\overline{CO}$)
		74F 10% V_{CC}	2.4					I_{OH} = −5.7 mA (X_0–X_3, $\overline{O}_0$–$\overline{O}_3$)
		74F 5% V_{CC}	2.4					I_{OH} = −0.4 mA ($\overline{CO}$)
		74F 5% V_{CC}	2.7					I_{OH} = −5.7 mA (X_0–X_3, $\overline{O}_0$–$\overline{O}_3$)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}	0.5			V	Min	I_{OL} = 4 mA ($\overline{CO}$)
		54F 10% V_{CC}	0.5					I_{OL} = 8 mA (X_0–X_3, $\overline{O}_0$–$\overline{O}_3$)
		74F 10% V_{CC}	0.5					I_{OL} = 8 mA ($\overline{CO}$)
		74F 10% V_{CC}	0.5					I_{OL} = 16 mA (X_0–X_3, $\overline{O}_0$–$\overline{O}_3$)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.4	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V (X_0–X_3, $\overline{O}_0$–$\overline{O}_3$)
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V (X_0–X_3, $\overline{O}_0$–$\overline{O}_3$)
I_{OS}	Output Short-Circuit Current		−30		−100	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			90	145	mA	Max	

AC Electrical Characteristics

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{O}_n$ (Note 1)	8.0 5.0	12.0 7.5	21.0 13.0	7.0 4.0	24.0 15.0	7.0 4.0	25.0 15.0	ns	407-c
t_{PLH} t_{PHL}	Propagation Delay, I_0 LOW I_1-I_3 to X_0-X_3	9.0 9.5	13.0 14.0	18.0 20.5	7.5 8.0	21.0 25.0	8.0 8.5	20.0 22.0	ns	407-a
t_{PLH} t_{PHL}	Propagation Delay, I_0 HIGH I_1-I_3 to X_0-X_3	16.5 11.0	23.5 17.0	33.0 25.0	8.5 6.5	50.0 35.0	14.5 10.0	36.0 27.0	ns	407-a
t_{PLH} t_{PHL}	Propagation Delay, I_0 LOW CP to X_n	9.0 11.5	13.5 18.0	21.0 24.0	7.0 8.5	24.0 28.0	8.0 10.5	22.5 26.0	ns	407-b
t_{PLH} t_{PHL}	Propagation Delay, I_0 HIGH CP to X_n	18.0 12.5	26.5 20.0	35.0 28.5	16.0 11.5	43.0 36.5	16.0 11.5	37.0 31.0	ns	407-b
t_{PLH} t_{PHL}	Propagation Delay $\overline{D}_n$ to X_n	10.5 6.0	15.0 9.0	23.0 14.0	6.5 3.0	29.0 20.5	9.5 5.0	25.0 15.5	ns	407-d
t_{PLH} t_{PHL}	Propagation Delay CI to X_n	7.0 5.5	10.5 9.0	16.0 12.0	4.0 4.5	22.0 14.0	6.0 4.5	17.5 13.5	ns	407-e
t_{PLH} t_{PHL}	Propagation Delay I_0 to X_n	4.5 4.5	9.0 10.0	11.5 14.0	4.0 3.0	14.5 19.5	4.0 4.0	13.0 15.5	ns	407-b
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{CO}$	11.0 11.5	19.0 18.5	24.0 27.0	9.0 6.5	33.0 38.0	11.0 11.5	26.0 29.0	ns	407-a
t_{PLH} t_{PHL}	Propagation Delay $\overline{CI}$ to $\overline{CO}$	3.5 4.5	5.5 7.0	8.5 12.0	3.0 3.0	11.0 10.0	3.0 4.0	9.5 13.0	ns	407-e
t_{PLH} t_{PHL}	Propagation Delay $\overline{D}_n$ to $\overline{CO}$	3.5 4.0	5.5 6.5	9.0 11.0	3.0 3.5	10.0 10.0	3.0 3.5	9.5 12.0	ns	407-d
t_{PLH} t_{PHL}	Propagation Delay I_1-I_3 to $\overline{CO}$	10.0 11.0	15.0 16.0	22.0 23.0	8.0 6.0	23.0 32.5	9.0 10.0	23.5 25.0	ns	407-a
t_{PZH} t_{PZL}	Enable Time $\overline{EO}_0$ to $\overline{O}_n$ or $\overline{EO}_x$ to X_n	7.0 6.0	10.0 9.0	14.5 15.0	4.5 3.5	26.0 16.0	5.5 5.5	17.0 16.5	ns	
t_{PHZ} t_{PLZ}	Disable Time $\overline{EO}_0$ to $\overline{O}_n$ or $\overline{EO}_x$ to X_n	1.5 5.0	4.0 10.0	7.0 14.0	2.0 5.0	9.0 18.0	1.5 4.0	8.0 15.5	ns	

Note 1: The internal clock is generated from CP and $\overline{EX}$. The internal Clock is HIGH if $\overline{EX}$ or CP is HIGH, LOW if $\overline{EX}$ and CP are LOW.

AC Electrical Characteristics

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{cw}	Clock Period	32.0	26.0		36.0		36.0		ns	
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW I_1-I_3 to Negative-Going CP	4.0 4.0			4.5 4.5		4.5 4.5		ns	407-c
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW I_1-I_3 to Positive-Going CP	0 0			0 0		0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{D}_n$ or $\overline{C}_1$ to Negative-Going CP	16.5 16.5			18.5 18.5		18.5 18.5		ns	407-c
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{D}_n$ or $\overline{CI}$ to Negative-Going Clock	0 0			0 0		0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{CI}$ to Positive-Going CP	13.0 13.0			14.5 14.5		14.5 14.5		ns	407-c
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{CI}$ to Positive-Going CP	0 0			0 0		0 0			
$t_w(H)$ $t_w(L)$	Clock Pulse Width HIGH or LOW	7.5 7.5			8.5 8.5		8.5 8.5		ns	407-c

National Semiconductor

54F/74F410 Register Stack—16 x 4 RAM TRI-STATE® Output Register

General Description


The 'F410 is a register-oriented high-speed 64-bit Read/Write Memory organized as 16-words by 4-bits. An edge-triggered 4-bit output register allows new input data to be written while previous data is held. TRI-STATE outputs are provided for maximum versatility. The 'F410 is fully compatible with all TTL families.

Features

- Edge-triggered output register
- Typical access time of 35 ns
- TRI-STATE outputs
- Optimized for register stack operation
- 18-pin package
- 9410 replacement

Ordering Code: See Section 5


Logic Symbols



TL/F/9538–3


Connection Diagrams

Pin Assignment for DIP and Flatpak



TL/F/9538–1

Pin Assignment for LCC



TL/F/9538–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_3	Address Inputs	1.0/1.0	20 μA/−0.6 mA
D_0–D_3	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CS}$	Chip Select Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{WE}$	Write Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
CP	Clock Input (Outputs Change on LOW-to-HIGH Transition)	1.0/2.0	20 μA/−1.2 mA
Q_0–Q_3	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)


Functional Description

Write Operation—When the three control inputs, Write Enable ($\overline{WE}$), Chip Select ($\overline{CS}$), and Clock (CP), are LOW the information on the data inputs (D_0–D_3) is written into the memory location selected by the address inputs (A_0–A_3). If the input data changes while $\overline{WE}$, $\overline{CS}$, and CP are LOW, the contents of the selected memory location follow these changes, provided setup and hold time criteria are met.

Read Operation—Whenever $\overline{CS}$ is LOW and CP goes from LOW-to-HIGH, the contents of the memory location selected by the address inputs (A_0–A_3) are edge-triggered into the Output Register.

The ($\overline{OE}$) input controls the output buffers. When $\overline{OE}$ is HIGH the four outputs (Q_0–Q_3) are in a high impedance or OFF state; when $\overline{OE}$ is LOW, the outputs are determined by the state of the Output Register.

Block Diagram

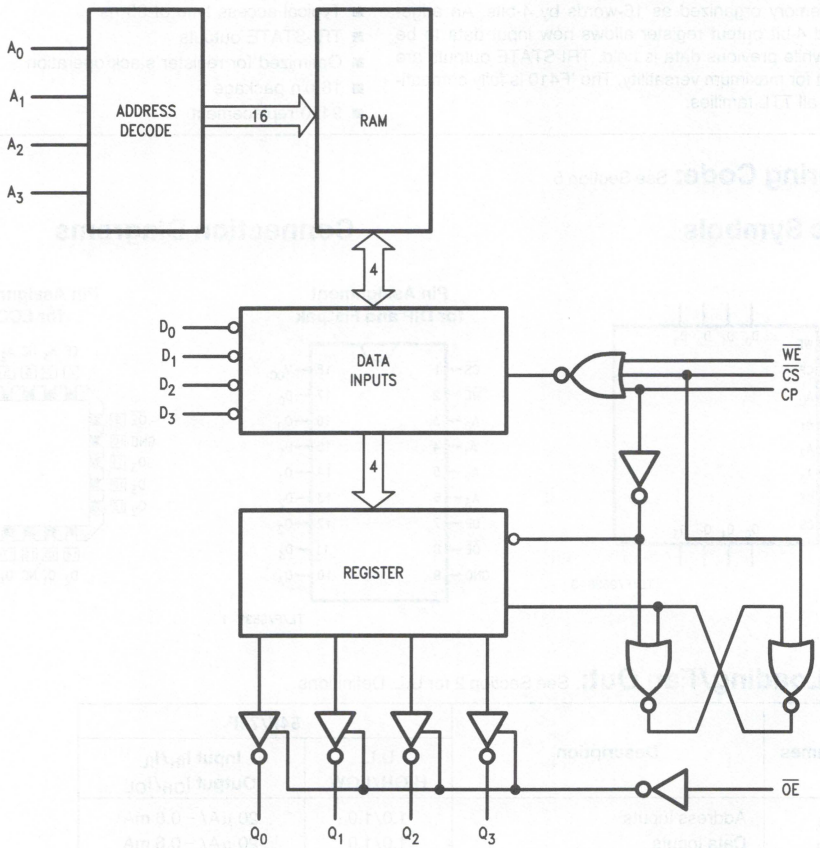

TL/F/9538–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (A_n, D_n, $\overline{OE}$, $\overline{WE}$)
					−1.2			V_{IN} = 0.5V ($\overline{CS}$, CP)
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{CCH}	Power Supply Current		47	70	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		47	70	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		47	70	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F T_A = +25°C V_{CC} = +5.0V C_L = 50 pF		54F T_A, V_{CC} = Mil C_L = 50 pF		74F T_A, V_{CC} = Com C_L = 50 pF		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay CP to Q	3.0 3.5	8.5 9.0	2.5 3.0	11.0 12.0	2.5 3.0	9.5 10.0	ns	2–3
t_{PZH} t_{PZL}	Enable Time $\overline{OE}$ to Q	3.0 3.5	8.0 9.0	2.5 3.0	10.5 13.0	2.5 3.0	9.0 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{OE}$ to Q	2.5 2.5	6.5 7.0	2.0 2.0	8.5 9.5	2.0 2.0	7.5 8.0		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F T_A = +25°C V_{CC} = +5.0V		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
READ MODE									
t_s(H) t_s(L)	Setup Time, HIGH or LOW A_n to CP	15.0 15.0		23 23		17.0 17.0		ns	2–6
t_h(H) t_h(L)	Hold Time, HIGH or LOW A_n to CP	0 0		0 0		0 0			
WRITE MODE									
t_s(H) t_s(L)	Setup Time, HIGH or LOW A_n to $\overline{WE}$	0 0		0 0		0 0		ns	2–6
t_h(H) t_h(L)	Hold Time, HIGH or LOW A_n to $\overline{WE}$	0 0		0 0		0 0			
t_s(H) t_s(L)	Setup Time, HIGH or LOW D_n to $\overline{WE}$	5.0 5.0		8.5 8.5		6.0 6.0		ns	2–6
t_h(H) t_h(L)	Hold Time, HIGH or LOW D_n to $\overline{WE}$	0 0		2.5 2.5		0 0			
t_w	$\overline{WE}$ Pulse Width Required to Write	7.5		9.5		8.5		ns	2–4
t_w	$\overline{CS}$ Pulse Width Required to Write	7.5		9.5		8.5		ns	2–4
t_w	CP Pulse Width Required to Write	7.5		9.5		8.5		ns	2–4

Note: Military temperature range for this device is −40°C to +85°C.

National Semiconductor

54F/74F412
Multi-Mode Buffered Latch with TRI-STATE® Outputs

General Description

The 'F412 is an 8-bit latch with TRI-STATE output buffers. Also included is a status flip-flop for providing device-busy or request-interrupt commands. Separate Mode and Select inputs allow data to be stored with the outputs enabled or disabled. The device can also operate in a fully transparent mode. The 'F412 is the functional equivalent of the Intel 8212.


Features

- TRI-STATE outputs
- Status flip-flop for interrupt commands
- Asynchronous or latched receiver modes
- 300 mil 24-pin slim package


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC

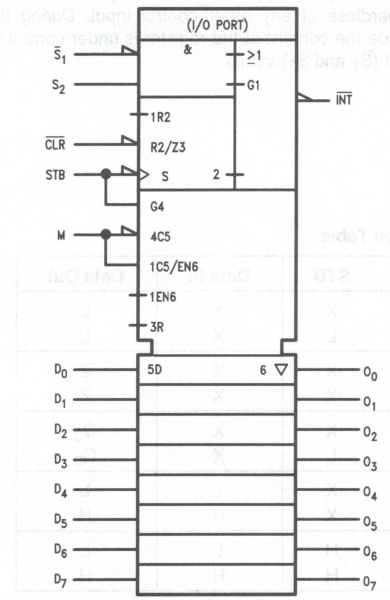


TL/F/9540–4

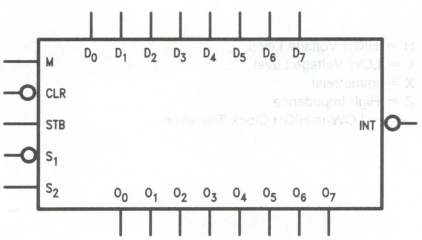

TL/F/9540–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9540–2

Pin Assignment for LCC

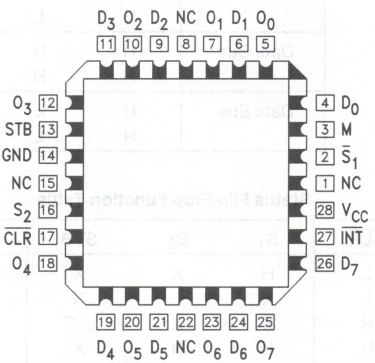

TL/F/9540–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
O_0-O_7	Latch Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
D_0-D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CLR}$	Clear	1.0/1.0	20 μA/−0.6 mA
STB	Strobe	1.0/1.0	20 μA/−0.6 mA
$\overline{INT}$	Interrupt	50/33.3	−1 mA/20 mA
M	Mode Control Input	1.0/1.0	20 μA/−0.6 mA
$\overline{S}_1$, S_2	Select Inputs	1.0/1.0	20 μA/−0.6 mA

Functional Description

This high-performance eight-bit parallel expandable buffer register incorporates package and mode selection inputs and an edge-triggered status flip-flop designed specifically for implementing bus-organized input/output ports. The TRI-STATE data outputs can be connected to a common data bus and controlled from the appropriate select inputs to receive or transmit data. An integral status flip-flop provides busy or request interrupt commands.

The eight data latches are fully transparent when the internal gate enable, G, input is HIGH and the outputs are enabled. Latch transparency is selected by the mode control (M), select ($\overline{S}_1$ and S_2), and the strobe (STB) inputs and during transparency each data output (O_n) follows its respective data input (D_n). This mode of operation can be terminated by clearing, de-selecting, or holding the data latches.

An input mode or an output mode is selectable from the M input. In the input mode, M = L, the eight data latch inputs are enabled when the strobe is HIGH regardless of device selection. If selected during an input mode, the outputs will follow the data inputs. When the strobe input is taken LOW, the latches will store the most-recently setup data.

In the output mode, M = H, the output buffers are enabled regardless of any other control input. During the output mode the content of the register is under control of the select ($\overline{S}_1$ and S_2) inputs.

Data Latches Function Table


Function	$\overline{CLR}$	M	$\overline{S}_1$	S_2	STB	Data In	Data Out
Clear	L	H	H	X	X	X	L
	L	L	L	H	L	X	L
De-Select	X	L	X	L	X	X	Z
	X	L	H	X	X	X	Z
Hold	H	H	H	L	X	X	Q_0
	H	L	L	H	L	X	Q_0
Data Bus	H	H	L	H	X	L	L
	H	H	L	H	X	H	H
Data Bus	H	L	L	H	H	L	L
	H	L	L	H	H	H	H

Status Flip-Flop Function Table

$\overline{CLR}$	$\overline{S}_1$	S_2	STB	$\overline{INT}$
L	H	X	X	H
L	X	L	X	H
H	X	X	⌐	L
H	L	H	X	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance
⌐ = LOW-to-HIGH Clock Transition

Logic Diagram

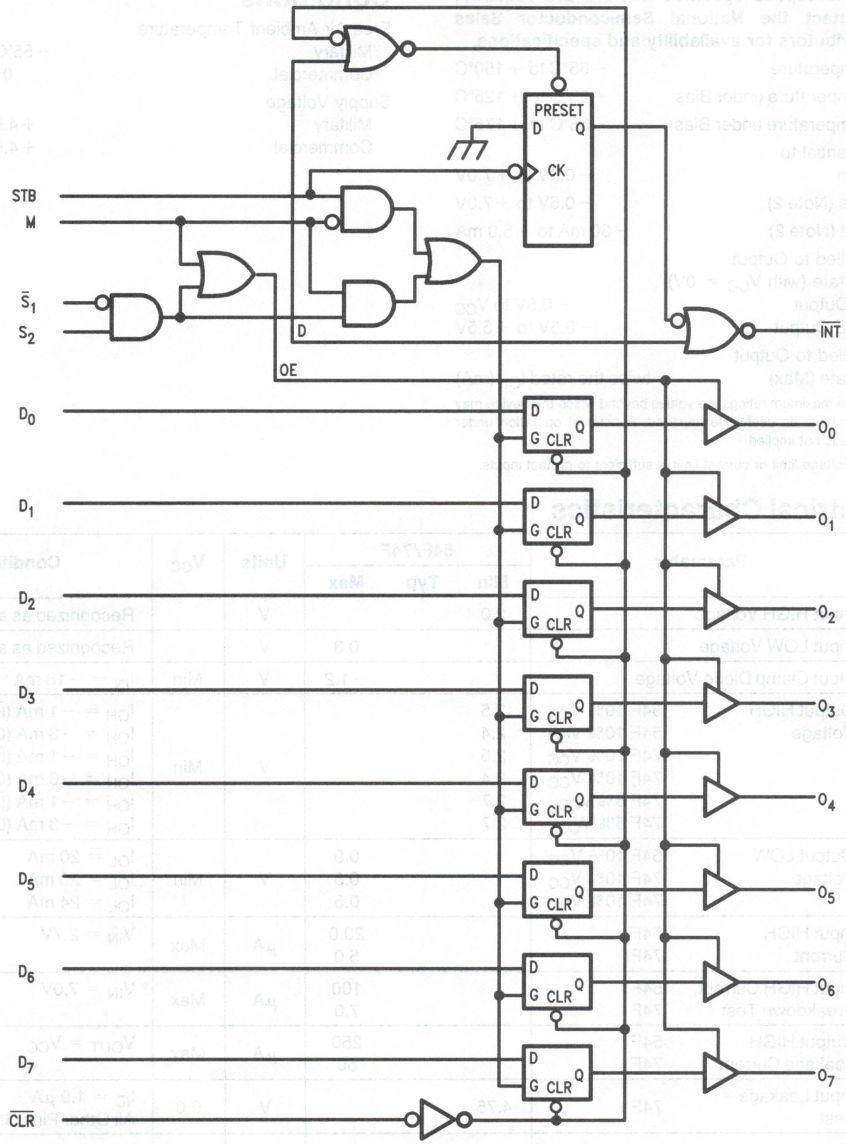

TL/F/9540–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA ($\overline{INT}$)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (O_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA ($\overline{INT}$)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (O_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA ($\overline{INT}$)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (O_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			33	50	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			40	60	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			40	60	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay D_n to O_n	3.5 2.5	6.5 5.0	8.5 6.5	3.0 2.0	11.5 8.5	3.0 2.0	9.5 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{S}_1$, S_2 or STB to O_n	8.5 7.5	14.5 12.5	18.5 16.0	6.5 6.0	23.0 19.0	7.5 6.5	20.5 17.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{S}_1$ or S_2 to $\overline{INT}$	4.5 4.5	7.5 8.0	9.5 10.5	3.5 3.5	12.0 12.5	4.0 4.0	10.5 11.5	ns	2–3
t_{PHL}	Propagation Delay $\overline{CLR}$ to O_n	7.5	12.5	16.0	5.5	18.5	6.5	17.5	ns	2–3
t_{PHL}	Propagation Delay STB to $\overline{INT}$	6.5	11.0	14.0	5.5	17.5	5.5	15.0	ns	2–3
t_{PZH} t_{PZL}	Access Time, HIGH or LOW $\overline{S}_1$ to O_n	8.0 6.5	12.5 11.0	18.0 14.0	6.5 5.5	20.0 18.0	7.0 5.5	19.0 15.0	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time, HIGH or LOW $\overline{S}_1$ to O_n	4.5 6.5	8.0 11.0	10.5 14.0	4.0 5.5	14.5 17.0	4.0 5.5	11.5 15.0		
t_{PZH} t_{PZL}	Access Time, HIGH or LOW S_2 to O_n	7.5 5.0	12.5 9.0	16.0 11.5	6.5 4.0	18.5 15.5	6.5 4.5	17.5 12.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time, HIGH or LOW S_2 to O_n	4.5 5.5	7.5 9.5	9.5 12.0	3.5 4.5	12.5 14.5	4.0 4.5	10.5 13.0		
t_{PZH} t_{PZL}	Access Time, HIGH or LOW M to O_n	5.0 5.0	8.5 8.5	11.0 11.0	4.5 4.0	16.0 15.0	4.5 4.5	12.0 12.0	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time, HIGH or LOW M to O_n	4.0 5.0	7.0 8.5	9.0 11.0	3.5 4.5	11.5 14.0	3.5 4.5	10.0 12.0		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to $\overline{S}_1$, S_2 or STB	0 0		2.0 2.0		1.0 1.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time D_n to $\overline{S}_1$, S_2 or STB	8.0 8.0		10.0 10.0		9.0 9.0			
$t_w(H)$ $t_w(L)$	$\overline{S}_1$, S_2 or STB Pulse Width, HIGH or LOW	8.0 8.0		11.0 11.0		9.0 9.0		ns	2–4
$t_w(L)$	$\overline{CLR}$ Pulse Width, LOW	8.0		11.5		9.0		ns	2–4

National Semiconductor

54F/74F413
64 x 4 First-In First-Out Buffer Memory with Parallel I/O

General Description


The 'F413 is an expandable fall-through type high-speed First-In First-Out (FIFO) buffer memory organized as 64 words by four bits. The 4-bit input and output registers record and transmit, respectively, asynchronous data in parallel form. Control pins on the input and output allow for handshaking and expansion. The 4-bit wide, 62-bit deep fall-through stack has self-contained control logic.

Features

- Separate input and output clocks
- Parallel input and output
- Expandable without external logic
- 15 MHz data rate
- Supply current 160 mA max
- Available in SOIC, (300 mil only)

Ordering Code: See Section 5


Logic Symbol



TL/F/9541–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9541–2

Pin Assignment for LCC



TL/F/9541–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_3	Data Inputs	1.0/0.667	20 μA/−0.4 mA
O_0–O_3	Data Outputs	50/13.3	−1 mA/8 mA
IR	Input Ready	1.0/0.667	20 μA/−0.4 mA
SI	Shift In	1.0/0.667	20 μA/−0.4 mA
SO	Shift Out	1.0/0.667	20 μA/−0.4 mA
OR	Output Ready	1.0/0.667	20 μA/−0.4 mA
$\overline{MR}$	Master Reset	1.0/0.667	20 μA/−0.4 mA

Functional Description


Data Input—Data is entered into the FIFO on D_0–D_3 inputs. To enter data the Input Ready (IR) should be HIGH, indicating that the first location is ready to accept data. Data then present at the four data inputs is entered into the first location when the Shift In (SI) is brought HIGH. An SI HIGH signal causes the IR to go LOW. Data remains at the first location until SI is brought LOW. When SI is brought LOW and the FIFO is not full, IR will go HIGH, indicating that more room is available. Simultaneously, data will propagate to the second location and continue shifting until it reaches the output stage or a full location. If the memory is full, IR will remain LOW.

Data Transfer—Once data is entered into the second cell, the transfer of any full cell to the adjacent (downstream) empty cell is automatic, activated by an on-chip control. Thus data will stack up at the end of the device while empty locations will "bubble" to the front. The t_{PT} parameter defines the time required for the first data to travel from input to the output of a previously empty device.

Data Output—Data is read from the O_0–O_3 outputs. When data is shifted to the output stage, Output Ready (OR) goes HIGH, indicating the presence of valid data. When the OR is HIGH, data may be shifted out by bringing the Shift Out (SO) HIGH. A HIGH signal at SO causes the OR to go LOW. Valid data is maintained while the SO is HIGH. When SO is brought LOW, the upstream data, provided that stage has valid data, is shifted to the output stage. When new valid data is shifted to the output stage, OR goes HIGH. If the FIFO is emptied, OR stays LOW, and O_0–O_3 remains as before, i.e., data does not change if FIFO is empty.

Input Ready and Output Ready may also be used as status signals indicating that the FIFO is completely full (Input Ready stays LOW for at least t_{PT}) or completely empty (Output Ready stays LOW for at least t_{PT}).

Block Diagram

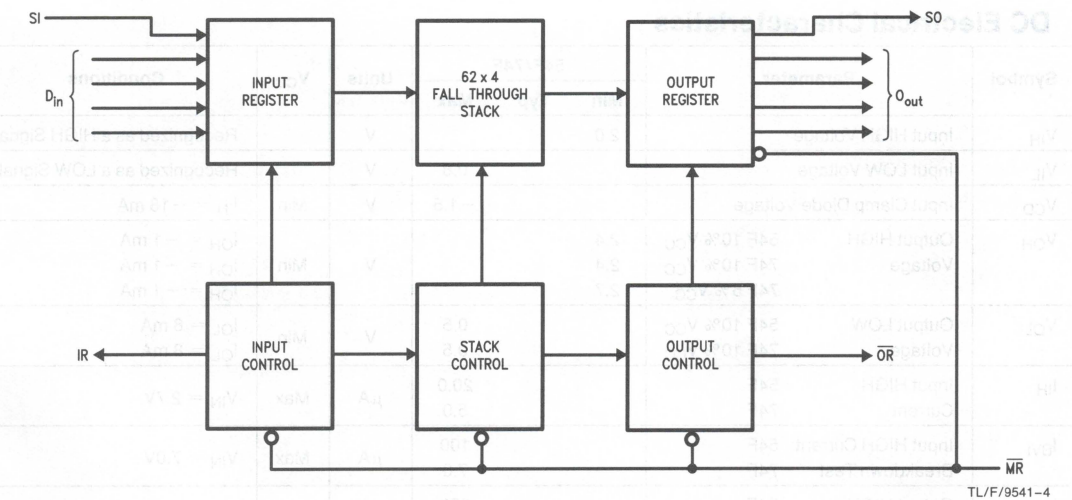

TL/F/9541–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.5	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 8 mA
		74F 10% V_{CC}			0.5			I_{OL} = 8 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.4	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−20		−130	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			115	160	mA	Max	V_O = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Shift In Rate	10			8.0		10		MHz	2–1
f_{max}	Shift Out Rate	10			8.0		10		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay Shift In to IR	1.5 1.5		44.0 31.0	1.5 1.5	50.0 37.0	1.5 1.5	48.0 35.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay Shift Out to OR	1.5 1.5		52.0 31.0	1.5 1.5	57.0 37.0	1.5 1.5	55.0 35.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay Output Data Delay	1.5 1.5		46.0 34.0	1.5 1.5	52.0 39.0	1.5 1.5	50.0 37.0	ns	2–3
t_{PLH}	Propagation Delay Master Reset to IR	1.5		27.0	1.5	33.0	1.5	31.0	ns	2–3
t_{PLH}	Propagation Delay Master Reset to OR	1.5		30.0	1.5	34.0	1.5	32.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to SI	1.0 1.0		1.0 1.0		1.0 1.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to SI	10.0 10.0		10.0 10.0		10.0 10.0			
$t_w(H)$ $t_w(L)$	Shift In Pulse Width HIGH or LOW	5.0 10.0		5.0 10.0		5.0 10.0		ns	2–4
$t_w(H)$ $t_w(L)$	Shift Out Pulse Width HIGH or LOW	7.5 10.0		8.5 10.0		7.5 10.0			
$t_w(H)$	Input Ready Pulse Width, HIGH	7.5		8.5		7.5		ns	2–4
$t_w(L)$	Output Ready Pulse Width, LOW	5.0		5.0		5.0		ns	2–4
$t_w(L)$	Master Reset Pulse Width, LOW	10.0		10.0		10.0		ns	2–4
t_{rec}	Recovery Time, MR to SI	32.0		35.0		35.0		ns	2–6
t_{PT}	Data Throughput Time		0.9		1.0		1.0	µs	

National Semiconductor


54F/74F420
Parallel Check Bit/Syndrome Bit Generator

General Description

The 'F420 is a parallel check bit/syndrome bit generator. The 'F420 utilizes a modified hamming code to generate 7 check bits from a 32-bit dataword, in 15 ns, when operated in the check bit generate mode. When operated in the syndrome generate mode, the check bits and data bits read from memory are utilized in a parity summer to generate syndrome bits upon error detection. The maximum error count detectable is 2. A single error detect can occur in 18 ns; a double error detect in 22 ns. The syndrome bit generation can be output in 15 ns (maximum).

Ordering Code: See Section 5


Logic Diagram



TL/F/9542–1


Connection Diagrams

Pin Assignment for LCC and PCC



TL/F/9542–2

Pin Assignment for DIP and Flatpak

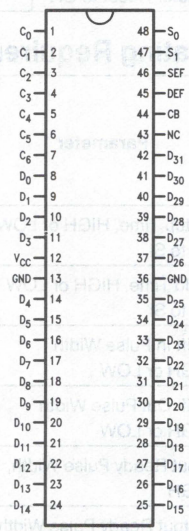

TL/F/9542–3


Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
C_0–C_6	Check Bit/Syndrome Bus Inputs/ Outputs	3.5/1.083 150/40 (33.3)	70 μA/−0.65 mA −3 mA/24 mA (20 mA)
D_0–D_{31}	Data Bit Bus	1.0/1.0	20 μA/−0.6 mA
CB	Check Bit Control	1.0/1.0	20 μA/−0.6 mA
DEF	Double Error Flag	50/33.3	−1 mA/20 mA
SEF	Single Error Flag	50/33.3	−1 mA/20 mA
S_0, S_1	Mode Control	1.0/1.0	20 μA/−0.6 mA

Function Table

Memory Cycle	Function	Control S_1	Control S_0	Check Bit	CB Control I/O	Error Flags SEF	Error Flags DEF
Write	Generate Check Bits	L	L	Output Check	L	H	H
Read	Read & Flag	H	L	Input	H	Enabled	
Read	Latch Check Bits	H	H	Inputs	H	Enabled	
Read	Output Syndrome Bits	H	H	Output Syndrome Bits	L	Enabled	
Diagnostics	Input Diagnostic Data Word	H	H	Latched Check Outputs High-Z	H	Enabled	
Diagnostics	Input Diagnostic Data Word	L	H	Output Latched Check Bits	L	Enabled	
Diagnostics	Input Diagnostic Data Word	H	H	Output Syndrome Bits	L	Enabled	

Block Diagram

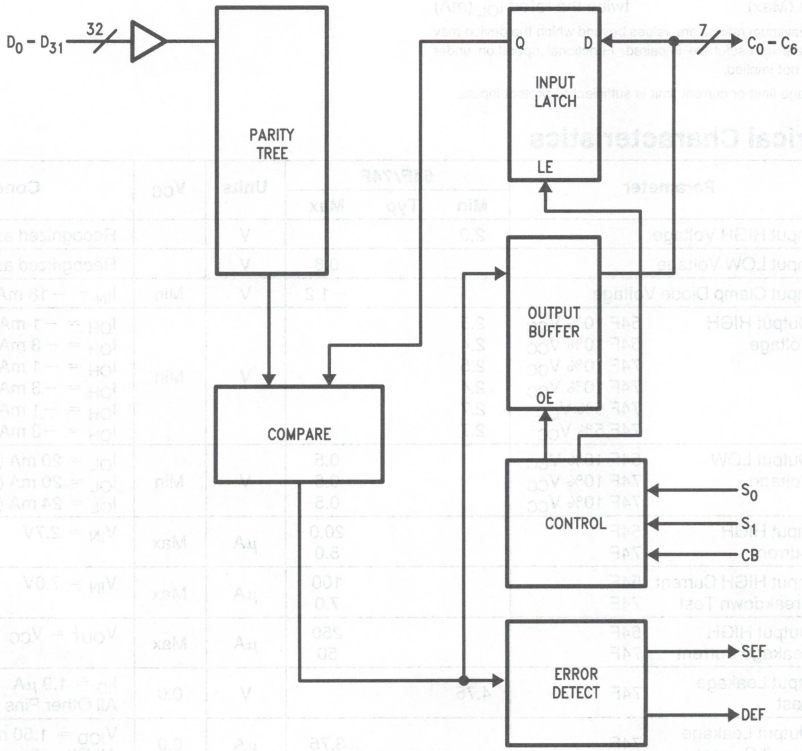

TL/F/9542–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA, D_n, CB, S_0, S_1
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (All Outputs)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (C_0–C_6)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (All Outputs)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (C_0–C_6)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (All Outputs)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (C_0–C_6)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (All Outputs)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA (DEF, SEF)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (C_0–C_6)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 1.50 mV All Other Pins Grounded
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)				1.0	mA	Max	V_{IN} = 5.5V (C_0–C_6)
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (D_n, CB, S_0, S_1)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (C_0–C_6)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (C_0–C_6)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current				130	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				130	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current				130	mA	Max	V_O = HIGH Z


AC Electrical Characteristics

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay D_n to C_n	5.0 5.0		20.0 17.0			5.0 5.0	22.0 19.0	ns	*420-a, b*
t_{PLH} t_{PHL}	Propagation Delay D_n/C_n to SEF	5.0 4.0		20.0 16.0			5.0 4.0	22.0 18.0	ns	*420-b*
t_{PLH} t_{PHL}	Propagation Delay D_n/C_n to DEF	6.0 5.0		24.0 21.0			6.0 5.0	26.0 22.0	ns	*420-b*
t_{PLH} t_{PHL}	Propagation Delay S1 to C_n	4.0 3.0		18.0 13.0			4.0 3.0	19.0 14.0	ns	*420-a, b*
t_{PLH} t_{PHL}	Propagation Delay S1 to SEF/DEF	4.0 3.0		14.0 9.0			4.0 3.0	15.0 10.0	ns	*420-b*
t_{PZH} t_{PZL}	Output Enable Time	2.0 2.0		12.0 11.0			2.0 2.0	13.0 12.0	ns	
t_{PHZ} t_{PLZ}	Output Disable Time	1.0 1.0		7.5 7.5			1.0 1.0	8.0 8.0		

AC Operating Requirements: See Section 2 for Waveforms


Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW C_n to S_0	5.0 5.0				5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW C_n to S_0	5.0 5.0				5.0 5.0		ns	2–6
$t_w(L)$	Clock Pulse Width LOW	8.0				8.0		ns	2–4

Timing Waveforms

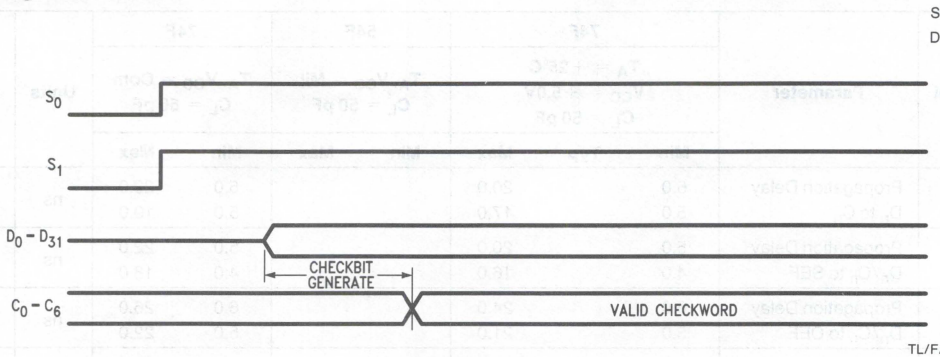

TL/F/9542–5

FIGURE 420-a.

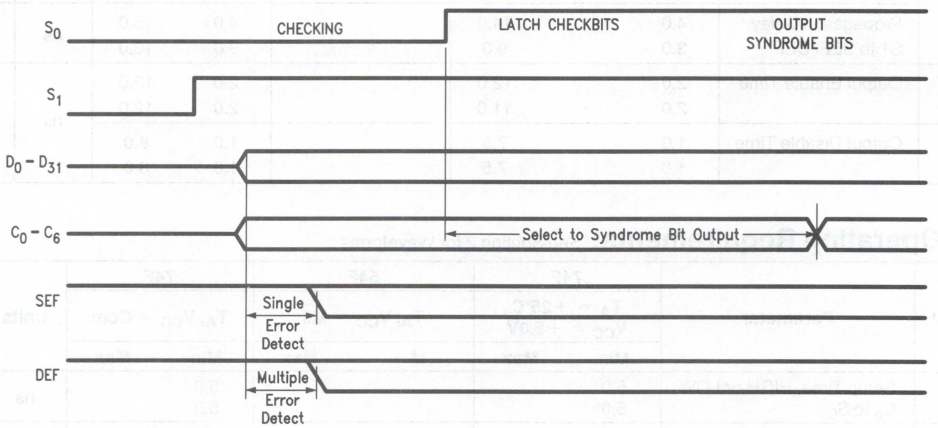

TL/F/9542–6

FIGURE 420-b.

National Semiconductor

54F/74F432
Multi-Mode Buffered Latch with TRI-STATE® Outputs

General Description

The 'F432 is an 8-bit latch with TRI-STATE output buffers and control and device selection logic. Also included is a status flip-flop for providing device-busy or request-interrupt commands. Separate Mode and Select inputs allow data to be stored with the outputs enabled or disabled. The device can also operate in a fully transparent mode.


The 'F432 is the functional equivalent of the Intel 8212, but with inverting outputs.

Features

- TRI-STATE inverting outputs
- Status flip-flop for interrupt commands
- Asynchronous or latched receiver modes
- Data to output propagation delay typically 8.5 ns
- Supply current 43 mA typ
- 24-pin slim package


Ordering Code: See Section 5

Logic Symbols



TL/F/9543–1


IEEE/IEC

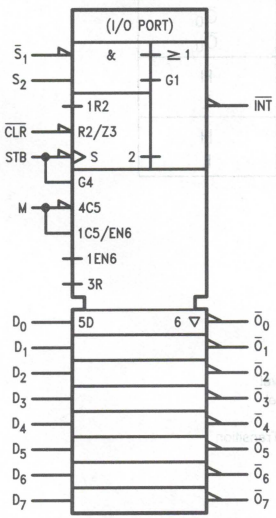

TL/F/9543–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9543–2

Pin Assignment for LCC



TL/F/9543–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_7$	Latch Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
$\overline{S}_1$,–$\overline{S}_2$,	Select Inputs	1.0/1.0	20 μA/−0.6 mA
M	Mode Control Input	1.0/1.0	20 μA/−0.6 mA
STB	Strobe	1.0/1.0	20 μA/−0.6 mA
$\overline{INT}$	Interrupt	50/33.3	−1 mA/20 mA
$\overline{CLR}$	Clear	1.0/1.0	20 μA/−0.6 mA

Functional Description

This high-performance eight-bit parallel expandable buffer register incorporates package and mode selection inputs and an edge-triggered status flip-flop designed specifically for implementing bus-organized input/output ports. The TRI-STATE data outputs can be connected to a common data bus and controlled from the appropriate select inputs to receive or transmit data. An integral status flip-flop provides busy or request interrupt commands.

The eight data latches are fully transparent when the internal gate enable, G, input is HIGH and the outputs are enabled. Latch transparency is selected by the mode control (M), select ($\overline{S}_1$ and S_2), and the strobe (STB) inputs and during transparency each data output ($\overline{O}_n$) follows its respective data input (D_n). This mode of operation can be terminated by clearing, de-selecting, or holding the data latches. See Data Latches Function Table.

An input mode or an output mode is selectable from this single input line. In the input mode, M = L, the eight data latch inputs are enabled when the strobe is HIGH regardless of device selection. If selected during an input mode, the outputs will follow the data inputs. When the strobe input is taken LOW the latches will store the most recently setup data.

In the output mode, M = H, the output buffers are enabled regardless of any other control input. During the output mode the content of the register is under control of the select ($\overline{S}_1$ and S_2) inputs. See Data Latches Function Table.

Data Latches Function Table

Function	$\overline{CLR}$	M	$\overline{S}_1$	S_2	STB	Data In	Data Out
Clear	L	H	H	X	X	X	H
	L	L	L	H	L	X	H
De-select	X	L	X	L	X	X	Z
	X	L	H	X	X	X	Z
Hold	H	H	H	L	X	X	$\overline{Q}_0$
	H	L	L	H	L	X	$\overline{Q}_0$
Data Bus	H	H	L	H	X	L	H
	H	H	L	H	X	H	L
Data Bus	H	L	L	H	H	L	H
	H	L	L	H	H	H	L


H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Status Flip-Flop Function Table

$\overline{CLR}$	$\overline{S}_1$	S_2	STB	$\overline{INT}$
L	H	X	X	H
L	X	L	X	H
H	X	X	⌐	L
H	L	H	X	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐ = LOW-to-HIGH Transition

Logic Diagram

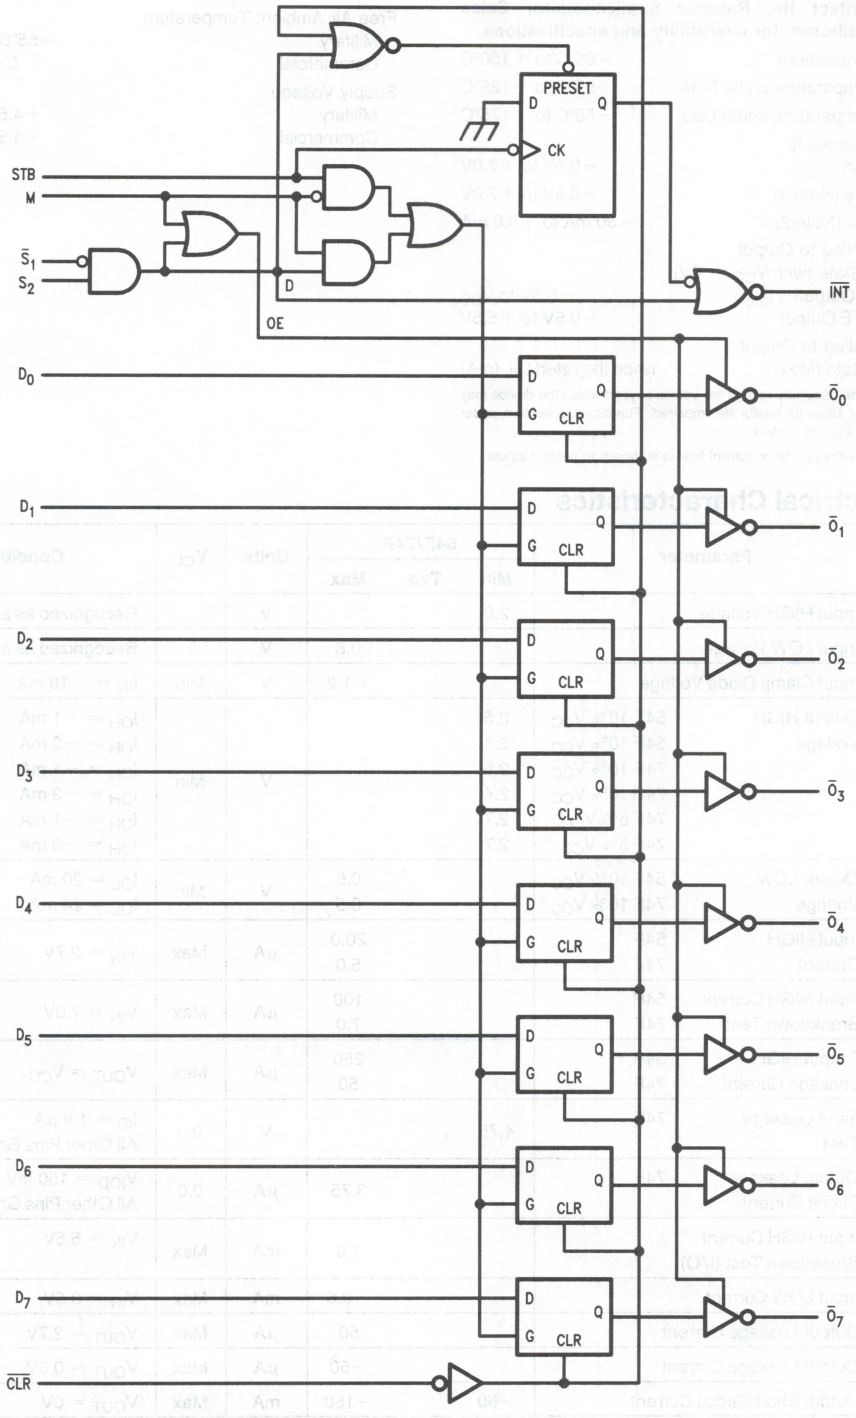

TL/F/9543–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)				1.0	mA	Max	V_{IN} = 5.5V
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current		50	65	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		50	65	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		50	65	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F T_A = +25°C, V_{CC} = +5.0V, C_L = 50 pF			54F T_A, V_{CC} = Mil, C_L = 50 pF		74F T_A, V_{CC} = Com, C_L = 50 pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	3.5	8.5	10.5			3.0	12.0	ns	2–3
t_{PHL}	D_n to $\overline{O}_n$	2.5	5.5	7.0			3.0	12.0		
t_{PLH}	Propagation Delay	8.5	16.0	21.0			7.5	23.0	ns	2–3
t_{PHL}	$\overline{S}_1$, S_2 or STB to $\overline{O}_n$	6.5	12.5	16.0			5.5	18.0		
t_{PHL}	Propagation Delay $\overline{CLR}$ to $\overline{O}_n$	7.0	15.0	18.5			6.0	20.5	ns	2–3
t_{PHL}	Propagation Delay STB to $\overline{INT}$	6.0	11.5	14.5			5.0	16.0	ns	2–3
t_{PLH}	Propagation Delay	4.0	7.5	9.5			3.5	10.5	ns	2–3
t_{PHL}	$\overline{S}_1$ to $\overline{INT}$	5.5	7.5	12.0			5.5	13.0		
t_{PLH}	Propagation Delay	4.0	7.5	9.5			3.5	10.5	ns	2–3
t_{PHL}	S_2 to $\overline{INT}$	4.5	7.5	9.5			4.5	10.5		
t_{PLH}	Propagation Delay	9.0	15.0	19.0			9.0	20.0	ns	2–3
t_{PHL}	M to $\overline{O}_n$	6.5	11.0	14.0			6.5	15.0		
t_{PZH}	Enable Time	6.0	8.5	14.0			6.0	15.0	ns	2–5
t_{PZL}	M to $\overline{O}_n$	6.0	8.5	13.0			6.0	14.5		
t_{PHZ}	Disable Time	4.5	6.5	9.5			4.5	10.5	ns	2–5
t_{PLZ}	M to $\overline{O}_n$	5.5	9.5	12.0			5.5	13.0		
t_{PZH}	Enable Time	4.5	13.0	18.0			4.0	20.0	ns	2–5
t_{PZL}	$\overline{S}_1$, S_2 to $\overline{O}_n$	5.0	11.0	15.0			4.0	17.0		
t_{PHZ}	Disable Time	4.0	8.0	11.0			3.5	12.5		
t_{PLZ}	$\overline{S}_1$, S_2 to $\overline{O}_n$	5.0	11.0	15.5			4.0	17.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{S}_1$ to D_n	0 0				0 0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{S}_1$ to D_n	11.0 8.5				12.5 9.5			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW S_2 to D_n	0 0				0 0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW S_2 to D_n	9.0 7.0				9.0 7.0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW STB to D_n	0 0				0 0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW STB to D_n	13.0 10.0				13.0 10.0		ns	2–6
$t_w(H)$ $t_w(L)$	STB Pulse Width HIGH or LOW	5.0 5.0				5.0 5.0		ns	2–4
$t_w(L)$	$\overline{CLR}$ Pulse Width, LOW	10.0				10.0		ns	2–4
$t_w(H)$ $t_w(L)$	$\overline{S}_1$ Pulse Width HIGH or LOW	9.0 7.0				9.0 7.0		ns	2–4
$t_w(H)$ $t_w(L)$	S_2 Pulse Width HIGH or LOW	7.0 9.0				7.0 9.0		ns	2–4

National Semiconductor

54F/74F433
First-In First-Out (FIFO) Buffer Memory

General Description

The 'F433 is an expandable fall-through type high-speed first-in first-out (FIFO) buffer memory that is optimized for high-speed disk or tape controller and communication buffer applications. It is organized as 64 words by 4 bits and may be expanded to any number of words or any number of bits in multiples of four. Data may be entered or extracted asynchronously in serial or parallel, allowing economical implementation of buffer memories.


The 'F433 has TRI-STATE® outputs that provide added versatility, and is fully compatible with all TTL families.

Features

- Serial or parallel input
- Serial or parallel output
- Expandable without additional logic
- TRI-STATE outputs
- Fully compatible with all TTL families
- Slim 24-pin package
- 9423 replacement

Ordering Code: See Section 5


Logic Symbol

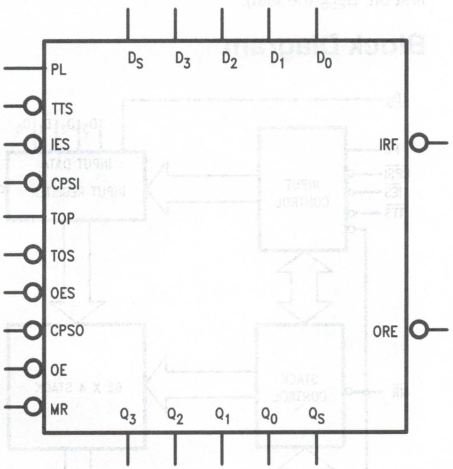

TL/F/9544–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

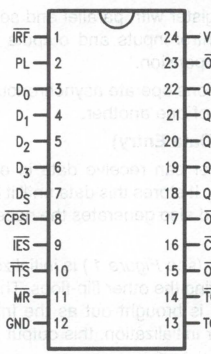

TL/F/9544–2

Pin Assignment for LCC

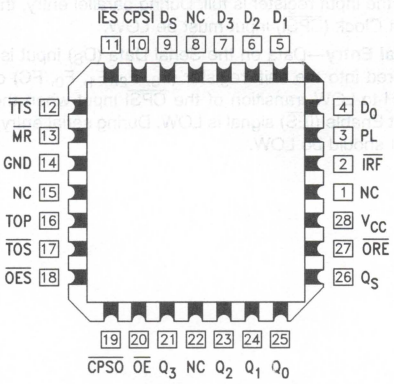

TL/F/9544–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
PL	Parallel Load Input	1.0/0.66	20 μA/400 μA
$\overline{CPSI}$	Serial Input Clock	1.0/0.66	20 μA/400 μA
$\overline{IES}$	Serial Input Enable	1.0/0.66	20 μA/400 μA
$\overline{TTS}$	Transfer to Stack Input	1.0/0.66	20 μA/400 μA
$\overline{MR}$	Master Reset	1.0/0.66	20 μA/400 μA
$\overline{OES}$	Serial Output Enable	1.0/0.66	20 μA/400 μA
TOP	Transfer Out Parallel	1.0/0.66	20 μA/400 μA
$\overline{TOS}$	Transfer Out Serial	1.0/0.66	20 μA/400 μA
$\overline{CPSO}$	Serial Output Clock	1.0/0.66	20 μA/400 μA
$\overline{OE}$	Output Enable	1.0/0.66	20 μA/400 μA
D_0–D_3	Parallel Data Inputs	1.0/0.66	20 μA/400 μA
D_S	Serial Data Input	1.0/0.66	20 μA/400 μA
Q_0–Q_3	Parallel Data Outputs	285/10	5.7 mA/16 mA
Q_S	Serial Data Output	285/10	5.7 μA/16 mA
$\overline{IRF}$	Input Register Full	20/5	400 μA/8 mA
$\overline{ORE}$	Output Register Empty	20/5	400 μA/8 mA

Functional Description

As shown in the block diagram, the 'F433 consists of three sections:

1. An Input Register with parallel and serial data inputs, as well as control inputs and outputs for input handshaking and expansion.
2. A 4-bit-wide, 62-word-deep fall-through stack with self-contained control logic.
3. An Output Register with parallel and serial data outputs, as well as control inputs and outputs for output handshaking and expansion.

These three sections operate asynchronously and are virtually independent of one another.

Input Register (Data Entry)

The Input Register can receive data in either bit-serial or 4-bit parallel form. It stores this data until it is sent to the fall-through stack, and also generates the necessary status and control signals.


This 5-bit register (see *Figure 1*) is initialized by setting flip-flop F_3 and resetting the other flip-flops. The $\overline{Q}$-output of the last flip-flop (FC) is brought out as the Input Register Full ($\overline{IRF}$) signal. After initialization, this output is HIGH.

Parallel Entry—A HIGH on the Parallel Load (PL) input loads the D_0–D_3 inputs into the F_0–F_3 flip-flops and sets the FC flip-flop. This forces the $\overline{IRF}$ output LOW, indicating that the input register is full. During parallel entry, the Serial Input Clock ($\overline{CPSI}$) input must be LOW.

Serial Entry—Data on the Serial Data (D_S) input is serially entered into the shift register (F_3, F_2, F_1, F_0, FC) on each HIGH-to-LOW transition of the $\overline{CPSI}$ input when the Serial Input Enable ($\overline{IES}$) signal is LOW. During serial entry, the PL input should be LOW.


After the fourth clock transition, the four data bits are located in flip-flops F_0–F_3. The FC flip-flop is set, forcing the $\overline{IRF}$ output LOW and internally inhibiting $\overline{CPSI}$ pulses from affecting the register. *Figure 2* illustrates the final positions in an 'F433 resulting from a 256-bit serial bit train (B_0 is the first bit, B_{255} the last).

Block Diagram

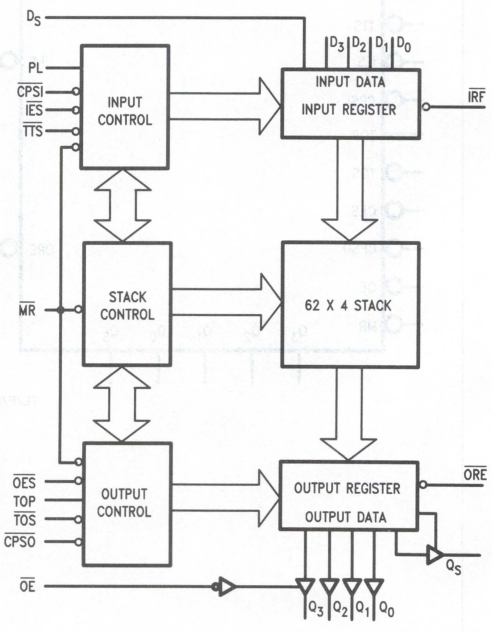


TL/F/9544–4

Functional Description (Continued)

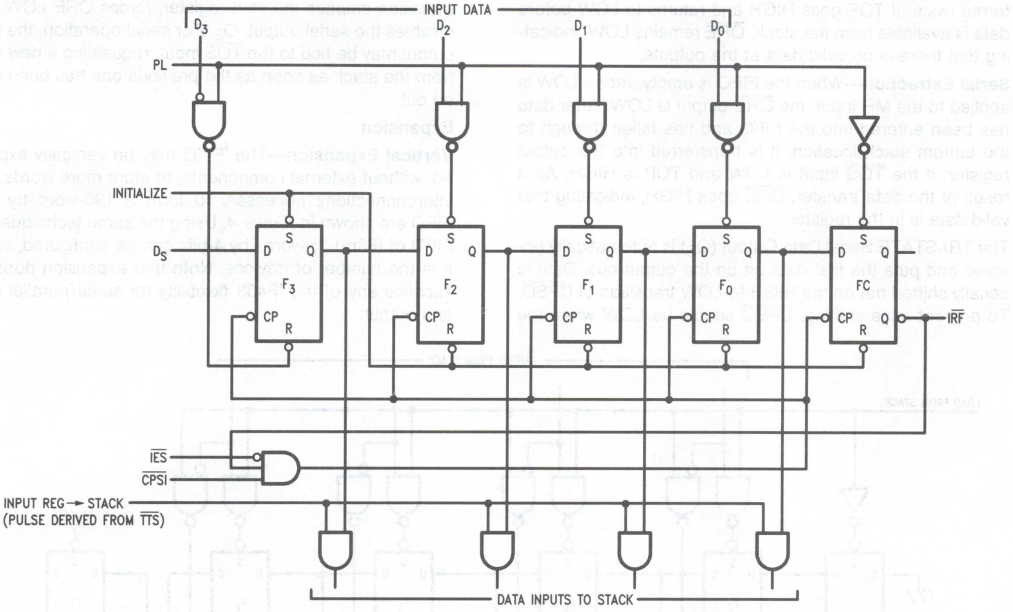

TL/F/9544–5

FIGURE 1. Conceptual Input Section

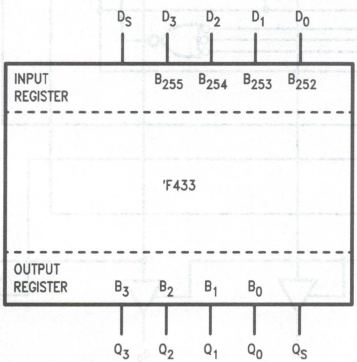

TL/F/9544–6

FIGURE 2. Final Positions in an 'F433 Resulting from a 256-Bit Serial Train

Fall-Through Stack—The outputs of flip-flops F_0–F_3 feed the stack. A LOW level on the Transfer to Stack ($\overline{TTS}$) input initiates a fall-through action; if the top location of the stack is empty, data is loaded into the stack and the input register is reinitialized. (Note that this initialization is delayed until PL is LOW). Thus, automatic FIFO action is achieved by connecting the $\overline{IRF}$ output to the $\overline{TTS}$ input.

An RS-type flip-flop (the initialization flip-flop) in the control section records the fact that data has been transferred to the stack. This prevents multiple entry of the same word into the stack even though $\overline{IRF}$ and $\overline{TTS}$ may still be LOW; the initialization flip-flop is not cleared until PL goes LOW.

Once in the stack, data falls through automatically, pausing only when it is necessary to wait for an empty next location. In the 'F433, the master reset ($\overline{MR}$) input only initializes the stack control section and does not clear the data.

Output Register

The Output Register (see *Figure 3*) receives 4-bit data words from the bottom stack location, stores them, and outputs data on a TRI-STATE, 4-bit parallel data bus or on a TRI-STATE serial data bus. The output section generates and receives the necessary status and control signals.

Parallel Extraction—When the FIFO is empty after a LOW pulse is applied to the MR input, the Output Register Empty ($\overline{ORE}$) output is LOW. After data has been entered into the FIFO and has fallen through to the bottom stack location, it is transferred into the output register, if the Transfer Out Parallel (TOP) input is HIGH. As a result of the data transfer, $\overline{ORE}$ goes HIGH, indicating valid data on the data outputs (provided that the TRI-STATE buffer is enabled). The TOP input can then be used to clock out the next word.

When TOP goes LOW, $\overline{ORE}$ also goes LOW, indicating that the output data has been extracted; however, the data itself remains on the output bus until a HIGH level on TOP permits the transfer of the next word (if available) into the output register. During parallel data extraction, the serial output clock ($\overline{CPSO}$) line should be LOW. The Transfer Out Serial ($\overline{TOS}$) line should be grounded for single-slice operation or connected to the appropriate $\overline{ORE}$ line for expanded operation (refer to the 'Expansion' section).

The TOP signal is not edge-triggered. Therefore, if TOP goes HIGH before data is available from the stack but data becomes available before TOP again goes LOW, that data is transferred into the output register. However, internal

Functional Description (Continued)


control circuitry prevents the same data from being transferred twice. If TOP goes HIGH and returns to LOW before data is available from the stack, $\overline{ORE}$ remains LOW, indicating that there is no valid data at the outputs.

Serial Extraction—When the FIFO is empty after a LOW is applied to the MR input, the $\overline{ORE}$ output is LOW. After data has been entered into the FIFO and has fallen through to the bottom stack location, it is transferred into the output register, if the $\overline{TOS}$ input is LOW and TOP is HIGH. As a result of the data transfer, $\overline{ORE}$ goes HIGH, indicating that valid data is in the register.

The TRI-STATE Serial Data Output (Q_S) is automatically enabled and puts the first data bit on the output bus. Data is serially shifted out on the HIGH-to-LOW transition of $\overline{CPSO}$. To prevent false shifting, $\overline{CPSO}$ should be LOW when the new word is being loaded into the output register. The fourth transition empties the shift register, forces $\overline{ORE}$ LOW, and disables the serial output, Q_S. For serial operation, the $\overline{ORE}$ output may be tied to the $\overline{TOS}$ input, requesting a new word from the stack as soon as the previous one has been shifted out.

Expansion


Vertical Expansion—The 'F433 may be vertically expanded, without external components, to store more words. The interconnections necessary to form a 190-word by 4-bit FIFO are shown in *Figure 4*. Using the same technique, any FIFO of (63n + 1)-words by 4-bits can be configured, where n is the number of devices. Note that expansion does not sacrifice any of the 'F433 flexibility for serial/parallel input and output.

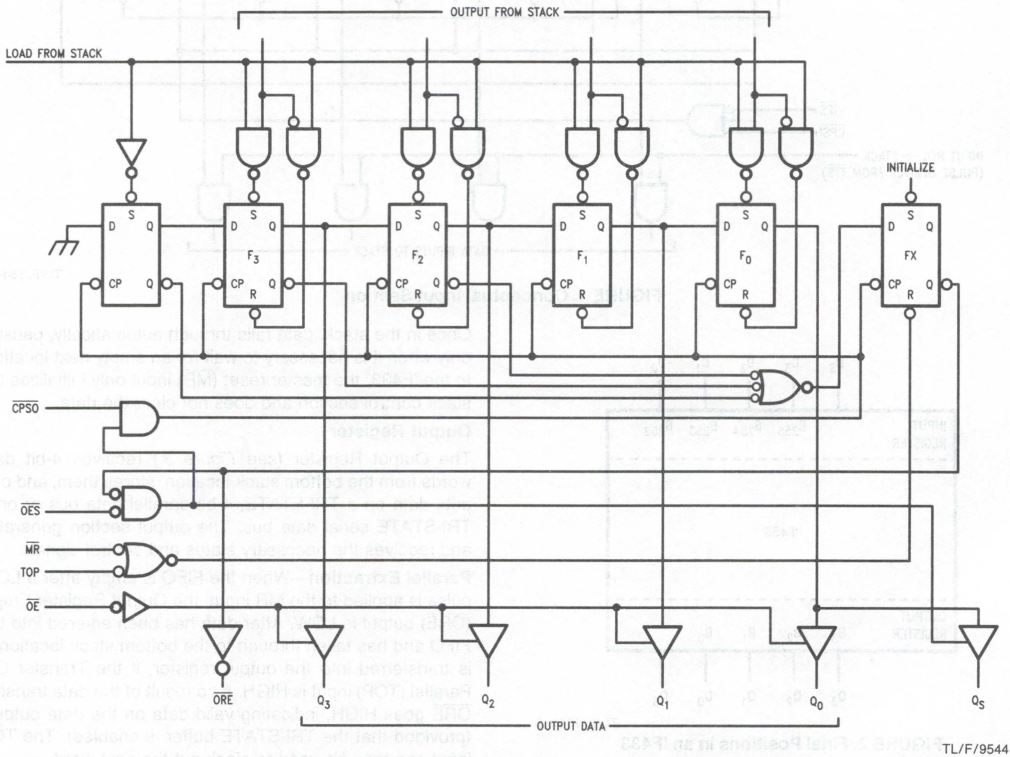

TL/F/9544–7

FIGURE 3. Conceptual Output Section

Functional Description (Continued)

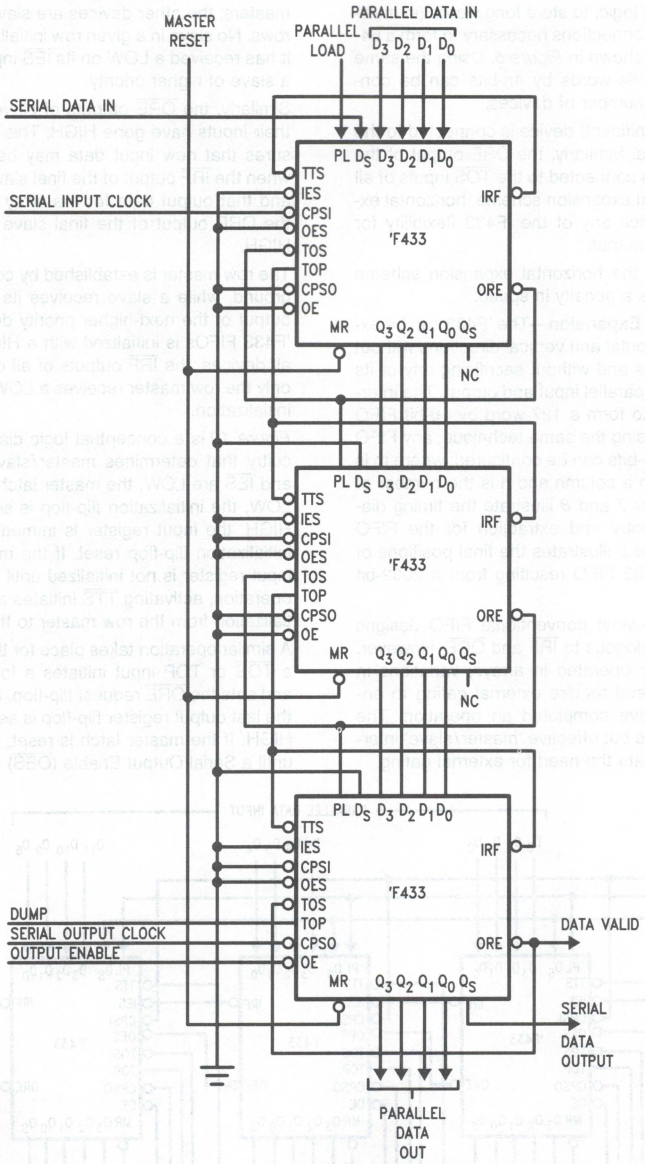

TL/F/9544–8

FIGURE 4. A Vertical Expansion Scheme

Functional Description (Continued)

Horizontal Expansion—The 'F433 can be horizontally expanded, without external logic, to store long words (in multiples of 4-bits). The interconnections necessary to form a 64-word by 12-bit FIFO are shown in *Figure 5*. Using the same technique, any FIFO of 64-words by 4n-bits can be constructed, where n is the number of devices.

The right-most (most significant) device is connected to the $\overline{TTS}$ inputs of all devices. Similarly, the $\overline{ORE}$ output of the most significant device is connected to the $\overline{TOS}$ inputs of all devices. As in the vertical expansion scheme, horizontal expansion does not sacrifice any of the 'F433 flexibility for serial/parallel input and output.

It should be noted that the horizontal expansion scheme shown in *Figure 5* exacts a penalty in speed.

Horizontal and Vertical Expansion—The 'F433 can be expanded in both the horizontal and vertical directions without any external components and without sacrificing any of its FIFO flexibility for serial/parallel input and output. The interconnections necessary to form a 127-word by 16-bit FIFO are shown in *Figure 6*. Using the same technique, any FIFO of (63m + 1)-words by 4n-bits can be configured, where m is the number of devices in a column and n is the number of devices in a row. *Figures 7* and *8* illustrate the timing diagrams for serial data entry and extraction for the FIFO shown in *Figure 6*. *Figure 9* illustrates the final positions of bits in an expanded 'F433 FIFO resulting from a 2032-bit serial bit train.

Interlocking Circuitry—Most conventional FIFO designs provide status signal analogous to $\overline{IRF}$ and $\overline{ORE}$. However, when these devices are operated in arrays, variations in unit-to-unit operating speed require external gating to ensure that all devices have completed an operation. The 'F433 incorporates simple but effective 'master/slave' interlocking circuitry to eliminate the need for external gating.


In the 'F433 array of *Figure 6*, devices 1 and 5 are the row masters; the other devices are slaves to the master in their rows. No slave in a given row initializes its input register until it has received a LOW on its $\overline{IES}$ input from a row master or a slave of higher priority.

Similarly, the $\overline{ORE}$ outputs of slaves do not go HIGH until their inputs have gone HIGH. This interlocking scheme ensures that new input data may be accepted by the array when the $\overline{IRF}$ output of the final slave in that row goes HIGH and that output data for the array may be extracted when the $\overline{ORE}$ output of the final slave in the output row goes HIGH.

The row master is established by connecting its $\overline{IES}$ input to ground, while a slave receives its $\overline{IES}$ input from the $\overline{IRF}$ output of the next-higher priority device. When an array of 'F433 FIFOs is initialized with a HIGH on the $\overline{MR}$ inputs of all devices, the $\overline{IRF}$ outputs of all devices are HIGH. Thus, only the row master receives a LOW on the $\overline{IES}$ input during initialization.

Figure 10 is a conceptual logic diagram of the internal circuitry that determines master/slave operation. When $\overline{MR}$ and $\overline{IES}$ are LOW, the master latch is set. When $\overline{TTS}$ goes LOW, the initialization flip-flop is set. If the master latch is HIGH, the input register is immediately initialized and the initialization flip-flop reset. If the master latch is reset, the input register is not initialized until $\overline{IES}$ goes LOW. In array operation, activating $\overline{TTS}$ initiates a ripple input register initialization from the row master to the last slave.


A similar operation takes place for the output register. Either a $\overline{TOS}$ or TOP input initiates a load-from-stack operation and sets the $\overline{ORE}$ request flip-flop. If the master latch is set, the last output register flip-flop is set and the $\overline{ORE}$ line goes HIGH. If the master latch is reset, the $\overline{ORE}$ output is LOW until a Serial Output Enable ($\overline{OES}$) input is received.

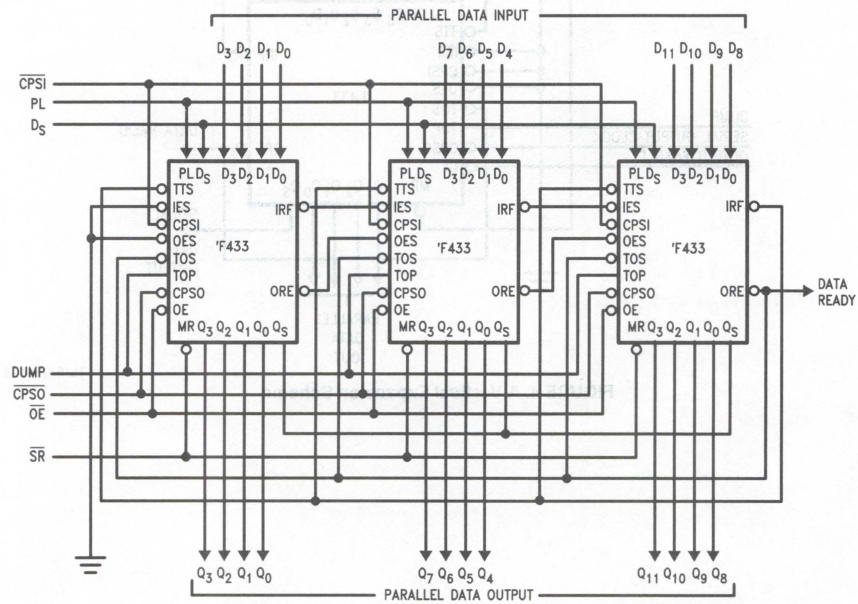

TL/F/9544–9


FIGURE 5. A Horizontal Expansion Scheme

Functional Description (Continued)

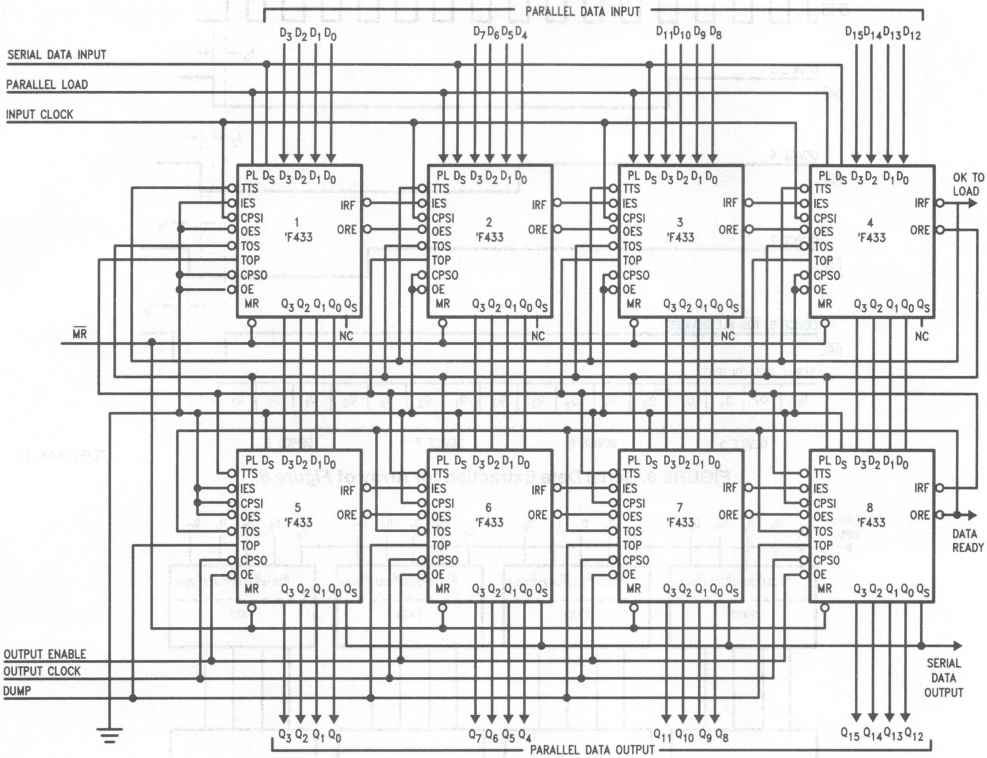

TL/F/9544–10


FIGURE 6. A 127 x 16 FIFO Array

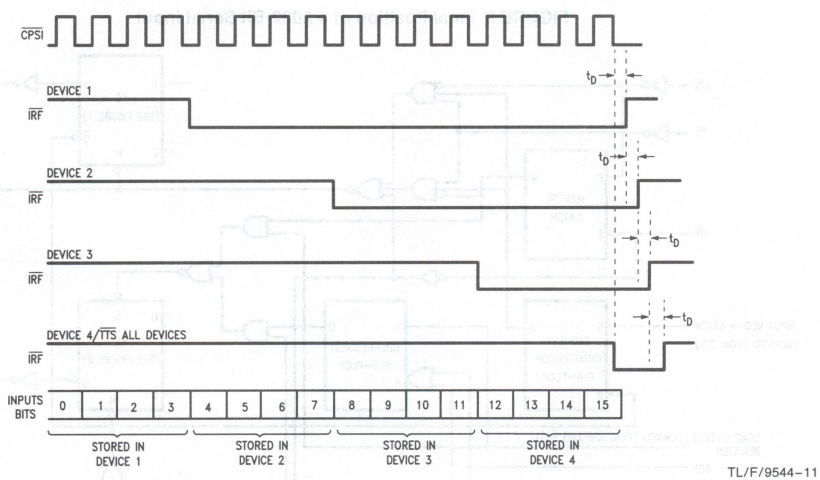

TL/F/9544–11


FIGURE 7. Serial Data Entry for Array of *Figure 6*

Functional Description (Continued)

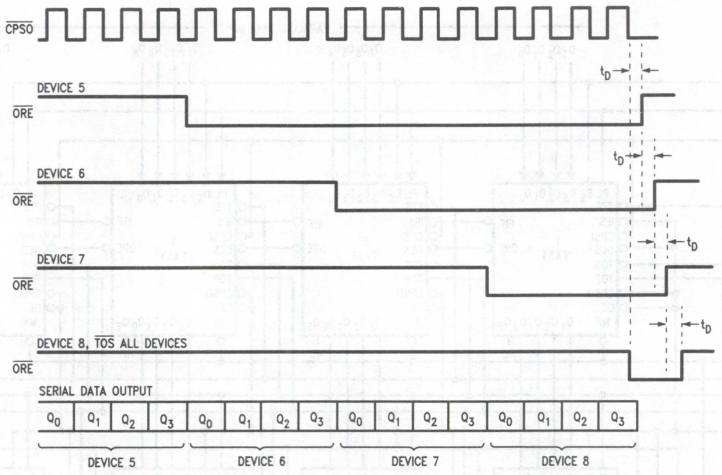


TL/F/9544–12

FIGURE 8. Serial Data Extraction for Array of *Figure 6*

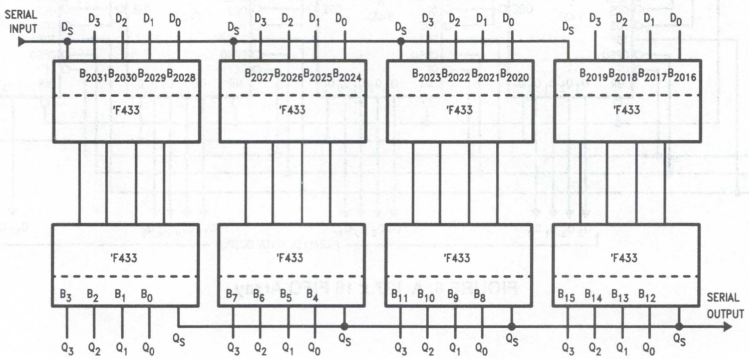

TL/F/9544–13

FIGURE 9. Final Position of a 2032-Bit Serial Input

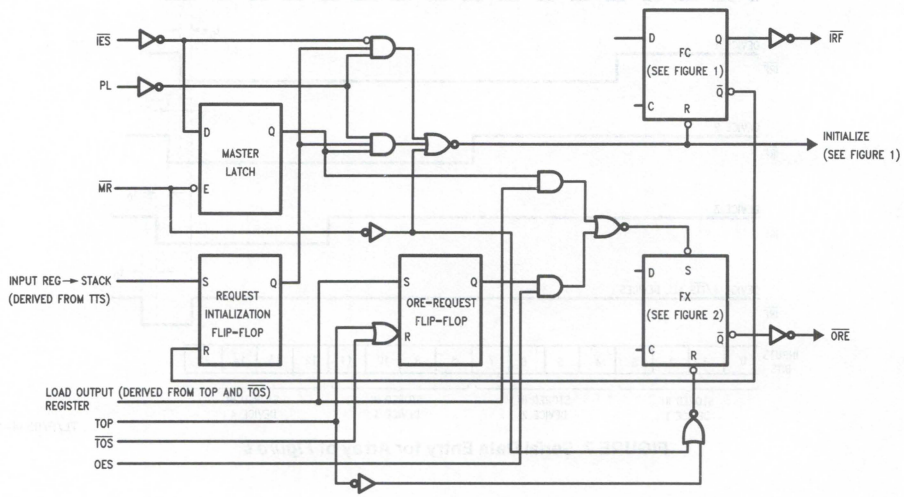

TL/F/9544–14

FIGURE 10. Conceptual Diagram, Interlocking Circuitry

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.5	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = 400 μA ($\overline{ORE}$, $\overline{IRF}$)
		54F 10% V_{CC}	2.4					I_{OH} = 5.7 mA (Q_n, Q_s)
		74F 10% V_{CC}	2.4					I_{OH} = 400 μA ($\overline{ORE}$, $\overline{IRF}$)
		74F 10% V_{CC}	2.4					I_{OH} = 5.7 mA (Q_n, Q_s)
		74F 5% V_{CC}	2.7					I_{OH} = 400 μA ($\overline{ORE}$, $\overline{IRF}$)
		74F 5% V_{CC}	2.7					I_{OH} = 5.7 mA (Q_n, Q_s)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.50	V	Min	I_{OL} = 8 mA ($\overline{ORE}$, $\overline{IRF}$)
		74F 10% V_{CC}			0.50			I_{OL} = 16 mA (Q_n, Q_s)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.4	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V (Q_n, Q_s)
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V (Q_n, Q_s)
I_{OS}	Output Short-Circuit Current		−20		−130	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			150	215	mA	Max	


AC Electrical Characteristics

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$		54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_{PHL}	Propagation Delay, Negative-Going CPSI to $\overline{IRF}$ Output	2.0	17.0			2.0	18.0	ns	433-a,b
t_{PLH}	Propagation Delay, Negative-Going $\overline{TTS}$ to $\overline{IRF}$	9.0	34.0			8.0	38.0		
t_{PLH} t_{PHL}	Propagation Delay, Negative-Going $\overline{CPSO}$ to Q_S Output	4.0 5.0	25.0 20.0			3.0 5.0	27.0 21.0	ns	433-c,d
t_{PLH} t_{PHL}	Propagation Delay, Positive-Going TOP to Q_0–Q_3 Outputs	8.0 7.0	35.0 30.0			7.0 7.0	38.0 32.0	ns	433-e
t_{PHL}	Propagation Delay, Negative-Going $\overline{CPSO}$ to $\overline{ORE}$	7.0	25.0			6.0	28.0	ns	433-c,d
t_{PHL}	Propagation Delay, Negative-Going TOP to $\overline{ORE}$	6.0	26.0			6.0	28.0	ns	433-e
t_{PLH}	Propagation Delay, Positive-Going TOP to $\overline{ORE}$	13.0	48.0			12.0	51.0		
t_{PLH}	Propagation Delay, Negative-Going $\overline{TOS}$ to Positive-Going $\overline{ORE}$	13.0	45.0			12.0	50.0	ns	433-c,d
t_{PHL}	Propagation Delay, Positive-Going PL to Negative-Going $\overline{IRF}$	4.0	22.0			4.0	23.0	ns	433-g,h
t_{PLH}	Propagation Delay, Negative-Going PL to Positive-Going $\overline{IRF}$	7.0	31.0			6.0	35.0		
t_{PLH}	Propagation Delay, Positive-Going $\overline{OES}$ to $\overline{ORE}$	9.0	38.0			8.0	44.0	ns	
t_{PLH}	Propagation Delay Positive-$\overline{IRF}$ Going $\overline{IES}$ to Positive-Going	5.0	25.0			5.0	27.0	ns	433-h
t_{PHL}	Propagation Delay MR to $\overline{ORE}$	7.0	28.0			7.0	31.0	ns	
t_{PLH}	Propagation Delay MR to $\overline{IRF}$	5.0	27.0			5.0	30.0	ns	
t_{PZH} t_{PZL}	Enable Time $\overline{OE}$ to Q_0–Q_3	1.0 1.0	16.0 14.0			1.0 1.0	18.0 16.0	ns	
t_{PHZ} t_{PLZ}	Disable Time $\overline{OE}$ to Q_0–Q_3	1.0 1.0	10.0 23.0			1.0 1.0	12.0 30.0		
t_{PZH} t_{PZL}	Enable Time Negative-Going $\overline{OES}$ to Q_S	1.0 1.0	10.0 14.0			1.0 1.0	12.0 15.0	ns	
t_{PHZ} t_{PLZ}	Disable Time Negative-Going $\overline{OES}$ to Q_S	1.0 1.0	10.0 14.0			1.0 1.0	12.0 16.0		
t_{PZH} t_{PZL}	Enable Time $\overline{TOS}$ to Q_S	1.0 1.0	35.0 35.0			1.0 1.0	42.0 39.0	ns	
t_{DFT}	Fall-Through Time	0.2	0.9			0.2	1.0	ns	433-f
t_{AP}	Parallel Appearance Time $\overline{ORE}$ to Q_0–Q_3	−20.0	−2.0			−20.0	−2.0	ns	
t_{AS}	Serial Appearance Time $\overline{ORE}$ to Q_S	−20.0	5.0			−20.0	5.0		

AC Operating Requirements

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_S to Negative $\overline{CPSI}$	7.0 7.0				7.0 7.0		ns	433-a,b
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_S to $\overline{CPSI}$	2.0 2.0				2.0 2.0			
$t_s(L)$	Setup Time, LOW $\overline{TTS}$ to $\overline{IRF}$, Serial or Parallel Mode	0.0				0.0		ns	433-a,b,g,h
$t_s(L)$	Setup Time, LOW Negative-Going $\overline{ORE}$ to Negative-Going $\overline{TOS}$	0.0				0.0		ns	433-c,d
$t_s(L)$	Setup Time, LOW Negative-Going $\overline{IES}$ to $\overline{CPSI}$	8.0				9.0		ns	433-b
$t_s(L)$	Setup Time, LOW Negative-Going $\overline{TTS}$ to $\overline{CPSI}$	30.0				33.0		ns	
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW Parallel Inputs to PL	0.0 0.0				0.0 0.0		ns	
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW Parallel Inputs to PL	4.0 4.0				4.0 4.0			
$t_w(H)$ $t_w(L)$	$\overline{CPSI}$ Pulse Width HIGH or LOW	10.0 5.0				11.0 6.0		ns	433-a,b
$t_w(H)$	PL Pulse Width, HIGH	7.0				9.0		ns	433-g,h
$t_w(L)$	$\overline{TTS}$ Pulse Width, LOW Serial or Parallel Mode	7.0				9.0		ns	433-a,b,c,d
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	7.0				9.0		ns	433-f
$t_w(H)$ $t_w(L)$	TOP Pulse Width HIGH or LOW	14.0 7.0				16.0 7.0		ns	433-e
$t_w(H)$ $t_w(L)$	$\overline{CPSO}$ Pulse Width HIGH or LOW	14.0 7.0				16.0 7.0		ns	433-c,d
t_{rec}	Recovery Time $\overline{MR}$ to Any Input	8.0				15.0		ns	433-f


Timing Waveforms

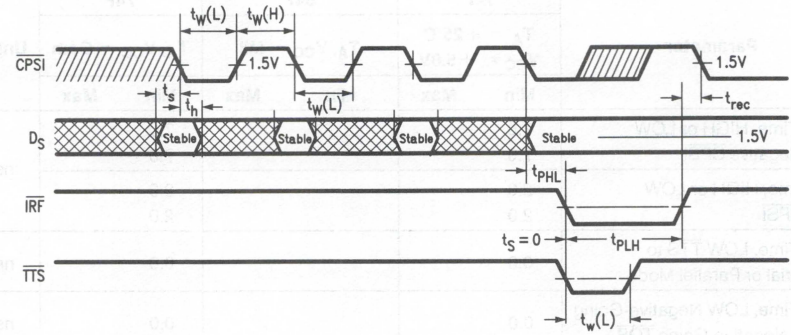

TL/F/9544–15

Conditions: Stack not full, $\overline{IES}$, PL LOW


FIGURE 433-a. Serial Input, Unexpanded or Master Operation

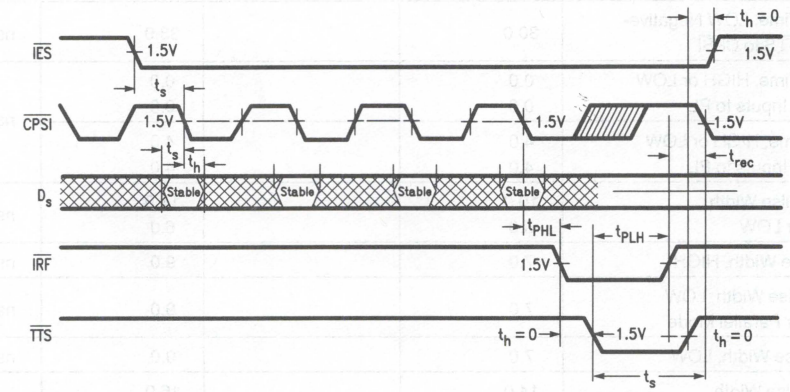

TL/F/9544–16

Conditions: Stack not full, $\overline{IES}$ HIGH when initiated, PL LOW

FIGURE 433-b. Serial Input, Expanded Slave Operation

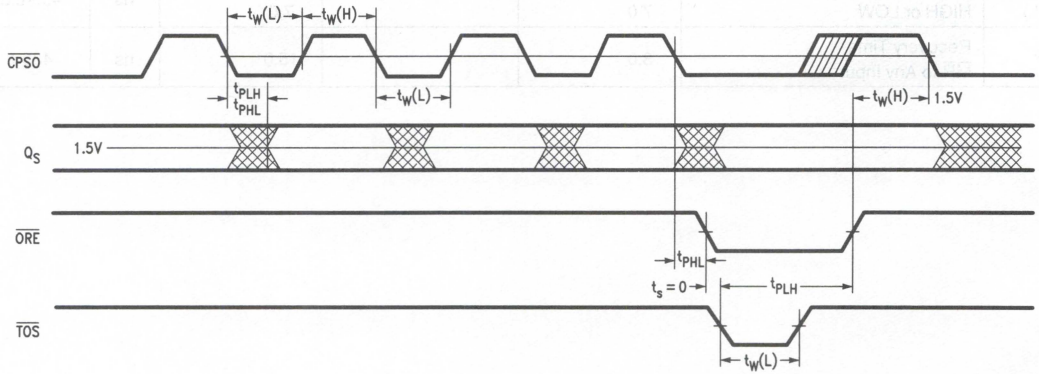


TL/F/9544–17

Conditions: Data in stack, TOP HIGH, $\overline{IES}$ LOW when initiated, $\overline{OES}$ LOW

FIGURE 433-c. Serial Output, Unexpanded or Master Operation


Timing Waveforms (Continued)

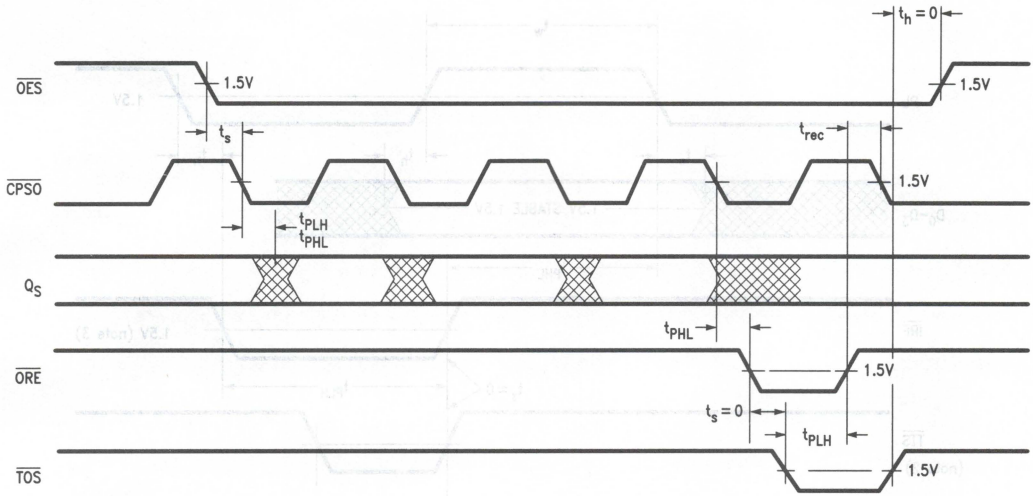

TL/F/9544–18

Conditions: Data in stack, TOP HIGH, $\overline{IES}$ HIGH when initiated


FIGURE 433-d. Serial Output, Slave Operation

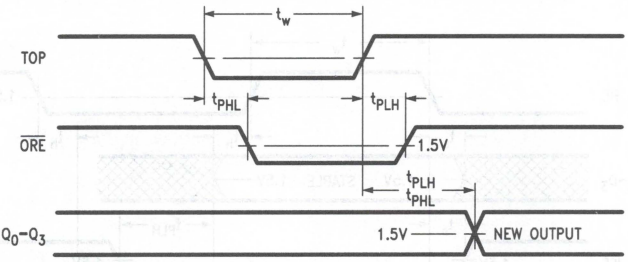

TL/F/9544–19

Conditions: $\overline{IES}$ LOW when initiated, $\overline{OE}$, $\overline{CPSO}$ LOW; data available in stack

FIGURE 433-e. Parallel Output, 4-Bit Word or Master in Parallel Expansion

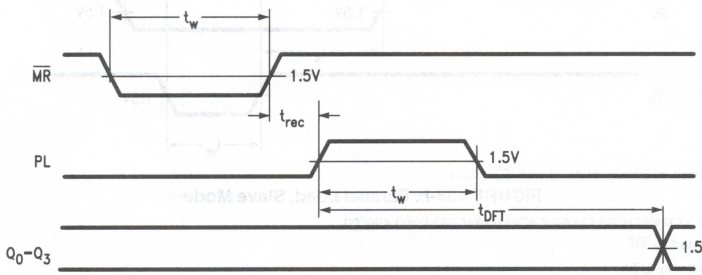


TL/F/9544–20

Conditions: $\overline{TTS}$ connected to $\overline{IRF}$, $\overline{TOS}$ connected to $\overline{ORE}$, $\overline{IES}$, $\overline{OES}$, $\overline{OE}$, $\overline{CPSO}$ LOW, TOP HIGH

FIGURE 433-f. Fall Through Time


Timing Waveforms (Continued)

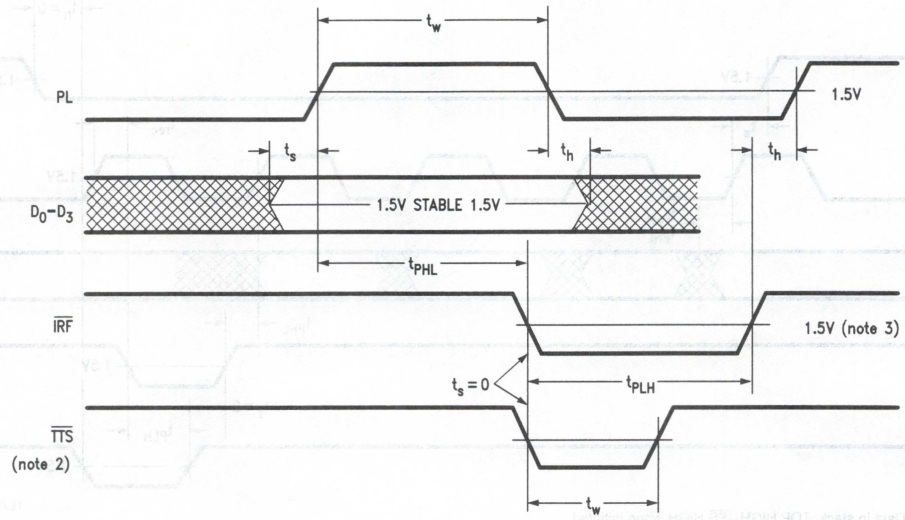

TL/F/9544–21

Conditions: Stack not full, $\overline{IES}$ LOW when initialized

FIGURE 433-g. Parallel Load Mode, 4-Bit Word (Unexpanded) or Master in Parallel Expansion

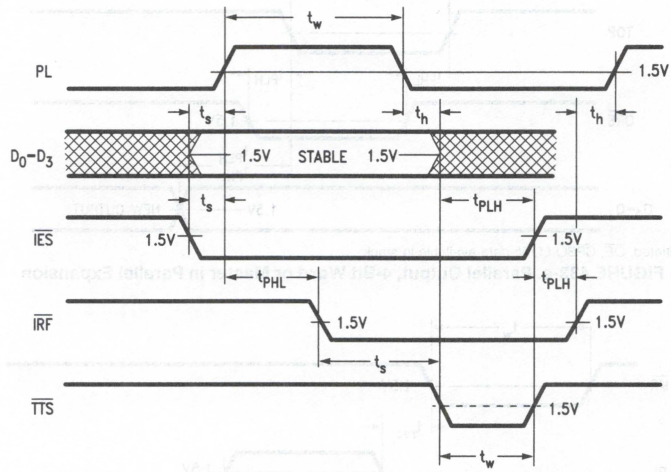

TL/F/9544–22

Conditions: Stack not full, device initialized (Note 1) with $\overline{IES}$ HIGH

FIGURE 433-h. Parallel Load, Slave Mode

Note 1: Initialization requires a master reset to occur after power has been applied.

Note 2: $\overline{TTS}$ normally connected to $\overline{IRF}$.

Note 3: If stack is full, $\overline{IRF}$ will stay LOW.

National Semiconductor

54F/74F521
8-Bit Identity Comparator

General Description


The 'F521 is an expandable 8-bit comparator. It compares two words of up to eight bits each and provides a LOW output when the two words match bit for bit. The expansion input $\overline{I}_{A=B}$ also serves as an active LOW enable input.

Features

- Compares two 8-bit words in 6.5 ns typ
- Expandable to any word length
- 20-pin package


Ordering Code: See Section 5

Logic Symbols

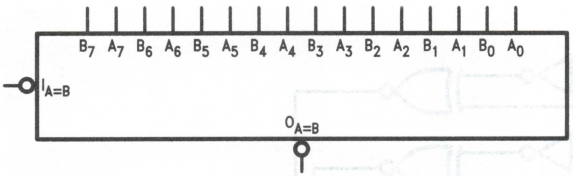

TL/F/9545–1


IEEE/IEC

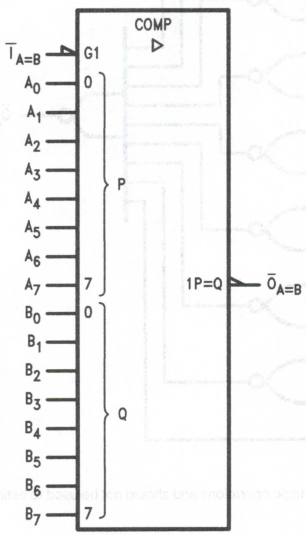

TL/F/9545–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9545–2

Pin Assignment for LCC



TL/F/9545–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0-A_7	Word A Inputs	1.0/1.0	20 μA/−0.6 mA
B_0-B_7	Word B Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{I}_{A=B}$	Expansion or Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_{A=B}$	Identity Output (Active LOW)	50/33.3	−1 mA/20 mA

Truth Table

Inputs		Output
$\overline{I}_{A=B}$	A, B	$\overline{O}_{A=B}$
L	A = B*	L
L	A ≠ B	H
H	A = B*	H
H	A ≠ B	H

H = HIGH Voltage Level
L = LOW Voltage Level
*$A_0 = B_0$, $A_1 = B_1$, $A_2 = B_2$, etc.

Logic Diagram

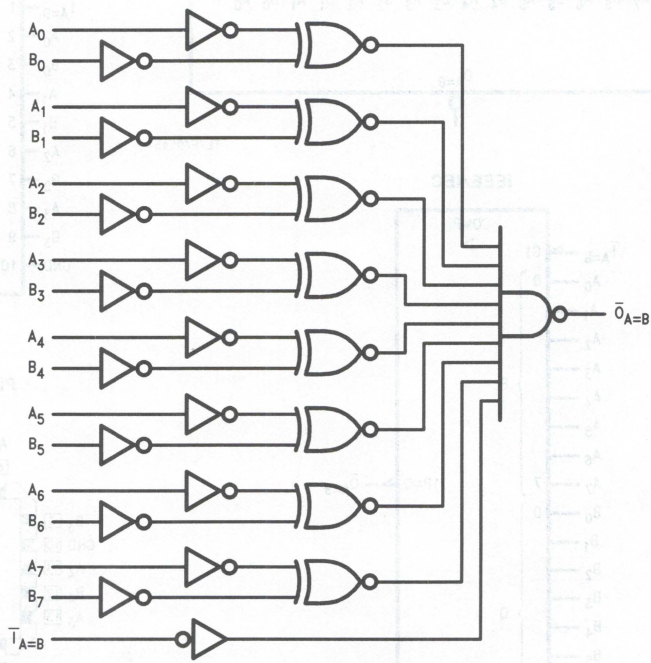

TL/F/9545–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics


Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			21	32	mA	Max	V_O = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$, $C_L = 50$ pF		74F $T_A, V_{CC} = Com$, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n or B_n to $\overline{O}_{A=B}$	3.0 4.5	7.0 7.0	10.0 10.0	3.0 4.0	14.0 15.0	3.0 4.0	11.0 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{I}_{A=B}$ to $\overline{O}_{A=B}$	3.0 3.5	5.0 6.5	6.5 9.0	3.0 3.5	8.5 13.5	3.0 3.5	7.5 10.0	ns	2–3


Applications

Ripple Expansion

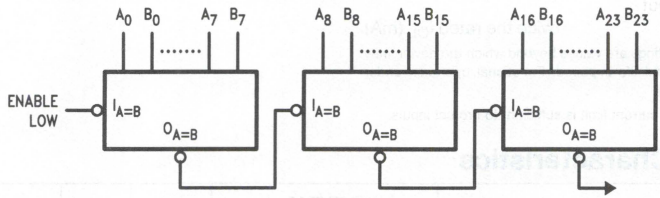

TL/F/9545–6

Parallel Expansion

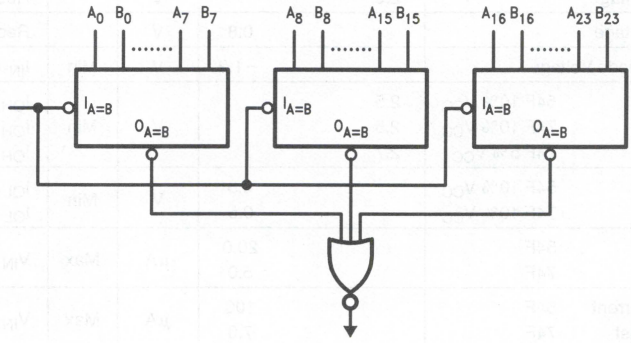

TL/F/9545–7

National Semiconductor

54F/74F524
8-Bit Registered Comparator

General Description

The 'F524 is an 8-bit bidirectional register with parallel input and output plus serial input and output progressing from LSB to MSB. All data inputs, serial and parallel, are loaded by the rising edge of the input clock. The device functions are controlled by two control lines (S_0, S_1) to execute shift, load, hold and read out.


An 8-bit comparator examines the data stored in the registers and on the data bus. Three true-HIGH, open-collector outputs representing 'register equal to bus', 'register greater than bus' and 'register less than bus' are provided. These outputs can be disabled to the OFF state by the use of Status Enable ($\overline{SE}$). A mode control has also been provided to allow twos complement as well as magnitude compare. Linking inputs are provided for expansion to longer words.

Features

- 8-Bit bidirectional register with bus-oriented input-output
- Independent serial input-output to register
- Register bus comparator with 'equal to', 'greater than' and 'less than' outputs
- Cascadable in groups of eight bits
- Open-collector comparator outputs for AND-wired expansion
- Twos complement or magnitude compare


Ordering Code: See Section 5

Logic Symbols



TL/F/9546–1


IEEE/IEC

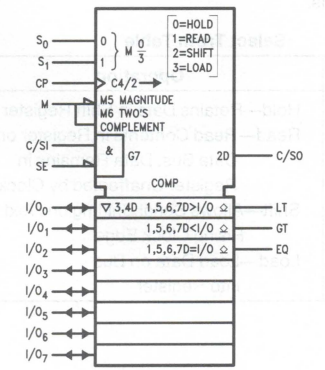

TL/F/9546–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9546–2

Pin Assignment for LCC



TL/F/9546–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
S_0, S_1	Mode Select Inputs	1.0/1.0	20 μA/−0.6 mA
C/SI	Status Priority or Serial Data Input	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{SE}$	Status Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
M	Compare Mode Select Input	1.0/1.0	20 μA/−0.6 mA
I/O_0–I/O_7	Parallel Data Inputs or TRI-STATE® Parallel Data Outputs	3.5/1.083 150/40 (33.3)	70 μA/−0.65 mA −3 mA/24 mA (20 mA)
C/SO	Status Priority or Serial Data Output	50/33.3	−1 mA/20 mA
LT	Register Less Than Bus Output	OC*/33.3	*/20 mA
EQ	Register Equal Bus Output	OC*/33.3	*/20 mA
GT	Register Greater Than Bus Output	OC*/33.3	*/20 mA

*OC = Open Collector

Functional Description

The 'F524 contains eight D-type flip-flops connected as a shift register with provision for either parallel or serial loading. Parallel data may be read from or loaded into the registers via the data bus I/O_0–I/O_7. Serial data is entered from the C/SI input and may be shifted into the register and out through the C/SO output. Both parallel and serial data entry occur on the rising edge of the input clock (CP). The operation of the shift register is controlled by two signals S_0 and S_1 according to the Select Truth Table. The TRI-STATE parallel output buffers are enabled only in the Read mode.

One port of an 8-bit comparator is attached to the data bus while the other port is tied to the outputs of the internal register. Three active-OFF, open-collector outputs indicate whether the contents held in the shift register are 'greater than', (GT), 'less than' (LT), or 'equal to' (EQ) the data on the input bus. A HIGH signal on the Status Enable ($\overline{SE}$) input disables these outputs to the OFF state. A mode control input (M) allows selection between a straightforward magnitude compare or a comparison between twos complement numbers.

For 'greater than' or 'less than' detection, the C/SI input must be held HIGH, as indicated in the Status Truth Table. The internal logic is arranged such that a LOW signal on the C/SI input disables the 'greater than' and 'less than' outputs. The C/SO output will be forced HIGH if the 'equal to' status condition exists, otherwise C/SO will be held LOW. These facilities enable the 'F524 to be cascaded for word length greater than eight bits.

Word length expansion (in groups of eight bits) can be achieved by connecting the C/SO output of the more significant byte to the C/SI input of the next less significant byte and also to its own $\overline{SE}$ input (see *Figure 1*). The C/SI input of the most significant device is held HIGH while the $\overline{SE}$ input of the least significant device is held LOW. The corresponding status outputs are AND-wired together. In the case of twos complement number compare, only the Mode input to the most significant device should be HIGH. The Mode inputs to all other cascaded devices are held LOW.

Suppose that an inequality condition is detected in the most significant device. Assuming that the byte stored in the register is greater than the byte on the data bus, the EQ and LT outputs will be pulled LOW and the GT output will float HIGH. Also the C/SO output of the most significant device will be forced LOW, disabling the subsequent devices but enabling its own status outputs. The correct status condition is thus indicated. The same applies if the registered byte is less than the data byte, only in this case the EQ and GT outputs go LOW and LT output floats HIGH.

If an equality condition is detected in the most significant device, its C/SO output is forced HIGH. This enables the next less significant device and also disables its own status outputs. In this way, the status output priority is handed down to the next less significant device which now effectively becomes the most significant byte. The worst case propagation delay for a compare operation involving 'n' cascaded 'F524s will be when an equality condition is detected in all but the least significant byte. In this case, the status priority has to ripple all the way down the chain before the correct status output is established. Typically, this will take $35 + 6(n-2)$ ns.

Select Truth Table

S_0	S_1	Operation
L	L	Hold—Retains Data in Shift Register
L	H	Read—Read Contents in Register onto Data Bus, Data Remains in Register Unaffected by Clock
H	L	Shift—Allows Serial Shifting on Next Rising Clock Edge
H	H	Load—Load Data on Bus into Register

Functional Description (Continued)


Number Representation Select Table

M	Operation
L	Magnitude Compare
H	Twos Complement Compare

Status Truth Table
(Hold Mode)

Inputs			Outputs			
$\overline{SE}$	C/SI	Data Comparison	EQ	GT	LT	C/SO
H	H	X	H	H	H	1
H	L	X	H	H	H	L
L	L	$O_A - O_H > I/O_0 - I/O_7$	L	H	H	L
L	L	$O_A - O_H = I/O_0 - I/O_7$	H	H	H	L
L	L	$O_A - O_H < I/O_0 - I/O_7$	L	H	H	L
L	H	$O_A - O_H > I/O_0 - I/O_7$	L	H	L	L
L	H	$O_A - O_H = I/O_0 - I/O_7$	H	L	L	H
L	H	$O_A - O_H < I/O_0 - I/O_7$	L	L	H	L


1 = HIGH if data are equal, otherwise LOW
H = HIGH Voltage Level
L = LOW Votlage Level
X = Immaterial

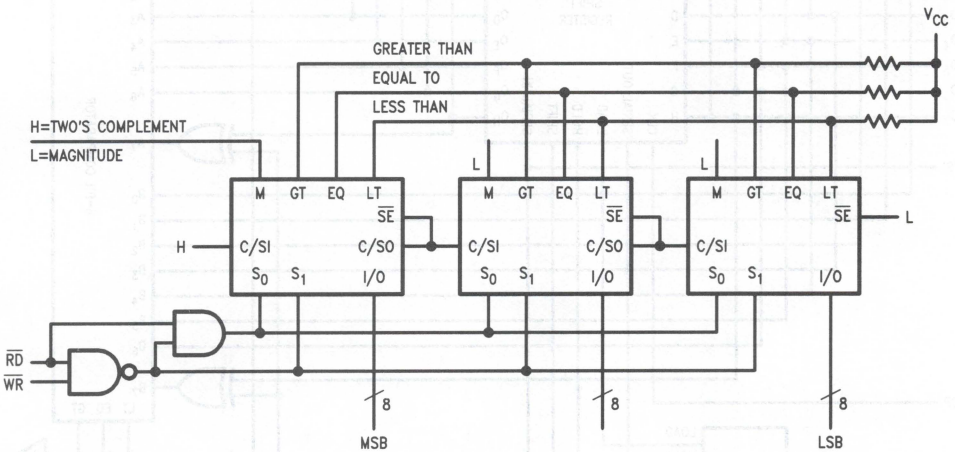

TL/F/9546–6

FIGURE 1. Cascading 'F524s for Comparing Longer Words

Block Diagram

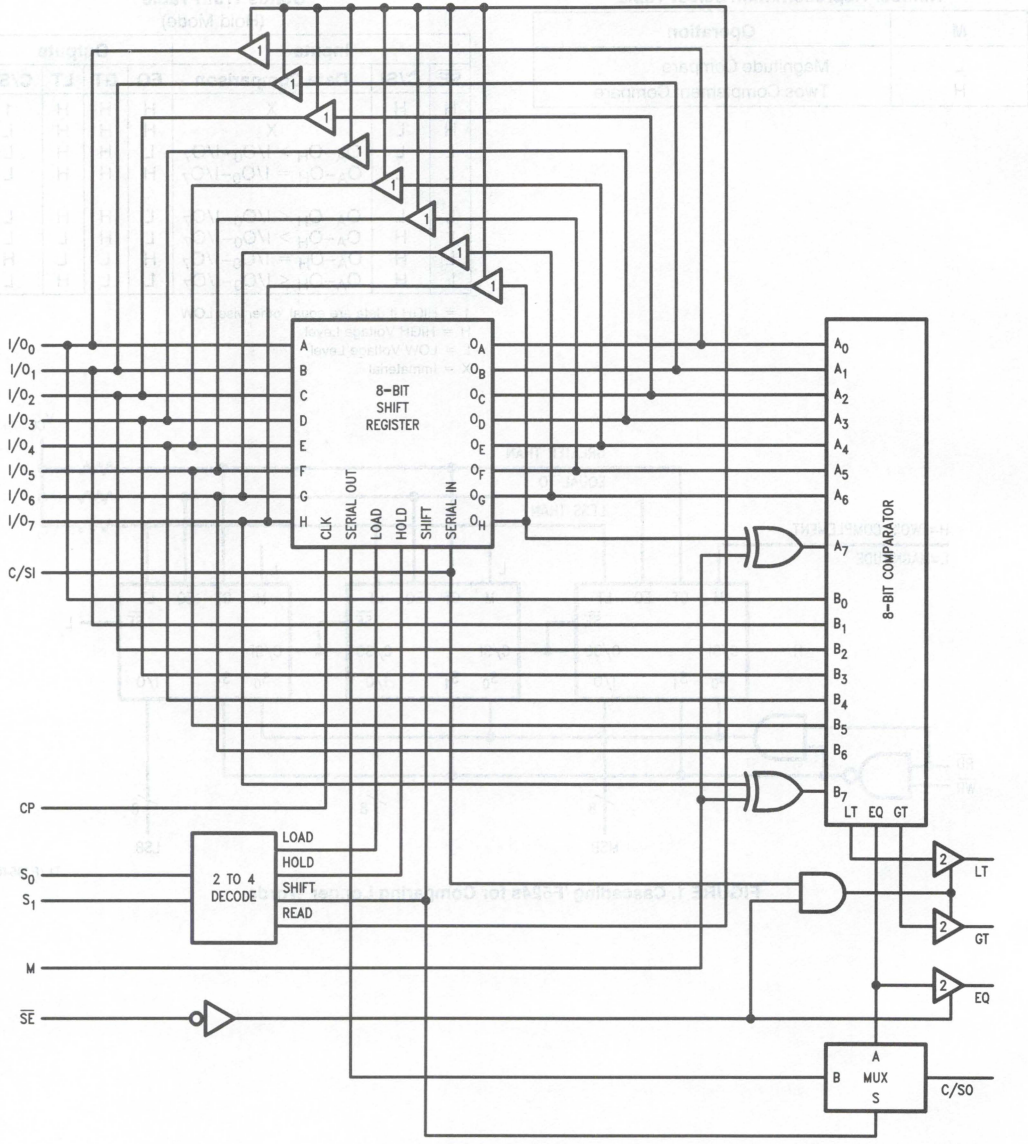

TL/F/9546–5

Notes:

1. TRI-STATE Output
2. Open-Collector Output

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (I/O_n)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA (I/O_n)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (LT, GT, EQ, C/SO)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	$V_{I/O}$ = 2.7V
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	$V_{I/O}$ = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{OHC}	Open Collector, Output OFF Leakage Test			250	μA	Min	$V_{OUT} = V_{CC}$
I_{CCH}	Power Supply Current		128	180	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		128	180	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		128	180	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Shift Frequency	50	75				50		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay I/O_n to EQ	9.0 5.0	16.5 9.5	20.0 12.0			9.0 5.0	21.0 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay I/O_n to GT	8.5 6.5	14.1 13.0	19.0 16.5			8.5 6.5	20.0 17.5		
t_{PLH} t_{PHL}	Propagation Delay I/O_n to LT	7.0 4.5	15.5 10.0	20.0 14.0			7.0 4.5	21.0 15.0		
t_{PLH} t_{PHL}	Propagation Delay I/O_n to C/SO	8.0 6.0	15.2 12.5	19.5 16.0			8.0 6.0	20.5 17.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to EQ	10.0 4.0	20.0 8.5	25.0 16.5			10.0 4.0	26.0 17.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to GT	10.0 8.5	16.5 17.0	21.0 22.0			10.0 8.5	22.0 23.0		
t_{PLH} t_{PHL}	Propagation Delay CP to LT	9.0 5.5	20.0 13.5	25.0 17.0			9.0 5.5	26.0 18.0		
t_{PLH}	Propagation Delay CP to C/SO (Load)	8.5	16.5	21.0			8.5	22.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to C/SO (Serial Shift)	5.0 4.5	10.0 9.0	13.0 11.5			5.0 4.5	14.0 12.5		
t_{PLH} t_{PHL}	Propagation Delay C/SI to GT	9.0 3.0	15.0 6.5	19.0 8.5			9.0 3.0	20.0 9.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay C/SI to LT	8.0 3.5	15.5 6.5	20.0 8.5			8.0 3.5	21.0 9.5		
t_{PLH} t_{PHL}	Propagation Delay S_0, S_1 to C/SO	6.5 5.5	11.5 14.0	14.5 18.0			6.5 5.5	15.5 19.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{SE}$ to EQ	3.5 2.5	8.0 6.0	10.5 8.0			3.5 2.5	11.5 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{SE}$ to GT	6.5 3.5	12.5 6.0	16.0 8.0			6.5 3.5	17.0 9.0		
t_{PLH} t_{PHL}	Propagation Delay $\overline{SE}$ to LT	5.0 3.5	10.5 6.0	13.5 8.0			5.0 3.5	14.5 9.0		
t_{PLH} t_{PHL}	Propagation Delay C/SI to C/SO	4.0 4.0	8.5 8.5	11.0 11.0			4.0 4.0	12.0 12.0	ns	2–3

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay M to GT	8.0 6.0	15.0 12.0	19.5 15.5			8.0 6.0	20.5 16.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay M to LT	8.0 4.5	17.0 9.5	22.0 12.0			8.0 4.5	23.0 13.0		
t_{PLH} t_{PHL}	Propagation Delay S_0, S_1 to EQ	15.0 9.0	25.0 15.0	33.0 19.0			15.0 9.0	35.0 20.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S_0, S_1 to GT	10.5 10.5	18.0 18.0	23.0 23.0			10.5 10.5	24.0 24.0		
t_{PLH} t_{PHL}	Propagation Delay S_0, S_1 to LT	13.0 12.0	22.0 19.0	28.0 24.0			13.0 12.0	30.0 25.0		
t_{PZH} t_{PZL}	Output Enable Time S_0, S_1 to I/O_n	4.5 5.5	10.0 11.0	13.0 15.0			4.5 5.5	14.0 16.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time S_0, S_1 to I/O_n	3.5 4.5	8.0 9.6	12.0 12.5			3.5 4.5	13.0 13.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW I/O_n to CP	6.0 6.0				6.0 6.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW I/O_n to CP	0 0				0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW S_0 or S_1 to CP	10.0 10.0				10.0 10.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW S_0 or S_1 to CP	0 0				0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW C/SI to CP	7.0 7.0				7.0 7.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW C/SI to CP	0 0				0 0			
$t_w(H)$	Clock Pulse Width, HIGH	5.0				5.0		ns	2–4

National Semiconductor

54F/74F525
Programmable Counter

General Description


The 'F525 is a multi-function 28-pin device. It consists of a 16-bit count-down counter, logic to control the counter, logic to control the state of the outputs and a PLA to decode the particular function selected by the user. The list of high-speed timing applications include:

Features

- Baud rate generator
- Digitally programmed monostable
- Variable system frequency generator
- Digital filter variable sampling rate
- 16-bit data path
- External trigger
- Extremely accurate one shot w/pulse widths from 50 ns to 3.27 ms @CP = 40 MHz

Ordering Code: See Section 5


Logic Symbol

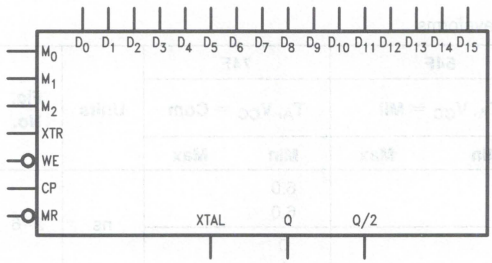

TL/F/9547–1


Connection Diagrams

Pin Assignment
DIP, SOIC and Flatpak

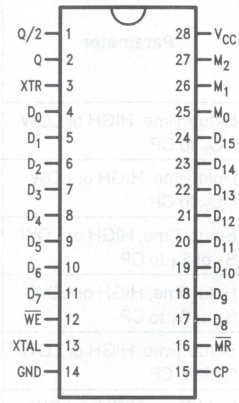

TL/F/9547–2

Pin Assignment
for LCC and PCC



TL/F/9547–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
Q	Ouput (Primarily indicates when the counter has reached zero)	50/33.3	−1 mA/20 mA
Q/2	Output (Divides Q by 2)	50/33.3	−1 mA/20 mA
M_0–M_2	Status Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Master Reset	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse	1.0/2.0	20 μA/−1.2 mA
D_0–D_{15}	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{WE}$	Write Enable Input	1.0/1.0	20 μA/−0.6 mA
XTR	External Trigger Input	1.0/3.0	20 μA/−1.8 mA
XTAL	Crystal Output	1.0/1.0	20 μA/−0.6 mA

Functional Description

The multi-function aspect of the device consists of eight different modes of operation. An explanation of the operation of the device in each of the modes follows. However, there is one operation that is independent of the selected mode: the loading of data. Data is latched into a set of data latches when $\overline{WE}$ is brought from a LOW to a HIGH state. The latches are transparent when $\overline{WE}$ is held LOW.

Operation Notes:

1. Device should be reset before operation.
2. The XTR input acts as a select line for the clock.
3. With XTR low, the clock goes into the counter.
4. With XTR high, the clock loads the counter.
5. In mode 4 and 5, during counting, the counter cannot be reloaded. XTR high freezes the count.
6. Mode 7 is the only auto-reload mode, all other modes require and XTR pulse to begin.
7. Loading 0 into the latches idles the device.

MODE 0: Interval Timer with Level Output

While XTR is HIGH, the data in the data latches is loaded into the counter upon the next positive edge of CP. The negative edge of XTR enables the count-down to begin with the next positive edge of CP. When the count reaches zero, Q, normally LOW, is brought HIGH and Q/2 toggles state. Taking XTR HIGH at any time enables the data in the data latches to be loaded into the counter on the rising edge of CP and clears Q. See *Figure 1*.

MODE 1: Interval Timer with Inverted Level Output

The operation is exactly the same as in Mode 0 except that Q is normally HIGH and goes LOW when the count reaches zero. Q/2 toggles on the negative-edge of Q. See *Figure 1*.

MODE 2: Interval Timer with Pulse Output

While XTR is HIGH, the data in the data latches is loaded into the counter upon the next positive edge of CP. The negative edge of XTR enables the count-down to begin with the next positive edge of CP. When the count reaches zero, Q, normally LOW, is brought HIGH for a single period of CP. Q/2 toggles state on the positive edge of Q. Taking XTR HIGH at any time causes the data in the data latches to be loaded into the counter on the rising edge of CP and clears Q. See *Figure 2*.

MODE 3: Interval Timer with Inverted Pulse Output

The operation is exactly the same as in Mode 2 except that Q is normally HIGH and goes LOW for a single period of CP. Q/2 toggles on the negative edge of Q. See *Figure 2*.

Function Table

M_2	M_1	M_0	Function
0	0	0	Mode 0
0	0	1	Mode 1
0	1	0	Mode 2
0	1	1	Mode 3
1	0	0	Mode 4
1	0	1	Mode 5
1	1	0	Mode 6
1	1	1	Mode 7

MODE 4: Interval Timer, Pulse Output with Count Hold

While XTR is HIGH, the data in the data latches is loaded into the counter upon the next positive edge of CP. The negative edge of XTR enables the count-down to begin with the next positive edge of CP. When the count reaches zero, Q, normally low, is brought HIGH for a single period of CP. Q/2 toggles state on the positive edge of Q. Taking XTR HIGH before the counters reach zero, stops the count-down from the point where it was held. Data cannot be reloaded into the counter until a count of zero is reached. See *Figure 3*.

MODE 5: Interval Timer, Inverted Pulse Output with Count Hold

The operation is exactly the same as Mode 4 except that Q is normally HIGH and goes LOW for a single period of CP. Q/2 toggles on the negative-edge of Q. See *Figure 3*.

Functional Description (Continued)


MODE 6: Retriggerable Synchronous One-Shot

When XTR is HIGH, the data in the data latches is loaded into the counter upon the positive edge of CP. The negative edge of XTR enables the count-down to begin with the next positive edge of CP, wehre Q, normally LOW, is then brought HIGH and the counter is decremented when the count reaches zero, Q is brought LOW, and Q/2 is toggled. Bringing XTR HIGH during the count-down will allow the data in the data latches to be loaded into the counter with the next positive edge of CP, but will not affect Q. See *Figure 4*. NOTE that the pulse width of Q will be N-1 clock cycles, where N is the number loaded into the counter. N = 1 should not be used as this may cause unpredictable results.

MODE 7: Frequency Generator


When XTR is HIGH, the data in the data latches is loaded into the counter upon the positive edge of CP. The negative edge of XTR enables the count-down to begin with the next positive edge of CP. When the count reaches zero, Q, normally LOW, is brought HIGH for a single period of CP and Q/2 is toggled. The same clock edge that brings Q HIGH, also loads the data in the data latches into the counter. The counter will start to count on the next positive edge of CP. This mode will run continuously after an initial XTR until stopped by MR. Taking XTR HIGH at any time causes the data in the data latches to be loaded into the counter and Q output to be cleared with the next positive edge of CP. See *Figure 5*.

Block Diagram

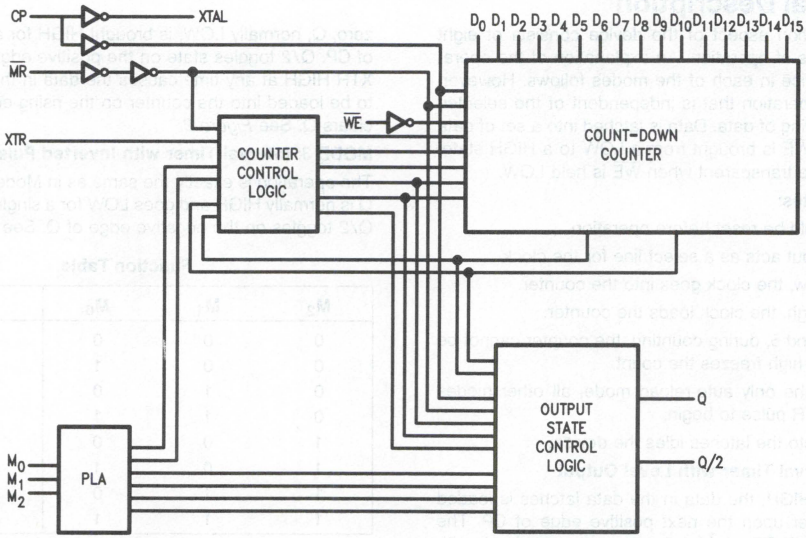

TL/F/9547–4


Timing Diagrams

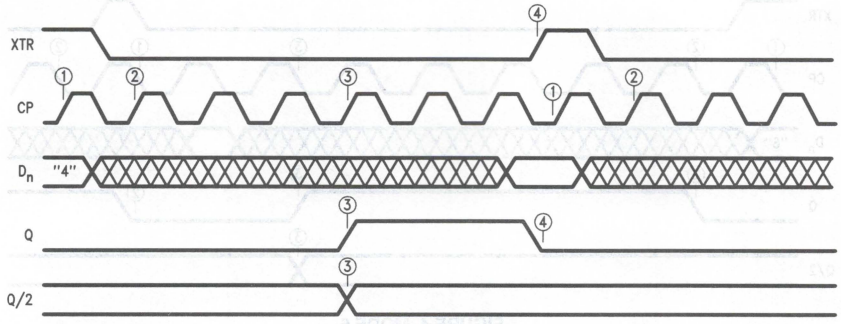

TL/F/9547–5

①With XTR HIGH, the rising edge of CP loads data from the latches to the counter.
②With XTR LOW, the rising edge of CP begins count-down cycle.
③When the count reaches zero, Q goes HIGH, and Q/2 toggles state.
④The next occurrence of XTR clears Q.


FIGURE 1. MODE 0 and MODE 1 (Inverse Output of Mode 0)
$\overline{M}_n$ = 000, 001

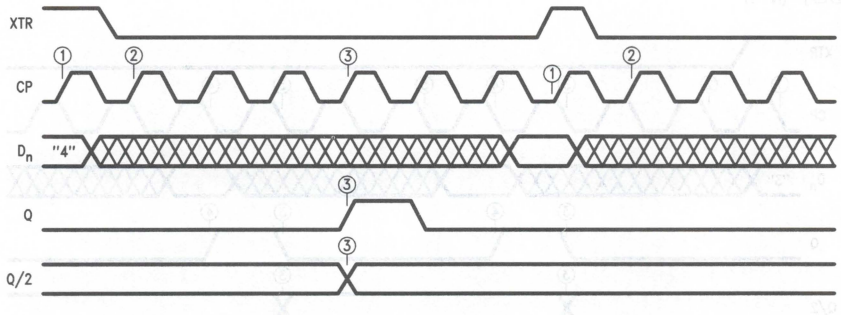

TL/F/9547–6

①With XTR HIGH, the rising edge of CP loads data from the latches to the counter.
②With XTR LOW, the rising edge of CP begins the count-down cycle.
③When the count reaches zero, Q goes HIGH for one period of CP, and Q/2 toggles state.

FIGURE 2. MODE 2 and MODE 3 (Inverse Output of Mode 2)
$\overline{M}_n$ = 010, 011

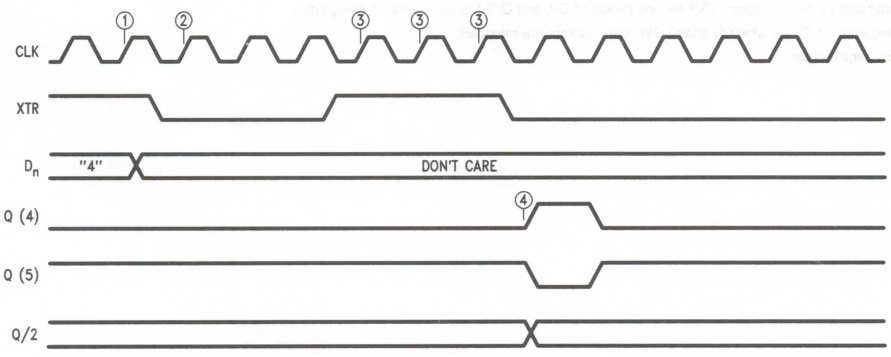


TL/F/9547–7

FIGURE 3. MODE 4 and MODE 5
$\overline{M}_n$ = 100, 101

①With XTR HIGH, the rising edge of CP loads data from the latches into the counter.
②With XTR LOW, the rising edge of CP begins the count-down.
③With XTR HIGH, during count-down, the rising edge of CP does nothing.
④When the count reaches zero, Q goes HIGH for one clock cycle and Q/2 toggles state.

Note: Once the count reaches zero, the counter can be reloaded with XTR HIGH.

Timing Diagrams (Continued)

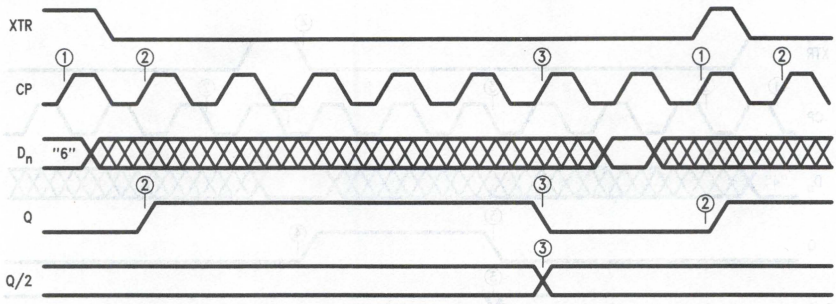

TL/F/9547–8

FIGURE 4. MODE 6
$\overline{M}_n$ = 110

①With XTR HIGH, the rising edge of CP loads data from the latches to the counter.


②With XTR LOW, the rising edge of CP begins the count, and Q goes HIGH.

③When the count reaches zero, Q goes LOW, and Q/2 toggles state. Bringing XTR HIGH before count reaches zero will reload the counter, but not affect Q.

Notes:

Loading N = 0 halts counter; loading N = 1 will result in undefined operation.

Pulse width = (2/CP) * (N − 1)

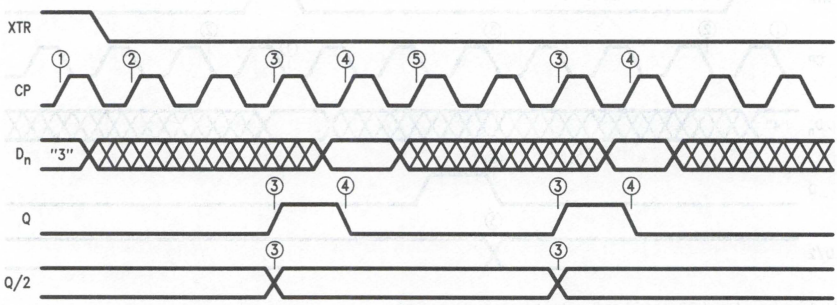

TL/F/9547–9

FIGURE 5. MODE 7
$\overline{M}_n$ = 111

①With XTR HIGH, the rising edge of CP, loads data from the latches to the counter.

②On the falling edge of XTR, the rising edge of CP begins count-down.

③When count reaches zero, Q goes HIGH for one period of CP, and Q/2 toggles on the Q rising edge.

④On the rising edge of CP on which Q goes LOW, the counters are reloaded.

⑤Count-down begins again.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			106	160	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			106	160	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	50	60				40		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to Q	9.0 8.0	16.0 12.0	20.5 15.5			8.0 7.0	22.5 17.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to Q/2	9.0 10.0	15.5 15.5	20.0 20.0			8.0 9.0	22.0 22.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay XTR to Q	8.5 6.0	12.0 10.5	15.5 13.5			7.5 5.0	17.5 15.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{MR}$ to Q	11.5 9.0	16.5 12.5	21.0 16.0			10.5 8.0	23.0 18.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{MR}$to Q/2	8.0 7.0	14.0 10.5	17.5 13.5			7.0 6.0	19.5 15.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay M_n to Q	10.0 10.5	15.0 17.0	19.0 21.5			9.0 9.5	21.0 23.5	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to $\overline{WE}$	2.0 4.0				2.5 4.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to $\overline{WE}$	0 2.0				0 2.5		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to CP	9.0 10.5				10.0 12.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to CP	0 0				0 0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW XTR to CP	7.0 8.0				8.0 9.0		ns	2–6
$t_h(H)$	Hold Time, HIGH or LOW XTR to CP	0				0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW Mode to CP	33.5 33.5				35.5 35.5		ns	2–6
$t_w(H)$	XTR Pulse Width, HIGH	11.5				13.0		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	7.0				8.0		ns	2–4
$t_w(L)$	$\overline{WE}$ Pulse Width, LOW	4.5				5.0		ns	2–4
$t_w(H)$ $t_w(L)$	CP Pulse Width HIGH or LOW	3.5 9.5				4.0 10.5		ns	2–4
t_{rec}	Recovery Time $\overline{MR}$ to CP	5.0				6.0		ns	2–6
t_{rec}	Recovery Time Mode to CP	30.0				32.0		ns	2–6

National Semiconductor

54F/74F533
Octal Transparent Latch with TRI-STATE® Outputs

General Description

The 'F533 consists of eight latches with TRI-STATE outputs for bus organized system applications. The flip-flops appear transparent to the data when Latch Enable (LE) is HIGH. When LE is LOW, the data that meets the setup times is latched. Data appears on the bus when the Output Enable ($\overline{OE}$) is LOW. When $\overline{OE}$ is HIGH the bus output is in the high impedance state. The 'F533 is the same as the 'F373, except that the outputs are inverted.


Features

- Eight latches in a single package
- TRI-STATE outputs for bus interfacing
- Inverted version of the 'F373
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC




TL/F/9548–4



TL/F/9548–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9548–2

Pin Assignment for LCC



TL/F/9548–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_7$	Complementary TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Function Table


Inputs			Output
LE	$\overline{OE}$	D	$\overline{O}$
H	L	H	L
H	L	L	H
L	L	X	$\overline{O}_0$
X	H	X	Z

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Functional Description

The 'F533 contains eight D-type latches with TRI-STATE output buffers. When the Latch Enable (LE) input is HIGH, data on the D_n inputs enters the latches. In this condition the latches are transparent, i.e., a latch output will change state each time its D input changes. When LE is LOW, the latches store the information that was present on the D inputs a setup time preceding the HIGH-to-LOW transition of LE. The TRI-STATE buffers are controlled by the Output Enable ($\overline{OE}$) input. When $\overline{OE}$ is LOW, the buffers are in the bi-state mode. When $\overline{OE}$ is HIGH the buffers are in the high impedance mode but this does not interfere with entering new data into the latches.

Logic Diagram

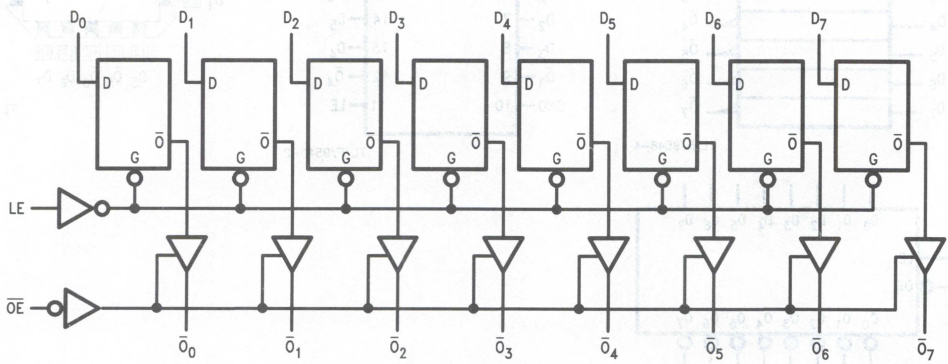

TL/F/9548–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			41	61	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	4.0	6.7	9.0	4.0	12.0	4.0	10.0	ns	2–3
t_{PHL}	D_n to $\overline{O}_n$	2.5	4.4	7.0	2.5	9.0	2.5	8.0		
t_{PLH}	Propagation Delay	5.0	7.1	11.0	5.0	14.0	5.0	13.0	ns	2–3
t_{PHL}	LE to $\overline{O}_n$	3.0	4.7	7.0	3.0	9.0	3.0	8.0		
t_{PZH}	Output Enable Time	2.0	5.9	10.0	2.0	12.5	2.0	11.0	ns	2–5
t_{PZL}		2.0	5.6	7.5	2.0	10.5	2.0	8.5		
t_{PHZ}	Output Disable Time	1.5	3.4	6.5	1.5	8.5	1.5	7.0	ns	2–5
t_{PLZ}		1.5	2.7	5.5	1.5	7.5	1.5	6.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	2.0		2.0		2.0		ns	2–6
$t_s(L)$	D_n to LE	2.0		2.0		2.0			
$t_h(H)$	Hold Time, HIGH or LOW	3.0		3.0		3.0		ns	2–6
$t_h(L)$	D_n to LE	3.0		3.0		3.0			
$t_w(H)$	LE Pulse Width, HIGH	6.0		6.0		6.0		ns	2–4

National Semiconductor

54F/74F534
Octal D-Type Flip-Flop with TRI-STATE® Outputs

General Description


The 'F534 is a high speed, low-power octal D-type flip-flop featuring separate D-type inputs for each flip-flop and TRI-STATE outputs for bus-oriented applications. A buffered Clock (CP) and Output Enable ($\overline{OE}$) are common to all flip-flops. The 'F534 is the same as the 'F374 except that the outputs are inverted.

Features

- Edge-triggered D-type inputs
- Buffered positive edge-triggered clock
- TRI-STATE outputs for bus-oriented applications
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbols



TL/F/9549–1


IEEE/IEC



TL/F/9549–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9549–2

Pin Assignment for LCC



TL/F/9549–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_7$	Complementary TRI-STATE Outputs	150/40(33.3)	−3 mA/24 mA (20 mA)

Functional Description


The 'F534 consists of eight edge-triggered flip-flops with individual D-type inputs and TRI-STATE complementary outputs. The buffered clock and buffered Output Enable are common to all flip-flops. The eight flip-flops will store the state of their individual D inputs that meet the setup and hold times requirements on the LOW-to-HIGH clock (CP) transition. With the Output Enable ($\overline{OE}$) LOW, the contents of the eight flip-flops are available at the outputs. When the $\overline{OE}$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}$ input does not affect the state of the flip-flops.

Function Table

Inputs			Output
CP	OE	D	$\overline{O}$
⌐‾	L	H	L
⌐‾	L	L	H
L	L	X	$\overline{O}_0$
X	H	X	Z

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐‾ = LOW-to-HIGH Clock Transition
Z = High Impedance
$\overline{O}_0$ = Value stored from previous clock cycle

Logic Diagram

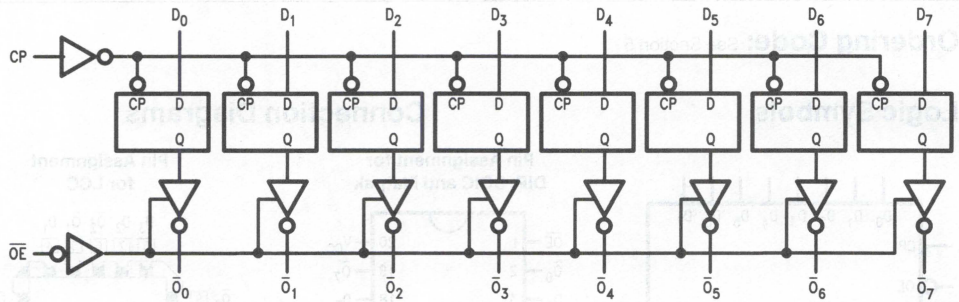

TL/F/9549–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 1.50 μA All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			55	86	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100			60		70		MHz	2–1
t_{PLH}	Propagation Delay	4.0	6.5	8.5	4.0	10.5	4.0	10.0	ns	2–3
t_{PHL}	CP to $\overline{O}_n$	4.0	6.5	8.5	4.0	11.0	4.0	10.0		
t_{PZH}	Output Enable Time	2.0	9.0	11.5	2.0	14.0	2.0	12.5	ns	2–5
t_{PZL}		2.0	5.8	7.5	2.0	10.0	2.0	8.5		
t_{PHZ}	Output Disable Time	1.5	5.3	7.0	1.5	8.0	1.5	8.0		
t_{PLZ}		1.5	4.3	5.5	1.5	7.5	1.5	6.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	2.0		2.0		2.0		ns	2–6
$t_s(L)$	D_n to CP	2.0		2.5		2.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0			
$t_h(L)$	D_n to CP	2.0		2.5		2.0			
$t_w(H)$	CP Pulse Width	7.0		7.0		7.0		ns	2–4
$t_w(L)$	HIGH or LOW	6.0		6.0		6.0			

National Semiconductor


54F/74F537
1-of-10 Decoder with TRI-STATE® Outputs

General Description

The 'F537 is one-of-ten decoder/demultiplexer with four active HIGH BCD inputs and ten mutually exclusive outputs. A polarity control input determines whether the outputs are active LOW or active HIGH. The 'F537 has TRI-STATE outputs, and a HIGH signal on the Output Enable ($\overline{OE}$) input forces all outputs to the high impedance state. Two input enables, active HIGH E_2 and active LOW $\overline{E}_1$, are available for demultiplexing data to the selected output in either non-inverted or inverted form. Input codes greater than BCD nine cause all outputs to go to the inactive state (i.e., same polarity as the P input).


Ordering Code: See Section 5

Logic Symbols



TL/F/9550-3


IEEE/IEC

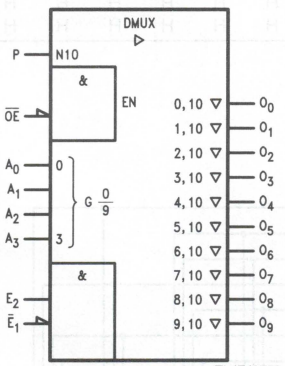

TL/F/9550-5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9550-1

Pin Assignment for LCC



TL/F/9550-2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_3	Address Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_1$	Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
E_2	Enable Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
P	Polarity Control Input	1.0/1.0	20 μA/−0.6 mA
O_0–O_9	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Truth Table

Function	Inputs									Outputs								
	$\overline{OE}$	$\overline{E}_1$	E_2	A_3	A_2	A_1	A_0	O_0	O_1	O_2	O_3	O_4	O_5	O_6	O_7	O_8	O_9
High Impedance	H	X	X	X	X	X	X	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
Disable	L	H	X	X	X	X	X			Outputs Equal P Input							
	L	X	L	X	X	X	X										
Active HIGH Output (P = L)	L	L	H	L	L	L	L	H	L	L	L	L	L	L	L	L	L
	L	L	H	L	L	L	H	L	H	L	L	L	L	L	L	L	L
	L	L	H	L	L	H	L	L	L	H	L	L	L	L	L	L	L
	L	L	H	L	L	H	H	L	L	L	H	L	L	L	L	L	L
	L	L	H	L	H	L	L	L	L	L	L	H	L	L	L	L	L
	L	L	H	L	H	L	H	L	L	L	L	L	H	L	L	L	L
	L	L	H	L	H	H	L	L	L	L	L	L	L	H	L	L	L
	L	L	H	L	H	H	H	L	L	L	L	L	L	L	H	L	L
	L	L	H	H	L	L	L	L	L	L	L	L	L	L	L	H	L
	L	L	H	H	L	L	H	L	L	L	L	L	L	L	L	L	H
	L	L	H	H	X	H	X	L	L	L	L	L	L	L	L	L	L
	L	L	H	H	H	X	X	L	L	L	L	L	L	L	L	L	L
Active LOW Output (P = H)	L	L	H	L	L	L	L	L	H	H	H	H	H	H	H	H	H
	L	L	H	L	L	L	H	H	L	H	H	H	H	H	H	H	H
	L	L	H	L	L	H	L	H	H	L	H	H	H	H	H	H	H
	L	L	H	L	L	H	H	H	H	H	L	H	H	H	H	H	H
	L	L	H	L	H	L	L	H	H	H	H	L	H	H	H	H	H
	L	L	H	L	H	L	H	H	H	H	H	H	L	H	H	H	H
	L	L	H	L	H	H	L	H	H	H	H	H	H	L	H	H	H
	L	L	H	L	H	H	H	H	H	H	H	H	H	H	L	H	H
	L	L	H	H	L	L	L	H	H	H	H	H	H	H	H	L	H
	L	L	H	H	L	L	H	H	H	H	H	H	H	H	H	H	L
	L	L	H	H	X	H	X	H	H	H	H	H	H	H	H	H	H
	L	L	H	H	H	X	X	H	H	H	H	H	H	H	H	H	H

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram

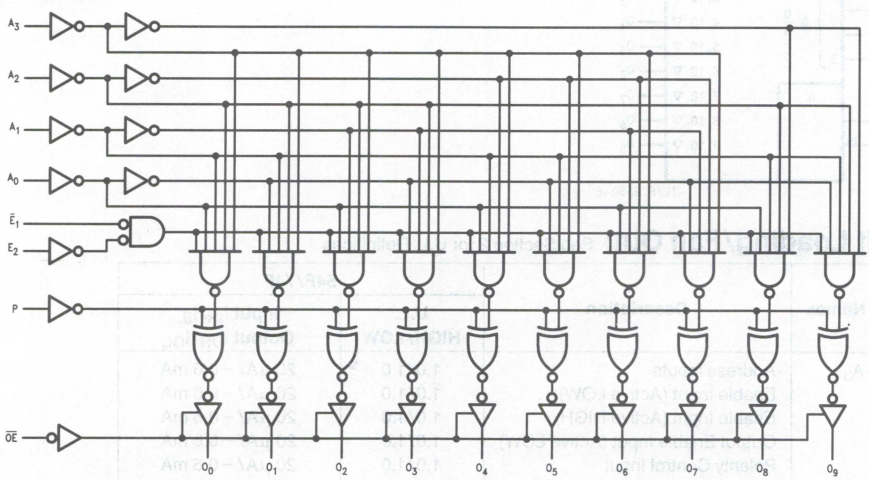

TL/F/9550–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current				56	mA	Max	V_O = HIGH
I_{CCZ}	Power Supply Current			44	66	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	6.0	11.0	16.0			6.0	17.0	ns	2–3
t_{PHL}	A_n to O_n	4.0	7.5	11.0			4.0	12.0		
t_{PLH}	Propagation Delay	5.0	8.5	14.5			5.0	15.5		
t_{PHL}	$\overline{E}_1$ to O_n	4.0	6.5	9.0			4.0	10.0		
t_{PLH}	Propagation Delay	6.0	11.0	16.0			6.0	17.0	ns	2–3
t_{PHL}	E_2 to O_n	5.0	10.0	14.0			5.0	15.0		
t_{PLH}	Propagation Delay	6.0	11.5	18.0			6.0	20.0		
t_{PHL}	P to O_n	6.0	11.0	16.0			6.0	17.0		
t_{PZH}	Output Enable Time	3.0	5.5	10.5			3.0	11.5	ns	2–5
t_{PZL}	$\overline{OE}$ to O_n	5.0	9.0	13.0			5.0	14.0		
t_{PHZ}	Output Disable Time	2.0	4.0	6.0			2.0	7.0		
t_{PLZ}	$\overline{OE}$ to O_n	3.0	5.0	7.0			3.0	8.0		

National Semiconductor

54F/74F538
1-of-8 Decoder with TRI-STATE® Outputs

General Description

The 'F538 decoder/demultiplexer accepts three Address (A_0–A_2) input signals and decodes them to select one of eight mutually exclusive outputs. A polarity control input (P) determines whether the outputs are active LOW or active HIGH. A HIGH Signal on either of the active LOW Output Enable ($\overline{OE}$) inputs forces all outputs to the high impedance state. Two active HIGH and two active LOW input enables are available for easy expansion to 1-of 32 decoding with four packages, or for data demultiplexing to 1-of-8 or 1-of-16 destinations.


Features

- Output polarity control
- Data demultiplexing capability
- Multiple enables for expansion
- TRI-STATE outputs


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC

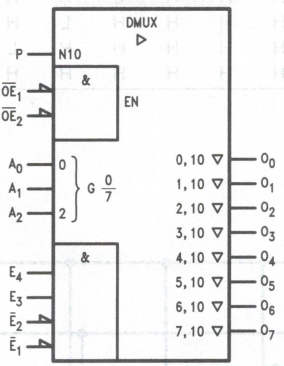


TL/F/9551–5



TL/F/9551–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9551–2

Pin Assignment for LCC



TL/F/9551–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_2	Address Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_1$, $\overline{E}_2$	Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
E_3, E_4	Enable Inputs (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
P	Polarity Control Input	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}_1$, $\overline{OE}_2$	Output Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Truth Table

Function	Inputs									Outputs							
	$\overline{OE}_1$	$\overline{OE}_2$	$\overline{E}_1$	E_2	E_3	E_4	A_2	A_1	A_0	O_0	O_1	O_2	O_3	O_4	O_5	O_6	O_7
High Impedance	H	X	X	X	X	X	X	X	X	Z	Z	Z	Z	Z	Z	Z	Z
	X	H	X	X	X	X	X	X	X	Z	Z	Z	Z	Z	Z	Z	Z
Disable	L	L	H	X	X	X	X	X	X	Outputs Equal P Input							
	L	L	X	H	X	X	X	X	X								
	L	L	X	X	L	X	X	X	X								
	L	L	X	X	X	L	X	X	X								
Active HIGH Output (P = L)	L	L	L	L	H	H	L	L	L	H	L	L	L	L	L	L	L
	L	L	L	L	H	H	L	L	H	L	H	L	L	L	L	L	L
	L	L	L	L	H	H	L	H	L	L	L	H	L	L	L	L	L
	L	L	L	L	H	H	L	H	H	L	L	L	H	L	L	L	L
	L	L	L	L	H	H	H	L	L	L	L	L	L	H	L	L	L
	L	L	L	L	H	H	H	L	H	L	L	L	L	L	H	L	L
	L	L	L	L	H	H	H	H	L	L	L	L	L	L	L	H	L
	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	L	H
Active LOW Output (P = H)	L	L	L	L	H	H	L	L	L	L	H	H	H	H	H	H	H
	L	L	L	L	H	H	L	L	H	H	L	H	H	H	H	H	H
	L	L	L	L	H	H	L	H	L	H	H	L	H	H	H	H	H
	L	L	L	L	H	H	L	H	H	H	H	H	L	H	H	H	H
	L	L	L	L	H	H	H	L	L	H	H	H	H	L	H	H	H
	L	L	L	L	H	H	H	L	H	H	H	H	H	H	L	H	H
	L	L	L	L	H	H	H	H	L	H	H	H	H	H	H	L	H
	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram

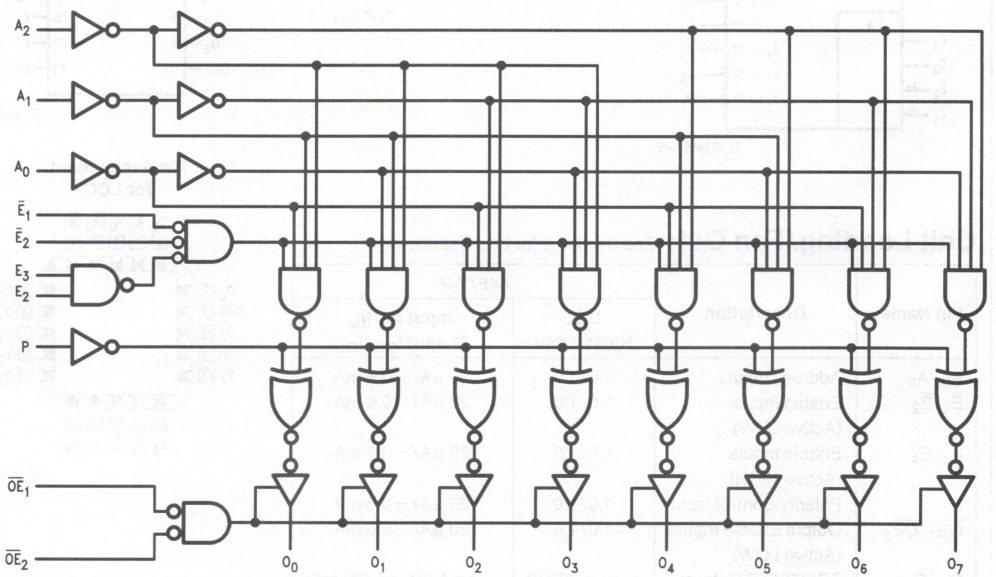

TL/F/9551–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			31	45	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			37	56	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			37	56	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	6.0	11.0	16.0			6.0	17.0	ns	2–3
t_{PHL}	A_n to O_n	4.0	7.5	11.0			4.0	12.0		
t_{PLH}	Propagation Delay	5.0	8.5	15.0			5.0	16.0		
t_{PHL}	$\overline{E}_1$ or $\overline{E}_2$ to O_n	4.0	6.5	9.0			4.0	10.0		
t_{PLH}	Propagation Delay	6.0	11.0	16.0			6.0	17.0	ns	2–3
t_{PHL}	E_3 or E_4 to O_n	5.0	10.0	14.0			5.0	15.0		
t_{PLH}	Propagation Delay	6.0	11.5	18.0			6.0	20.0		
t_{PHL}	P to O_n	6.0	11.0	16.0			6.0	17.0		
t_{PZH}	Output Enable Time	3.0	5.5	10.0			3.0	11.0	ns	2–5
t_{PZL}	$\overline{OE}_1$ or $\overline{OE}_2$ to O_n	5.0	9.0	13.0			5.0	14.0		
t_{PHZ}	Output Disable Time	2.0	4.0	6.0			2.0	7.0		
t_{PLZ}	$\overline{OE}_1$ or $\overline{OE}_2$ to O_n	3.0	5.0	8.0			3.0	9.0		

National Semiconductor


54F/74F539
Dual 1-of-4 Decoder with TRI-STATE® Outputs

General Description

The 'F539 contains two independent decoders. Each accepts two Address (A_0, A_1) input signals and decodes them to select one of four mutually exclusive outputs. A polarity control input (P) determines whether the outputs are active HIGH (P = L) or active LOW (P = H). An active LOW input Enable ($\overline{E}$) is available for data demultiplexing; data is routed to the selected output in non-inverted form in the active LOW mode or in inverted form in the active HIGH mode. A HIGH signal on the active LOW Output Enable ($\overline{OE}$) input forces the TRI-STATE outputs to the high impedance state.


Ordering Code: See Section 5

Logic Symbols

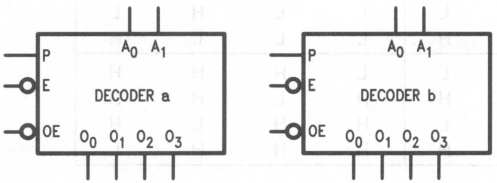

TL/F/9552–1


IEEE/IEC

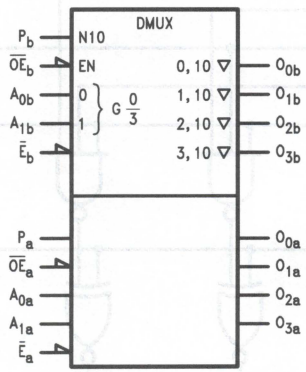

TL/F/9552–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9552–2

Pin Assignment for LCC



TL/F/9552–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_{0a}–A_{1a}	Side A Address Inputs	1.0/1.0	20 μA/−0.6 mA
A_{0b}–A_{1b}	Side B Address Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_a$, $\overline{E}_b$	Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}_a$, $\overline{OE}_b$	Output Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
P_a, P_b	Polarity Control Inputs	1.0/1.0	20 μA/−0.6 mA
O_{0a}–O_{3a}	Side A TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
O_{0b}–O_{3b}	Side B TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Truth Table (each half)

Function	Inputs				Outputs			
	$\overline{OE}$	$\overline{E}$	A_1	A_0	O_0	O_1	O_2	O_3
High Impedance	H	X	X	X	Z	Z	Z	Z
Disable	L	H	X	X	$O_n = P$			
Active HIGH Output (P = L)	L	L	L	L	H	L	L	L
	L	L	L	H	L	H	L	L
	L	L	H	L	L	L	H	L
	L	L	H	H	L	L	L	H
Active LOW Output (P = H)	L	L	L	L	L	H	H	H
	L	L	L	H	H	L	H	H
	L	L	H	L	H	H	L	H
	L	L	H	H	H	H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Logic Diagram (one half shown)

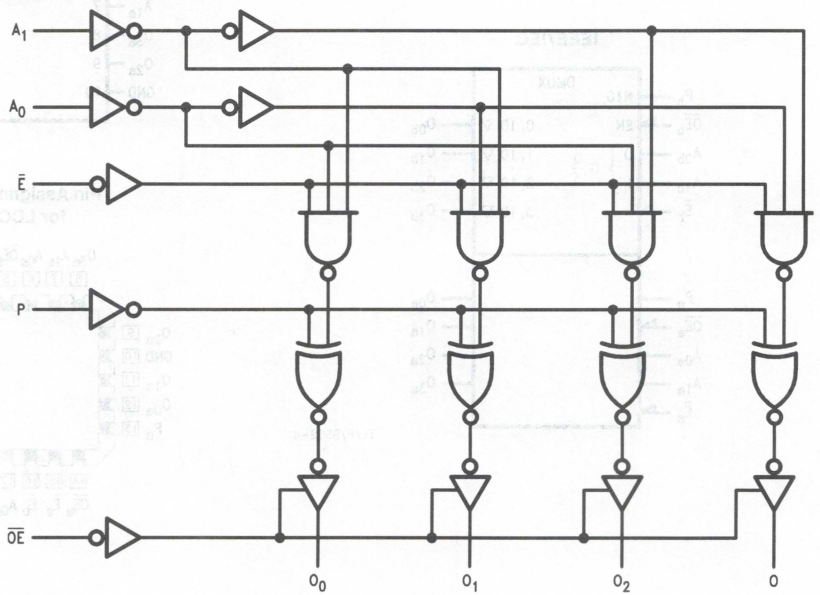

TL/F/9552–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			28	45	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			40	60	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			40	60	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n to O_n	4.0 4.0	14.5 9.5	18.5 12.0			3.5 4.0	19.5 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}$ to O_n	5.0 4.0	12.0 7.5	16.0 9.5			5.5 4.0	17.0 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay P to O_n	7.5 5.0	14.5 11.0	21.5 16.5			4.5 4.5	22.5 17.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to O_n	4.5 5.5	8.0 10.0	10.5 13.0			4.0 5.0	11.5 14.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to O_n	2.0 3.0	4.5 6.5	6.5 8.5			2.0 3.0	7.0 9.5	ns	2–5

National Semiconductor

54F/74F540 • 54F/74F541
Octal Buffer/Line Driver with TRI-STATE® Outputs

General Description

The 'F540 and 'F541 are similar in function to the 'F240 and 'F244 respectively, except that the inputs and outputs are on opposite sides of the package (see Connection Diagrams). This pinout arrangement makes these devices especially useful as output ports for microprocessors, allowing ease of layout and greater PC board density.

Features


- TRI-STATE outputs drive bus lines
- Inputs and outputs opposite side of package, allowing easier interface to microprocessors

Ordering Code: See Section 5

Connection Diagrams


Pin Assignment for DIP, SOIC and Flatpak

'F540




TL/F/9553–1

Pin Assignment for LCC




TL/F/9553–2

'F541



TL/F/9553–4



TL/F/9553–5

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}_1$, $\overline{OE}_2$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
I_n	Inputs	1.0/1.0	20 μA/−0.6 mA
O_n, $\overline{O}_n$	Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)


Truth Table

Inputs			Outputs	
$\overline{OE}_1$	$\overline{OE}_2$	I	'F540	'F541
L	L	H	L	H
H	X	X	Z	Z
X	H	X	Z	Z
L	L	L	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance


Logic Diagrams

IEEE/IEC
'F540

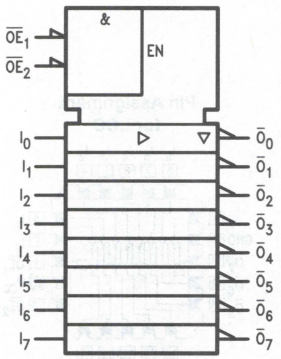

TL/F/9553–3

IEEE/IEC
'F541

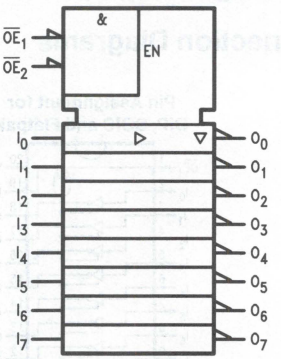

TL/F/9553–6

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{CCH}	Power Supply Current ('F540)		11	20	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F540)		53	75	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F540)		31	45	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F541)		26	35	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F541)		55	75	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F541)		31	55	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F			54F		74F		Units	Fig. No.
		T_A = +25°C V_{CC} = +5.0V C_L = 50 pF			T_A, V_{CC} = Mil C_L = 50 pF		T_A, V_{CC} = Com C_L = 50 pF			
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	1.5	3.0	5.0	1.0	6.0	1.0	5.5	ns	2–3
t_{PHL}	Data to Output ('F540)	1.0	2.0	4.0	1.0	4.5	1.0	4.0		
t_{PZH}	Output Enable Time ('F540)	2.5	4.9	8.0	2.5	9.0	2.5	8.5	ns	2–5
t_{PZL}		3.5	5.8	10.0	3.5	11.0	3.5	10.5		
t_{PHZ}	Output Disable Time ('F540)	1.5	3.4	6.0	1.5	7.0	1.5	6.5		
t_{PLZ}		1.0	2.5	5.5	1.0	7.5	1.0	6.0		
t_{PLH}	Propagation Delay	1.5	3.3	5.5			1.5	6.0	ns	2–3
t_{PHL}	Data to Output ('F541)	1.5	2.7	5.5			1.5	6.0		
t_{PZH}	Output Enable Time ('F541)	3.0	5.8	8.0			2.5	9.5	ns	2–5
t_{PZL}		3.5	6.1	8.5			3.0	9.5		
t_{PHZ}	Output Disable Time ('F541)	1.5	3.4	6.0			1.5	6.5		
t_{PLZ}		1.5	2.9	5.5			1.5	6.0		

National Semiconductor

54F/74F543
Octal Registered Transceiver

General Description


The 'F543 octal transceiver contains two sets of D-type latches for temporary storage of data flowing in either direction. Separate Latch Enable and Output Enable inputs are provided for each register to permit independent control of inputting and outputting in either direction of data flow. The A outputs are guaranteed to sink 24 mA (20 mA Mil) while the B outputs are rated for 64 mA (48 mA Mil).

Features

- 8-bit octal transceiver
- Back-to-back registers for storage
- Separate controls for data flow in each direction
- A outputs sink 24 mA (20 mA Mil)
- B outputs sink 64 mA (48 mA Mil)
- 300 mil slim package

Ordering Code: See Section 5


Logic Symbols



TL/F/9554–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

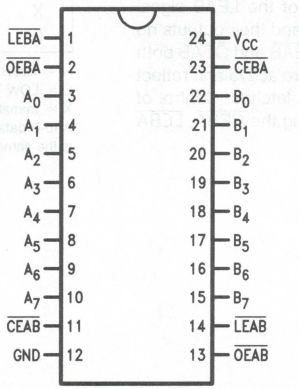


TL/F/9554–2

Pin Assignment for LCC



TL/F/9554–3

IEEE/IEC

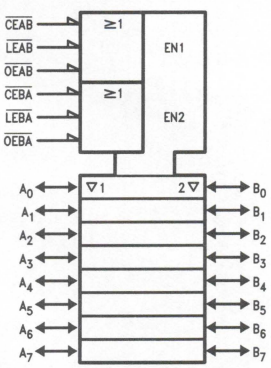

TL/F/9554–5

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OEAB}$	A-to-B Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OEBA}$	B-to-A Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{CEAB}$	A-to-B Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$\overline{CEBA}$	B-to-A Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$\overline{LEAB}$	A-to-B Latch Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{LEBA}$	B-to-A Latch Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
A_0–A_7	A-to-B Data Inputs or	3.5/1.083	70 μA/−650 μA
	B-to-A TRI-STATE® Outputs	150/40 (33.8)	−3 mA/24 mA (20 mA)
B_0–B_7	B-to-A Data Inputs or	3.5/1.083	70 μA/−650 μA
	A-to-B TRI-STATE Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

Functional Description


The 'F543 contains two sets of eight D-type latches, with separate input and output controls for each set. For data flow from A to B, for example, the A-to-B Enable ($\overline{CEAB}$) input must be LOW in order to enter data from A_0–A_7 or take data from B_0–B_7, as indicated in the Data I/O Control Table. With $\overline{CEAB}$ LOW, a LOW signal on the A-to-B Latch Enable ($\overline{LEAB}$) input makes the A-to-B latches transparent; a subsequent LOW-to-HIGH transition of the $\overline{LEAB}$ signal puts the A latches in the storage mode and their outputs no longer change with the A inputs. With $\overline{CEAB}$ and $\overline{OEAB}$ both LOW, the TRI-STATE B output buffers are active and reflect the data present at the output of the A latches. Control of data flow from B to A is similar, but using the $\overline{CEBA}$, $\overline{LEBA}$ and $\overline{OEBA}$ inputs.

Data I/O Control Table

Inputs			Latch Status	Output Buffers
$\overline{CEAB}$	$\overline{LEAB}$	$\overline{OEAB}$		
H	X	X	Latched	High Z
X	H	X	Latched	—
L	L	X	Transparent	—
X	X	H	—	High Z
L	X	L	—	Driving

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
A-to-B data flow shown; B-to-A flow control is the same, except using $\overline{CEBA}$, $\overline{LEBA}$ and $\overline{OEBA}$

Logic Diagram

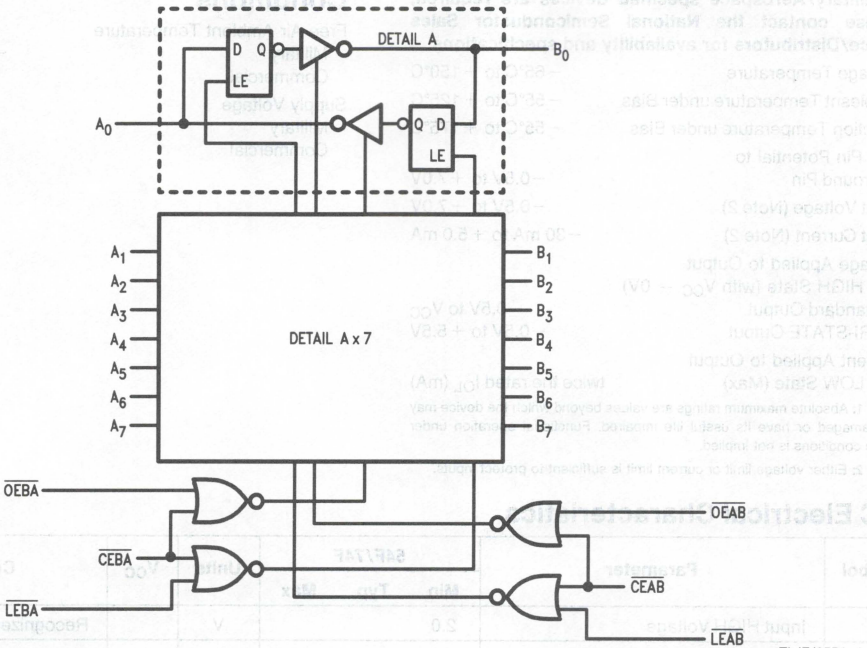

TL/F/9554–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambiesnt Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (A_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n (B_n)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (A_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n)
		74F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (A_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n, B_n)
		74F 5% V_{CC}	2.0					I_{OH} = −15 mA (B_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (A_n)
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA (B_n)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (A_n)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (B_n)
I_{IH}	Input HIGH Current	54F			20.0	µA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	µA	Max	V_{IN} = 7.0V ($\overline{OEAB}$, $\overline{OEBA}$, $\overline{LEAB}$, $\overline{LEBA}$, $\overline{CEAB}$, $\overline{CEBA}$)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	µA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 µA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	µA	0.0	V_{IOD} = 150 mV All Other Pins Grounded

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
I_{IL}	Input LOW Current			−0.6 −1.2	mA	Max	V_{IN} = 0.5V ($\overline{OEAB}$, $\overline{OEBA}$) V_{IN} = 0.5V ($\overline{CEAB}$, $\overline{CEBA}$)
$I_{IH} + I_{OZH}$	Output Leakage Current			70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
$I_{IL} + I_{OZL}$	Output Leakage Current			−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current	−60 −100		−150 −225	mA	Max	V_{OUT} = 0V (A_n) V_{OUT} = 0V (B_n)
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V (A_n, B_n)
I_{CCH}	Power Supply Current		67	100	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		83	125	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		83	125	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F T_A = +25°C, V_{CC} = +5.0V, C_L = 50 pF Min	Typ	Max	54F T_A, V_{CC} = Mil, C_L = 50 pF Min	Max	74F T_A, V_{CC} = Com, C_L = 50 pF Min	Max	Units	Fig. No.
t_{PLH} t_{PHL}	Propagation Delay Transparent Mode A_n to B_n or B_n to A_n	3.0 3.0	5.5 5.0	7.5 6.5			3.0 3.0	8.5 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{LEBA}$ to A_n	4.5 4.5	8.5 8.5	11.0 11.0			4.5 4.5	12.5 12.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{LEAB}$ to B_n	4.5 4.5	8.5 8.5	11.0 11.0			4.5 4.5	12.5 12.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OEBA}$ or $\overline{OEAB}$ to A_n or B_n $\overline{CEBA}$ or $\overline{CEAB}$ to A_n or B_n	3.0 4.0	7.0 7.5	9.0 10.5			3.0 4.0	10.0 12.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OEBA}$ or $\overline{OEAB}$ to A_n or B_n $\overline{CEBA}$ or $\overline{CEAB}$ to A_n or B_n	1.0 2.5	6.0 5.5	8.0 10.5			1.0 2.5	9.0 11.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F T_A = +25°C, V_{CC} = +5.0V Min	Max	54F T_A, V_{CC} = Mil Min	Max	74F T_A, V_{CC} = Com Min	Max	Units	Fig. No.
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A_n or B_n to $\overline{LEBA}$ or $\overline{LEAB}$	3.0 3.0				3.5 3.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A_n or B_n to $\overline{LEBA}$ or $\overline{LEAB}$	3.0 3.0				3.5 3.5			
$t_w(L)$	Latch Enable, B to A Pulse Width, LOW	8.0				9.0		ns	2–4

National Semiconductor

54F/74F544
Octal Registered Transceiver

General Description


The 'F544 octal transceiver contains two sets of D-type latches for temporary storage of data flowing in either direction. Separate Latch Enable and Output Enable inputs are provided for each register to permit independent control of inputting and outputting in either direction of data flow. The A outputs are guaranteed to sink 24 mA (20 mA Mil) while the B outputs are rated for 64 mA (48 mA Mil). The 'F544 inverts data in both directions.

Features

- 8-bit octal transceiver
- Back-to-back registers for storage
- Separate controls for data flow in each direction
- A outputs sink 24 mA (20 mA Mil), B outputs sink 64 mA (48 mA Mil)
- 300 mil slim PDIP

Ordering Code: See Section 5


Logic Symbols



TL/F/9555–2


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

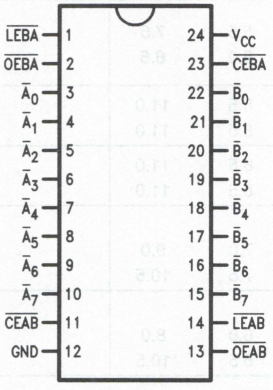


TL/F/9555–3

Pin Assignment for LCC



TL/F/9555–4

IEEE/IEC

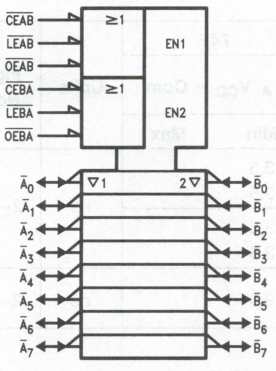

TL/F/9555–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OEAB}$	A-to-B Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OEBA}$	B-to-A Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{CEAB}$	A-to-B Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$\overline{CEBA}$	B-to-A Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$\overline{LEAB}$	A-to-B Latch Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{LEBA}$	B-to-A Latch Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{A}_0$–$\overline{A}_7$	A-to-B Data Inputs or	3.5/1.083	70 μA/−650 μA
	B-to-A TRI-STATE Outputs	150/40(33.3)	−3 mA/24 mA (20 mA)
$\overline{B}_0$–$\overline{B}_7$	B-to-A Data Inputs or	3.5/1.083	70 μA/−650 μA
	A-to-B TRI-STATE Outputs	600/106.6(80)	−12 mA/64 mA (48 mA)

Functional Description

The 'F544 contains two sets of eight D-type latches, with separate input and output controls for each set. For data flow from A to B, for example, the A-to-B Enable ($\overline{CEAB}$) input must be LOW in order to enter data from $\overline{A}_0$–$\overline{A}_7$ or take data from $\overline{B}_0$–$\overline{B}_7$, as indicated in the Data I/O Control Table. With $\overline{CEAB}$ LOW, a LOW signal on the A-to-B Latch Enable ($\overline{LEAB}$) input makes the A-to-B latches transparent; a subsequent LOW-to-HIGH transition of the $\overline{LEAB}$ signal puts the A latches in the storage mode and their outputs no longer change with the A inputs. With $\overline{CEAB}$ and $\overline{OEAB}$ both LOW, the TRI-STATE® B output buffers are active and reflect the data present at the output of the A latches. Control of data flow from B to A is similar, but using the $\overline{CEBA}$, $\overline{LEBA}$ and $\overline{OEBA}$ inputs.

Data I/O Control Table

Inputs			Latch Status	Output Buffers
$\overline{CEAB}$	$\overline{LEAB}$	$\overline{OEAB}$		
H	X	X	Latched	High Z
X	H	X	Latched	—
L	L	X	Transparent	—
X	X	H	—	High Z
L	X	L	—	Driving


H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

A-to-B data flow shown; B-to-A flow control is the same, except using $\overline{CEBA}$, $\overline{LEBA}$ and $\overline{OEBA}$

Logic Diagram

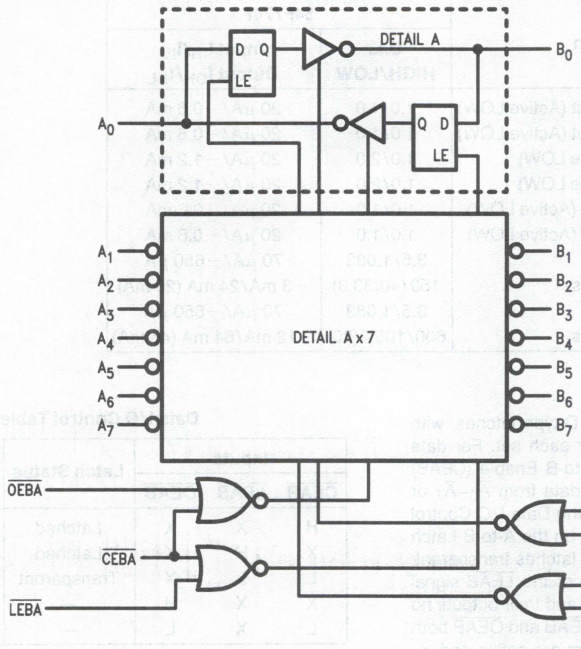

TL/F/9555–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA, (except $\overline{A}_n$, $\overline{B}_n$)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA ($\overline{A}_n$)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA ($\overline{A}_n$, $\overline{B}_n$)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA ($\overline{B}_n$)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA ($\overline{A}_n$)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA ($\overline{A}_n$, $\overline{B}_n$)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA ($\overline{B}_n$)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA ($\overline{A}_n$)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA ($\overline{A}_n$, $\overline{B}_n$)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA ($\overline{A}_n$)
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA ($\overline{B}_n$)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA ($\overline{A}_n$)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA ($\overline{B}_n$)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V (except $\overline{A}_n$, $\overline{B}_n$)
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V (except $\overline{A}_n$, $\overline{B}_n$)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V ($\overline{A}_n$, $\overline{B}_n$)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC} ($\overline{A}_n$, $\overline{B}_n$)
		74F			250			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V ($\overline{OEAB}$, $\overline{OEBA}$)
					−1.2			V_{IN} = 0.5V ($\overline{CEAB}$, $\overline{CEBA}$)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V ($\overline{A}_n$, $\overline{B}_n$)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V ($\overline{A}_n$, $\overline{B}_n$)

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{OS}	Output Short-Circuit Current	−60 −100		−150 −225	mA	Max	V_{OUT} = 0V ($\overline{A}_n$) V_{OUT} = 0V ($\overline{B}_n$)
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V ($\overline{A}_n$, $\overline{B}_n$)
I_{CCH}	Power Supply Current		70	105	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		85	130	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		83	125	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F T_A = +25°C V_{CC} = +5.0V C_L = 50 pF			54F T_A, V_{CC} = Mil C_L = 50 pF		74F T_A, V_{CC} = Com C_L = 50 pF		Units	Fig No
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay Transparent Mode $\overline{A}_n$ to $\overline{B}_n$ or $\overline{B}_n$ to $\overline{A}_n$	3.0 3.0	7.0 5.0	9.5 6.5	3.0 2.5	12.0 8.5	3.0 3.0	10.5 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{LEBA}$ to $\overline{A}_n$	6.0 4.0	10.0 7.0	13.0 9.5	6.0 4.0	18.0 11.5	6.0 4.0	14.5 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{LEAB}$ to $\overline{B}_n$	6.0 4.0	10.0 7.0	13.0 9.5	6.0 4.0	18.0 11.5	6.0 4.0	14.5 10.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OEBA}$ or $\overline{OEAB}$ to $\overline{A}_n$ or $\overline{B}_n$ $\overline{CEBA}$ or $\overline{CEAB}$ to $\overline{A}_n$ or $\overline{B}_n$	3.0 4.0	7.0 7.5	9.0 10.5	3.0 4.0	11.0 13.0	3.0 4.0	10.0 12.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OEBA}$ or $\overline{OEAB}$ to $\overline{A}_n$ or $\overline{B}_n$ $\overline{CEBA}$ or $\overline{CEAB}$ to $\overline{A}_n$ or $\overline{B}_n$	1.0 2.5	6.0 5.5	8.0 10.5	2.0 2.0	10.0 9.5	1.0 2.5	9.0 11.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F T_A = +25°C V_{CC} = +5.0V		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig No
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{A}_n$ or $\overline{B}_n$ to $\overline{LEBA}$ or $\overline{LEAB}$	3.0 3.0		3.0 3.0		3.0 3.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{A}_n$ or $\overline{B}_n$ to $\overline{LEBA}$ or $\overline{LEAB}$	3.0 3.0		3.0 3.0		3.0 3.0			
$t_w(L)$	Latch Enable, B to A Pulse Width, LOW	6.0		9.0		7.5		ns	2–4

National Semiconductor

54F/74F545 Octal Bidirectional Transceiver with TRI-STATE® Outputs

General Description

The 'F545 is an 8-bit, TRI-STATE, high-speed transceiver. It provides bidirectional drive for bus-oriented microprocessor and digital communications systems. Straight through bidirectional transceivers are featured, with 24 mA (20 mA Mil) bus drive capability on the A ports and 64 mA (48 mA Mil) bus drive capability on the B ports.


One input, Transmit/Receive ($T/\overline{R}$) determines the direction of logic signals through the bidirectional transceiver. Transmit enables data from A ports to B ports; Receive enables data from B ports to A ports. The Output Enable input disables both A and B ports by placing them in a TRI-STATE condition.

Features

- Higher drive than 8304
- 8-bit bidirectional data flow reduces system package count
- TRI-STATE inputs/outputs for interfacing with bus-oriented systems
- 24 mA (20 mA Mil) and 64 mA (48 mA Mil) bus drive capability on A and B ports, respectively
- Transmit/Receive and Output Enable simplify control logic
- Guaranteed 4000V minimum ESD protection
- Pin for Pin compatible with Intel 8286


Ordering Code: See Section 5

Logic Symbols



TL/F/9556–3


IEEE/IEC



TL/F/9556–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9556–1

Pin Assignment for LCC



TL/F/9556–2

Truth Table

Inputs		Outputs
$\overline{OE}$	$T/\overline{R}$	
L	L	Bus B Data to Bus A
L	H	Bus A Data to Bus B
H	X	High Z

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
$T/\overline{R}$	Transmit/Receive Input	1.0/2.0	20 μA/−1.2 mA
A_0–A_7	Side A TRI-STATE Inputs or	3.5/1.083	70 μA/−650 μA
	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
B_0–B_7	Side B TRI-STATE Inputs or	3.5/1.083	70 μA/−650 μA
	TRI-STATE Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA ($\overline{OE}$, T/$\overline{R}$)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (A_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (A_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (B_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (A_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (A_n)
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA (B_n)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (A_n)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (B_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V ($\overline{OE}$, T/$\overline{R}$)
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V ($\overline{OE}$, T/$\overline{R}$)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−1.2	mA	Max	V_{IN} = 0.5V ($\overline{OE}$, T/$\overline{R}$)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V (A_n)
			−100		−225			V_{OUT} = 0V (B_n)


DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current		70	90	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		95	120	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		85	110	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F			54F		74F		Units	Fig. No.
		T_A = +25°C, V_{CC} = +5.0V, C_L = 50 pF			T_A, V_{CC} = Mil, C_L = 50 pF		T_A, V_{CC} = Com, C_L = 50 pF			
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.5	4.2	6.0	2.0	7.5	2.5	7.0	ns	2–3
t_{PHL}	A_n to B_n or B_n to A_n	2.5	4.6	6.0	2.0	7.5	2.5	7.0		
t_{PZH}	Output Enable Time	3.0	5.3	7.0	2.5	9.0	3.0	8.0	ns	2–5
t_{PZL}		3.5	6.0	8.0	3.0	10.0	3.5	9.0		
t_{PHZ}	Output Disable Time	3.0	5.0	6.5	2.5	9.0	3.0	7.5		
t_{PLZ}		2.0	5.0	6.5	2.0	10.0	2.0	7.5		

Logic Diagram

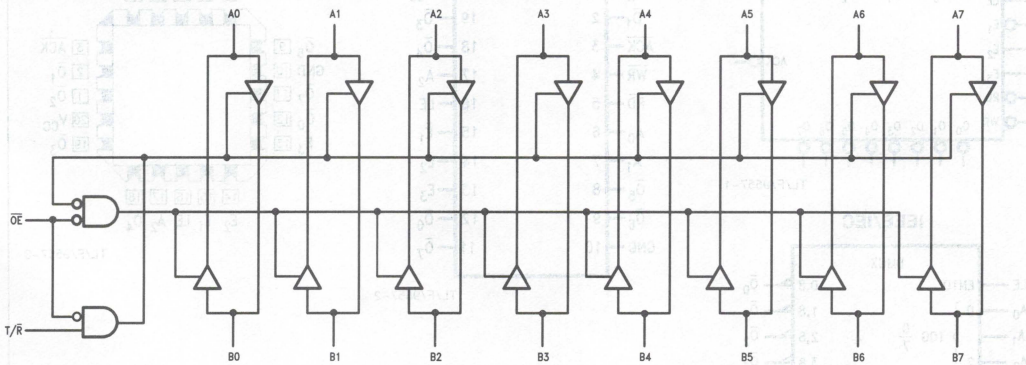

TL/F/9556–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

National Semiconductor

54F/74F547
Octal Decoder/Demultiplexer with Address Latches and Acknowledge

General Description


The 'F547 is a 3-to-8 line address decoder with latches for address storage. Designed primarily to simplify multiple chip selection in a microprocessor system, it contains one active LOW and two active HIGH Enables to conserve address space. Also included is an active LOW Acknowledge output that responds to either a Read or Write input signal when the Enables are active.

Features

- 3-to-8 line address decoder
- Address storage latches
- Multiple enables for address extension
- Open collector acknowledge output


Ordering Code: See Section 5

Logic Symbols



TL/F/9557–1


IEEE/IEC

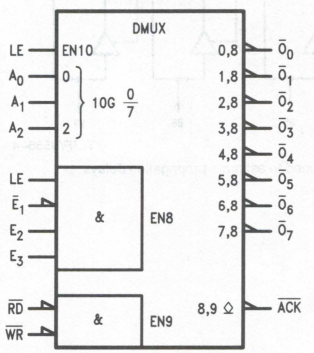

TL/F/9557–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9557–2

Pin Assignment for LCC



TL/F/9557–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F U.L. HIGH/LOW	54F/74F Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_2	Address Select Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_1$	Chip Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
E_2, E_3	Chip Enable Inputs	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable Input	1.0/1.0	20 μA/−0.6 mA
$\overline{RD}$	Read Acknowledge Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{WR}$	Write Acknowledge Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{ACK}$	Open Collector Acknowledge Output (Active LOW)	*OC/33.3	*OC/20 mA
$\overline{O}_0$–$\overline{O}_7$	Decoded Outputs (Active LOW)	50/33.3	−1 mA/20 mA

*OC = Open Collector

Functional Description

When enabled, the 'F547 accepts the A_0–A_2 Address inputs and decodes them to select one of eight active LOW, mutually exclusive outputs, as shown in the Decoder Truth Table. With LE HIGH, the Address latches are transparent and the output selection changes each time the A_0–A_2 address changes. When LE is LOW, the latches store the last valid address preceding the HIGH-to-LOW transition of the LE input signal. For applications in which the separation of latch enable and chip enable functions is not required, LE and $\overline{E}_1$ can be tied together, such that when HIGH the outputs are OFF and the latches are transparent, and when LOW the latches are storing and the selected output is enabled.

The open collector Acknowledge ($\overline{ACK}$) output is normally HIGH (i.e., OFF) and goes LOW when $\overline{E}_1$, E_2 and E_3 are all active and either the Read ($\overline{RD}$) or Write ($\overline{WR}$) input is LOW, as indicated in the Acknowledge Truth Table.

Acknowledge Truth Table

Inputs					Output
$\overline{E}_1$	E_2	E_3	$\overline{RD}$	$\overline{WR}$	$\overline{ACK}$
H	X	X	X	X	H
X	L	X	X	X	H
X	X	L	X	X	H
L	H	H	H	H	H
L	H	H	L	X	L
L	H	H	X	L	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Latch Status Table

Input LE	Latch Status
H	Transparent
L	Storing

Output Status Table

Inputs			Decoder Outputs
$\overline{E}_1$	E_2	E_3	
L	H	H	$\overline{O}_n$ = LOW†
H	X	X	O_0–O_7 = HIGH
X	L	X	O_0–O_7 = HIGH
X	X	L	O_0–O_7 = HIGH


†See Decoder Truth Table

Decoder Truth Table*

Inputs			Outputs							
A_2	A_1	A_0	$\overline{O}_0$	$\overline{O}_1$	$\overline{O}_2$	$\overline{O}_3$	$\overline{O}_4$	$\overline{O}_5$	$\overline{O}_6$	$\overline{O}_7$
L	L	L	L	H	H	H	H	H	H	H
L	L	H	H	L	H	H	H	H	H	H
L	H	L	H	H	L	H	H	H	H	H
L	H	H	H	H	H	L	H	H	H	H
H	L	L	H	H	H	H	L	H	H	H
H	L	H	H	H	H	H	H	L	H	H
H	H	L	H	H	H	H	H	H	L	H
H	H	H	H	H	H	H	H	H	H	L

*Assuming $\overline{E}_1$, LOW; E_2 and E_3, HIGH

Logic Diagram

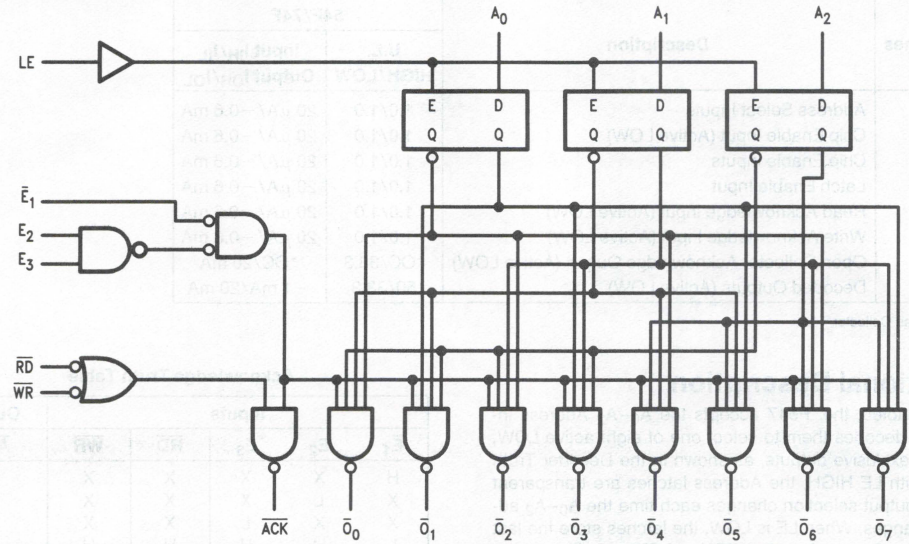

TL/F/9557–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA ($\overline{O}_n$)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA ($\overline{O}_n$)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA ($\overline{O}_n$)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA ($\overline{ACK}$, $\overline{O}_n$)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA ($\overline{ACK}$, $\overline{O}_n$)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC} ($\overline{O}_n$)
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V ($\overline{O}_n$)
I_{OHC}	Open Collector, Output OFF Leakage Test				250	μA	Min	V_{OUT} = V_{CC} ($\overline{ACK}$)
I_{CC}	Power Supply Current			17	30	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n to $\overline{O}_n$	2.0 4.5	7.0 9.0	9.0 12.0	3.0 5.0	10.5 13.5	1.5 4.0	10.0 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}_1$ to $\overline{O}_n$	2.5 3.0	6.5 6.5	8.5 8.5	3.0 3.5	10.0 10.0	2.0 3.0	9.5 9.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay LE to $\overline{O}_n$	3.5 5.0	7.5 14.5	10.0 14.0	4.0 5.0	11.5 20.0	3.0 5.0	11.0 15.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay E_2 or E_3 to $\overline{O}_n$	4.0 4.0	8.5 8.5	10.0 10.0	4.5 4.5	12.5 12.5	3.0 4.0	11.0 11.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}_1$, $\overline{RD}$ or $\overline{WR}$ to $\overline{ACK}$	6.5 3.5	11.0 7.5	13.0 9.5	6.5 3.5	16.0 11.0	6.5 3.0	14.0 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay E_2 or E_3 to $\overline{ACK}$	7.5 4.5	13.0 8.5	14.0 12.0	8.0 5.0	18.5 12.5	7.0 4.0	15.0 11.0	ns	2–3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A_n to LE	5.0 5.0		5.0 5.0		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A_n to LE	6.0 6.0		6.0 6.0		6.0 6.0			
$t_w(H)$	LE Pulse Width, HIGH	6.0		6.0		6.0		ns	2–4

National Semiconductor

54F/74F548
Octal Decoder/Demultiplexer with Acknowledge

General Description


The 'F548 is a 3-to-8 line address decoder with four Enable inputs. Two of the Enables are Active LOW and two are Active HIGH for maximum addressing versatility. Also provided is an Active LOW Acknowledge output that responds to either a Read or Write input signal when the Enables are active.

Features

- 3-to-8 line address decoder
- Multiple enables for address extension
- Open collector acknowledge output
- Active LOW decoder outputs


Ordering Code: See Section 5

Logic Symbols



TL/F/9558–3


IEEE/IEC



TL/F/9558–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9558–1

Pin Assignment for LCC



TL/F/9558–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_2	Output Select Address Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{E}_1$, $\overline{E}_2$	Chip Enable Inputs (Active LOW)	1.0/1.0	20 μA/−0.6 mA
E_3, E_4	Chip Enable Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{RD}$	Read Acknowledge Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{WR}$	Write Acknowledge Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{ACK}$	Open Collector Acknowledge Output (Active LOW)	OC*/33.3	*/20 mA
$\overline{O}_0$–$\overline{O}_7$	Decoded Outputs (Active LOW)	50/33.3	−1 mA/20 mA

*OC = Open Collector

Functional Description

When enabled, the 'F548 accepts the A_0–A_2 Address inputs and decodes them to select one of eight active LOW, mutually exclusive outputs, as shown in the Decoder Truth Table. When one or more Enables is inactive, all decoder outputs are HIGH. Thus, the 'F548 can be used as a demultiplexer by applying data to one of the Enables.

The open collector Acknowledge ($\overline{ACK}$) output is normally HIGH (i.e., OFF) and goes LOW when the Enables are all active and either the Read ($\overline{RD}$) or Write ($\overline{WR}$) input is LOW, as indicated in the Acknowledge Truth Table.

Acknowledge Truth Table


Inputs						Output
$\overline{E}_1$	$\overline{E}_2$	E_3	E_4	$\overline{RD}$	$\overline{WR}$	$\overline{ACK}$
H	X	X	X	X	X	H
X	H	X	X	X	X	H
X	X	L	X	X	X	H
X	X	X	L	X	X	H
L	L	H	H	H	H	H
L	L	H	H	L	X	L
L	L	H	H	X	L	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Decoder Truth Table

Inputs							Outputs							
$\overline{E}_1$	$\overline{E}_2$	E_3	E_4	A_2	A_1	A_0	$\overline{O}_0$	$\overline{O}_1$	$\overline{O}_2$	$\overline{O}_3$	$\overline{O}_4$	$\overline{O}_5$	$\overline{O}_6$	$\overline{O}_7$
H	X	X	X	X	X	X	H	H	H	H	H	H	H	H
X	H	X	X	X	X	X	H	H	H	H	H	H	H	H
X	X	L	X	X	X	X	H	H	H	H	H	H	H	H
X	X	X	L	X	X	X	H	H	H	H	H	H	H	H
L	L	H	H	L	L	L	L	H	H	H	H	H	H	H
L	L	H	H	L	L	H	H	L	H	H	H	H	H	H
L	L	H	H	L	H	L	H	H	L	H	H	H	H	H
L	L	H	H	L	H	H	H	H	H	L	H	H	H	H
L	L	H	H	H	L	L	H	H	H	H	L	H	H	H
L	L	H	H	H	L	H	H	H	H	H	H	L	H	H
L	L	H	H	H	H	L	H	H	H	H	H	H	L	H
L	L	H	H	H	H	H	H	H	H	H	H	H	H	L

Logic Diagram

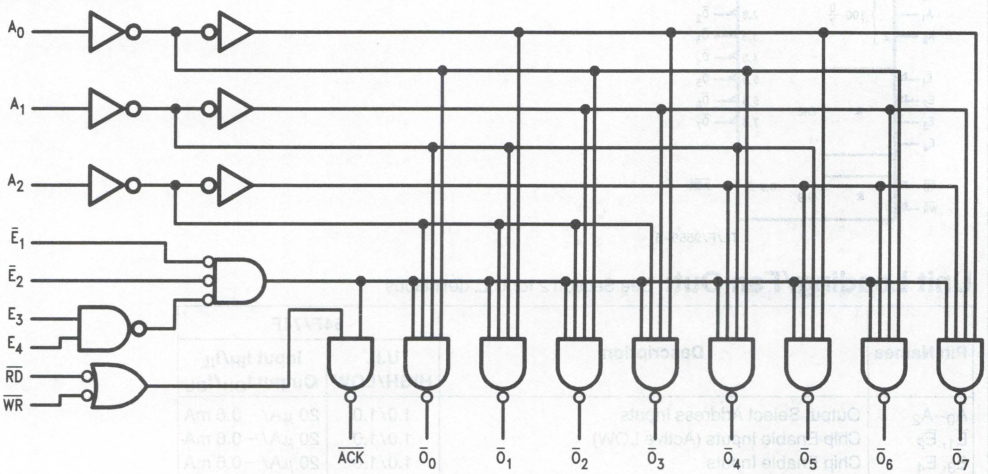

TL/F/9558–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA ($\overline{O}_0$–$\overline{O}_7$)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA ($\overline{O}_0$–$\overline{O}_7$)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA ($\overline{O}_0$–$\overline{O}_7$)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V ($\overline{O}_0$–$\overline{O}_7$)
I_{OHC}	Open Collector, Output OFF Leakage Test				250	μA	Min	V_{OUT} = V_{CC} ($\overline{ACK}$)
I_{CCH}	Power Supply Current			14	21	mA	Max	V_O = HIGH

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n to $\overline{O}_n$	2.0 4.0	5.5 8.0	8.0 9.5	3.0 4.0	10.0 12.0	1.5 4.0	9.0 10.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}_1$ or $\overline{E}_2$ to $\overline{O}_n$	2.5 3.5	6.5 6.5	8.5 8.5	3.0 3.5	10.0 10.0	2.0 3.0	9.5 9.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay E_3 or E_4 to $\overline{O}_n$	4.0 4.0	8.5 8.5	9.5 9.5	5.0 4.0	13.0 12.5	3.0 3.5	10.5 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{E}_1$ or $\overline{E}_2$ to $\overline{ACK}$	6.5 3.0	11.0 7.5	12.5 9.5	6.5 3.0	16.5 11.0	6.5 3.0	13.0 10.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay E_3 or E_4 to $\overline{ACK}$	8.0 4.0	13.0 8.5	14.0 10.0	8.0 4.0	19.5 13.0	8.0 4.0	15.0 11.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{RD}$ or $\overline{WR}$ to $\overline{ACK}$	5.5 2.5	10.0 5.0	12.0 8.0	5.5 2.5	16.5 8.5	5.5 2.5	12.5 8.5	ns	2–3

National Semiconductor

54F/74F550 • 54F/74F551
Octal Registered Transceiver with Status Flags

General Description

The 'F550 and 'F551 octal transceivers each contain two 8-bit registers for temporary storage of data flowing in either direction. Each register has its own clock pulse and clock enable inputs, as well as a flag flip-flop that is set automatically as the register is loaded. Each flag flip-flop is provided with a clear input, and each register has a separate output enable control for its TRI-STATE® buffers. The separate clocks, flags and enables provide considerable flexibility as I/O ports for demand-response data transfer. The 'F550 is non-inverting; the 'F551 inverts data in both directions.


Features

- 8-bit bidirectional I/O port with handshake
- Back-to-back registers for storage
- Register status flag flip-flops
- Separate edge-detecting clears for flags
- Inverting and non-inverting versions
- B outputs sink 64 mA (48 mA Mil)

Ordering Code: See Section 5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak 'F550

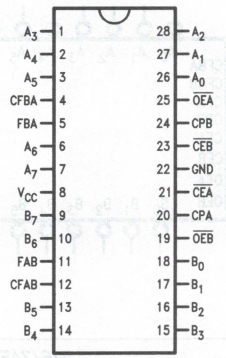


TL/F/9559–1

Pin Assignment for LCC 'F550



TL/F/9559–2


'F551

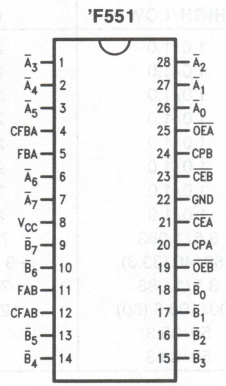

TL/F/9559–8

IEEE/IEC


'F551



TL/F/9559–9


Connection Diagrams (Continued)

'F550

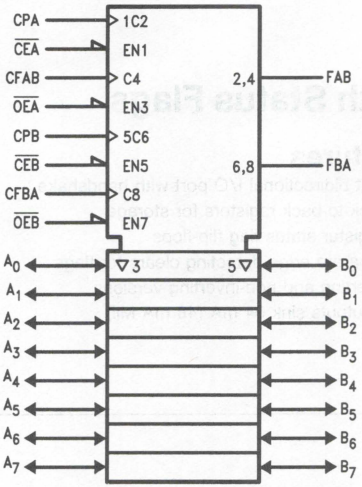

TL/F/9559–10


'F551

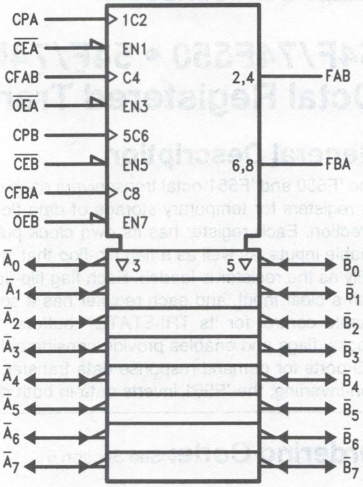

TL/F/9559–11


Logic Symbols

'F550

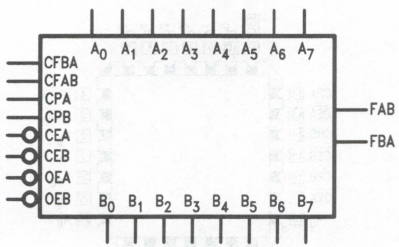

TL/F/9559–3

'F551

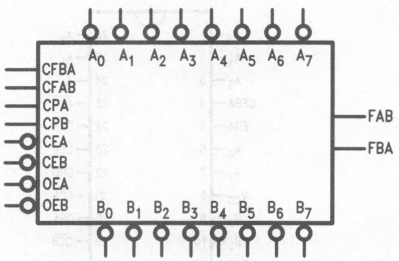

TL/F/9559–7

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
CPA	A-to-B Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
CPB	B-to-A Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{CEA}$	A-to-B Clock Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{CEB}$	B-to-A Clock Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OEA}$	A Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OEB}$	B Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
CFAB	A-to-B Flag Clear Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
CFBA	B-to-A Flag Clear Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
A_0–A_7	A-to-B Data Inputs or	3.5/1.083	70 μA/−0.65 mA
	TRI-STATE B-to-A Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
B_0–B_7	B-to-A Data Inputs or	3.5/1.083	70 μA/−0.65 mA
	TRI-STATE A-to-B Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)
FAB	A-to-B Status Flag Output (Active HIGH)	50/33.3	−1 mA/20 mA
FBA	B-to-A Status Flag Output (Active HIGH)	50/33.3	−1 mA/20 mA

Functional Description

Data applied to the A inputs is entered and stored on the rising edge of the A Clock Pulse (CPA), provided that the A Clock Enable ($\overline{CEA}$) is LOW; simultaneously, the status flip-flop is set and the A-to-B flag (FAB) output goes HIGH. Data thus entered from the A inputs is present at the inputs to the B output buffers, but only appears on the B I/O pins when the B Output Enable ($\overline{OEB}$) signal is made LOW. After the B output data is assimilated, the receiving system clears the A-to-B flag flip-flop by applying a LOW-to-HIGH transition to the CFAB input. Optionally, the $\overline{OEB}$ and CFAB pins can be tied together and operated by one function from the receiving system.

Data flow from B-to-A proceeds in the same manner described for A-to-B flow. Inputs $\overline{CEB}$ and CPB enter the B input data and set the B-to-A flag (FBA) output HIGH. A LOW signal on $\overline{OEA}$ enables the A output buffers and a LOW-to-HIGH transition on CFBA clears the FBA flag.


Logic Diagrams

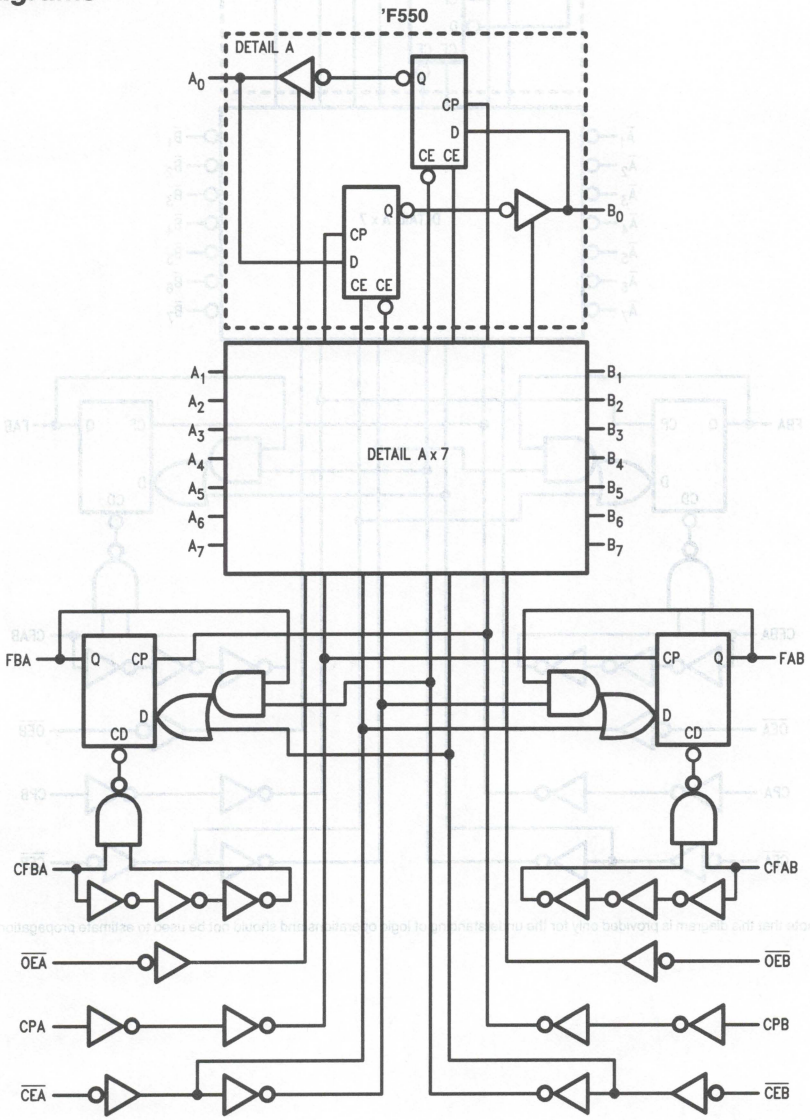

TL/F/9559–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Logic Diagrams (Continued)

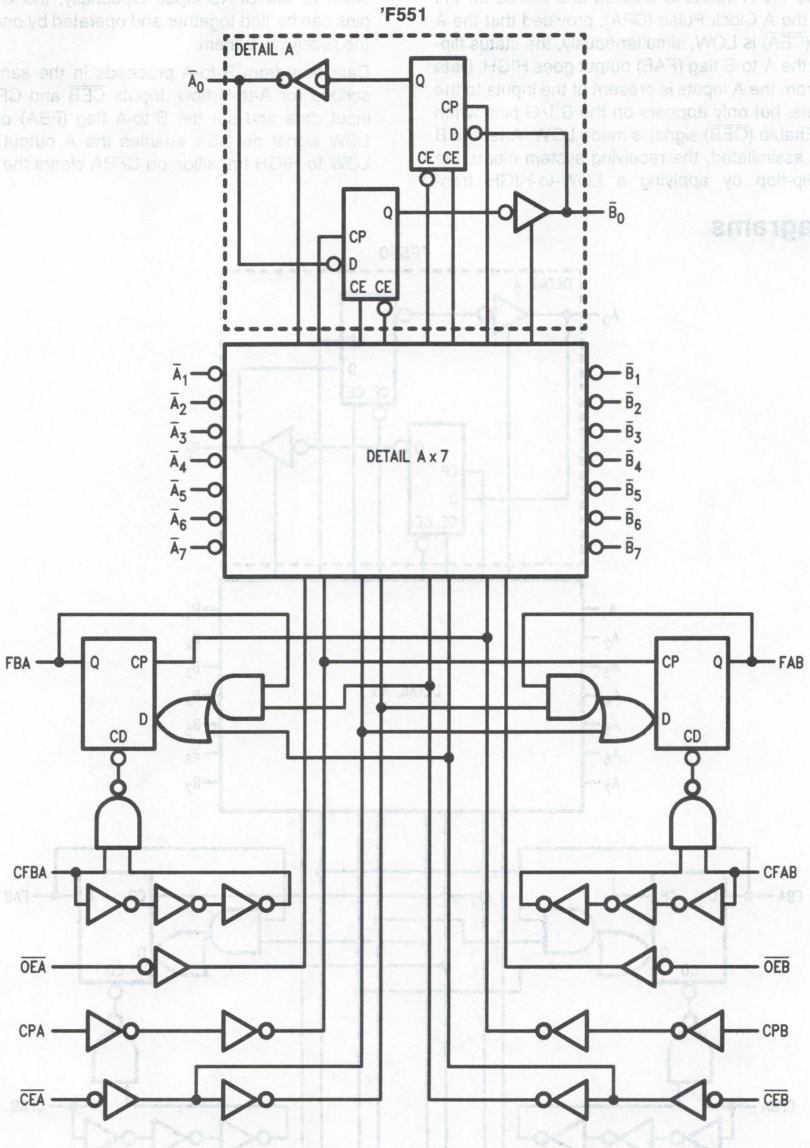

TL/F/9559–12

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (A_0–A_7)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_0–A_7)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_0–B_7)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (A_0–A_7)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_0–A_7)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (B_0–B_7)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (A_0–A_7)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_0–A_7)
V_{OL}	Output Low Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (A_0–A_7)
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA (B_0–B_7)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (A_0–A_7)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (B_0–B_7)
I_{IH}	Input HIGH Current	54F			20.0	µA	Max	V_{IN} = 2.7V (Non I/O Inputs)
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	µA	Max	V_{IN} = 7.0V (Non I/O Inputs)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	µA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 µA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	µA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Non I/O Inputs)
I_{IH} + I_{OZH}	Output Leakage Current				70	µA	Max	V_{OUT} = 2.7V (A_0–A_7, B_0–B_7)
I_{IL} + I_{OZL}	Output Leakage Current				−650	µA	Max	V_{OUT} = 0.5V (A_0–A_7, B_0–B_7)

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{OS}	Output Short-Circuit Current	−60 −100		−150 −225	mA mA	Max Max	V_{OUT} = 0V (A_0–A_7) V_{OUT} = 0V (B_0–B_7)
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current		84	140	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		105	140	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		102	140	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F T_A = +25°C V_{CC} = +5.0V C_L = 50 pF			54F T_A, V_{CC} = Mil C_L = 50 pF		74F T_A, V_{CC} = Com C_L = 50 pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay CPA or CPB to B_n or A_n	3.0 4.0	5.5 7.0	7.5 9.0			2.5 3.5	8.5 10.0	ns	2–3
t_{PLH}	Propagation Delay CPA or CPB to FBA or FAB	3.5	6.0	8.0			3.0	9.0	ns	2–3
t_{PHL}	Propagation Delay CFAB or CFBA to FAB or FBA	5.0	9.0	11.5			4.5	13.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OEA}$ or $\overline{OEB}$ to A_n or B_n	2.5 3.5	5.5 7.0	7.5 9.5			2.0 3.0	8.5 10.5	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OEA}$ or $\overline{OEB}$ to A_n or B_n	3.0 2.5	6.5 5.5	9.0 7.5			2.5 2.0	10.0 8.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F T_A = +25°C V_{CC} = +5.0V		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_s(H) t_s(L)	Setup Time, HIGH or LOW A_n, B_n to CPA, CPB	4.0 4.0				4.5 4.5		ns	2–6
t_h(H) t_h(L)	Hold Time, HIGH or LOW A_n, B_n to CPA, CPB	2.0 2.0				2.5 2.5			
t_s(H) t_s(L)	Setup Time, HIGH or LOW $\overline{CEA}$, $\overline{CEB}$ to CPA, CPB	1.0 4.0				1.5 4.5		ns	2–6
t_h(H) t_h(L)	Hold Time, HIGH or LOW $\overline{CEA}$, $\overline{CEB}$ to CPA, CPB	2.0 2.0				2.5 2.5			
t_w(H) t_w(L)	Pulse Width, HIGH or LOW CPA or CPB	3.0 3.0				3.5 3.5		ns	2–4
t_w(H)	Pulse Width, HIGH CFAB or CFBA	3.0				3.5		ns	2–4
t_{rec}	Recovery Time CFAB, CFBA to CPA, CPB	9.0				10.0		ns	2–6

National Semiconductor

54F/74F552
Octal Registered Transceiver with Parity and Flags

General Description


The 'F552 octal transceiver contains two 8-bit registers for temporary storage of data flowing in either direction. Each register has its own clock pulse and clock enable input as well as a flag flip-flop that is set automatically as the register is loaded. The flag output will be reset when the output enable returns to HIGH after reading the output port. Each register has a separate output enable control for its TRI-STATE® buffer. The separate Clocks, Flags, and Enables provide considerable flexibility as I/O ports for demand-response data transfer. When data is transferred from the A-port to the B-port, a parity bit is generated. On the other hand, when data is transferred from the B-port to the A-port, the parity of input data on B_0–B_7 is checked.

Features

- 8-Bit bidirectional I/O Port with handshake
- Register status flag flip-flops
- Separate clock enable and output enable
- Parity generation and parity check
- B-outputs sink 64 mA
- TRI-STATE outputs


Ordering Code: See Section 5

Logic Symbols



TL/F/9561–1


IEEE/IEC

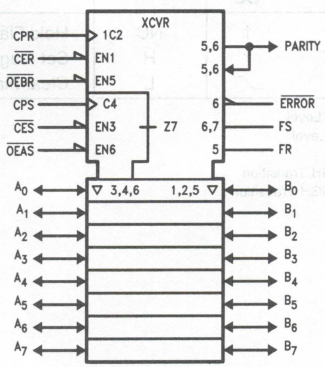

TL/F/9561–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

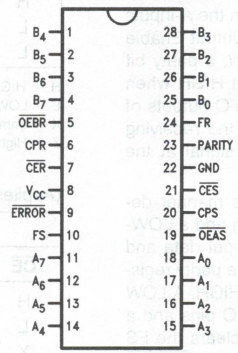

TL/F/9561–2

Pin Assignment for LCC and PCC



TL/F/9561–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F U.L. HIGH/LOW	54F/74F Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_7	A-to-B Port Data Inputs or	3.5/1.083	70 μA/−0.65 mA
	B-to-A TRI-STATE	150/40 (33.3)	−3 mA/24 mA (20 mA)
B_0–B_7	B-to-A Transceiver Inputs or	3.5/1.083	70 μA/−0.65 mA
	A-to-B TRI-STATE Output	600/106.6 (80)	−12 mA/64 mA (48 mA)
FR	B Port Flag Output	50/33.3	−1 mA/20 mA
FS	A Port Flag Output	50/33.3	−1 mA/20 mA
PARITY	Parity Bit Transceiver Input or Output	3.5/1.083	70 μA/−0.65 mA
		600/106.6 (50)	−12 mA/64 mA (48 mA)
$\overline{ERROR}$	Parity Check Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{CER}$	R Registers Clock Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{CES}$	S Registers Clock Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
CPR	R Registers Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
CPS	S Registers Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{OEBR}$	B Port and PARITY Output Enable (Active LOW)	1.0/2.0	20 μA/−1.2 mA
	and Clear FR Input (Active Rising Edge)		
$\overline{OEAS}$	A Port Output Enable (Active LOW)	1.0/2.0	20 μA/−1.2 mA
	and Clear FS Input (Active Rising Edge)		

Functional Description

Data applied to the A-inputs are entered and stored in the R register on the rising edge of the CPR Clock Pulse, provided that the Clock Enable ($\overline{CER}$) is LOW; simultaneously, the status flip-flop is set and the flag (FR) output goes HIGH. As the Clock Enable ($\overline{CER}$) returns to HIGH, the data will be held in the R register. These data entered from the A-inputs will appear at the B-port I/O pins after the Output Enable ($\overline{OEBR}$) has gone LOW. When $\overline{OEBR}$ is LOW, a parity bit appears at the PARITY pin, which will be set HIGH when there is an even number of 1s or all 0s at the Q outputs of the R register. After the data is assimilated, the receiving system clears the flag FR by changing the signal at the $\overline{OEBR}$ pin from LOW to HIGH.

Data flow from B-to-A proceeds in the same manner described for A-to-B flow. A LOW at the $\overline{CES}$ pin and a LOW-to-HIGH transition at CPS pin enters the B-input data and the parity-input data into the S registers and the parity register respectively and set the flag output FS to HIGH. A LOW signal at the $\overline{OEAS}$ pin enables the A-port I/O pins and a LOW-to-HIGH transition of the $\overline{OEAS}$ signal clears the FS flag. When $\overline{OEAS}$ is LOW, the parity check output $\overline{ERROR}$ will be HIGH if there is an odd number of 1s at the Q outputs of the S registers and the parity register. The flag FS can be cleared by a LOW-to-HIGH transition of the $\overline{OEAS}$ signal.

Register Function Table

(Applies to R or S Register)

Inputs D	Inputs CP	Inputs $\overline{CE}$	Internal Q	Function
X	X	H	NC	Hold Data
L	↗	L	L	Load Data
H	↗	L	H	
X	†	L	NC	Keep Old Data

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
↗ = LOW-to-HIGH Transition
† = Not LOW-to-HIGH Transition
NC = No Change

Output Control

$\overline{OE}$	Internal Q	A or B Outputs	Function
H	X	Z	Disable Output
L	L	L	Enable Output
L	H	H	Enable Output

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Flag Flip-Flop Function Table

(Applies to R or S Flag Flip-Flop)

Inputs $\overline{CE}$	Inputs CP	Inputs $\overline{OE}$	Flag Output	Function
H	X	†	NC	Hold Flag
L	↗	†	H	Set Flag
X	X	↗	L	Clear Flag

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
↗ = LOW-to-HIGH Transition
† = Not LOW-to-HIGH Transition
NC = No Change

Functional Description

Parity Generation Function

$\overline{OEBR}$	Number of HIGHs in the Q Outputs of the R Register	Parity Output
H	X	Z
L	0, 2, 4, 6, 8	H
L	1, 3, 5, 7	L


H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Parity Check Function

$\overline{OEAS}$	Number of HIGHs in the Q Outputs of the S Register	Parity Input	$\overline{ERROR}$ Output
H	X	X	H
L	0, 2, 4, 6, 8	L	L
L	1, 3, 5, 7	L	H
L	0, 2, 4, 6, 8	H	H
L	1, 3, 5, 7	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Block Diagram

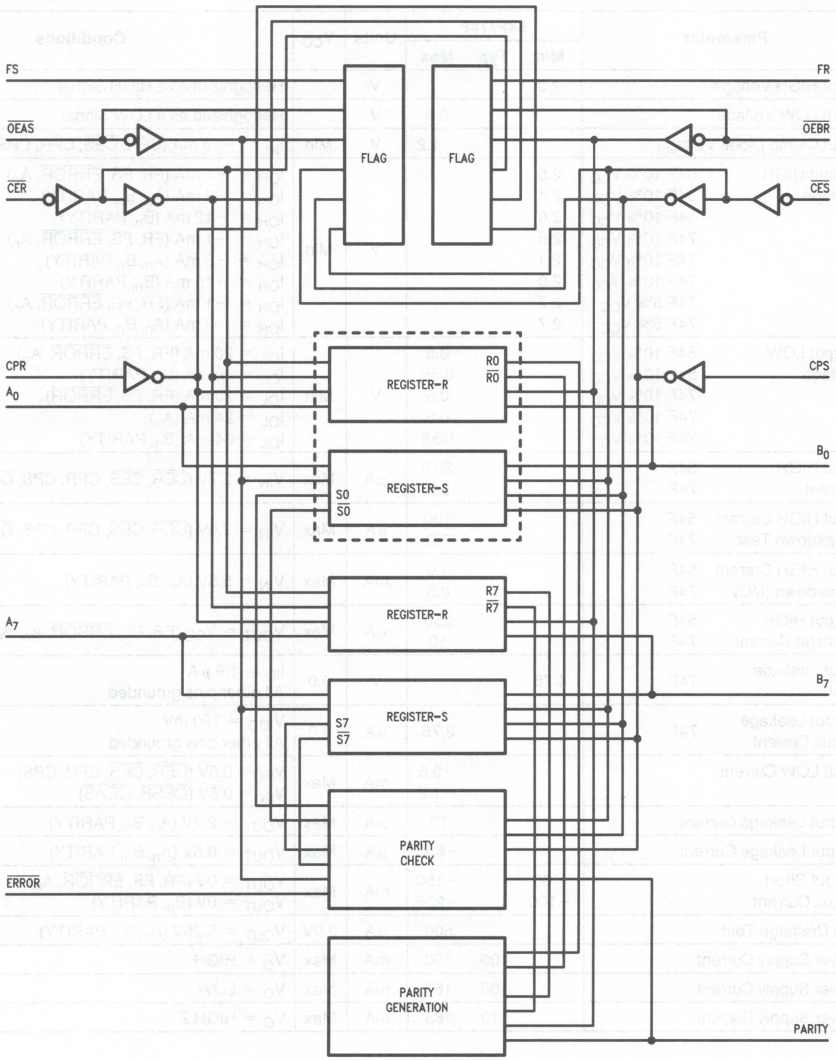

TL/F/9561–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA ($\overline{CER}$, $\overline{CES}$, CPR, CPS, $\overline{OEBR}$, $\overline{OEAS}$)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (FR, FS, $\overline{ERROR}$, A_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n, PARITY)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_n, PARITY)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (FR, FS, $\overline{ERROR}$, A_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n PARITY)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (B_n, PARITY)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (FR, FS, $\overline{ERROR}$, A_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n, B_n, PARITY)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (FR, FS, $\overline{ERROR}$, A_n)
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA (B_n, PARITY)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA (FR, FS, $\overline{ERROR}$)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (A_n)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (B_n, PARITY)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V ($\overline{CER}$, $\overline{CES}$, CPR, CPS, $\overline{OEBR}$, $\overline{OEAS}$)
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V ($\overline{CER}$, $\overline{CES}$, CPR, CPS, $\overline{OEBR}$, $\overline{OEAS}$)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n, PARITY)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC} (FR, FS, $\overline{ERROR}$, A_n, B_n, PARITY)
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V ($\overline{CER}$, $\overline{CES}$, CPR, CPS)
					−1.2			V_{IN} = 0.5V ($\overline{OEBR}$, $\overline{OEAS}$)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n, PARITY)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n, PARITY)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V (FR, FS, $\overline{ERROR}$, A_n)
			−100		−225			V_{OUT} = 0V (B_n, PARITY)
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V (A_n, B_n, PARITY)
I_{CCH}	Power Supply Current			100	150	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			100	150	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			110	165	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F T_A, V_{CC} = Mil $C_L = 50$ pF		74F T_A, V_{CC} = Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay CPS or CPR to A_n or B_n	3.5 4.0	6.0 7.0	8.0 9.5			3.0 3.5	9.0 10.5	ns	2–3
t_{PLH}	Propagation Delay CPS or CPR to FS or FR	3.0	5.5	7.5			2.5	8.5	ns	2–3
t_{PHL}	Propagation Delay $\overline{OEAS}$ to FS	3.5	6.0	8.0			3.0	9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CPR to Parity	8.0 8.5	14.0 14.5	18.0 18.5			7.0 7.5	20.0 20.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CPS to $\overline{ERROR}$	8.0 7.5	13.5 13.0	17.5 16.5			7.0 6.5	19.5 18.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{OEAS}$ to $\overline{ERROR}$	3.5 3.0	6.0 5.0	8.0 7.0			3.0 2.5	9.0 8.0	ns	2–3
t_{PZH} t_{PZL}	Enable Time $\overline{OEAS}$ or $\overline{OEBR}$ to B_n or A_n	3.0 3.5	5.5 7.0	7.5 9.5			2.5 3.0	8.5 10.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{OEAS}$ or $\overline{OEBR}$ to B_n or A_n	3.0 3.0	6.5 5.5	8.5 7.5			2.5 2.5	9.5 8.5		
t_{PZH} t_{PZL}	Enable Time $\overline{OEBR}$ to Parity	3.0 3.5	4.5 6.0	7.5 9.5			2.5 3.0	8.5 10.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{OEBR}$ to Parity	3.0 3.0	5.5 6.5	8.5 7.5			2.5 2.5	9.5 8.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A_n or B_n or Parity to CPS or CPR	7.5 4.5				8.5 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A_n or B_n or Parity to CPS or CPR	0 0				0 0			
$t_s(H)$ $t_s(L)$	Setup, Time HIGH or LOW $\overline{CES}$ or $\overline{CER}$ to CPS or CPR	6.0 10.0				7.0 11.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{CES}$ or $\overline{CER}$ to CPS or CPR	0 0				0 0			
$t_w(H)$ $t_w(L)$	Pulse Width, HIGH or LOW CPS or CPR	4.0 6.0				4.5 7.0		ns	2–4

National Semiconductor

54F/74F563
Octal D-Type Latch with TRI-STATE® Outputs

General Description

The 'F563 is a high-speed octal latch with buffered common Latch Enable (LE) and buffered common Output Enable ($\overline{OE}$) inputs.


This device is functionally identical to the 'F573, but has inverted outputs.

Features

- Inputs and outputs on opposite sides of package allowing easy interface with microprocessors
- Useful as input or output port for microprocessors
- Functionally identical to 'F573


Ordering Code: See Section 5

Logic Symbols



TL/F/9562–3


IEEE/IEC



TL/F/9562–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9562–1

Pin Assignment for LCC



TL/F/9562–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_7$	TRI-STATE Latch Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description


The 'F563 contains eight D-type latches with TRI-STATE output buffers. When the Latch Enable (LE) input is HIGH, data on the D_n inputs enters the latches. In this condition the latches are transparent, i.e., a latch output will change state each time its D input changes. When LE is LOW the latches store the information that was present on the D inputs a setup time preceding the HIGH-to-LOW transition of LE. The TRI-STATE buffers are controlled by the Output Enable ($\overline{OE}$) input. When $\overline{OE}$ is LOW, the buffers are in the bi-state mode. When $\overline{OE}$ is HIGH the buffers are in the high impedance mode but this does not interfere with entering new data into the latches.

Function Table

Inputs			Internal	Output	Function
$\overline{OE}$	LE	D	Q	O	
H	X	X	X	Z	High Z
H	H	L	H	Z	High Z
H	H	H	L	Z	High Z
H	L	X	NC	Z	Latched
L	H	L	H	H	Transparent
L	H	H	L	L	Transparent
L	L	X	NC	NC	Latched

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance
NC = No Change

Logic Diagram

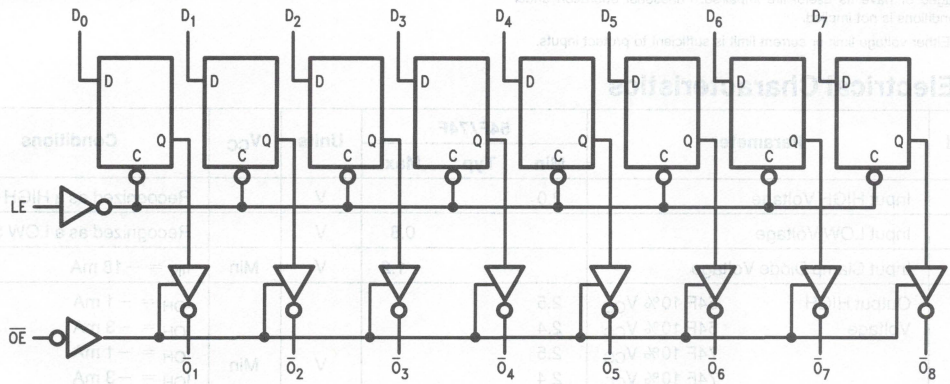

TL/F/9562–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCL}	Power Supply Current			40	61	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			40	61	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay D_n to $\overline{O}_n$	3.5 2.5		8.5 6.5	3.0 2.0	10.5 7.5	3.0 2.0	9.5 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay LE to $\overline{O}_n$	4.5 3.0		9.5 7.0	4.0 2.5	11.0 7.5	4.0 2.5	10.5 7.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time	2.0 3.0		7.5 8.5	2.0 2.5	9.5 10.0	2.0 1.5	9.0 9.5	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time	1.5 1.5		5.5 5.5	1.5 1.5	7.0 5.5	1.5 1.5	6.5 5.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to LE	2.0 2.0		2.0 2.0		2.0 2.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to LE	3.0 3.0		3.0 3.0		3.0 3.0		ns	2–6
$t_w(H)$	LE Pulse Width, HIGH	4.0		4.0		4.0		ns	2–4

National Semiconductor

54F/74F564
Octal D-Type Flip-Flop with TRI-STATE® Outputs

General Description

The 'F564 is a high-speed, low power octal flip-flop with a buffered common Clock (CP) and a buffered common Output Enable ($\overline{OE}$). The information presented to the D inputs is sorted in the flip-flops on the LOW-to-HIGH Clock (CP) transition.


This device is functionally identical to the 'F574, but has inverted outputs.

Features

- Inputs and outputs on opposite sides of package allow easy interface with microprocessors
- Useful as input or output port for microprocessors
- Functionally identical to 'F574
- TRI-STATE outputs for bus-oriented applications


Ordering Code: See Section 5

Logic Symbols



TL/F/9563–3


IEEE/IEC



TL/F/9563–6


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9563–1

Pin Assignment for LCC



TL/F/9563–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_7$	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description


The 'F564 consists of eight edge-triggered flip-flops with individual D-type inputs and TRI-STATE true outputs. The buffered clock and buffered Output Enable are common to all flip-flops. The eight flip-flops will store the state of their individual D inputs that meet the setup and hold times requirements on the LOW-to-HIGH Clock (CP) transition. With the Output Enable ($\overline{OE}$) LOW, the contents of the eight flip-flops are available at the outputs. When $\overline{OE}$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}$ input does not affect the state of the flip-flops.

Function Table

Inputs			Internal	Outputs	Function
$\overline{OE}$	CP	D	Q	O	
H	H	L	NC	Z	Hold
H	H	H	NC	Z	Hold
H	↗	L	H	Z	Load
H	↗	H	L	Z	Load
L	↗	L	H	H	Data Available
L	↗	H	L	L	Data Available
L	H	L	NC	NC	No Change in Data
L	H	H	NC	NC	No Change in Data

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance
↗ = LOW-to-HIGH Transition
NC = No Change

Logic Diagram

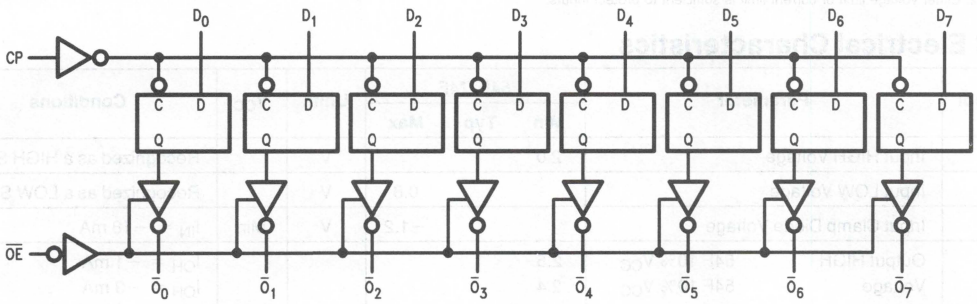

TL/F/9563–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F% 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F% 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F% 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F% 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			55	86	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100			60		70		MHz	2–1
t_{PLH}	Propagation Delay	2.5	5.2	8.5	2.5	9.5	2.5	8.5	ns	2–3
t_{PHL}	CP to $\overline{O}_n$	2.5	5.9	8.5	2.5	9.5	2.5	8.5		
t_{PZH}	Output Enable Time	3.0	5.6	9.0	2.5	10.5	2.5	10.0	ns	2–5
t_{PZL}		3.0	6.2	9.0	2.5	10.5	2.5	10.0		
t_{PHZ}	Output Disable Time	1.5	3.4	5.5	1.5	7.0	1.5	6.5		
t_{PLZ}		1.5	2.7	5.5	1.5	7.0	1.5	6.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	2.0		2.5		2.0		ns	2–6
$t_s(L)$	D_n to CP	2.5		3.0		2.5			
$t_h(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0			
$t_h(L)$	D_n to CP	2.0		2.0		2.0			
$t_w(H)$	CP Pulse Width	5.0		5.0		5.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0		5.0		5.0			

National Semiconductor

54F/74F568 • 54F/74F569
4-Bit Bidirectional Counters with TRI-STATE® Outputs

General Description


The 'F568 and 'F569 are fully synchronous, reversible counters with TRI-STATE outputs. The 'F568 is a BCD decade counter; the 'F569 is a binary counter. They feature preset capability for programmable operation, carry lookahead for easy cascading, and a U/$\overline{D}$ input to control the direction of counting. For maximum flexibility there are both synchronous and master asynchronous reset inputs as well as both Clocked Carry ($\overline{CC}$) and Terminal Count ($\overline{TC}$) outputs. All state changes except Master Reset are initiated by the rising edge of the clock. A HIGH signal on the Output Enable ($\overline{OE}$) input forces the output buffers into the high impedance state but does not prevent counting, resetting or parallel loading.

Features

- Synchronous counting and loading
- Lookahead carry capability for easy cascading
- Preset capability for programmable operation
- TRI-STATE outputs for bus organized systems


Ordering Code: See Section 5

Logic Symbols




TL/F/9565–1

IEEE/IEC
'F568



TL/F/9565–4


IEEE/IEC
'F569



TL/F/9565–11


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9565–2

Pin Assignment for LCC



TL/F/9565–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
P_0-P_3	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CEP}$	Count Enable Parallel Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{CET}$	Count Enable Trickle Input (Active LOW)	1.0/1.0	20 μA/−1.2 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{PE}$	Parallel Enable Input (Active LOW)	1.0/1.0	20 μA/−1.2 mA
U/$\overline{D}$	Up/Down Count Control Input	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{MR}$	Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{SR}$	Synchronous Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
O_0-O_3	TRI-STATE Parallel Data Outputs	150/40(33.3)	−3 mA/24 mA (20 mA)
$\overline{TC}$	Terminal Count Output (Active LOW)	50/33.3	−1 mA/20 mA
$\overline{CC}$	Clocked Carry Output (Active LOW)	50/33.3	−1 mA/20 mA

Functional Description

The 'F568 counts modulo-10 in the BCD (8421) sequence. From state 9 (HLLH) it will increment to 0 (LLLL) in the Up mode; in Down mode it will decrement from 0 to 9. The 'F569 counts in the modulo-16 binary sequence. From state 15 it will increment to state 0 in the Up mode; in the Down mode it will decrement from 0 to 15. The clock inputs of all flip-flops are driven in parallel through a clock buffer. All state changes (except due to Master Reset) occurs synchronously with the LOW-to-HIGH transition of the Clock Pulse (CP) input signal.

The circuits have five fundamental modes of operation, in order of precedence: asynchronous reset, synchronous reset, parallel load, count and hold. Five control inputs—Master Reset ($\overline{MR}$), Synchronous Reset ($\overline{SR}$), Parallel Enable ($\overline{PE}$), Count Enable Parallel ($\overline{CEP}$) and Count Enable Trickle $\overline{CET}$)—plus the Up/Down (U/$\overline{D}$) input, determine the mode of operation, as shown in the Mode Select Table. A LOW signal on $\overline{MR}$ overrides all other inputs and asynchronously forces the flip-flop Q outputs LOW. A LOW signal on $\overline{SR}$ overrides counting and parallel loading and allows the Q outputs to go LOW on the next rising edge of CP. A LOW signal on $\overline{PE}$ overrides counting and allows information on the Parallel Data (P_n) inputs to be loaded into the flip-flops on the next rising edge of CP. With $\overline{MR}$, $\overline{SR}$ and $\overline{PE}$ HIGH, $\overline{CEP}$ and $\overline{CET}$ permit counting when both are LOW. Conversely, a HIGH signal on either $\overline{CEP}$ or $\overline{CET}$ inhibits counting.

The 'F568 and 'F569 use edge-triggered flip-flops and changing the $\overline{SR}$, $\overline{PE}$, $\overline{CEP}$, $\overline{CET}$ or U/$\overline{D}$ inputs when the CP is in either state does not cause errors, provided that the recommended setup and hold times, with respect to the rising edge of CP, are observed.

Two types of outputs are provided as overflow/underflow indicators. The Terminal Count ($\overline{TC}$) output is normally HIGH and goes LOW providing $\overline{CET}$ is LOW, when the counter reaches zero in the Down mode, or reaches maximum (9 for the 'F568, 15 for the 'F569) in the Up mode. $\overline{TC}$ will then remain LOW until a state change occurs, whether by counting or presetting, or until U/$\overline{D}$ or $\overline{CET}$ is changed. To implement synchronous multistage counters, the connections between the $\overline{TC}$ output and the $\overline{CEP}$ and $\overline{CET}$ inputs can provide either slow or fast carry propagation.

Figure 1 shows the connections for simple ripple carry, in which the clock period must be longer than the CP to $\overline{TC}$ delay of the first stage, plus the cumulative $\overline{CET}$ to $\overline{TC}$ delays of the intermediate stages, plus the $\overline{CET}$ to CP setup time of the last stage. This total delay plus setup time sets the upper limit on clock frequency. For faster clock rates, the carry lookahead connections shown in *Figure 2* are recommended. In this scheme the ripple delay through the intermediate stages commences with the same clock that causes the first stage to tick over from max to min in the Up mode, or min to max in the Down mode, to start its final cycle. Since this final cycle takes 10 ('F568) or 16 ('F569) clocks to complete, there is plenty of time for the ripple to progress through the intermediate stages. The critical timing that limits the clock period is the CP to $\overline{TC}$ delay of the first stage plus the $\overline{CEP}$ to CP setup time of the last stage. The $\overline{TC}$ output is subject to decoding spikes due to internal race conditions and is therefore not recommended for use as a clock or asynchronous reset for flip-flops, registers or counters. For such applications, the Clocked Carry ($\overline{CC}$) output is provided. The $\overline{CC}$ output is normally HIGH. When $\overline{CEP}$, $\overline{CET}$, and $\overline{TC}$ are LOW, the $\overline{CC}$ output will go LOW when the clock next goes LOW and will stay LOW until the clock goes HIGH again, as shown in the $\overline{CC}$ Truth Table. When the Output Enable ($\overline{OE}$) is LOW, the parallel data outputs O_0-O_3 are active and follow the flip-flop Q outputs. A HIGH signal on $\overline{OE}$ forces O_0-O_3 to the High Z state but does not prevent counting, loading or resetting.

Logic Equations

Count Enable = $\overline{CEP} \bullet \overline{CET} \bullet PE$

Up ('F568): $\overline{TC} = Q_0 \bullet \overline{Q}_1 \bullet \overline{Q}_2 \bullet Q_3 \bullet (Up) \bullet \overline{CET}$

('F569): $\overline{TC} = Q_0 \bullet Q_1 \bullet Q_2 \bullet Q_3 \bullet (Up) \bullet \overline{CET}$

Down (Both): $\overline{TC} = \overline{Q}_0 \bullet \overline{Q}_1 \bullet \overline{Q}_2 \bullet \overline{Q}_3 \bullet (Down) \bullet \overline{CET}$

$\overline{CC}$ Truth Table

Inputs						Output
$\overline{SR}$	$\overline{PE}$	$\overline{CEP}$	$\overline{CET}$	$\overline{TC}$*	CP	$\overline{CC}$
L	X	X	X	X	X	H
X	L	X	X	X	X	H
X	X	H	X	X	X	H
X	X	X	H	X	X	H
X	X	X	X	H	X	H
H	H	L	L	L	⊓⊔	⊓⊔

*$\overline{TC}$ is generated internally

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

⊓⊔ = HIGH-to-LOW-to-HIGH Clock Transition


Mode Select Table

Inputs						Operating Mode
$\overline{MR}$	$\overline{SR}$	$\overline{PE}$	$\overline{CEP}$	$\overline{CET}$	U/$\overline{D}$	
L	X	X	X	X	X	Asynchronous Reset
H	L	X	X	X	X	Synchronous Reset
H	H	L	X	X	X	Parallel Load
H	H	H	H	X	X	Hold
H	H	H	X	H	X	Hold
H	H	H	L	L	H	Count Up
H	H	H	L	L	L	Count Down

H = HIGH Voltage Level


L = LOW Voltage Level

X = Immaterial

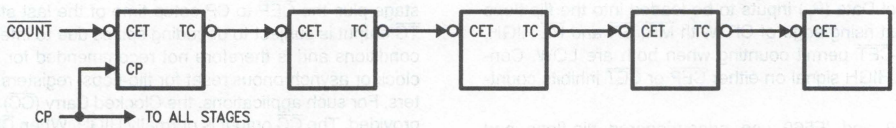

TL/F/9565–5

FIGURE 1: Multistage Counter with Ripple Carry

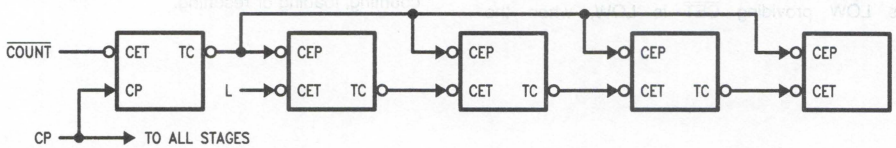


TL/F/9565–6

FIGURE 2: Multistage Counter with Lookahead Carry


State Diagrams

'F568

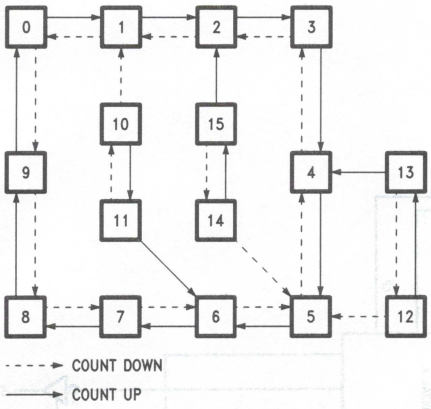

TL/F/9565–7


'F569

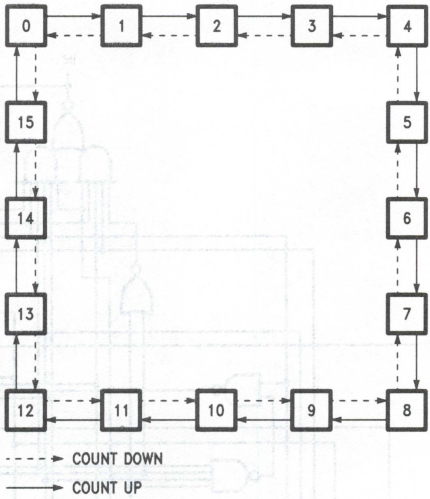

TL/F/9565–8

Logic Diagrams


'F568

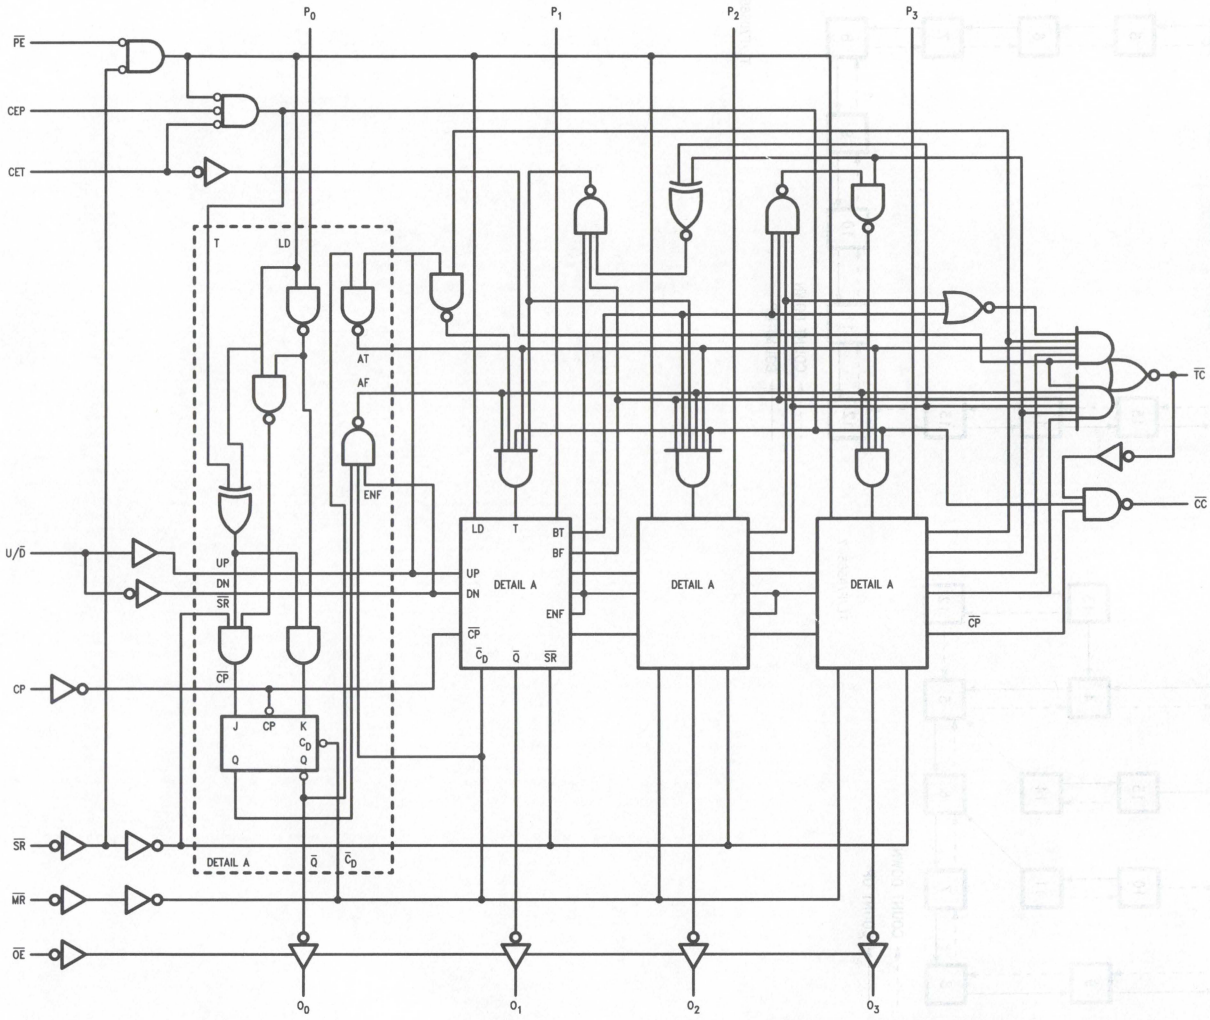

TL/F/9565–9

Please note that these diagrams are provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Logic Diagrams (Continued)

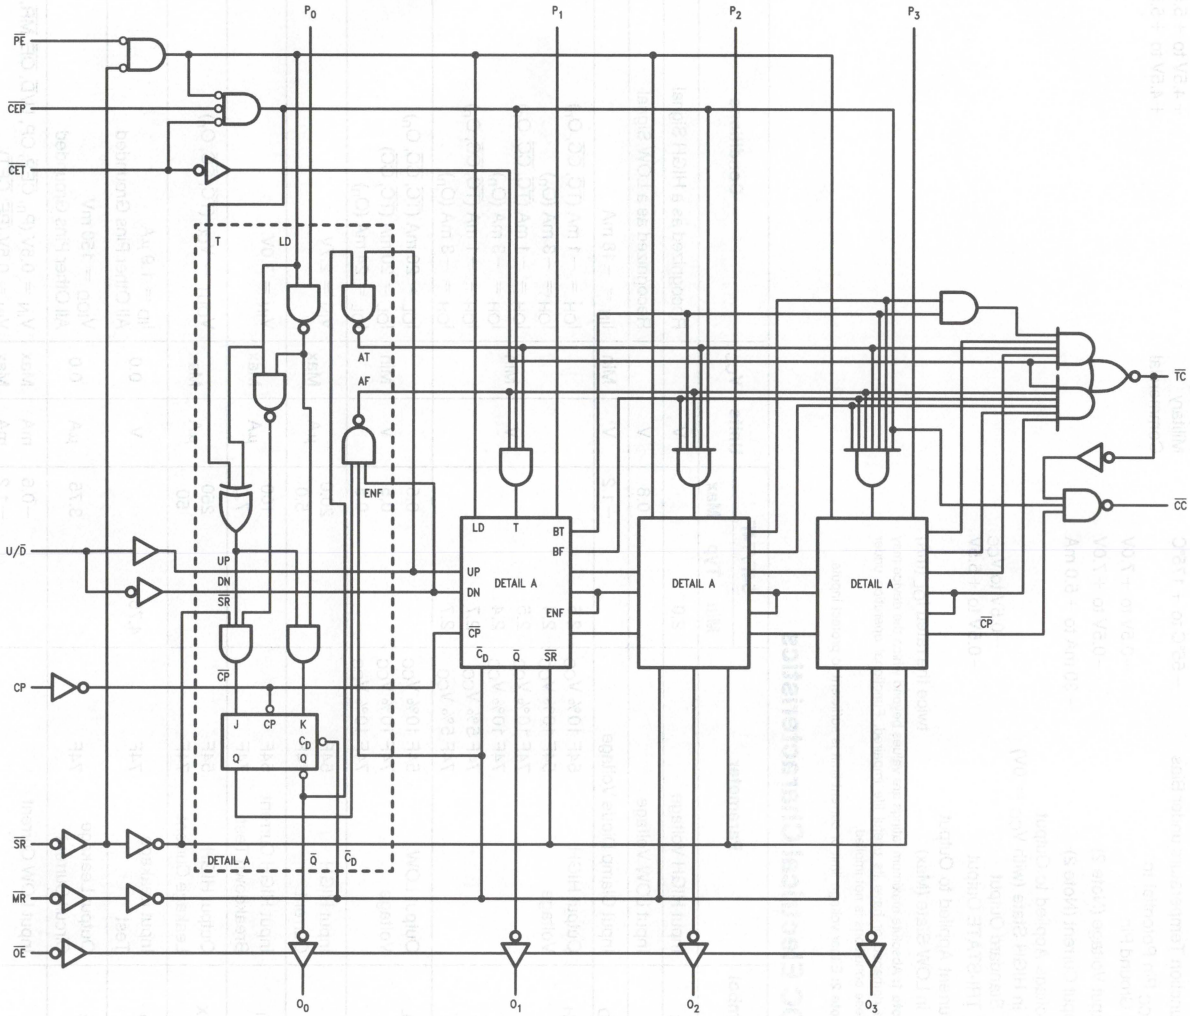

TL/F/9565–10

Please note that these diagrams are provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	Typ	Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA ($\overline{TC}$, $\overline{CC}$, O_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (O_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA ($\overline{TC}$, $\overline{CC}$, O_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (O_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA ($\overline{TC}$, $\overline{CC}$, O_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (O_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA ($\overline{TC}$, $\overline{CC}$, O_n)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA ($\overline{TC}$, $\overline{CC}$)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (O_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC} ($\overline{TC}$, $\overline{CC}$, O_n)
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (P_n, $\overline{CEP}$, CP, U/$\overline{D}$, $\overline{OE}$, $\overline{MR}$, $\overline{SR}$)
					−1.2	mA	Max	V_{IN} = 0.5V ($\overline{PE}$, $\overline{CET}$)

DC Electrical Characteristic (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{OZH}	Output Leakage Current			50	μA	Max	V_{OUT} = 2.7V (O_n)
I_{OZL}	Output Leakage Current			−50	μA	Max	V_{OUT} = 0.5V (O_n)
I_{OS}	Output Short-Circuit Current	−60		−150	mA	Max	V_{OUT} = 0V ($\overline{TC}$, $\overline{CC}$, O_n)
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V (O_n)
I_{CCH}	Power Supply Current		45	67	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		45	67	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		45	67	mA	Max	V_O = HIGH Z

'F568

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F			54F		74F		Units	Fig. No.
		T_A = +25°C, V_{CC} = +5.0V, C_L = 50 pF			T_A, V_{CC} = Mil, C_L = 50 pF		T_A, V_{CC} = Com, C_L = 50 pF			
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	115				90		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to O_n ($\overline{PE}$ HIGH or LOW)	3.0 4.0	6.5 9.0	8.5 11.5			3.0 4.0	9.5 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{TC}$	5.5 4.0	12.0 8.5	15.5 11.0			5.5 4.0	17.5 12.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CET}$ to $\overline{TC}$	2.5 2.5	4.5 6.0	6.0 8.0			2.5 2.5	7.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay U/$\overline{D}$ to $\overline{TC}$	3.5 4.0	8.5 12.5	11.0 16.0			3.5 4.0	12.5 18.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{CC}$	2.5 2.0	5.5 4.5	7.0 6.0			2.5 2.0	8.0 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CEP}$, $\overline{CET}$ to $\overline{CC}$	2.5 4.0	5.0 8.5	6.5 11.0			2.5 4.0	7.5 12.5	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to O_n	5.0	10.0	13.0			5.0	14.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to O_n	2.5 3.0	5.5 6.0	7.0 8.0			2.5 3.0	8.0 9.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to O_n	1.5 2.0	5.0 4.5	6.5 6.0			1.5 2.0	7.5 7.0	ns	2–5

'F568

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to CP	4.0 4.0				4.5 4.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to CP	3.0 3.0				3.5 3.5			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{CEP}$ or $\overline{CET}$ to CP	5.0 5.0				6.0 6.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{CEP}$ or $\overline{CET}$ to CP	0 0				0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{PE}$ to CP	8.0 8.0				9.0 9.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{PE}$ to CP	0 0				0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW U/$\overline{D}$ to CP	11.0 16.0				12.5 17.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW U/$\overline{D}$ to CP	0 0				0 0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{SR}$ to CP	9.5 8.5				10.5 9.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{SR}$ to CP	0 0				0 0			
$t_w(H)$ $t_w(L)$	CP Pulse Width, HIGH or LOW	4.0 6.0				4.5 6.5		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	4.5				5.0		ns	2–4
t_{rec}	$\overline{MR}$ Recovery Time	6.0				7.0		ns	2–6

'F569

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	90					70		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to O_n ($\overline{PE}$ HIGH or LOW)	3.0 4.0	6.5 9.0	8.5 11.5			3.0 4.0	9.5 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{TC}$	5.5 4.0	12.0 8.5	15.5 12.5			5.5 4.0	17.5 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CET}$ to $\overline{TC}$	2.5 2.5	4.5 6.0	6.5 11.0			2.5 2.5	7.0 12.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay U/$\overline{D}$ to $\overline{TC}$	3.5 4.0	8.5 8.0	11.5 12.0			3.5 4.0	12.5 13.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay CP to $\overline{CC}$	2.5 2.0	5.5 4.5	7.0 6.0			2.0 2.0	8.0 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{CEP}$, $\overline{CET}$ to $\overline{CC}$	2.5 4.0	5.0 8.5	6.5 11.0			2.0 4.0	7.5 12.5	ns	2–3
t_{PHL}	Propagation Delay $\overline{MR}$ to O_n	5.0	10.0	13.0			5.0	14.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to O_n	2.5 3.0	5.5 6.0	8.0 9.0			2.5 3.0	8.5 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to O_n	1.5 2.0	5.0 4.5	7.0 6.0			1.5 2.0	8.0 7.0		

'F569

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW P_n to CP	4.0 4.0				4.5 4.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW P_n to CP	3.0 3.0				3.5 3.5			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{CEP}$ or $\overline{CET}$ to CP	7.0 5.0				8.0 6.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{CEP}$ or $\overline{CET}$ to CP	0 0.5				0 0.5			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{PE}$ to CP	8.0 8.0				9.0 9.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{PE}$ to CP	0.0 0				1.0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW U/$\overline{D}$ to CP	11.0 7.0				12.5 8.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW U/$\overline{D}$ to CP	0 0				0 0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{SR}$ to CP	10.5 8.5				11.0 9.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{SR}$ to CP	0 0				0 0			
$t_w(H)$ $t_w(L)$	CP Pulse Width, HIGH or LOW	4.0 7.0				4.5 8.0		ns	2–4
$t_w(L)$	$\overline{MR}$ Pulse Width, LOW	4.5				6.0		ns	2–4
t_{rec}	$\overline{MR}$ Recovery Time	6.0				8.0		ns	2–6

National Semiconductor

54F/74F573
Octal D-Type Latch with TRI-STATE® Outputs

General Description

The 'F573 is a high speed octal latch with buffered common Latch Enable (LE) and buffered common Output Enable ($\overline{OE}$) inputs.


This device is functionally identical to the 'F373 but has different pinouts.

Features

- Inputs and outputs on opposite sides of package allowing easy interface with microprocessors
- Useful as input or output port for microprocessors
- Functionally identical to 'F373
- TRI-STATE outputs for bus interfacing
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbol



TL/F/9566–1


IEEE/IEC



TL/F/9566–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9566–2

Pin Assignment for LCC



TL/F/9566–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable Input (Active HIGH)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	TRI-STATE Latch Outputs	150/40(33.3)	−3 mA/24 mA (20 mA)

Functional Description


The 'F573 contains eight D-type latches with 3-state output buffers. When the Latch Enable (LE) input is HIGH, data on the D_n inputs enters the latches. In this condition the latches are transparent, i.e., a latch output will change state each time its D input changes. When LE is LOW the latches store the information that was present on the D inputs a setup time preceding the HIGH-to-LOW transition of LE. The 3-state buffers are controlled by the Output Enable ($\overline{OE}$) input. When $\overline{OE}$ is LOW, the buffers are in the bi-state mode. When $\overline{OE}$ is HIGH the buffers are in the high impedance mode but this does not interfer with entering new data into the latches.

Function Table

Inputs			Outputs
$\overline{OE}$	LE	D	O
L	H	H	H
L	H	L	L
L	L	X	O_0
H	X	X	Z

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
O_0 = Value stored from previous clock cycle

Logic Diagram

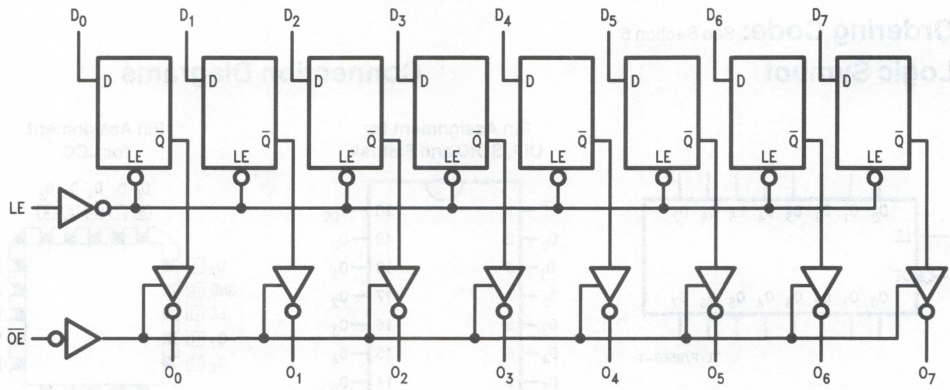

TL/F/9566–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCL}	Power Supply Current			35	55	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			35	55	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay D_n to O_n	3.0 2.0	5.3 3.7	7.0 6.0	3.0 2.0	9.0 7.0	3.0 2.0	8.0 6.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay LE to O_n	5.0 3.0	9.0 5.2	11.0 7.0	5.0 3.0	13.5 7.5	5.0 3.0	12.0 7.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time	2.0 2.0	5.0 5.6	8.0 8.5	2.0 2.0	10.0 10.0	2.0 2.0	9.0 9.5	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time	1.5 1.5	4.5 3.8	5.5 5.5	1.5 1.5	7.0 5.5	1.5 1.5	6.5 5.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to LE	2.0 2.0		2.0 2.0		2.0 2.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to LE	3.0 3.5		3.0 4.0		3.0 3.5			
$t_w(H)$	LE Pulse Width, HIGH	4.0		4.0		4.0		ns	2–4

National Semiconductor

54F/74F574
Octal D-Type Flip-Flop with TRI-STATE® Outputs

General Description

The 'F574 is a high-speed, low power octal flip-flop with a buffered common Clock (CP) and a buffered common Output Enable ($\overline{OE}$). The information presented to the D inputs is stored in the flip-flops on the LOW-to-HIGH Clock (CP) transition.


This device is functionally identical to the 'F374 except for the pinouts.

Features

- Inputs and outputs on opposite sides of package allowing easy interface with microprocessors
- Useful as input or output port for microprocessors
- Functionally identical to 'F374
- TRI-STATE outputs for bus-oriented applications


Ordering Code: See Section 5

Logic Symbols



TL/F/9567–1


IEEE/IEC



TL/F/9567–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9567–2

Pin Assignment for LCC



TL/F/9567–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description


The 'F574 consists of eight edge-triggered flip-flops with individual D-type inputs and TRI-STATE true outputs. The buffered clock and buffered Output Enable are common to all flip-flops. The eight flip-flops will store the state of their individual D inputs that meet the setup and hold times requirements on the LOW-to-HIGH Clock (CP) transition. With the Output Enable ($\overline{OE}$) LOW, the contents of the eight flip-flops are available at the outputs. When $\overline{OE}$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}$ input does not affect the state of the flip-flops.

Function Table

Inputs			Internal	Outputs	Function
$\overline{OE}$	CP	D	Q	O	
H	H	L	NC	Z	Hold
H	H	H	NC	Z	Hold
H	↗	L	L	Z	Load
H	↗	H	H	Z	Load
L	↗	L	L	L	Data Available
L	↗	H	H	H	Data Available
L	H	L	NC	NC	No Change in Data
L	H	H	NC	NC	No Change in Data

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance
↗ = LOW-to-HIGH Transition
NC = No Change

Logic Diagram

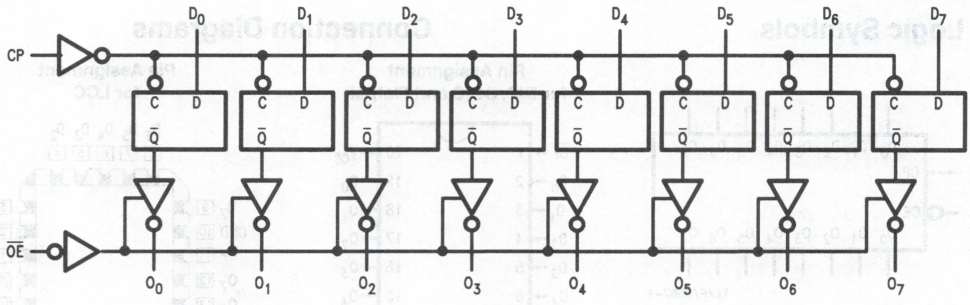

TL/F/9567–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			55	86	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100			60		70		MHz	2–1
t_{PLH}	Propagation Delay	2.5	5.3	8.5	2.5	9.5	2.5	8.5	ns	2–3
t_{PHL}	CP to O_n	2.5	5.3	8.5	2.5	9.5	2.5	8.5		
t_{PZH}	Output Enable Time	3.0	5.5	9.0	2.5	10.5	2.5	10.0	ns	2–5
t_{PZL}		3.0	6.0	9.0	2.5	10.5	2.5	10.0		
t_{PHZ}	Output Disable Time	1.5	3.3	5.5	1.5	7.0	1.5	6.5		
t_{PLZ}		1.5	2.8	5.5	1.5	7.0	1.5	6.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Set-up Time, HIGH or LOW	2.5		3.0		2.5		ns	2–6
$t_s(L)$	D_n to CP	2.0		2.5		2.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0			
$t_h(L)$	D_n to CP	2.0		2.0		2.0			
$t_w(H)$	CP Pulse Width	5.0		5.0		5.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0		5.0		5.0			

National Semiconductor

ADVANCE INFORMATION

54F/74F579
8-Bit Bidirectional Binary Counter with TRI-STATE® Outputs


General Description

The 'F579 is a fully synchronous 8-stage up/down counter with multiplexed TRI-STATE I/O ports for bus-oriented applications. It features a preset capability for programmable operation, carry lookahead for easy cascading and a U/$\overline{D}$ input to control the direction of counting. All state changes, whether in counting or parallel loading, are initiated by the rising edge of the clock.

Features


- Multiplexed TRI-STATE I/O ports
- Built-in lookahead carry capability
- Count frequency 100 MHz typ
- Supply current 75 mA typ

Logic Symbols



TL/F/9568–1


IEEE/IEC

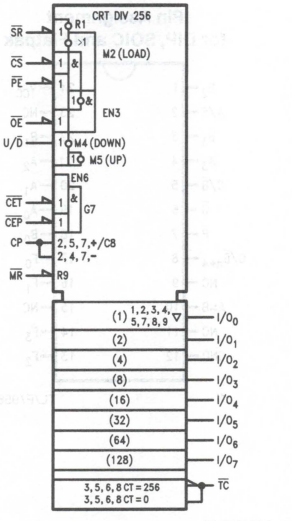

TL/F/9568–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9568–2

Pin Assignment for LCC



TL/F/9568–3

4

National Semiconductor

54F/74F582
4-Bit BCD Arithmetic Logic Unit

General Description


The 'F582 is a 24-pin expandable Arithmetic Logic Unit (ALU) that performs two arithmetic operations (A plus B, A minus B), compare (A equals B), and binary to BCD conversion. In addition to a ripple carry output, carry Propagate (P) and Generate (G) outputs are provided for use with the 'F182 carry lookahead generator for high-speed expansion to higher decades. It is functionally equivalent to the 82S82.

Features

- Performs four BCD functions
- $\overline{P}$ and $\overline{G}$ outputs for high-speed expansion
- Add/subtract delay 22 ns max
- Lookahead delay 15.5 ns max
- Supply current 80 mA max
- 24-Lead 300 mil slim package


Ordering Code: See Section 5

Logic Symbols



TL/F/9569–1


IEEE/IEC

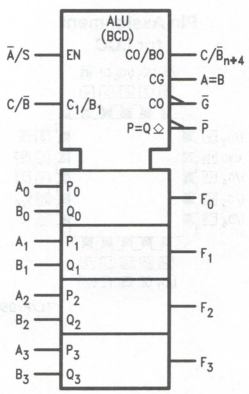

TL/F/9569–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9569–2

Pin Assignment for LCC



TL/F/9569–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0-A_3	A Operand Inputs	1.0/2.0	20 μA/−1.2 mA
B_0	B Operand Input	1.0/1.0	20 μA/−0.6 mA
B_1	B Operand Input	1.0/5.0	20 μA/−3 mA
B_2	B Operand Input	1.0/3.0	20 μA/−1.8 mA
B_3	B Operand Input	1.0/2.0	20 μA/−1.2 mA
F_0-F_3	Functional Outputs	50/33.3	−1 mA/20 mA
A = B	Comparator Output	OC*/33.3	*/20 mA
$\overline{P}$	Carry Propagate Output	50/33.3	−1 mA/20 mA
$\overline{G}$	Carry Generate Output	50/33.3	−1 mA/20 mA
$C/\overline{B}$	Carry/$\overline{\text{Borrow}}$ Input	1.0/1.0	20 μA/−0.6 mA
$C/\overline{B}_{n+4}$	Carry/$\overline{\text{Borrow}}$ Output	50/33.3	−1 mA/20 mA
$\overline{A}/S$	$\overline{\text{Add}}$/Subtract	1.0/3.0	20 μA/−1.8 mA

*OC—Open Collector

Functional Description

The 'F582 Binary Coded Decimal (BCD) Arithmetic Logic Unit (ALU) is a 24-pin expandable unit that performs addition, subtraction, comparison of two numbers, and binary to BCD conversion.


The 'F582's input and output logic includes a Carry/$\overline{\text{Borrow}}$ which is generated internally in the lookahead mode, allowing BCD arithmetic to be computed directly. For more than one BCD decade, the Carry/$\overline{\text{Borrow}}$ term may ripple between 'F582s.

When $\overline{A}/S$ is LOW, BCD addition is performed (A + B + $C/\overline{B}$ = F). If the sum is greater than 9, binary to BCD conversion results at the output.

When $\overline{A}/S$ is HIGH, subtraction is performed. If the $C/\overline{B}$ is LOW, then the subtraction is accomplished by internally computing the 9s complement addition of two BCD numbers (A−B−1 = F). When $C/\overline{B}$ is HIGH, the difference of the two numbers is figured as A−B = F. For A greater than or equal to B, the BCD difference appears at the output F in its true form. If A is less than B and $C/\overline{B}$ is HIGH, the difference appears at the output as the 10s complement of the true form. If A is less than B and $C/\overline{B}$ is LOW, the 9s complement of the true form appears at the output F. As long as A is less than B, and Active LOW borrow is also generated.

The 'F582 also performs binary to BCD conversion. For inputs between 10 and 15, binary to BCD conversion occurs by grounding the B inputs and applying the binary number to the other set of inputs. This will generate a carry term to the next decade.

Logic Diagram

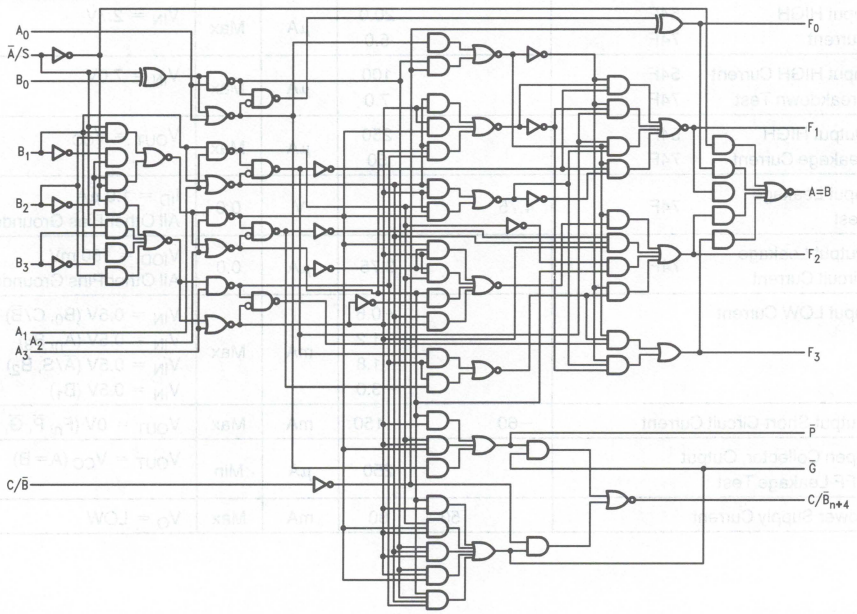

TL/F/9569–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (F_n, $\overline{P}$, $\overline{G}$, C/$\overline{B}_n$ +4)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (F_n, $\overline{P}$, $\overline{G}$, C/$\overline{B}_n$ +4)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (F_n, $\overline{P}$, $\overline{G}$, C/$\overline{B}_n$ +4)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (B_0, C/$\overline{B}$)
					−1.2			V_{IN} = 0.5V (A_n, B_3)
					−1.8			V_{IN} = 0.5V ($\overline{A}$/S, B_2)
					−3.0			V_{IN} = 0.5V (B_1)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V (F_n, $\overline{P}$, $\overline{G}$, C/$\overline{B}_n$ + 4)
I_{OHC}	Open Collector, Output OFF Leakage Test				250	μA	Min	V_{OUT} = V_{CC} (A = B)
I_{CC}	Power Supply Current			50	80	mA	Max	V_O = LOW

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n or B_n to F_n	2.5 2.5	29.0 22.0			2.5 2.5	31.0 23.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A_n or B_n to $C/\overline{B}_{n+4}$	4.0 4.0	21.5 16.0			4.0 4.0	24.0 17.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $C/\overline{B}_n$ to $C/\overline{B}_{n+4}$	3.5 2.0	8.5 6.5			3.0 2.0	9.5 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A_n or B_n to A = B	8.0 6.0	35.0 25.0			7.5 5.5	28.5 24.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A_n or B_n to $\overline{G}$ or $\overline{P}$	4.0 3.5	18.0 15.5			4.0 3.5	19.0 16.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{A}/S$ to F_n	2.5 7.0	33.0 18.0			2.5 6.5	34.0 19.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $C/\overline{B}$ to F_n	4.0 2.5	21.0 14.0			3.5 2.5	23.0 15.5	ns	2–3

National Semiconductor

54F/74F583
4-Bit BCD Adder

General Description


The 'F583 high-speed 4-bit, BCD full adder with internal carry lookahead accepts two 4-bit decimal numbers (A_0–A_3, B_0–B_3) and a Carry Input (C_n). It generates the decimal sum outputs (S_0–S_3), and a Carry Output (C_{n+4}) if the sum is greater than 9. The 'F583 is the functional equivalent of the 82S83.

Features

- Adds two decimal numbers
- Full internal lookahead
- Fast ripple carry for economical expansion
- Sum output delay time 16.5 ns max
- Ripple carry delay time 8.5 ns max
- Input to ripple delay time 14.0 ns max
- Supply current 60 mA max
- Available in SOIC, (300 mil only)


Ordering Code: See Section 5

Logic Symbols



TL/F/9570–1


IEEE/IEC



TL/F/9570–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9570–2

Pin Assignment for LCC



TL/F/9570–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_3	A Operand Inputs	1.0/2.0	20 μA/−1.2 mA
B_0–B_3	B Operand Inputs	1.0/2.0	20 μA/−1.2 mA
C_n	Carry Input	1.0/1.0	20 μA/−0.6 mA
S_0–S_3	Sum Outputs	50/33.3	−1 mA/20 mA
C_{n+4}	Carry Output	50/33.3	−1 mA/20 mA

Functional Description

The 'F583 4-bit binary coded (BCD) full adder performs the addition of two decimal numbers (A_0–A_3, B_0–B_3). The look-ahead generates the BCD carry terms internally, allowing the 'F583 to then do BCD addition correctly. For BCD numbers 0 through 9 at A and B inputs, the BCD sum forms at the output. In the addition of two BCD numbers totalling a number greater than 9, a valid BCD number and a carry will result.

For input values larger than 9, the number is converted from binary to BCD. Binary to BCD conversion occurs by grounding one set of inputs, A_n or B_n, and applying any 4-bit binary number to the other set of inputs. If the input is between 0 and 9, a BCD number occurs at the output. If the binary input falls between 10 and 15, a carry term is generated. Both the carry term and the sum are the BCD equivalent of the binary input. Converting binary numbers greater than 16 may be achieved through cascading 'F583s.

Logic Diagram

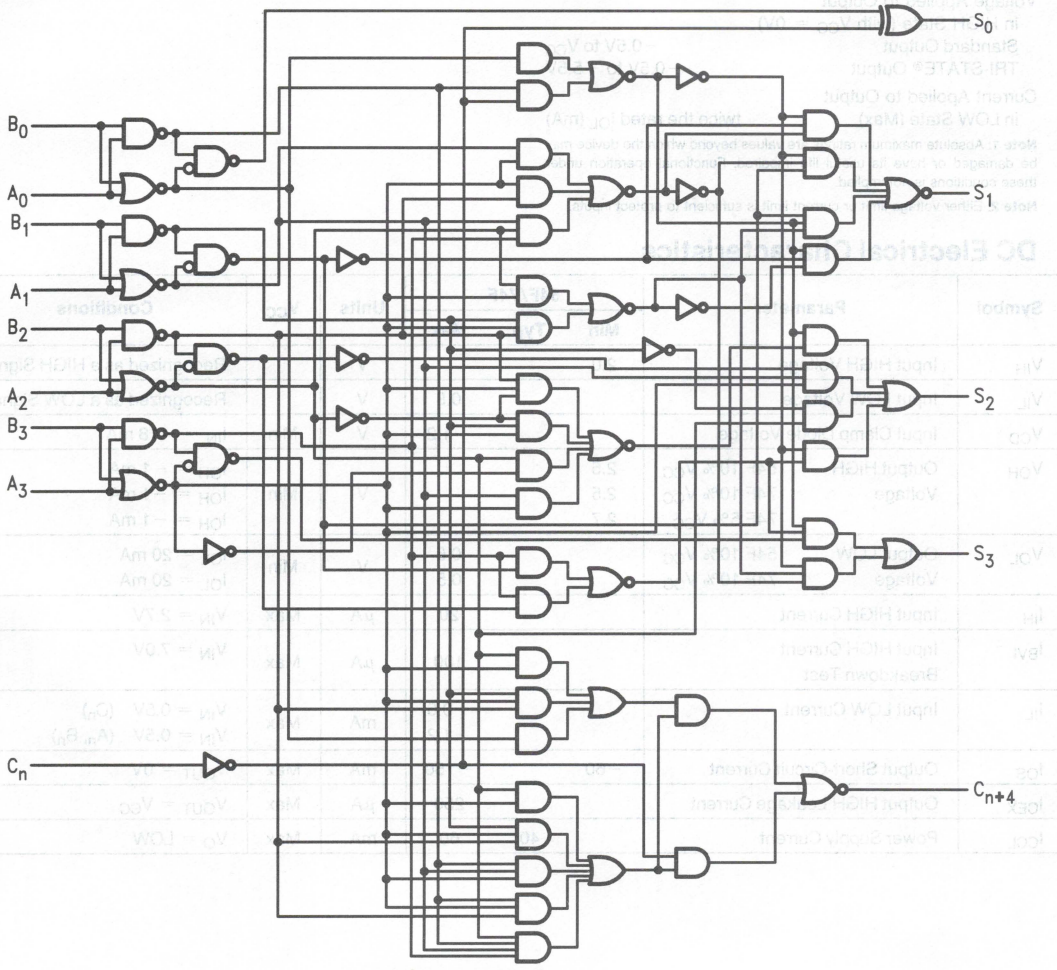

TL/F/9570–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current				20	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test				100	μA	Max	V_{IN} = 7.0V
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (C_n)
					−1.2			V_{IN} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CEX}	Output HIGH Leakage Current				250	μA	Max	V_{OUT} = V_{CC}
I_{CCL}	Power Supply Current			40	60	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n or B_n to S_n	2.5 2.5	13.0 11.0	16.5 14.0	2.5 2.5	20.5 19.0	2.5 2.5	17.5 15.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay C_n to C_{n+4}	2.5 2.5	6.5 5.0	8.5 6.5	2.5 2.5	10.5 8.5	2.5 2.5	9.5 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A_n or B_n to C_{n+4}	4.0 4.0	11.0 8.0	14.0 10.5	4.0 4.0	19.5 13.5	4.0 4.0	15.0 11.5	ns	2–3

National Semiconductor

54F/74F588
Octal Bidirectional Transceiver with TRI-STATE® Inputs/Outputs and IEEE-488 Termination Resistors

General Description


The 'F588 contains eight non-inverting bidirectional buffers with TRI-STATE outputs and is intended for bus-oriented applications. The B ports have termination resistors as specified in the IEEE-488 specifications. Current sinking capability is 24 mA (20 mA Mil) at the A ports and 64 mA (48 mA Mil) at the B ports. The Transmit/Receive ($T/\overline{R}$) input determines the direction of data flow through the bidirectional transceiver. Transmit (active HIGH) enables data from A ports to B ports; Receive (active LOW) enables data from B ports to A ports. The Output Enable input, when HIGH, disables both A and B ports by placing them in a high impedance condition.

Features


- Non-inverting buffers
- Bidirectional data path
- B outputs sink 64 mA (48 mA Mil), source 12 mA
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Logic Symbols




TL/F/9571–2

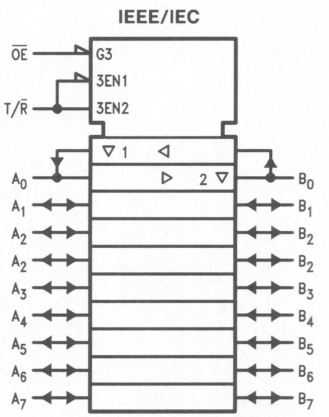

TL/F/9571–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9571–3

Pin Assignment for LCC



TL/F/9571–4

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
T/$\overline{R}$	Transmit/Receive Control Input	1.0/2.0	20 μA/−1.2 mA
A_0–A_7	A Port Inputs or	3.5/1.083	70 μA/−0.65 mA
	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
B_0–B_7	B Port Inputs or	*T/5.33	*T/3.2 mA
	TRI-STATE Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)

*T = Resistive Termination per IEEE-488 Standard

Truth Table

Inputs		Outputs
$\overline{OE}$	T/$\overline{R}$	
L	L	Bus B Data to Bus A
L	H	Bus A Data to Bus B
H	X	High Impedance


Logic Diagram

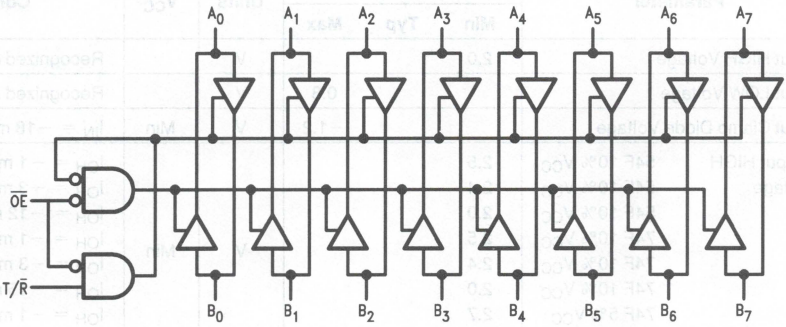

TL/F/9571–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

B Port Input Characteristic with T/$\overline{R}$ LOW

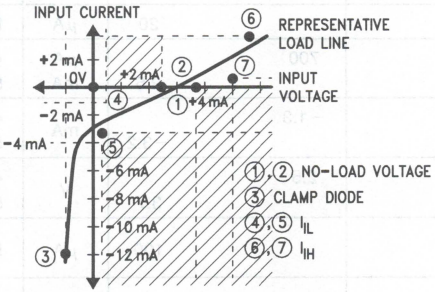

TL/F/9571–6

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA ($\overline{OE}$, T/$\overline{R}$)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (A_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (A_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (B_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (A_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n, B_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (A_n)
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA (B_n)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (A_n)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (B_n)
I_{IH}	Input HIGH Current				20	μA	Max	V_{IN} = 2.7V ($\overline{OE}$, T/$\overline{R}$)
I_{IH} + I_{OZH}	I_{IH}		700			μA	4.75	V_{IN} = 5.0V (B_n)
	IEEE-488				2.5	mA	5.25	V_{IN} = 5.5V (B_n)
I_{IL} + I_{OZL}	I_{IL}		−1.3			mA	4.75	V_{IN} = 0.4V (B_n)
	IEEE-488				−3.2		5.25	V_{IN} = 0.4V (B_n)
V_{NL}	No Load Voltage		2.5			V	4.75	I_{IN} = 0V (B_n)
					3.7		5.25	I_{IN} = 0V (B_n)
I_{BVI}	Input HIGH Current Breakdown Test				100	μA	Max	V_{IN} = 7.0V ($\overline{OE}$, T/$\overline{R}$)
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)				1.0	mA	Max	V_{IN} = 5.5V (A_n)

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{IL}	Input LOW Current			−1.2	mA	Max	V_{IN} = 0.5V ($\overline{OE}$, T/$\overline{R}$)
$I_{IH} + I_{OZH}$	Output Leakage Current			70	μA	Max	V_{OUT} = 2.7V (A_n)
$I_{IL} + I_{OZL}$	Output Leakage Current			−650	μA	Max	V_{OUT} = 0.5V (A_n)
I_{OS}	Output Short-Circuit Current	−60 −100		−150 −225	mA	Max	V_{OUT} = 0V (A_n) V_{OUT} = 0V (B_n)
I_{CEX}	Output HIGH Leakage Current			250	μA	Max	V_{OUT} = V_{CC} (A_n)
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V (A_n, B_n)
I_{CCH}	Power Supply Current		67	100	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		90	135	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		83	125	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F T_A = +25°C V_{CC} = +5.0V C_L = 50 pF			54F T_A, V_{CC} = Mil C_L = 50 pF		74F T_A, V_{CC} = Com C_L = 50 pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A to B or B to A	2.5 2.5	4.5 5.0	6.0 6.5			2.5 2.5	7.0 7.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time T/$\overline{R}$ or $\overline{OE}$ to A or B	2.5 2.5	5.0 7.0	7.0 9.0			2.5 2.5	8.0 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time T/$\overline{R}$ or $\overline{OE}$ to A or B	2.5 2.5	5.5 5.5	7.0 7.0			2.5 2.5	8.0 8.0		

National Semiconductor

54F/74F620 • 54F/74F623
Inverting Octal Bus Transceiver with TRI-STATE® Outputs

General Description


These devices are octal bus transceivers designed for asynchronous two-way data flow between the A and B busses. Both busses are capable of sinking 64 mA and have TRI-STATE outputs. Dual enable pins (GAB, $\overline{GBA}$) allow data transmission from the A bus to the B bus or from the B bus to the A bus. The 'F620 is an inverting option of the 'F623.

Features

- Designed for asynchronous two-way data flow between busses
- Outputs sink 64 mA
- Dual enable inputs control direction of data flow
- Guaranteed 4000V minimum ESD protection
- 'F620 is an inverting option of the 'F623

Ordering Code: See Section 5

Logic Symbol




TL/F/9577–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{GBA}$, GAB	Enable Inputs	1.0/1.0	20 μA/−0.6 mA
A_0–A_7	A Inputs or	3.5/1.083	70 μA/−0.4 mA
	TRI-STATE Outputs	150/40 (33.3)	−3 mA/64 mA (48 mA)
B_0–B_7	B Inputs or	3.5/1.083	70 μA/−0.4 mA
	TRI-STATE Outputs	150/40 (33.3)	−3 mA/64 mA (48 mA)


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9577–1

Pin Assignment for LCC



TL/F/9577–2

Functional Description

The enable inputs GAB and $\overline{G}BA$ control whether data is transmitted from the A bus to the B bus or from the B bus to the A bus. If both $\overline{G}BA$ and GAB are disabled ($\overline{G}BA$ HIGH and GAB low), the outputs are in the high impedance state and data is stored at the A and B busses. When $\overline{G}BA$ is active (LOW), B data is sent to the A bus. When GAB is active (HIGH), data from the A bus is sent to the B bus. If both enable inputs are active ($\overline{G}BA$ LOW and GAB HIGH) B data is sent to the A bus while A data is sent to the B bus.


Function Table

Enable Inputs		Operation	
$\overline{G}BA$	GAB	'F620	'F623
L	L	$\overline{B}$ Data to A Bus	B Data to A Bus
H	H	$\overline{A}$ Data to B Bus	A Data to B Bus
H	L	Z	Z
L	H	$\overline{B}$ Data to A Bus, $\overline{A}$ Data to B Bus	B Data to A Bus, A Data to B Bus

H = HIGH Voltage Level
L = LOW Voltage Level
Z = High Impedance

Logic Diagram


'F620

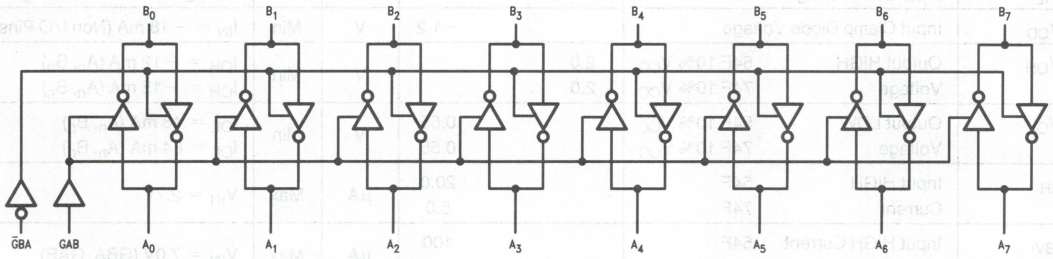

TL/F/9577–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

'F623

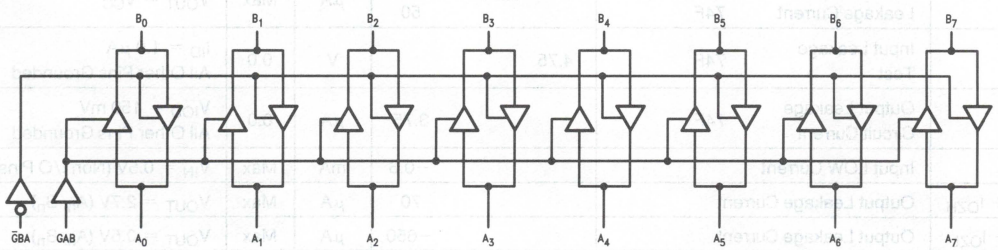

TL/F/9577–7

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA (Non I/O Pins)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC} 74F 10% V_{CC}	2.0 2.0			V	Min	I_{OH} = −12 mA (A_n, B_n) I_{OH} = −15 mA (A_n, B_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC} 74F 10% V_{CC}			0.55 0.55	V	Min	I_{OL} = 48 mA (A_n, B_n) I_{OL} = 64 mA (A_n, B_n)
I_{IH}	Input HIGH Current	54F 74F			20.0 5.0	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test	54F 74F			100 7.0	μA	Max	V_{IN} = 7.0V (GBA, GAB)
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F 74F			1.0 0.5	mA	Max	V_{IN} = 5.5V (A_n, B_n)
I_{CEX}	Output HIGH Leakage Current	54F 74F			250 50	μA	Max	V_{OUT} = V_{CC}
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Non I/O Pins)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current ('F620)				82	mA	Max	V_O = HIGH, V_{IN} = 0.2V
I_{CCL}	Power Supply Current ('F620)				82	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F620)				95	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F623)				65	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F623)				82	mA	Max	V_O = LOW, V_{IN} = 0.2V
I_{CCZ}	Power Supply Current ('F623)				85	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A Input to B Output ('F620)	2.5 2.0		7.5 7.0			2.0 2.0	8.0 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay B Input to A Output ('F620)	2.5 2.0		7.5 7.0			2.0 2.0	8.0 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A Input to B Output ('F623)	1.5 2.0		6.5 7.0			1.5 2.0	7.5 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay B Input to A Output ('F623)	1.5 2.0		6.5 7.0			1.5 2.0	7.5 7.5	ns	2–3
t_{PZH} t_{PZL}	Enable Time $\overline{G}$BA Input to A Output	2.0 2.5		7.0 8.0			2.0 2.0	8.0 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{G}$BA Input to A Output	1.5 1.0		6.5 5.5			1.5 1.0	7.5 5.5		
t_{PZH} t_{PZL}	Enable Time GAB Input to B Output ('F620)	2.0 3.0		7.5 8.0			2.0 2.0	8.5 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time GAB Input to B Output ('F620)	2.5 2.0		8.0 7.5			2.0 2.0	9.0 8.0		
t_{PZH} t_{PZL}	Enable Time GAB Input to B Output ('F623)	2.0 2.5		7.5 8.0			2.0 2.0	8.5 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time GAB Input to B Output ('F623)	2.0 2.0		8.0 8.0			2.0 2.0	9.0 8.0		

National Semiconductor

54F/74F632
32-Bit Parallel Error Detection and Correction Circuit

General Description

The 'F632 device is a 32-bit parallel error detection and correction circuit (EDAC) in a 52-pin or 68-pin package. The EDAC uses a modified Hamming code to generate a 7-bit check word from a 32-bit data word. This check word is stored along with the data word during the memory write cycle. During the memory read cycle, the 39-bit words from memory are processed by the EDAC to determine if errors have occurred in memory.

Single-bit errors in the 32-bit data word are flagged and corrected.

Single-bit errors in the 7-bit check word are flagged, and the CPU sends the EDAC through the correction cycle even though the 32-bit data word is not in error. The correction cycle will simply pass along the original 32-bit data word in this case and produce error syndrome bits to pinpoint the error-generating location.

Dual-bit errors are flagged but not corrected. These errors may occur in any two bits of the 39-bit word from memory (two errors in the 32-bit data word, two errors in the 7-bit check word, or one error in each word). The gross-error condition of all LOWs or all HIGHs from memory will be detected. Otherwise, errors in three or more bits of the 39-bit word are beyond the capabilities of these devices to detect.

Read-modify-write (byte-control) operations can be performed by using output latch enable, $\overline{LEDBO}$, and the individual $\overline{OEB}_0$ through $\overline{OEB}_3$ byte control pins.


Diagnostics are performed on the EDACs by controls and internal paths that allow the user to read the contents of the Data Bit and Check Bit input latches. These will determine if the failure occurred in memory or in the EDAC.

Features

- Detects and corrects single-bit errors
- Detects and flags dual-bit errors
- Built-in diagnostic capability
- Fast write and read cycle processing times
- Byte-write capability
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Logic Symbol

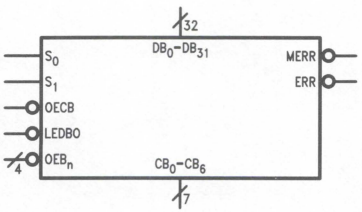


TL/F/9579–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
CB_0–CB_6	Check Word Bit, Input	3.5/1.083	70 μA/−650 μA
	or TRI-STATE® Output	150/40 (33.3)	−3 mA/24 mA (20 mA)
DB_0–DB_{31}	Data Word Bit, Input	3.5/1.083	70 μA/−650 μA
	or TRI-STATE Output	150/40 (33.3)	−3 mA/24 mA (20 mA)
$\overline{OEB}_0$–$\overline{OEB}_3$	Output Enable Data Bits	1.0/1.0	20 μA/−0.6 mA
$\overline{LEDBO}$	Output Latch Enable Data Bit	1.0/1.0	20 μA/−0.6 mA
$\overline{OECB}$	Output Enable Check Bit	1.0/1.0	20 μA/−0.6 mA
S_0, S_1	Select Pins	1.0/1.0	20 μA/−0.6 mA
$\overline{ERR}$	Single Error Flag	50/33.3	−1 mA/20 mA
$\overline{MERR}$	Multiple Error Flag	50/33.3	−1 mA/20 mA


Connection Diagrams

Pin Assignment for Side Brazed DIP

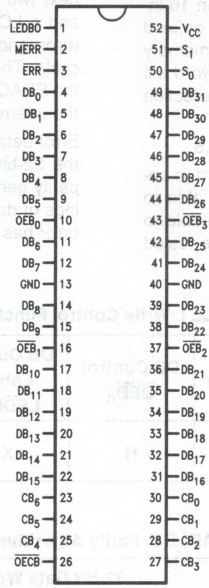


TL/F/9579–2

Pin Assignment for LCC and PCC 52-Pin

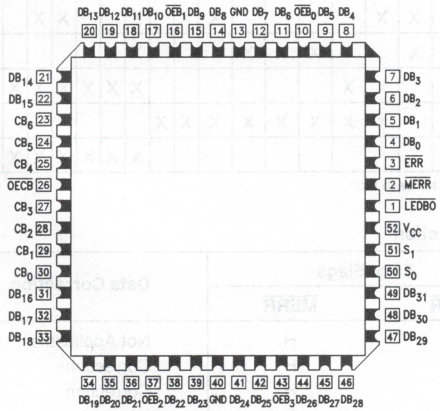

TL/F/9579–3

Pin Assignment for LCC and PCC 68-Pin

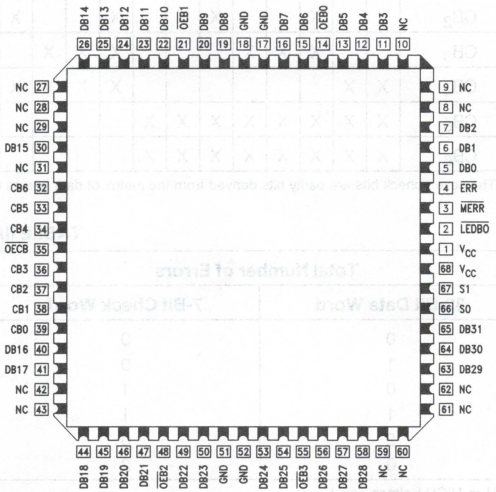

TL/F/9579–8

NC—No internal connection

Functional Description

MEMORY WRITE CYCLE DETAILS

During a memory write cycle, the check bits (CB_0 through CB_6) are generated internally in the EDAC by seven 16-input parity generators using the 32-bit data word as defined in Table II. These seven check bits are stored in memory along with the original 32-bit data word. This 32-bit word will later be used in the memory read cycle for error detection and correction.

ERROR DETECTION AND CORRECTION DETAILS

During a memory read cycle, the 7-bit check word is retrieved along with the actual data. In order to be able to determine whether the data from memory is acceptable to use as presented to the bus, the error flags must be tested to determine if they are at the HIGH level.

The first case in Table III represents the normal, no-error conditions. The EDAC presents HIGHs on both flags. The next two cases of single-bit errors give a HIGH on $\overline{MERR}$ and a LOW on $\overline{ERR}$, which is the signal for a correctable error, and the EDAC should be sent through the correction cycle. The last three cases of double-bit errors will cause the EDAC to signal LOWs on both $\overline{ERR}$ and $\overline{MERR}$, which is the interrupt indication for the CPU.

Error detection is accomplished as the 7-bit check word and the 32-bit data word from memory are applied to internal parity generators/checkers. If the parity of all seven groupings of data and check bits is correct, it is assumed that no error has occurred and both error flags will be HIGH.

TABLE I. Write Control Function

Memory Cycle	EDAC Function	Control S_1	Control S_0	Data I/O	DB Control $\overline{OEB_n}$	DB Output Latch $\overline{LEDBO}$	Check I/O	CB Control $\overline{OECB}$	Error Flags $\overline{ERR}$	Error Flags $\overline{MERR}$
Write	Generate Check Word	L	L	Input	H	X	Output Check Bit*	L	H	H

*See Table II for details of check bit generation.

TABLE II. Parity Algorithm

Check Word Bit	32-Bit Data Word																													
	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
CB_0	X		X	X		X					X		X	X	X			X			X		X	X	X	X		X				X
CB_1				X		X		X		X		X		X	X	X				X		X		X		X		X		X	X	X
CB_2	X		X			X	X		X			X	X			X	X		X			X	X		X			X	X			X
CB_3			X	X	X				X	X	X				X	X			X	X	X				X	X	X				X	X
CB_4	X	X							X	X	X	X	X	X			X	X							X	X	X	X	X	X		
CB_5	X	X	X	X	X	X	X	X									X	X	X	X	X	X	X	X								
CB_6	X	X	X	X	X	X	X	X																	X	X	X	X	X	X	X	X

The seven check bits are parity bits derived from the matrix of data bits as indicated by X for each bit.

TABLE III. Error Function

Total Number of Errors		Error Flags		Data Correction
32-Bit Data Word	7-Bit Check Word	$\overline{ERR}$	$\overline{MERR}$	
0	0	H	H	Not Applicable
1	0	L	H	Correction
0	1	L	H	Correction
1	1	L	L	Interrupt
2	0	L	L	Interrupt
0	2	L	L	Interrupt

H = HIGH Voltage Level
L = LOW Voltage Level

Functional Description (Continued)

If the parity of one or more of the check groups is incorrect, an error has occurred and the proper error flag or flags will be set LOW. Any single error in the 32-bit data word will change the state of either three or five bits of the 7-bit check word. Any single error in the 7-bit check word changes the state of only that one bit. In either case, the single error flag ($\overline{ERR}$) will be set LOW while the dual error flag ($\overline{MERR}$) will remain HIGH.

Any 2-bit error will change the state of an even number of check bits. The 2-bit error is not correctable since the parity tree can only identify single-bit errors. Both error flags are set LOW when any 2-bit error is detected.

Three or more simultaneous bit errors can cause the EDAC to believe that no error, a correctable error, or an uncorrectable error has occurred and will produce erroneous results in all three cases. It should be noted that the gross-error conditions of all LOWs and all HIGHs will be detected.

As the corrected word is made available on the data I/O port (DB_0 through DB_{31}), the check word I/O port (CB_0 through CB_6) presents a 7-bit syndrome error code. This syndrome error code can be used to locate the bad memory chip. See Table V for syndrome decoding.

READ-MODIFY-WRITE (BYTE CONTROL) OPERATIONS

The 'F632 device is capable of byte-write operations. The 39-bit word from memory must first be latched into the Data Bit and Check Bit input latches. This is easily accomplished by switching from the read and flag mode (S_1 = H, S_0 = L) to the latch input mode (S_1 = H, S_0 = H). The EDAC will then make any corrections, if necessary, to the data word and place it at the input of the output data latch. This data word must then be latched into the output data latch by taking $\overline{LEDBO}$ from a LOW to a HIGH.

Byte control can now be employed on the data word through the $\overline{OEB}_0$ through $\overline{OEB}_3$ controls. $\overline{OEB}_0$ controls DB_0–DB_7 (byte 0), $\overline{OEB}_1$ controls DB_8–DB_{15} (byte 1), $\overline{OEB}_2$ controls DB_{16}–DB_{23} (byte 2), and $\overline{OEB}_3$ controls DB_{24}–DB_{31} (byte 3). Placing a HIGH on the byte control will disable the output and the user can modify the byte. If a LOW is placed on the byte control, then the original byte is allowed to pass onto the data bus unchanged. If the original data word is altered through byte control, a new check word must be generated before it is written back into memory. This is easily accomplished by taking controls S_1 and S_0 LOW. Table VI lists the read-modify-write functions.

DIAGNOSTIC OPERATIONS

The 'F632 is capable of diagnostics that allow the user to determine whether the EDAC or the memory is failing. The diagnostic function tables will help the user to see the possibilities for diagnostic control. In the diagnostic mode (S_1 = L, S_0 = H), the check word is latched into the input latch while the data input latch remains transparent. This lets the user apply various data words against a fixed known check word. If the user applies a diagnostic data word with an error in any bit location, the $\overline{ERR}$ flag should be LOW. If a diagnostic data word with two errors in any bit location is applied, the $\overline{MERR}$ flag should be LOW. After the check word is latched into the input latch, it can be verified by taking $\overline{OECB}$ LOW. This outputs the latched check word. The diagnostic data word can be latched into the output data latch and verified. By changing from the diagnostic mode (S_1 = L, S_0 = H) to the correction mode (S_1 = H, S_0 = H), the user can verify that the EDAC will correct the diagnostic data word. Also, the syndrome bits can be produced to verify that the EDAC pinpoints the error location. Table VII lists the diagnostic functions.

TABLE IV. Read, Flag and Correct Function

Memory Cycle	EDAC Function	Control S_1	Control S_0	Data I/O	DB Control $\overline{OEB}_n$	DB Output Latch $\overline{LEDBO}$	Check I/O	CB Control $\overline{OECB}$	Error Flags $\overline{ERR}$ $\overline{MERR}$
Read	Read & Flag	H	L	Input	H	X	Input	H	Enabled (Note 1)
Read	Latch Input Data & Check Bits	H	H	Latched Input Data	H	L	Latched Input Check Word	H	Enabled (Note 1)
Read	Output Corrected Data & Syndrome Bits	H	H	Output Corrected Data Word	L	X	Output Syndrome Bits (Note 2)	L	Enabled (Note 1)

Note 1: See Table III for error description.

Note 2: See Table V for error location.

Functional Description (Continued)

TABLE V. Syndrome Decoding

Syndrome Bits							Error
6	5	4	3	2	1	0	
L	L	L	L	L	L	L	unc
L	L	L	L	L	L	H	2-Bit
L	L	L	L	L	H	L	2-Bit
L	L	L	L	L	H	H	unc
L	L	L	L	H	L	L	2-Bit
L	L	L	L	H	L	H	unc
L	L	L	L	H	H	L	unc
L	L	L	L	H	H	H	2-Bit (Note 2)
L	L	L	H	L	L	L	2-Bit
L	L	L	H	L	L	H	unc
L	L	L	H	L	H	L	DB_{31}
L	L	L	H	L	H	H	2-Bit
L	L	L	H	H	L	L	unc
L	L	L	H	H	L	H	2-Bit
L	L	L	H	H	H	L	2-Bit
L	L	L	H	H	H	H	DB_{30}
L	L	H	L	L	L	L	2-Bit
L	L	H	L	L	L	H	unc
L	L	H	L	L	H	L	DB_{29}
L	L	H	L	L	H	H	2-Bit
L	L	H	L	H	L	L	DB_{28}
L	L	H	L	H	L	H	2-Bit
L	L	H	L	H	H	L	2-Bit
L	L	H	L	H	H	H	DB_{27}
L	L	H	H	L	L	L	DB_{26}
L	L	H	H	L	L	H	2-Bit
L	L	H	H	L	H	L	2-Bit
L	L	H	H	L	H	H	DB_{25}
L	L	H	H	H	L	L	2-Bit
L	L	H	H	H	L	H	DB_{24}
L	L	H	H	H	H	L	unc
L	L	H	H	H	H	H	2-Bit
L	H	L	L	L	L	L	2-Bit
L	H	L	L	L	L	H	unc
L	H	L	L	L	H	L	DB_7
L	H	L	L	L	H	H	2-Bit
L	H	L	L	H	L	L	DB_6
L	H	L	L	H	L	H	2-Bit
L	H	L	L	H	H	L	2-Bit
L	H	L	L	H	H	H	DB_5
L	H	L	H	L	L	L	DB_4
L	H	L	H	L	L	H	2-Bit
L	H	L	H	L	H	L	2-Bit
L	H	L	H	L	H	H	DB_3
L	H	L	H	H	L	L	2-Bit
L	H	L	H	H	L	H	DB_2
L	H	L	H	H	H	L	unc
L	H	L	H	H	H	H	2-Bit
L	H	H	L	L	L	L	DB_0
L	H	H	L	L	L	H	2-Bit
L	H	H	L	L	H	L	2-Bit
L	H	H	L	L	H	H	unc
L	H	H	L	H	L	L	2-Bit
L	H	H	L	H	L	H	DB_1
L	H	H	L	H	H	L	unc
L	H	H	L	H	H	H	2-Bit
L	H	H	H	L	L	L	2-Bit
L	H	H	H	L	L	H	unc
L	H	H	H	L	H	L	unc
L	H	H	H	L	H	H	2-Bit
L	H	H	H	H	L	L	unc
L	H	H	H	H	L	H	2-bit
L	H	H	H	H	H	L	2-bit
L	H	H	H	H	H	H	CB_6

CB_X = Error in check bit X
DB_Y = Error in data bit Y
2-Bit = Double-bit error
unc = Uncorrectable multi-bit error

Note: 2-bit and unc condition will cause both $\overline{ERR}$ and $\overline{MERR}$ to be LOW
Note 1: Syndrome bits for all LOWs. $\overline{MERR}$ and $\overline{ERR}$ LOW for all LOWs, only $\overline{ERR}$ LOW for DB_{30} error.
Note 2: Syndrome bits for all HIGHs.

Functional Description (Continued)

TABLE V. Syndrome Decoding (Continued)

Syndrome Bits							Error
6	5	4	3	2	1	0	
H	L	L	L	L	L	L	2-Bit
H	L	L	L	L	L	H	unc
H	L	L	L	L	H	L	unc
H	L	L	L	L	H	H	2-Bit
H	L	L	L	H	L	L	unc
H	L	L	L	H	L	H	2-Bit
H	L	L	L	H	H	L	2-Bit
H	L	L	L	H	H	H	unc
H	L	L	H	L	L	L	unc
H	L	L	H	L	L	H	2-Bit
H	L	L	H	L	H	L	2-Bit
H	L	L	H	L	H	H	DB_{15}
H	L	L	H	H	L	L	2-Bit
H	L	L	H	H	L	H	unc
H	L	L	H	H	H	L	DB_{14}
H	L	L	H	H	H	H	2-Bit
H	L	H	L	L	L	L	unc
H	L	H	L	L	L	H	2-Bit
H	L	H	L	L	H	L	2-Bit
H	L	H	L	L	H	H	DB_{13}
H	L	H	L	H	L	L	2-Bit
H	L	H	L	H	L	H	DB_{12}
H	L	H	L	H	H	L	DB_{11}
H	L	H	L	H	H	H	2-Bit
H	L	H	H	L	L	L	2-Bit
H	L	H	H	L	L	H	DB_{10}
H	L	H	H	L	H	L	DB_9
H	L	H	H	L	H	H	2-Bit
H	L	H	H	H	L	L	DB_8
H	L	H	H	H	L	H	2-Bit
H	L	H	H	H	H	L	2-Bit
H	L	H	H	H	H	H	CB_5

Syndrome Bits							Error
6	5	4	3	2	1	0	
H	H	L	L	L	L	L	unc
H	H	L	L	L	L	H	2-Bit
H	H	L	L	L	H	L	2-Bit
H	H	L	L	L	H	H	DB_{23}
H	H	L	L	H	L	L	2-Bit
H	H	L	L	H	L	H	DB_{22}
H	H	L	L	H	H	L	DB_{21}
H	H	L	L	H	H	H	2-Bit
H	H	L	H	L	L	L	2-Bit
H	H	L	H	L	L	H	DB_{20}
H	H	L	H	L	H	L	DB_{19}
H	H	L	H	L	H	H	2-Bit
H	H	L	H	H	L	L	DB_{18}
H	H	L	H	H	L	H	2-Bit
H	H	L	H	H	H	L	2-Bit
H	H	L	H	H	H	H	CB_4
H	H	H	L	L	L	L	2-Bit
H	H	H	L	L	L	H	DB_{16}
H	H	H	L	L	H	L	unc
H	H	H	L	L	H	H	2-Bit
H	H	H	L	H	L	L	DB_{17}
H	H	H	L	H	L	H	2-Bit
H	H	H	L	H	H	L	2-Bit
H	H	H	L	H	H	H	CB_3
H	H	H	H	L	L	L	unc (Note 1)
H	H	H	H	L	L	H	2-Bit
H	H	H	H	L	H	L	2-Bit
H	H	H	H	L	H	H	CB_2
H	H	H	H	H	L	L	2-Bit
H	H	H	H	H	L	H	CB_1
H	H	H	H	H	H	L	CB_0
H	H	H	H	H	H	H	None

CB_X = Error in check bit X
DB_Y = Error in data bit Y
2-Bit = Double-bit error
unc = Uncorrectable multi-bit error

Note: 2-bit and unc condition will cause both $\overline{ERR}$ and $\overline{MERR}$ to be LOW
Note 1: Syndrome bits for all LOWs. $\overline{MERR}$ and $\overline{ERR}$ LOW for all LOWs, only $\overline{ERR}$ LOW for DB_{30} error.
Note 2: Syndrome bits for all HIGHs.

Functional Description (Continued)

TABLE VI. Read-Modify-Write Function

Memory Cycle	EDAC Function	Control S_1	Control S_0	BYTEn*	$\overline{OEBn}$*	DB Output Latch $\overline{LEDBO}$	Check I/O	CB Control $\overline{OECB}$	Error Flags $\overline{ERR}$	Error Flags $\overline{MERR}$
Read	Read & Flag	H	L	Input	H	X	Input	H	Enabled	
Read	Latch Input Data & Check Bits	H	H	Latched Input Data	H	L	Latched Input Check Word	H	Enabled	
Read	Latch Corrected Data Word into Output Latch	H	H	Latched Output Data Word	H	H	High Z	H	Enabled	
							Output Syndrome Bits	L		
Modify/ Write	Modify Appropriate Byte or Bytes & Generate New Check Word	L	L	Input Modified $BYTE_0$	H	H	Output Check Word	L	H	H
				Output Unchanged $BYTE_0$	L					


*$\overline{OEB}_0$ controls DB_0–DB_7 ($BYTE_0$); $\overline{OEB}_1$ controls DB_8–DB_{15} ($BYTE_1$); $\overline{OEB}_2$ controls DB_{16}–DB_{23} ($BYTE_2$); $\overline{OEB}_3$ controls DB_{24}–DB_{31} ($BYTE_3$).

TABLE VII. Diagnostic Function

EDAC Function	Control S_1	Control S_0	Data I/O	DB Byte Control $\overline{OEB_n}$	DB Output Latch $\overline{LEDBO}$	Check I/O	CB Control $\overline{OECB}$	Error Flags $\overline{ERR}$	Error Flags $\overline{MERR}$
Read & Flag	H	L	Input Correct Data Word	H	X	Input Correct Check Bits	H	H	
Latch Input Check Word while Data Input Latch Remains Transparent	L	H	Input Diagnostic Data Word*	H	L	Latched Input Check Bits	H	Enabled	
Latch Diagnostic Data Word into Output Latch	L	H	Input Diagnostic Data Word*	H	H	Output Latched Check Bits	L	Enabled	
						High Z	H		
Latch Diagnostic Data Word into Input Latch	H	H	Latched Input Diagnostic Data Word	H	H	Output Syndrome Bits	L	Enabled	
						High Z	H		
Output Diagnostic Data Word & Syndrome Bits	H	H	Output Diagnostic Data Word	L	H	Output Syndrome Bits	L	Enabled	
						High Z	H		
Output Corrected Diagnostic Data Word & Output Syndrome Bits	H	H	Output Corrected Diagnostic Data Word	L	L	Output Syndrome Bits	L	Enabled	
						High Z	H		

*Diagnostic data is a data word with an error in one bit location except when testing the $\overline{MERR}$ error flag. In this case,the diagnostic data word will contain errors in two bit locations.


Block Diagram

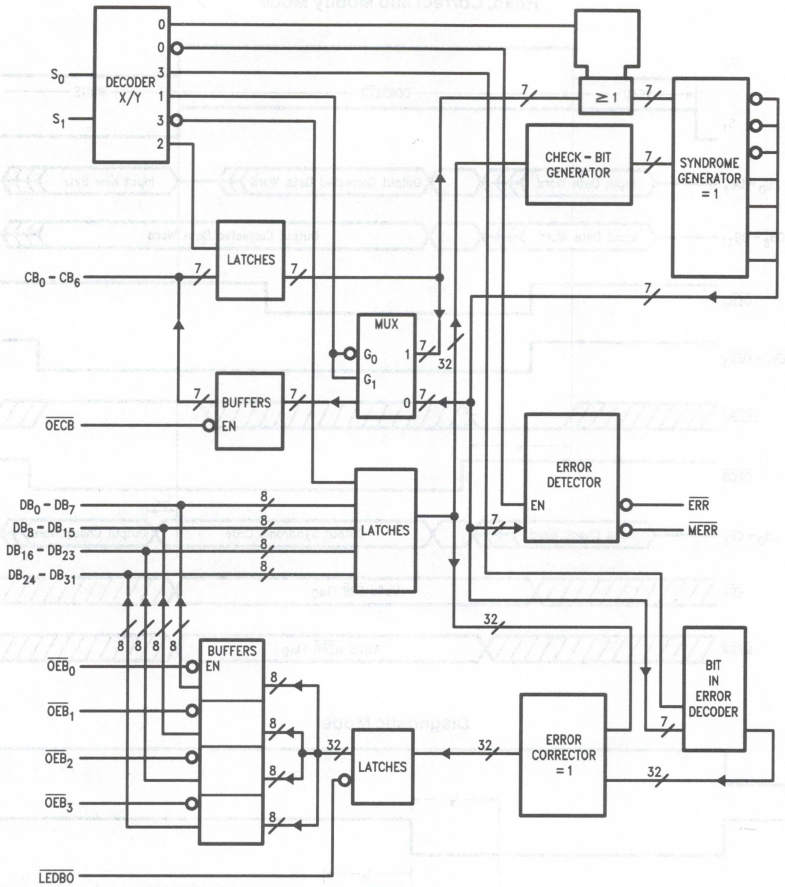

TL/F/9579–4

Timing Waveforms


Read, Flag and Correct Mode

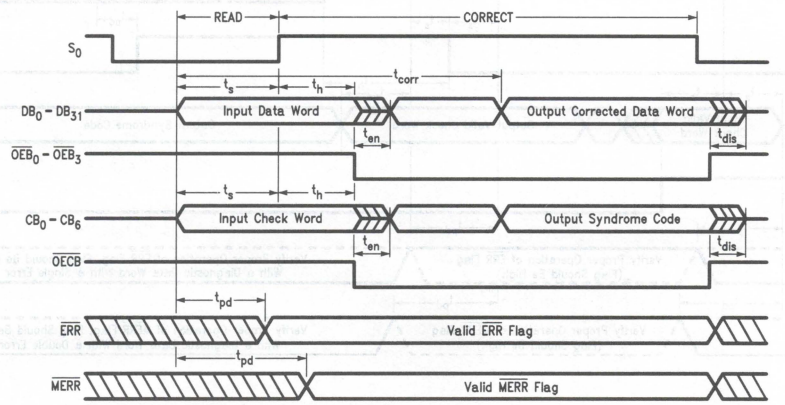

TL/F/9579–5


Timing Waveforms (Continued)

Read, Correct and Modify Mode

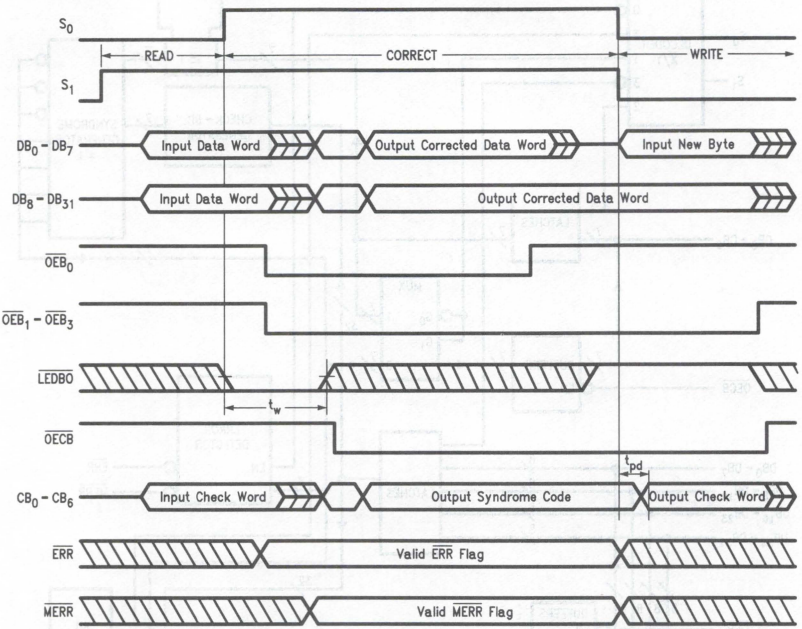

TL/F/9579–6

Diagnostic Mode

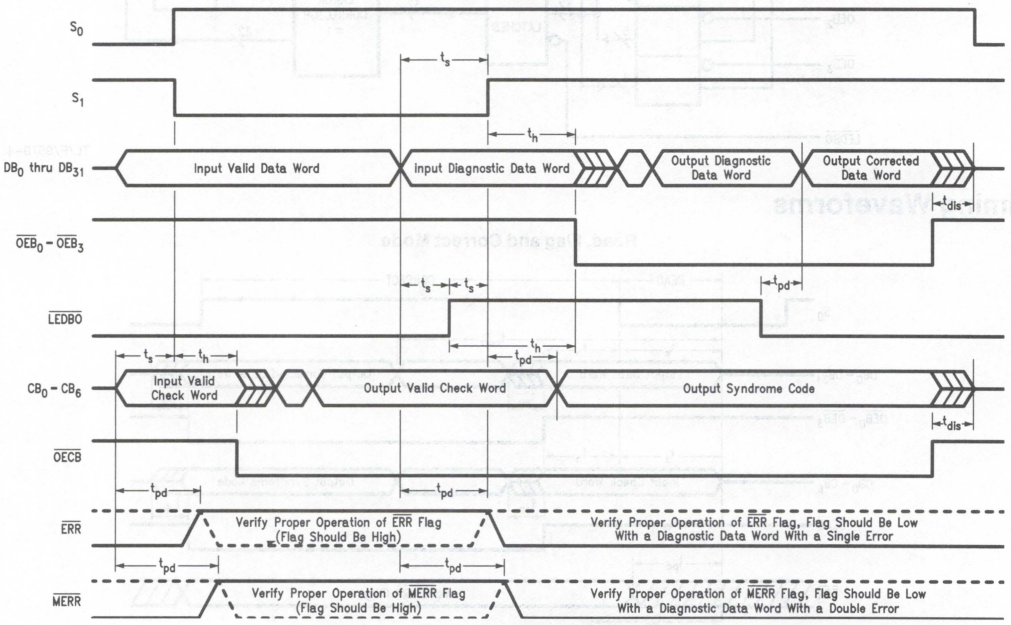

TL/F/9579–7

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA ($\overline{ERR}$, $\overline{MERR}$, DB_n, CB_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (DB_n, CB_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA ($\overline{ERR}$, $\overline{MERR}$, DB_n, CB_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (DB_n, CB_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA ($\overline{ERR}$, $\overline{MERR}$, DB_n, CB_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (DB_n, CB_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA ($\overline{ERR}$, $\overline{MERR}$, DB_n, CB_n)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA ($\overline{ERR}$, $\overline{MERR}$)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (DB_n, CB_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V (S_0, S_1, $\overline{OEB_n}$, $\overline{OECB}$, $\overline{LEDBO}$)
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V (S_0, S_1, $\overline{OEB_n}$, $\overline{OECB}$, $\overline{LEDBO}$)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (CB_n, DB_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (S_0, S_1, $\overline{OEB_n}$, $\overline{OECB}$, $\overline{LEDBO}$)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	$V_{I/O}$ = 2.7V (CB_n, DB_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	$V_{I/O}$ = 0.5V (CB_n, DB_n)
I_{OZH}	Output Leakage Current				70	μA	Max	$V_{I/O}$ = 2.7V (CB_n, DB_n)
I_{OZL}	Output Leakage Current				−650	μA	Max	$V_{I/O}$ = 0.5V (CB_n, DB_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V (CB_n, DB_n)
I_{CC}	Power Supply Current				340	mA	Max	T_A = 0°C–25°C
I_{CC}	Power Supply Current				325	mA	Max	T_A = 25°C–70°C

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay DB or CB to $\overline{ERR}$	4.0 4.0	14.0 10.5	27.0 18.0			4.0 4.0	31.0 20.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay DB to $\overline{ERR}$	4.0 4.0	21.0 14.0	27.0 18.0			4.0 4.0	31.0 20.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay DB or CB to $\overline{MERR}$	5.0 5.0	17.0 16.0	27.0 27.0			5.0 5.0	31.0 31.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay DB to $\overline{MERR}$	5.0 5.0	23.0 19.0	27.0 27.0			5.0 5.0	31.0 31.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S_0 and S_1, LOW, to DB	4.0 4.0	12.0 12.0	16.0 16.0			4.0 4.0	20.0 20.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay S_1 to CB	4.0 4.0	10.5 9.0	14.0 14.0			4.0 4.0	15.0 15.0	ns	2–3
t_{PLH}	Propagation Delay S_0 or S_1 to $\overline{ERR}$ or $\overline{MERR}$	2.0	11.5	13.0			2.0	14.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay DB to CB	4.0 4.0	16.0 18.0	23.0 23.0			4.0 4.0	25.0 25.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay $\overline{LEDBO}$ to DB	2.0 2.0	11.0 11.0	13.0 13.0			2.0 2.0	14.0 14.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OEB}_n$ to DB	1.0 1.0	6.0 6.0	10.0 10.0			1.0 1.0	10.0 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OEB}_n$ to DB	10 1.0	5.0 4.0	10.0 10.0			1.0 1.0	10.0 10.0	ns	2–5
t_{PZH} t_{PZL}	Output Enable Time $\overline{OECB}$ to CB	1.0 1.0	6.0 6.0	10.0 10.0			1.0 1.0	10.0 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OECB}$ to CB	1.0 1.0	5.0 4.0	10.0 10.0			1.0 1.0	10.0 10.0	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_s	Setup Time, HIGH or LOW DB/CB before S_0 HIGH (S_1 HIGH)	3.0				3.0		ns	2–6
$t_s(H)$	Setup Time, HIGH S_0 HIGH before $\overline{LEDBO}$ HIGH	12.0				14.0		ns	2–6
$t_s(H)$	Setup Time, HIGH $\overline{LEDBO}$ HIGH before S_0 or S_1 LOW	0				0		ns	2–6
$t_s(H)$	Setup Time, HIGH $\overline{LEDBO}$ HIGH before S_1 HIGH	0				0		ns	2–6
t_s	Setup Time, HIGH or LOW Diagnostic DB before S_1 HIGH	0				0		ns	2–6
t_s	Setup Time, HIGH or LOW Diagnostic CB before S_1 LOW or S_0 HIGH	3.0				3.0		ns	2–6
t_s	Setup Time, HIGH or LOW Diagnostic DB before $\overline{LEDBO}$ HIGH (S_1 LOW, S_0 HIGH)	8.0				8.0		ns	2–6
$t_h(L)$	Hold Time, LOW S_0 LOW after S_1 HIGH	8.0				8.0		ns	2–6
t_h	Hold Time, HIGH or LOW DB and CB Hold after S_0 HIGH	8.0				8.0		ns	2–6
t_h	Hold Time, HIGH or LOW DB Hold after S_1 HIGH	8.0				8.0		ns	2–6
t_h	Hold Time, HIGH or LOW CB Hold after S_1 LOW or S_0 HIGH	5.0				5.0		ns	2–6
t_h	Hold Time, HIGH or LOW Diagnostic DB after $\overline{LEDBO}$ HIGH (S_1 LOW, S_0 HIGH)	0				0		ns	2–6
$t_w(L)$*	$\overline{LEDBO}$ Pulse Width	8.0				8.0		ns	2–4
t_{corr}*	Correction Time		25.0				28.0	ns	

***Note:** These parameters are guaranteed by characterization or other tests performed.

National Semiconductor

54F/74F640 • 54F/74F643 • 54F/74F645
Octal Bus Transceiver with TRI-STATE® Outputs

General Description


These devices are octal bus transceivers designed for asynchronous two-way data flow between the A and B busses. Both busses are capable of sinking 64 mA, have TRI-STATE outputs, and a common output enable pin. The direction of data flow is determined by the transmit/receive ($T/\overline{R}$) input. The 'F645 is a high speed/low power version of the 'F245. The 'F640 is an inverting option of the 'F645. The 'F643 has a noninverting A bus and an inverting B bus.

Features

- Designed for asynchronous two-way data flow between busses
- Outputs sink 64 mA
- Transmit/receive ($T/\overline{R}$) input controls the direction of data flow
- Guaranteed 4000V minimum ESD protection
- 'F645 is a lower power, faster version of the 'F245
- 'F640 is an inverting option of the 'F645
- 'F643 has noninverting A bus and inverting B bus

Ordering Code: See Section 5

Logic Symbol




TL/F/10267–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$T/\overline{R}$	Transmit/Receive Input	1.0/1.0	20 μA/−0.6 mA
A_0–A_7	Side A Inputs or	3.5/0.667	70 μA/−0.4 mA
	TRI-STATE Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)
B_0–B_7	Side B Inputs or	3.5/0.667	70 μA/−0.4 mA
	TRI-STATE Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/10267–1

Pin Assignment for LCC



TL/F/10267–2

Functional Description

The output enable ($\overline{OE}$) is active LOW. If the device is disabled ($\overline{OE}$ HIGH), the outputs are in the high impedance state. The transmit/receive input (T/$\overline{R}$) controls whether data is transmitted from the A bus to the B bus or from the B bus to the A bus. When T/$\overline{R}$ is LOW, B data is sent to the A bus. If T/$\overline{R}$ is HIGH, A data is sent to the B bus.


Function Table

Inputs		Outputs		
$\overline{OE}$	T/$\overline{R}$	'F640	'F643	'F645
L	L	Bus $\overline{B}$ data to Bus A	Bus B data to Bus A	Bus B data to Bus A
L	H	Bus $\overline{A}$ data to Bus B	Bus $\overline{A}$ data to Bus B	Bus A data to Bus B
H	X	Z	Z	Z

H = High voltage level
L = Low voltage level
X = Don't care
Z = High-impedance state


Logic Diagrams

'F640

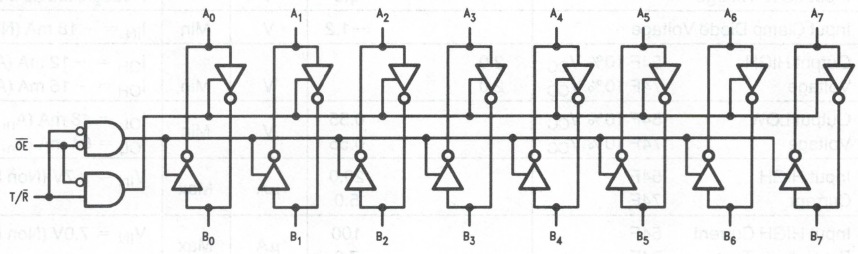


TL/F/10267–4

'F643

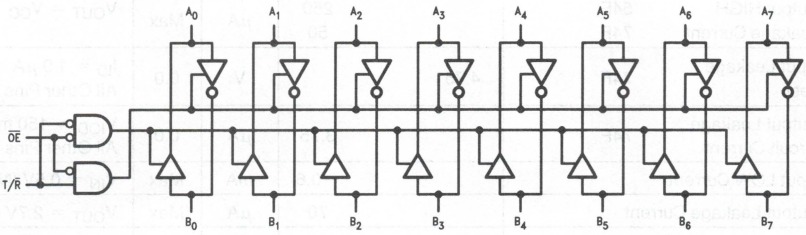

TL/F/10267–5

'F645

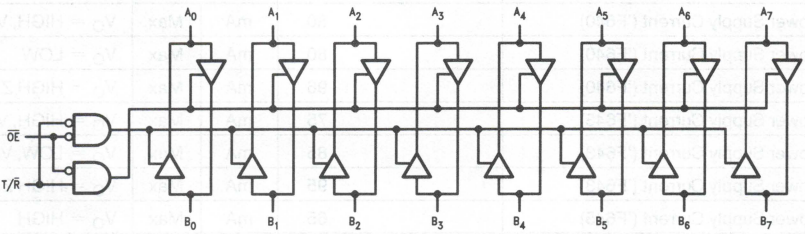

TL/F/10267–6

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA (Non I/O Pins)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.0			V	Min	I_{OH} = −12 mA (A_n, B_n)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (A_n, B_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA (A_n, B_n)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (A_n, B_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V (Non I/O Pins)
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V (Non I/O Pins)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Non I/O Pins)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25
I_{CCH}	Power Supply Current ('F640)				80	mA	Max	V_O = HIGH, V_{IN} = 0.2V
I_{CCL}	Power Supply Current ('F640)				80	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F640)				96	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F643)				75	mA	Max	V_O = HIGH, V_{IN} = 0.2V (A_n)
I_{CCL}	Power Supply Current ('F643)				85	mA	Max	V_O = LOW, V_{IN} = 0.2V (B_n)
I_{CCZ}	Power Supply Current ('F643)				95	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F645)				65	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F645)				80	mA	Max	V_O = LOW, V_{IN} = 0.2V
I_{CCZ}	Power Supply Current ('F645)				90	mA	Max	V_O = HIGH Z

'F640 AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.5		7.5			2.0	8.0	ns	2–3
t_{PHL}	A Input to B Output	2.0		7.0			2.0	7.0		
t_{PLH}	Propagation Delay	2.5		7.5			2.0	8.0	ns	2–3
t_{PHL}	B Input to A Output	2.0		7.0			2.0	7.0		
t_{PZH}	Enable Time	2.5		7.5			2.0	9.0	ns	2–5
t_{PZL}	$\overline{OE}$ Input to A Output	2.5		8.0			2.0	8.5		
t_{PHZ}	Disable Time	1.5		7.0			1.0	7.5		
t_{PLZ}	$\overline{OE}$ Input to A Output	1.5		6.0			1.5	6.0		
t_{PZH}	Enable Time	2.5		7.5			2.0	9.0	ns	2–5
t_{PZL}	$\overline{OE}$ Input to B Output	2.5		8.0			2.0	8.5		
t_{PHZ}	Disable Time	1.5		7.0			1.0	7.5		
t_{PLZ}	$\overline{OE}$ Input to B Output	1.5		6.0			1.5	6.0		

'F643 AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.5		7.5			2.0	8.0	ns	2–3
t_{PHL}	A Input to B Output	2.0		7.0			2.0	7.0		
t_{PLH}	Propagation Delay	1.5		6.0			1.5	7.0	ns	2–3
t_{PHL}	B Input to A Output	2.0		7.0			2.0	7.5		
t_{PZH}	Enable Time	2.5		8.0			2.0	9.0	ns	2–5
t_{PZL}	$\overline{OE}$ Input to A Output	2.5		8.5			2.0	8.5		
t_{PHZ}	Disable Time	1.5		7.0			1.0	8.0		
t_{PLZ}	$\overline{OE}$ Input to A Output	1.0		5.5			1.0	5.5		
t_{PZH}	Enable Time	2.5		7.5			2.0	9.0	ns	2–5
t_{PZL}	$\overline{OE}$ Input to B Output	2.5		8.0			2.0	8.5		
t_{PHZ}	Disable Time	1.5		6.5			1.0	7.5		
t_{PLZ}	$\overline{OE}$ Input to B Output	1.5		6.0			1.5	6.0		

'F645 AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A Input to B Output	1.5 2.0		6.0 7.0			1.5 2.0	7.0 7.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay B Input to A Output	1.5 2.0		6.0 7.0			1.5 2.0	7.0 7.5	ns	2–3
t_{PZH} t_{PZL}	Enable Time $\overline{OE}$ Input to A Output	2.5 2.5		8.0 8.5			2.0 2.0	9.0 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{OE}$ Input to A Output	1.5 1.0		7.0 5.5			1.0 1.0	8.0 5.5		
t_{PZH} t_{PZL}	Enable Time $\overline{OE}$ Input to B Output	2.5 2.5		7.5 8.5			2.0 2.5	9.5 9.0	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{OE}$ Input to B Output	1.5 1.0		6.5 5.5			1.0 1.0	7.5 5.5		

National Semiconductor

54F/74F646 • 54F/74F648
Octal Transceiver/Register with TRI-STATE® Outputs

General Description

These devices consist of bus transceiver circuits with TRI-STATE, D-type flip-flops, and control circuitry arranged for multiplexed transmission of data directly from the input bus or from the internal registers. Data on the A or B bus will be clocked into the registers as the appropriate clock pin goes to a high logic level. Control $\overline{G}$ and direction pins are provided to control the transceiver function. In the transceiver mode, data present at the high impedance port may be stored in either the A or the B register or in both. The select controls can multiplex stored and real-time (transparent mode) data. The direction control determines which bus will receive data when the enable control $\overline{G}$ is Active LOW. In the isolation mode (control $\overline{G}$ HIGH), A data may be stored in the B register and/or B data may be stored in the A register.


Features

- Independent registers for A and B buses
- Multiplexed real-time and stored data
- Choice of true and inverting ('F648) data paths
- TRI-STATE outputs
- 300 mil slim DIP
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5


Logic Symbols

F646




TL/F/9580–1

F648




TL/F/9580–7

IEEE/IEC F646

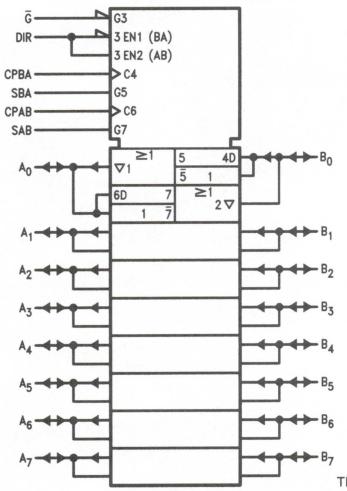

TL/F/9580–4


IEEE/IEC F648

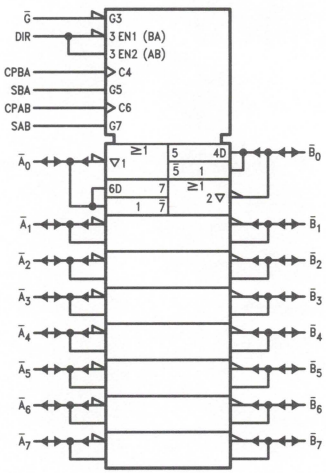

TL/F/9580–9


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak F646

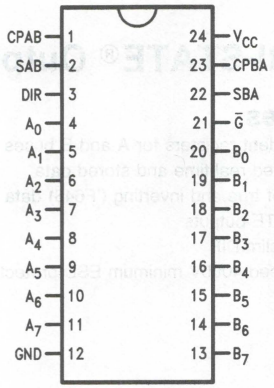


TL/F/9580–2

Pin Assignment for DIP, SOIC and Flatpak F648

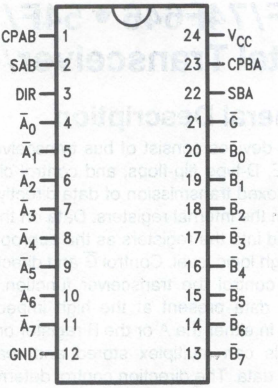


TL/F/9580–8

Pin Assignment for LCC F646

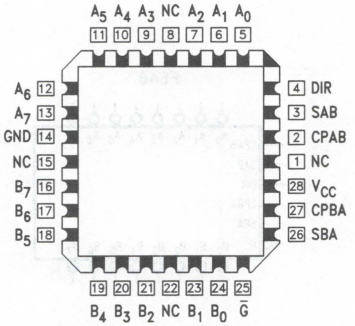

TL/F/9580–3

Pin Assignment for LCC F648

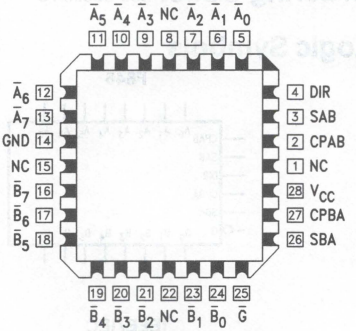

TL/F/9580–10

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_7	Data Register A Inputs/ TRI-STATE Outputs	3.5/1.083 600/106.6 (80)	70 μA/−650 μA −12 mA/64 mA (48 mA)
B_0–B_7	Data Register B Inputs/ TRI-STATE Outputs	3.5/1.083 600/106.6 (80)	70 μA/−650 μA −12 mA/64 mA (48 mA)
CPAB, CPBA	Clock Pulse Inputs	1.0/1.0	20 μA/−0.6 mA
SAB, SBA	Select Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{G}$	Output Enable Input	1.0/1.0	20 μA/−0.6 mA
DIR	Direction Control Input	1.0/1.0	20 μA/−0.6 mA

Function Table


Inputs						Data I/O*		Function
$\overline{G}$	DIR	CPAB	CPBA	SAB	SBA	A_0–A_7	B_0–B_7	
H	X	H or L	H or L	X	X	Input	Input	Isolation
H	X	↗	X	X	X			Clock A_n Data into A Register
H	X	X	↗	X	X			Clock B_n Data into B Register
L	H	X	X	L	X	Input	Output	A_n to B_n—Real Time (Transparent Mode)
L	H	↗	X	L	X			Clock A_n Data into A Register
L	H	H or L	X	H	X			A Register to B_n (Stored Mode)
L	H	↗	X	H	X			Clock A_n Data into A Register and Output to B_n
L	L	X	X	X	L	Output	Input	B_n to A_n—Real Time (Transparent Mode)
L	L	X	↗	X	L			Clock B_n Data into B Register
L	L	X	H or L	X	H			B Register to A_n (Stored Mode)
L	L	X	↗	X	H			Clock B_n Data into B Register and Output to A_n

*The data output functions may be enabled or disabled by various signals at the $\overline{G}$ and DIR Inputs. Data input functions are always enabled; i.e., data at the bus pins will be stored on every LOW-to-HIGH transition of the clock inputs.

H = HIGH Voltage Level
L = LOW Voltage Level
X = Irrelevant
↗ = LOW-to-HIGH Transition

Logic Diagrams (Continued)

'F646

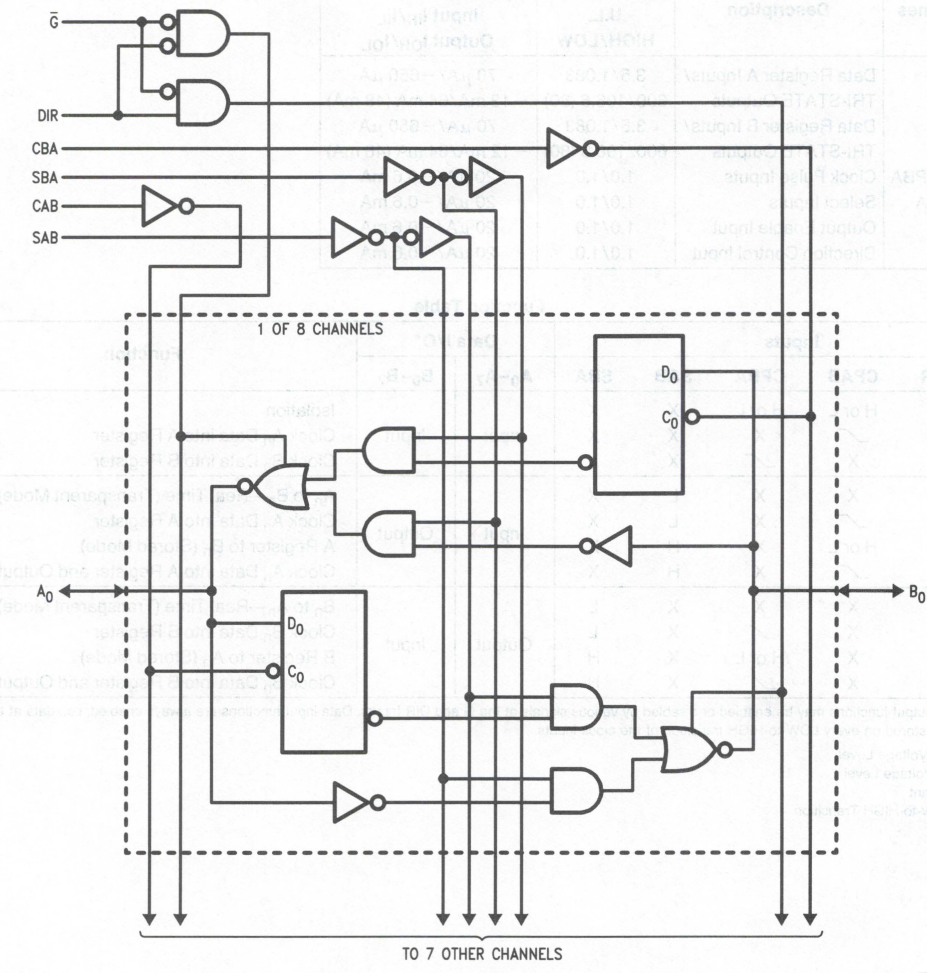


TL/F/9580–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Logic Diagrams (Continued)

'F648

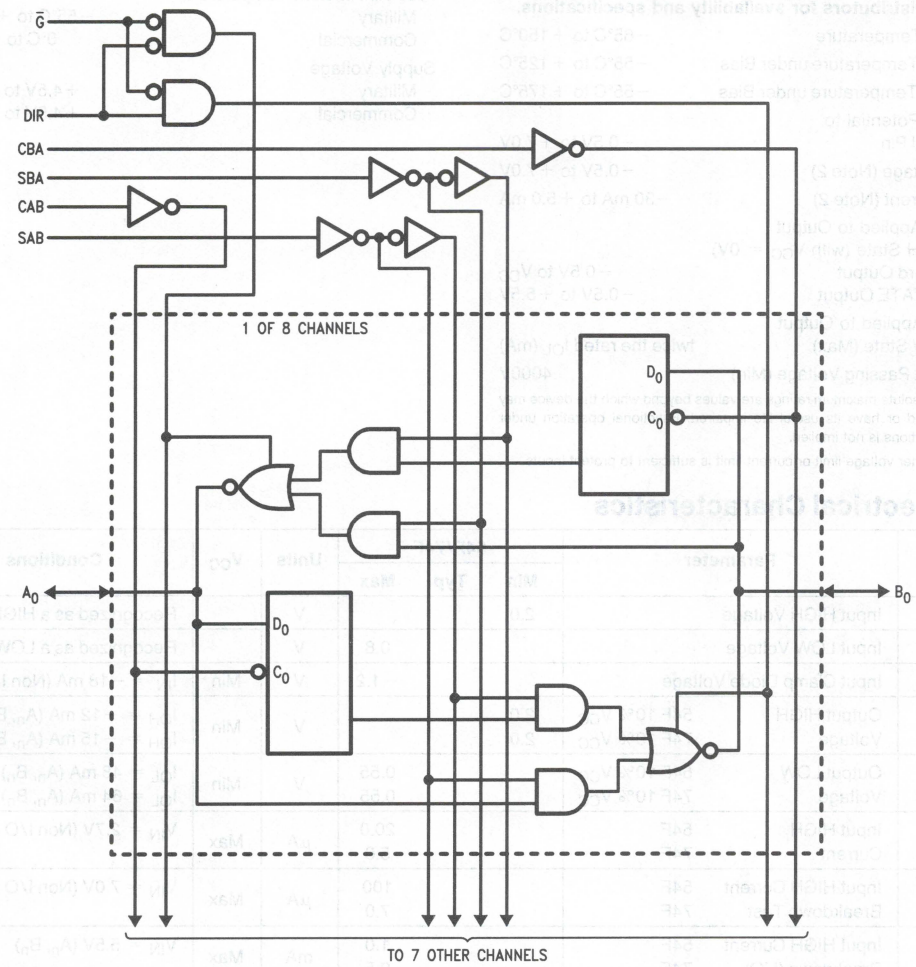

TL/F/9580–6

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA (Non I/O Pins)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC} 74F 10% V_{CC}	2.0 2.0			V	Min	I_{OH} = −12 mA (A_n, B_n) I_{OH} = −15 mA (A_n, B_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC} 74F 10% V_{CC}			0.55 0.55	V	Min	I_{OL} = 48 mA (A_n, B_n) I_{OL} = 64 mA (A_n, B_n)
I_{IH}	Input HIGH Current	54F 74F			20.0 5.0	μA	Max	V_{IN} = 2.7V (Non I/O Pins)
I_{BVI}	Input HIGH Current Breakdown Test	54F 74F			100 7.0	μA	Max	V_{IN} = 7.0V (Non I/O Pins)
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F 74F			1.0 0.5	mA	Max	V_{IN} = 5.5V (A_n, B_n)
I_{CEX}	Output HIGH Leakage Current	54F 74F			250 50	μA	Max	V_{OUT} = V_{CC}
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Non I/O Pins)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current				135	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				150	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current				150	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$		54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	90		75		90		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay Clock to Bus	2.0 2.0	7.0 8.0	2.0 2.0	8.5 9.5	2.0 2.0	8.0 9.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay Bus to Bus ('F646)	1.0 1.0	7.0 6.5	1.0 1.0	8.0 8.0	1.0 1.0	7.5 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay Bus to Bus ('F648)	2.0 1.0	8.5 7.5	1.0 1.0	10.0 9.0	2.0 1.0	9.0 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay SBA or SAB to A or B	2.0 2.0	8.5 8.0	2.0 2.0	11.0 10.0	2.0 2.0	9.5 9.0	ns	2–3
t_{PZH} t_{PZL}	Enable Time $\overline{OE}$ to A or B	2.0 2.0	8.5 12.0	2.0 2.0	10.0 13.5	2.0 2.0	9.0 12.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{OE}$ to A or B	1.0 2.0	7.5 9.0	1.0 2.0	9.0 11.0	1.0 2.0	8.5 9.5	ns	2–5
t_{PZH} t_{PZL}	Enable Time DIR to A or B	2.0 2.0	14.0 13.0	2.0 2.0	16.0 15.0	2.0 2.0	15.0 14.0	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time DIR to A or B	1.0 2.0	9.0 11.0	1.0 2.0	10.0 12.0	1.0 2.0	9.5 11.5	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW Bus to Clock	5.0 5.0		5.0 5.0		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW Bus to Clock	2.0 2.0		2.5 2.5		2.0 2.0		ns	2–6
$t_w(H)$ $t_w(L)$	Clock Pulse Width HIGH or LOW	5.0 5.0		5.0 5.0		5.0 5.0		ns	2–4

National Semiconductor

54F/74F651 • 54F/74F652 Transceivers/Registers

General Description

These devices consist of bus transceiver circuits with D-type flip-flops, and control circuitry arranged for multiplexed transmission of data directly from the input bus or from internal registers. Data on the A or B bus will be clocked into the registers as the appropriate clock pin goes to HIGH logic level. Output Enable pins (OEAB, $\overline{OEBA}$) are provided to control the transceiver function.


Features

- Independent registers for A and B buses
- Multiplexed real-time and stored data
- Choice of non-inverting and inverting data paths
  - — 'F651 inverting
  - — 'F652 non-inverting
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5


Logic Symbols

IEEE/IEC
'F651

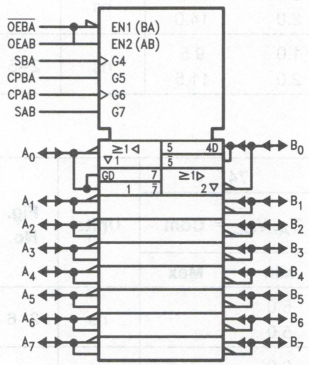


TL/F/9581–1

IEEE/IEC
'F652

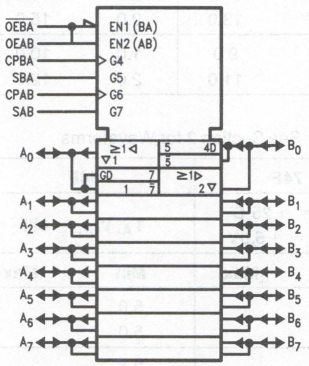


TL/F/9581–10

'F651



TL/F/9581–2


'F652



TL/F/9581–11


Connection Diagrams

Pin Assignment
DIP, SOIC and Flatpak



TL/F/9581–3

Pin Assignment
for LCC




TL/F/9581–4

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0-A_7, B_0-B_7	A and B Inputs/ TRI-STATE® Outputs	1.0/1.0 600/106.6 (80)	20 μA/−0.6 mA −12 mA/64 mA (48 mA)
CPAB, CPBA	Clock Inputs	1.0/1.0	20 μA/−0.6 mA
SAB, SBA	Select Inputs	1.0/1.0	20 μA/−0.6 mA
OEAB, $\overline{OEBA}$	Output Enable Inputs	1.0/1.0	20 μA/−0.6 mA

Logic Diagrams

'F652

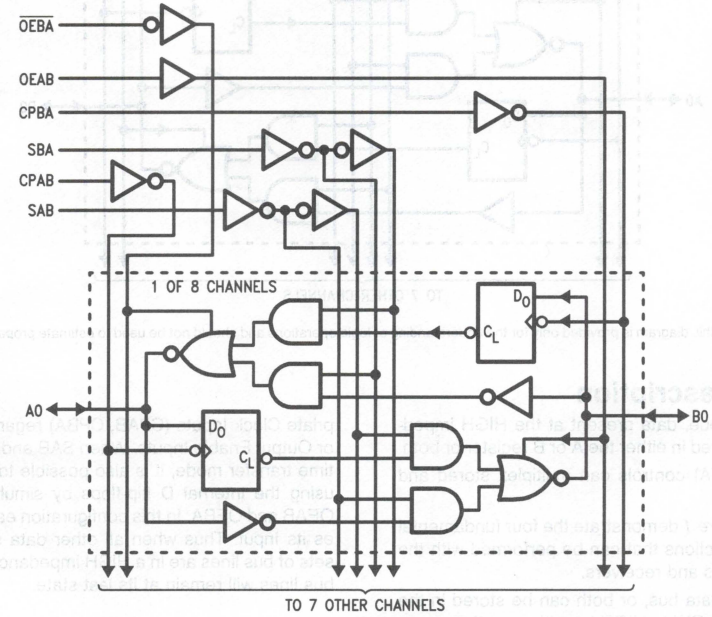


TL/F/9581–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Logic Diagrams (Continued)

'F651

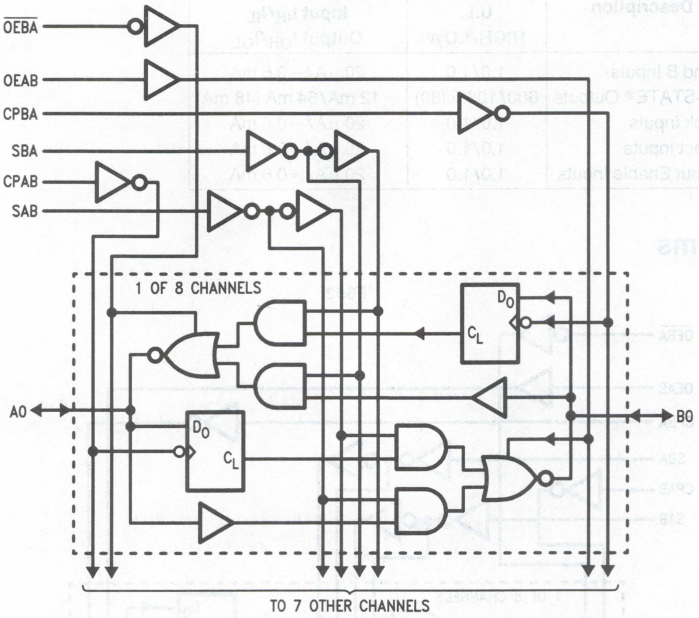

TL/F/9581–12

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Functional Description


In the transceiver mode, data present at the HIGH impedance port may be stored in either the A or B register or both.

The select (SAB, SBA) controls can multiplex stored and real-time.

The examples in *Figure 1* demonstrate the four fundamental bus-management functions that can be performed with the Octal bus transceivers and receivers.

Data on the A or B data bus, or both can be stored in the internal D flip-flop by LOW to HIGH transitions at the appropriate Clock Inputs (CPAB, CPBA) regardless of the Select or Output Enable Inputs. When SAB and SBA are in the real time transfer mode, it is also possible to store data without using the internal D flip-flops by simultaneously enabling OEAB and OEBA. In this configuration each Output reinforces its Input. Thus when all other data sources to the two sets of bus lines are in a HIGH impedance state, each set of bus lines will remain at its last state.


Note A: Real-Time Transfer Bus B to Bus A



TL/F/9581–6

OEAB	$\overline{OEBA}$	CPAB	CPBA	SAB	SBA
L	L	X	X	X	L


Note B: Real-Time Transfer Bus A to Bus B



TL/F/9581–7

OEAB	$\overline{OEBA}$	CPAB	CPBA	SAB	SBA
H	H	X	X	L	X


Note C: Storage



TL/F/9581–8

OEAB	$\overline{OEBA}$	CPAB	CPBA	SAB	SBA
X	H	↗	X	X	X
L	X	X	↗	X	X
L	H	↗	↗	X	X

Note D: Transfer Storage Data to A or B



TL/F/9581–9

OEAB	$\overline{OEBA}$	CPAB	CPBA	SAB	SBA
H	L	H or L	H or L	H	X

FIGURE 1

Inputs						Inputs/Outputs (Note 1)		Operating Mode
OEAB	$\overline{OEBA}$	CPAB	CPBA	SAB	SBA	A_0 thru A_7	B_0 thru B_7	
L	H	H or L	H or L	X	X	Input	Input	Isolation
L	H	↗	↗	X	X			Store A and B Data
X	H	↗	H or L	X	X	Input	Not Specified	Store A, Hold B
H	H	↗	↗	X	X	Input	Output	Store A in Both Registers
L	X	H or L	↗	X	X	Not Specified	Input	Hold A, Store B
L	L	↗	↗	X	X	Output	Input	Store B in Both Registers
L	L	X	X	X	L	Output	Input	Real-Time B Data to A Bus
L	L	X	H or L	X	H			Store B Data to A Bus
H	H	X	X	L	X	Input	Output	Real-Time A Data to B Bus
H	H	H or L	X	H	X			Stored A Data to B Bus
H	L	H or L	H or L	H	H	Output	Output	Stored A Data to B Bus and Stored B Data to A Bus

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
↗ = LOW to HIGH Clock Transition

Note 1: The data output functions may be enabled or disabled by various signals at OEAB or OEBA inputs. Data input functions are always enabled, i.e., data at the bus pins will be stored on every LOW to HIGH transition on the clock inputs.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA (Non I/O Pins)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC} 74F 10% V_{CC}	2.0 2.0			V	Min	I_{OH} = −12 mA (A_n, B_n) I_{OH} = −15 mA (A_n, B_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC} 74F 10% V_{CC}			0.55 0.55	V	Min	I_{OL} = 48 mA (A_n, B_n) I_{OL} = 64 mA (A_n, B_n)
I_{IH}	Input HIGH Current	54F 74F			20.0 5.0	μA	Max	V_{IN} = 2.7V (Non I/O Pins)
I_{BVI}	Input HIGH Current Breakdown Test	54F 74F			100 7.0	μA	Max	V_{IN} = 7.0V
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F 74F			1.0 0.5	mA	Max	V_{IN} = 5.5V (A_n, B_n)
I_{CEX}	Output HIGH Leakage Current	54F 74F			250 50	μA	Max	V_{OUT} = V_{CC}
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Non I/O Pins)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			105	135	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			118	150	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			115	150	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$		54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
f_{max}	Max. Clock Frequency	90		75		90		MHz	2–1
t_{PLH}	Propagation Delay	2.0	7.0	2.0	8.5	2.0	8.0	ns	2–3
t_{PHL}	Clock to Bus	2.0	8.0	2.0	9.5	2.0	9.0		
t_{PLH}	Propagation Delay	2.0	8.5	1.0	9.0	2.0	9.0	ns	2–3
t_{PHL}	Bus to Bus ('F651)	1.0	7.5	1.0	8.0	1.0	8.0		
t_{PLH}	Propagation Delay	1.0	7.0	1.0	8.0	1.0	7.5	ns	2–3
t_{PHL}	Bus to Bus ('F652)	1.0	6.5	1.0	8.0	1.0	7.0		
t_{PLH}	Propagation Delay	2.0	8.5	2.0	11.0	2.0	9.5	ns	2–3
t_{PHL}	SBA or SAB to A or B	2.0	8.0	2.0	10.0	2.0	9.0		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_{PZH}	Enable Time	2.0	9.5	2.0	10.0	2.0	10.0	ns	2–5
t_{PZL}	*OEBA to A	2.0	12.0	2.0	10.0	2.0	12.5		
t_{PHZ}	Disable Time	1.0	7.5	1.0	9.0	1.0	8.0		
t_{PLZ}	*OEBA to A	2.0	8.5	1.0	9.0	2.0	9.0		
t_{PZH}	Enable Time	2.0	9.5	2.0	10.0	2.0	10.0		
t_{PZL}	OEAB to B	3.0	13.0	2.0	12.0	3.0	14.0		
t_{PHZ}	Disable Time	2.0	9.0	1.0	9.0	2.0	10.0	ns	2–5
t_{PLZ}	OEAB to B	2.0	10.5	1.0	12.0	2.0	11.0		
$t_s(H)$	Setup Time, HIGH or	5.0		5.0		5.0		ns	2–6
$t_s(L)$	LOW, Bus to Clock	5.0		5.0		5.0			
$t_h(H)$	Hold Time, HIGH or	2.0		2.5		2.0		ns	2–6
$t_h(L)$	LOW, Bus to Clock	2.0		2.5		2.0			
$t_w(H)$	Clock Pulse Width	5.0		5.0		5.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0		5.0		5.0			

National Semiconductor

54F/74F657 Octal Bidirectional Transceiver with 8-Bit Parity Generator/Checker and TRI-STATE® Outputs

General Description

The 'F657 contains eight non-inverting buffers with TRI-STATE® outputs and an 8-bit parity generator/checker. It is intended for bus-oriented applications. The buffers have a guaranteed current sinking capability of 24 mA (20 mA mil) at the A port and 64 mA (48 mA mil) at the B port.


Features

- 300 Mil 24-pin slimline DIP
- Combines 'F245 and 'F280A functions in one package
- TRI-STATE outputs
- B Outputs sink 64 mA (48 mA mil)
- 12 mA source current, B side
- Input diodes for termination effects


Ordering Code: See Section 5

Logic Symbols

IEEE/IEC

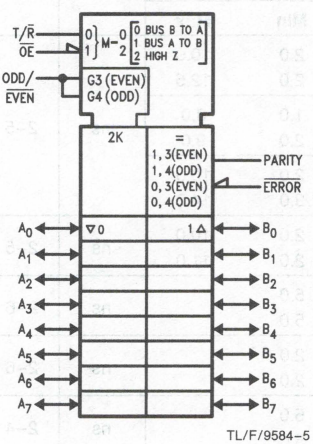


TL/F/9584–5



TL/F/9584–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9584–2

Pin Assignment for LCC



TL/F/9584–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_7	Data Inputs/	4.5/0.15	90 μA/ − 90 μA
	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
B_0–B_7	Data Inputs/	3.5/0.117	70 μA/ −70 μA
	TRI-STATE Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)
T/$\overline{R}$	Transmit/Receive Input	2.0/0.067	40 μA/ −40 μA
$\overline{OE}$	Enable Input	2.0/0.067	40 μA/ −40 μA
PARITY	Parity Input/	3.5/0.117	70 μA/ −70μA
	TRI-STATE Output	600/106.6 (80)	−12 mA/64 mA (48 mA)
ODD/$\overline{EVEN}$	ODD/$\overline{EVEN}$ Parity Input	1.0/0.033	20 μA/ −20 μA
$\overline{ERROR}$	Error Output	600/106.6 (80)	−12 mA/64 mA (48 mA)

Functional Description

The Transmit/Receive (T/$\overline{R}$) input determines the direction of the data flow through the bidirectional transceivers. Transmit (active HIGH) enables data from the A port to the B port; Receive (active LOW) enables data from the B port to the A port.

The Output Enable ($\overline{OE}$) input disables the parity and $\overline{ERROR}$ outputs and both the A and B ports by placing them in a HIGH-Z condition when the Output Enable input is HIGH.

When transmitting (T/$\overline{R}$ HIGH), the parity generator detects whether an even or odd number of bits on the A port are HIGH and compares these with the condition of the parity select (ODD/$\overline{EVEN}$). If the Parity Select is HIGH and an even number of A inputs are HIGH, the Parity output is HIGH.

In receiving mode (T/$\overline{R}$ LOW), the parity select and number of HIGH inputs on port B are compared to the condition of the Parity input. If an even number of bits on the B port are HIGH, the parity select is HIGH, and the PARITY input is HIGH, then $\overline{ERROR}$ will be HIGH to indicate no error. If an odd number of bits on the B port are HIGH, the parity select is HIGH, and the PARITY input is HIGH, the $\overline{ERROR}$ will be LOW indicating an error.

Function Table

Number of Inputs That Are High	Inputs			Input/ Output	Outputs	
	$\overline{OE}$	T/$\overline{R}$	ODD/$\overline{EVEN}$	Parity	$\overline{ERROR}$	Outputs Mode
0, 2, 4, 6, 8	L	H	H	H	Z	Transmit
	L	H	L	L	Z	Transmit
	L	L	H	H	H	Receive
	L	L	H	L	L	Receive
	L	L	L	H	L	Receive
	L	L	L	L	H	Receive
1, 3, 5, 7	L	H	H	L	Z	Transmit
	L	H	L	H	Z	Transmit
	L	L	H	H	L	Receive
	L	L	H	L	H	Receive
	L	L	L	H	H	Receive
	L	L	L	L	L	Receive
Immaterial	H	X	X	Z	Z	Z


H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Function Table

Inputs		Outputs
$\overline{OE}$	T/$\overline{R}$	
L	L	Bus B Data to Bus A
L	H	Bus A Data to Bus B
H	X	High-Z State

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial

Functional Block Diagram

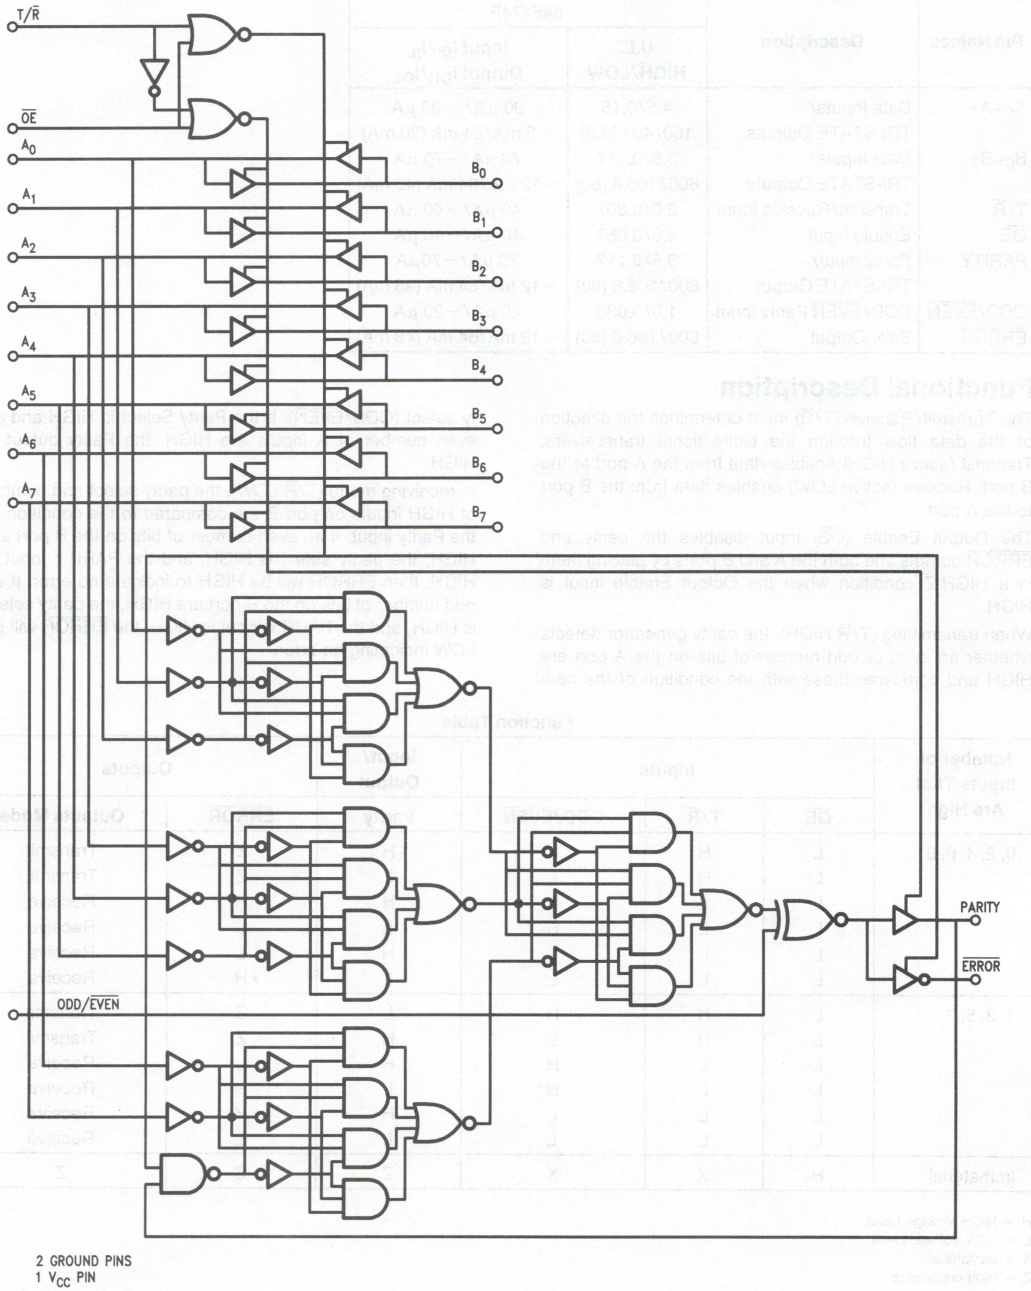

TL/F/9584–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter	54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage	2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage			0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage			−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage 54F 10%V_{CC}	2.5			V	Min	I_{OH} = −1 mA (A_n)
	Output HIGH Voltage 54F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n, Parity, $\overline{ERROR}$)
	Output HIGH Voltage 54F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_n, Parity, $\overline{ERROR}$)
	Output HIGH Voltage 74F 10% V_{CC}	2.5					I_{OH} = −1 mA (A_n)
	Output HIGH Voltage 74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n B_n, Parity, $\overline{ERROR}$)
	Output HIGH Voltage 74F 10% V_{CC}	2.0					I_{OH} = −15 mA (B_n, Parity, $\overline{ERROR}$)
	Output HIGH Voltage 74F 5% V_{CC}	2.7					I_{OH} = −1 mA (A_n)
	Output HIGH Voltage 74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n, B_n, Parity, $\overline{ERROR}$)
V_{OL}	Output LOW Voltage 54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (A_n)
	Output LOW Voltage 54F 10% V_{CC}			0.55			I_{OL} = 48 mA (B_n, Parity, $\overline{ERROR}$)
	Output LOW Voltage 74F 10% V_{CC}			0.5			I_{OL} = 24 mA (A_n)
	Output LOW Voltage 74F 10% V_{CC}			0.55			I_{OL} = 64 mA (B_n Parity, $\overline{ERROR}$)
I_{IH}	Input HIGH Current			20	μA	Max	V_{IN} = 2.7V (ODD/$\overline{EVEN}$)
				40			V_{IN} 2.7V (T/$\overline{R}$, $\overline{OE}$)
I_{BVI}	Input HIGH Current Breakdown Test			100	μA	V_{CC} = 0	V_{IN} = 7.0V (T/$\overline{R}$, $\overline{OE}$, ODD/$\overline{EVEN}$)
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)			1.0	mA	Max	V_{IN} = 5.5V (Parity, B_n)
				2.0			V_{IN} = 5.5V (A_n)
I_{IL}	Input LOW Current			−20	μA	Max	V_{IN} = 0.5V (ODD/$\overline{EVEN}$)
				−40			V_{IN} = 0.5V (T/$\overline{R}$, $\overline{OE}$)
I_{OZH}	Output Leakage Current			50	μA	Max	V_{OUT} = 2.7V ($\overline{ERROR}$)
I_{OZL}	Output Leakage Current			−50	μA	Max	V_{OUT} = 0.5V ($\overline{ERROR}$)
I_{IH} + I_{OZH}	Output Leakage Current			70	μA	Max	$V_{I/O}$ = 2.7V (B_n, Parity)
				90			$V_{I/O}$ = 2.7V (A_n)
I_{IL} + I_{OZL}	Output Leakage Current			−70	μA	Max	$V_{I/O}$ = 0.5V (B_n, Parity)
				−90			$V_{I/O}$ = 0.5V (A_n)
I_{OS}	Output Short-Circuit Current	−60		−150	mA	Max	V_{OUT} = 0V (A_n)
		−100		−225			V_{OUT} = 0V (B_n, Parity, $\overline{ERROR}$)
I_{CEX}	Output HIGH Leakage Current			250	μA	Max	V_{OUT} = V_{CC} ($\overline{ERROR}$)
				1.0	mA	Max	V_{OUT} = V_{CC} (B_n, Parity)
				2.0	mA	Max	V_{OUT} = V_{CC} (A_n)
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V (A_n, B_n, Parity, $\overline{ERROR}$)
I_{CCH}	Power Supply Current		101	125	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		112	150	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		109	145	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n to B_n, B_n to A_n	2.5 3.0	4.5 4..9	8.0 7.5	2.5 3.0	9.5 8.5	2.5 3.0	9.0 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A_n to Parity	6.5 7.0	10.1 10.9	14.0 15.0	5.5 5.5	18.0 20.5	6.0 6.0	16.0 16.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay ODD/$\overline{\text{EVEN}}$ to PARITY	4.5 4.5	7.8 8.8	11.0 12.0	4.0 4.5	14.0 16.5	4.0 4.5	13.0 13.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay ODD/$\overline{\text{EVEN}}$ to $\overline{\text{ERROR}}$	4.5 4.5	7.5 8.2	11.0 12.0	4.0 4.5	14.0 16.5	4.0 4.5	13.0 13.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay B_n to $\overline{\text{ERROR}}$	8.0 8.0	14.0 15.0	20.5 21.5	7.5 7.5	27.0 28.5	7.5 7.5	23.0 23.5	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay PARITY to $\overline{\text{ERROR}}$	7.0 7.5	10.8 11.8	15.5 16.5	6.0 6.5	20.0 22.0	6.0 7.5	17.0 18.5	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to A_n/B_n	3.0 4.0	5.0 6.5	8.0 10.0	2.5 3.5	11.0 13.5	2.5 3.5	9.5 11.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to A_n/B_n	1.0 1.0	4.5 4.9	8.0 7.5	1.0 1.0	9.5 8.5	1.0 1.0	9.0 8.0	ns	2–5
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to $\overline{\text{ERROR}}$ (Note 1)	3.0 4.0	5.0 7.7	8.0 10.0	2.5 3.5	11.0 13.5	2.5 3.5	9.5 11.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to $\overline{\text{ERROR}}$	1.0 1.0	4.5 4.9	8.0 7.5	1.0 1.0	9.5 8.5	1.0 1.0	9.0 8.0	ns	2–5
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to PARITY	3.0 4.0	5.0 7.7	8.0 10.0	2.5 3.5	11.0 13.5	2.5 3.5	9.5 11.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to PARITY	1.0 1.0	4.6 5.1	8.0 7.5	1.0 1.0	9.5 8.5	1.0 1.0	9.0 8.0	ns	2–5

Note 1: These delay times reflect the TRI-STATE recovery time only and not the signal time through the buffers or the parity check circuitry. To assure VALID information at the $\overline{\text{ERROR}}$ pin, time must be allowed for the signal to propagate through the drivers (B to A), through the parity check circuitry (same as A to PARITY), and to the $\overline{\text{ERROR}}$ output after the $\overline{\text{ERROR}}$ pin has been enabled (Output Enable times). VALID data at the $\overline{\text{ERROR}}$ pin ≥ (A to PARITY) + (Output Enable Time).

National Semiconductor

54F/74F673A
16-Bit Serial-In, Serial/Parallel-Out Shift Register

General Description


The 'F673A contains a 16-bit serial-in, serial-out shift register and a 16-bit parallel-out storage register. A single pin serves either as an input for serial entry or as a TRI-STATE® serial output. In the Serial-out mode, the data recirculates in the shift register. By means of a separate clock, the contents of the shift register are transferred to the storage register for parallel outputting. The contents of the storage register can also be parallel loaded back into the shift register. A HIGH signal on the Chip Select input prevents both shifting and parallel transfer. The storage register may be cleared via $\overline{STMR}$.

Features

- Serial-to-parallel converter
- 16-bit serial I/O shift register
- 16-bit parallel-out storage register
- Recirculating serial shifting
- Recirculating parallel transfer
- Common serial data I/O pin
- Slim 24 lead package


Ordering Code: See Section 5

Logic Symbols

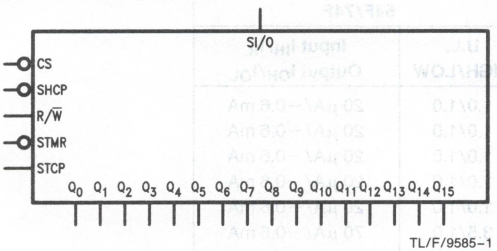

TL/F/9585–1


IEEE/IEC

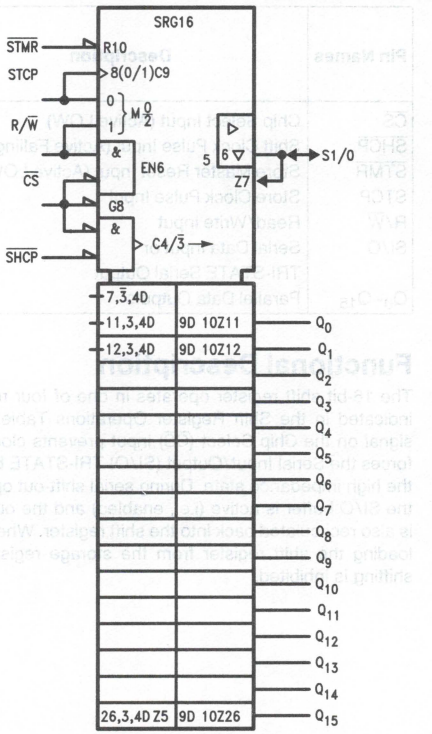

TL/F/9585–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

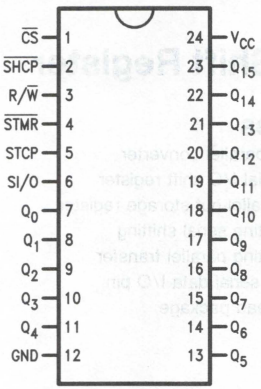

TL/F/9585–2

Pin Assignment for LCC

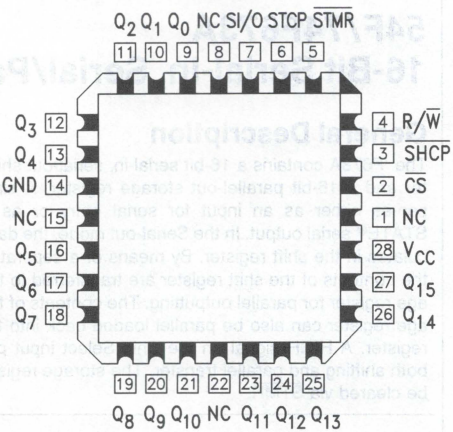

TL/F/9585–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{CS}$	Chip Select Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{SHCP}$	Shift Clock Pulse Input (Active Falling Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{STMR}$	Store Master Reset Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
STCP	Store Clock Pulse Input	1.0/1.0	20 μA/−0.6 mA
R/$\overline{W}$	Read/Write Input	1.0/1.0	20 μA/−0.6 mA
SI/O	Serial Data Input or	3.5/1.0	70 μA/−0.6 mA
	TRI-STATE Serial Output	150/40 (33.3)	−3 mA/24 mA (20 mA)
Q_0–Q_{15}	Parallel Data Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 16-bit shift register operates in one of four modes, as indicated in the Shift Register Operations Table. A HIGH signal on the Chip Select ($\overline{CS}$) input prevents clocking and forces the Serial Input/Output (SI/O) TRI-STATE buffer into the high impedance state. During serial shift-out operations, the SI/O buffer is active (i.e., enabled) and the output data is also recirculated back into the shift register. When parallel loading the shift register from the storage register, serial shifting is inhibited.

The storage register has an asynchronous master reset ($\overline{STMR}$) input that overrides all other inputs and forces the Q_0–Q_{15} outputs LOW. The storage register is in the Hold mode when either $\overline{CS}$ or the Read/Write (R/$\overline{W}$) input is HIGH. With $\overline{CS}$ and R/$\overline{W}$ both LOW, the storage register is parallel loaded from the shift register.

Shift Register Operations Table

Control Inputs				SI/O Status	Operating Mode
$\overline{CS}$	R/$\overline{W}$	$\overline{SHCP}$	STCP		
H	X	X	X	High Z	Hold
L	L		X	Data In	Serial Load
L	H	↘	L	Data Out	Serial Output with Recirculation
L	H	↘	H	Active	Parallel Load; No Shifting


H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
↘ = HIGH-to-LOW Transition

Storage Register Operations Table

Control Inputs				Operating Mode
$\overline{STMR}$	$\overline{CS}$	R/$\overline{W}$	STCP	
L	X	X	X	Reset; Outputs LOW
H	H	X	X	Hold
H	X	H	X	Hold
H	L	L	↗	Parallel Load

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
↗ = LOW-to-HIGH Transition

Block Diagram

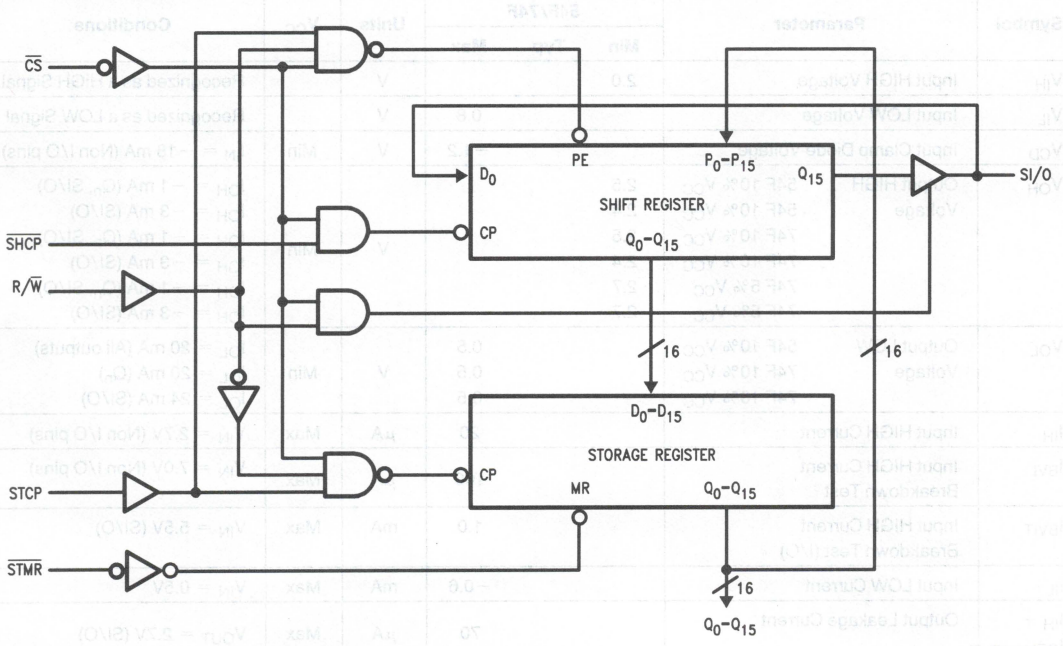

TL/F/9585–5

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA (Non I/O pins)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (Q_n, SI/O)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (SI/O)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (Q_n, SI/O)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (SI/O)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (Q_n, SI/O)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (SI/O)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (All outputs)
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA (Q_n)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (SI/O)
I_{IH}	Input HIGH Current				20	μA	Max	V_{IN} = 2.7V (Non I/O pins)
I_{BVI}	Input HIGH Current Breakdown Test				100	μA	Max	V_{IN} = 7.0V (Non I/O pins)
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)				1.0	mA	Max	V_{IN} = 5.5V (SI/O)
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (SI/O)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (SI/O)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CEX}	Output HIGH Leakage Current				250	μA	Max	V_{OUT} = V_{CC}
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			114	172	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			114	172	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	130				85		MHz	2–1
t_{PLH}	Propagation Delay	3.0	8.0	10.5			2.5	12.0	ns	2–3
t_{PHL}	STCP to Q_n	3.0	10.5	13.5			2.5	15.0		
t_{PHL}	Propagation Delay $\overline{STMR}$ to Q_n	6.0	16.5	20.5			5.5	22.5	ns	2–3
t_{PLH}	Propagation Delay	4.0	6.5	8.5			3.5	9.5	ns	2–3
t_{PHL}	$\overline{SHCP}$ to SI/O	4.5	8.0	10.5			4.0	12.0		
t_{PZH}	Output Enable Time	5.0	8.5	11.0			4.0	12.5	ns	2–5
t_{PZL}	$\overline{CS}$ to SI/O	5.5	9.0	11.5			4.5	13.0		
t_{PHZ}	Output Disable Time	3.5	5.5	7.5			3.0	8.5		
t_{PLZ}	$\overline{CS}$ to SI/O	3.0	4.5	6.5			2.5	7.5		
t_{PZH}	Output Enable Time	4.5	7.5	9.5			4.0	10.5	ns	2–5
t_{PZL}	R/$\overline{W}$ to SI/O	4.5	8.0	10.0			4.0	11.5		
t_{PHZ}	Output Disable Time	3.0	5.5	7.0			2.5	8.0		
t_{PLZ}	R/$\overline{W}$ to SI/O	2.5	4.0	5.5			2.0	6.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	54F/74F $T_A = +25°C$, $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	3.5				4.0		ns	2–6
$t_s(L)$	$\overline{CS}$ or R/$\overline{W}$ to STCP	6.0				7.0			
$t_h(H)$	Hold Time, HIGH or LOW	0				0			
$t_h(L)$	$\overline{CS}$ or R/$\overline{W}$ to STCP	0				0			
$t_s(H)$	Setup Time, HIGH or LOW	3.0				3.5		ns	2–6
$t_s(L)$	SI/O to $\overline{SHCP}$	3.0				3.5			
$t_h(H)$	Hold Time, HIGH or LOW	3.0				3.5			
$t_h(L)$	SI/O to $\overline{SHCP}$	3.0				3.5			

National Semiconductor

54F/74F675A
16-Bit Serial-In, Serial/Parallel-Out Shift Register

General Description


The 'F675A contains a 16-bit serial in/serial out shift register and a 16-bit parallel out storage register. Separate serial input and output pins are provided for expansion to longer words. By means of a separate clock, the contents of the shift register are transferred to the storage register. The contents of the storage register can also be loaded back into the shift register. A HIGH signal on the Chip Select input prevents both shifting and parallel loading.

Features

- Serial-to-parallel converter
- 16-Bit serial I/O shift register
- 16-Bit parallel out storage register
- Recirculating parallel transfer
- Expandable for longer words
- Slim 24 lead package
- 'F675A version prevents false clocking through $\overline{CS}$ or R/$\overline{W}$ inputs


Ordering Code: See Section 5

Logic Symbols

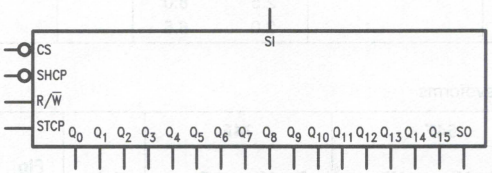

TL/F/9587–1


IEEE/IEC

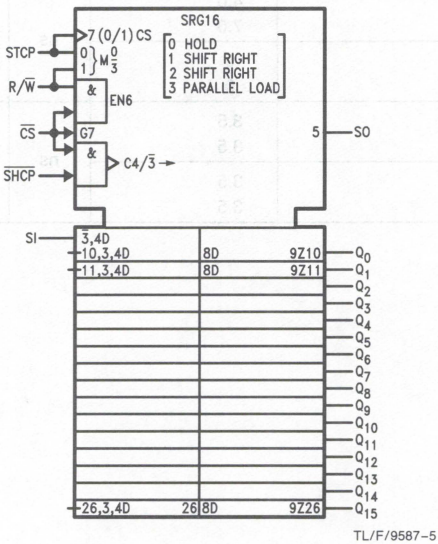

TL/F/9587–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

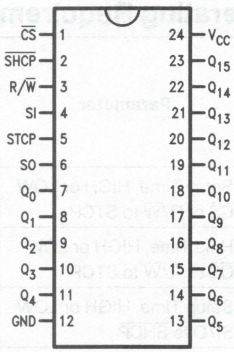

TL/F/9587–2

Pin Assignment for LCC



TL/F/9587–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
SI	Serial Data Input	1.0/1.0	20 μA/−0.6 mA
$\overline{CS}$	Chip Select Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{SHCP}$	Shift Clock Pulse Input (Active Falling Edge)	1.0/1.0	20 μA/−0.6 mA
STCP	Store Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
R/$\overline{W}$	Read/Write Input	1.0/1.0	20 μA/−0.6 mA
SO	Serial Data Output	50/33.3	−1 mA/20 mA
Q_0–Q_{15}	Parallel Data Outputs	50/33.3	−1 mA/20 mA

Functional Description

The 16-Bit shift register operates in one of four modes, as determined by the signals applied to the Chip Select ($\overline{CS}$), Read/Write (R/$\overline{W}$) and Store Clock Pulse (STCP) input. State changes are indicated by the falling edge of the Shift Clock Pulse ($\overline{SHCP}$). In the Shift Right mode, data enters D_0 from the Serial Input (SI) pin and exits from Q_{15} via the Serial Data Output (SO) pin. In the Parallel Load mode, data from the storage register outputs enter the shift register and serial shifting is inhibited.

The storage register is in the Hold mode when either $\overline{CS}$ or R/$\overline{W}$ is HIGH. With $\overline{CS}$ and R/$\overline{W}$ both LOW, the storage register is parallel loaded from the shift register on the rising edge of STCP.

To prevent false clocking of the shift register, $\overline{SHCP}$ should be in the LOW state during a LOW-to-HIGH transition of $\overline{CS}$. To prevent false clocking of the storage register, STCP should be LOW during a HIGH-to-LOW transition of $\overline{CS}$ if R/$\overline{W}$ is LOW, and should also be LOW during a HIGH-to-LOW transition of R/$\overline{W}$ if $\overline{CS}$ is LOW.

Shift Register Operations Table


Control Inputs				Operating Mode
$\overline{CS}$	R/$\overline{W}$	$\overline{SHCP}$	STCP	
H	X	X	X	Hold
L	L	↘	X	Shift Right
L	H	↘	L	Shift Right
L	H	↘	H	Parallel Load, No Shifting

Storage Register Operations Table

Inputs			Operating Mode
$\overline{CS}$	R/$\overline{W}$	STCP	
H	X	X	Hold
L	H	X	Hold
L	L	↗	Parallel Load

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
↗ = LOW-to-HIGH Transition
↘ = HIGH-to-LOW Transition

Logic Diagram

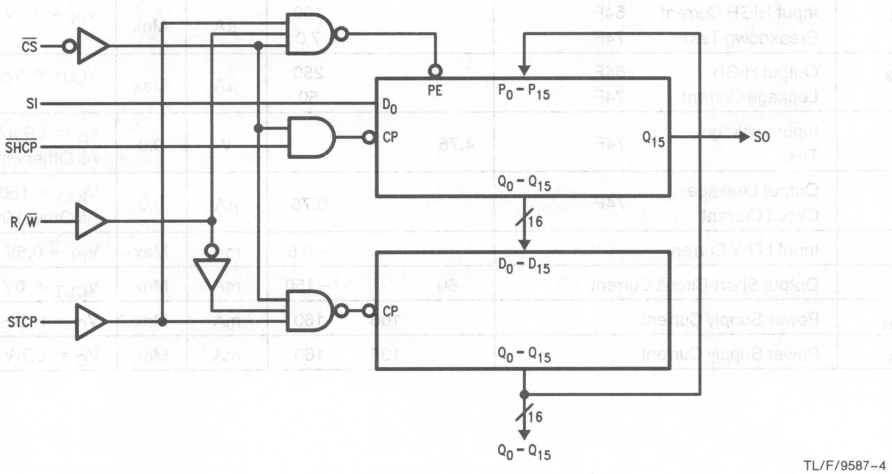

TL/F/9587–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			106	160	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			106	160	mA	Max	V_O = LOW

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	130				85		MHz	2–1
t_{PLH}	Propagation Delay	3.0	8.0	10.5			2.5	12.0	ns	2–3
t_{PHL}	STCP to Q_n	3.0	10.5	13.5			2.5	15.0		
t_{PLH}	Propagation Delay	4.0	7.0	9.5			3.5	10.5	ns	2–3
t_{PHL}	$\overline{SHCP}$ to SO	4.5	8.0	10.5			4.0	12.0		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	3.5				4.0		ns	2–6
$t_s(L)$	$\overline{CS}$ or R/$\overline{W}$ to STCP	5.5				6.5			
$t_h(H)$	Hold Time, HIGH or LOW	0				0			
$t_h(L)$	$\overline{CS}$ or R/$\overline{W}$ to STCP	0				0			
$t_s(H)$	Setup Time, HIGH or LOW	3.0				3.5		ns	2–6
$t_s(L)$	SI to $\overline{SHCP}$	3.0				3.5			
$t_h(H)$	Hold Time, HIGH or LOW	3.0				3.5			
$t_h(L)$	SI to $\overline{SHCP}$	3.0				3.5			
$t_s(H)$	Setup Time, HIGH or LOW	6.5				7.5		ns	2–6
$t_s(L)$	R/$\overline{W}$ to $\overline{SHCP}$	9.0				10.0			
$t_h(H)$	Hold Time, HIGH or LOW	0				0			
$t_h(L)$	R/$\overline{W}$ to $\overline{SHCP}$	0				0			
$t_s(H)$	Setup Time, HIGH or LOW	7.0				8.0		ns	2–6
$t_s(L)$	STCP to $\overline{SHCP}$	7.0				8.0			
$t_h(H)$	Hold Time, HIGH or LOW	0				0			
$t_h(L)$	STCP to $\overline{SHCP}$	0				0			
$t_s(H)$	Setup Time, HIGH or LOW	3.0				3.5		ns	2–6
$t_s(L)$	$\overline{CS}$ to $\overline{SHCP}$	3.0				3.5			
$t_h(H)$	Hold Time, HIGH or LOW	3.0				3.5			
$t_h(L)$	$\overline{CS}$ to $\overline{SHCP}$	3.0				3.5			
$t_w(H)$	$\overline{SHCP}$ Pulse Width	5.0				6.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0				6.0			
$t_w(H)$	STCP Pulse Width	6.0				7.0			
$t_w(L)$	HIGH or LOW	5.0				6.0			
$t_s(L)$	$\overline{SHCP}$ to STCP	8.0				9.0		ns	2–6
$t_h(H)$	$\overline{SHCP}$ to STCP	0.0				0.0		ns	2–6

National Semiconductor

54F/74F676
16-Bit Serial/Parallel-In, Serial-Out Shift Register

General Description


The 'F676 contains 16 flip-flops with provision for synchronous parallel or serial entry and serial output. When the Mode (M) input is HIGH, information present on the parallel data (P_0–P_{15}) inputs is entered on the falling edge of the Clock Pulse ($\overline{CP}$) input signal. When M is LOW, data is shifted out of the most significant bit position while information present on the Serial (SI) input shifts into the least significant bit position. A HIGH signal on the Chip Select ($\overline{CS}$) input prevents both parallel and serial operations.

Features

- 16-bit parallel-to-serial conversion
- 16-bit serial-in, serial-out
- Chip select control
- Slim 24 lead 300 mil package


Ordering Code: See Section 5

Logic Symbols

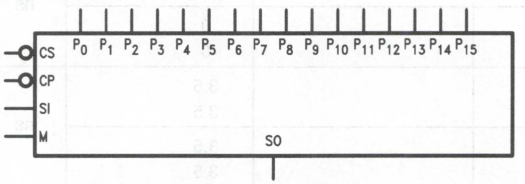

TL/F/9588–1


IEEE/IEC

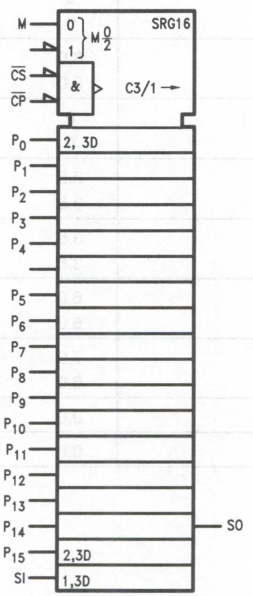

TL/F/9588–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

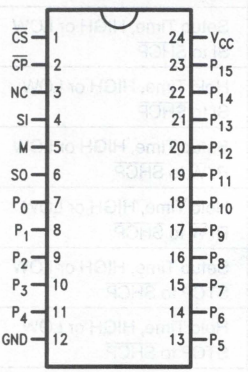

TL/F/9588–2

Pin Assignment for LCC



TL/F/9588–3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
P_0–P_{15}	Parallel Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CS}$	Chip Select Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{CP}$	Clock Pulse Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
M	Mode Select Input	1.0/1.0	20 μA/−0.6 mA
SI	Serial Data Input	1.0/1.0	20 μA/−0.6 mA
SO	Serial Output	50/33.3	−1 mA/20 mA

Functional Description

The 16-bit shift register operates in one of three modes, as indicated in the Shift Register Operations Table.

HOLD—a HIGH signal on the Chip Select ($\overline{CS}$) input prevents clocking, and data is stored in the sixteen registers.

Shift/Serial Load—data present on the SI pin shifts into the register on the falling edge of $\overline{CP}$. Data enters the Q_0 position and shifts toward Q_{15} on successive clocks, finally appearing on the SO pin.

Parallel Load—data present on P_0–P_{15} are entered into the register on the falling edge of $\overline{CP}$. The SO output represents the Q_{15} register output.


To prevent false clocking, $\overline{CP}$ must be LOW during a LOW-to-HIGH transition of $\overline{CS}$.

Shift Register Operations Table

Control Input			Operating Mode
$\overline{CS}$	M	$\overline{CP}$	
H	X	X	Hold
L	L	⌥	Shift/Serial Load
L	H	⌥	Parallel Load

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌥ = HIGH-to-LOW Transition

Block Diagram

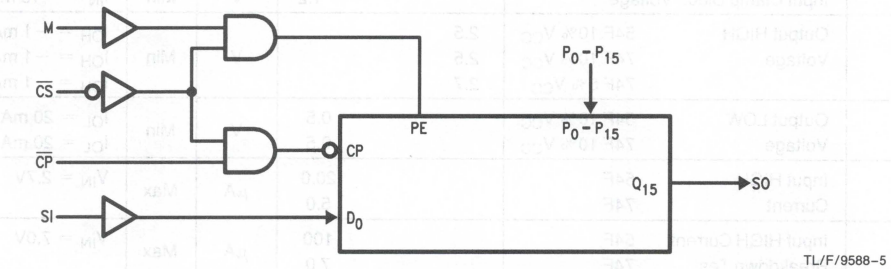

TL/F/9588–5

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA, All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV, All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current				72	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		74F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	110		45		90		MHz	2–1
t_{PLH}	Propagation Delay	4.5	9.0	11.0	4.5	17.0	4.5	12.0	ns	2–3
t_{PHL}	$\overline{CP}$ to SO	5.0	9.0	12.5	5.0	14.5	5.0	13.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	4.0		4.0		4.0		ns	2–6
$t_s(L)$	SI to $\overline{CP}$	4.0		4.0		4.0			
$t_h(H)$	Hold Time, HIGH or LOW	4.0		4.0		4.0			
$t_h(L)$	SI to $\overline{CP}$	4.0		4.0		4.0			
$t_s(H)$	Setup Time, HIGH or LOW	3.0		3.0		3.0		ns	2–6
$t_s(L)$	P_n to $\overline{CP}$	3.0		3.0		3.0			
$t_h(H)$	Hold Time, HIGH or LOW	4.0		4.0		4.0			
$t_h(L)$	P_n to $\overline{CP}$	4.0		4.0		4.0			
$t_s(H)$	Setup Time, HIGH or LOW	8.0		8.0		8.0		ns	2–6
$t_s(L)$	M to $\overline{CP}$	8.0		8.0		8.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0			
$t_h(L)$	M to $\overline{CP}$	2.0		2.0		2.0			
$t_s(L)$	Setup Time, LOW $\overline{CS}$ to $\overline{CP}$	10.0		12.0		10.0		ns	2–6
$t_h(H)$	Hold Time, HIGH $\overline{CS}$ to $\overline{CP}$	10.0		10.0		10.0			
$t_w(H)$	$\overline{CP}$ Pulse Width	4.0		5.0		4.0		ns	2–4
$t_w(L)$	HIGH or LOW	6.0		9.0		6.0			

National Semiconductor

ADVANCE INFORMATION

54F/74F779
8-Bit Bidirectional Binary Counter with TRI-STATE® Outputs


General Description

The 'F779 is a fully synchronous 8-stage up/down counter with multiplexed TRI-STATE I/O ports for bus-oriented applications. All control functions (hold, count up, count down, synchronous load) are controlled by two mode pins (S_0, S_1). The device also features carry lookahead for easy cascading. All state changes are initiated by the rising edge of the clock.

Features


- Multiplexed TRI-STATE I/O ports
- Built-in lookahead carry capability
- Count frequency 100 MHz typ
- Supply current 80 mA typ

Logic Symbols



TL/F/9593–1


IEEE/IEC

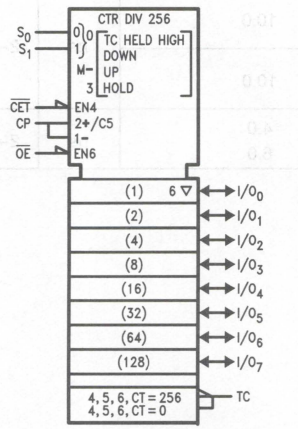

TL/F/9593–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9593–2

Pin Assignment for LCC and PCC



TL/F/9593–3

National Semiconductor

54F/74F784
8-Bit Serial/Parallel Multiplier with Adder/Subtractor

General Description

The 'F784 is an 8-bit by 1-bit sequential logic element that multiplies two numbers represented in twos complement notation. The device implements Booth's algorithm internally to produce a twos complement product that needs no subsequent correction. In addition to the serial product output (SP), an S ± B output is obtained with an internal adder/subtractor stage which adds a B bit to the SP product. Parallel inputs accept and store an 8-bit multiplicand (X_0–X_7). The add/subtract ($\overline{A}$/S), B_n and B_{n-1} inputs control the internal adder/subtractor stage. The multiplier word is then applied to the Y input in a serial bit stream, least significant bit first. The product is clocked out at the SP output and the product ± B at the S ± B output delayed by one clock cycle. Both appear least significant bit first.


The K input is used for expansion to longer X words, using two or more 'F784 devices by connecting the output (SP) of one device to the K input of the other device. The Mode Control (M) input is used to establish the most significant device. An asynchronous Parallel Load ($\overline{PL}$) input clears the internal flip-flops to the start condition and enables the X latches to accept new multiplicand data. The Parallel Load ($\overline{PL}$) also clears the outputs (SP and S ± B).

Features

- Twos complement multiplication
- 8-bit by 1-bit sequential logic element
- Includes product output (SP) and product ± B output (S ± B)
- Parallel inputs accept and store an 8-bit multiplicand (X_0–X_7)
- K input is used for expansion to longer X words
- Combines the 'F384 and 'F385 in one chip

Ordering Code: See Section 5


Logic Symbol



TL/F/10230–1


Connection Diagrams

Pin Assignment for DIP and SOIC



TL/F/10230–2

Pin Assignment for LCC



TL/F/10230–3

Input Loading/Fan-Out: See Section 2

Pin Names	Description	54F/74F (U.L.) High/Low	I_{IH}/I_{IL} I_{OH}/I_{OL}
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
K	Serial Expansion Input	1.0/1.0	20 μA/−0.6 mA
M	Mode Control Input	1.0/1.0	20 μA/−0.6 mA
$\overline{PL}$	Asynchronous Parallel Load Input (Active LOW)	1.0/2.0	20 μA/−1.2 mA
X_0–X_7	Multiplicand Data Inputs	1.0/1.0	20 μA/−0.6 mA
Y	Serial Multiplier Input	1.0/1.0	20 μA/−0.6 mA
$\overline{A}$/S	Add/Subtract	1.0/1.0	20 μA/−0.6 mA
B_n	Serial B Input	1.0/1.0	20 μA/−0.6 mA
B_{n-1}	Delayed Serial B Input	1.0/1.0	20 μA/−0.6 mA
S ± B	Serial X • Y ± B Output	50/33.3	−1 mA/20 mA
SP	Serial X • Y Product Output	50/33.3	−1 mA/20 mA

Functional Description

The 'F784 is a serial-parallel 8-bit multiplier. Also included is an adder/subtractor stage. The X word (multiplicand) is loaded into a register while simultaneously clearing the arithmetic cell flip-flops in preparation for a multiplication. The Y word (multiplier) is clocked in serially. (See *Figure A*).

Expansion capability is provided via the M and K inputs. The K (cascade) input is connected to the S_0 output of the more significant chip. The M (mode) input is used to determine whether the multiplicand is to be treated as a two's complement or unsigned number.

The 'F784 has logic to enable complex arithmetic to be performed. A serial adder/subtractor enables constants to be added to the product. Typically this feature would be used in FFT butterfly networks to reduce package count and power.

Two outputs are provided: the product XY and the product XY ±B. Because of the internal adder/subtractor, a speed advantage is gained when using the 'F784 over using a separate adder and multiplier chip. (Refer to *Figure B*).

During a multiplication operation, the first clock cycle is used to load both the X word (multiplicand) and the first bit of the Y word (operand) into the input registers. At this time there is no valid data at the SP output so that B bits added will not give the correct sum output. In order to load the first B bit on the same clock as X and Y, a B_{n-1} input is provided which delays the B data by one clock cycle. Thus, a valid output results.

Inputs			Function
$\overline{A}/S$	B_n	B_{n-1}	
L	H	C_n	Add C_n to product (C_n loaded at the same time as Y_n)
L	C_n	H	Add C_n to product (C_n must be delayed one clock cycle)
H	H	C_n	Subtract C_n from product (C_n loaded at the same time as Y_n)
H	C_n	H	Subtract C_n from product (C_n must be delayed one clock cycle)


L = LOW Voltage Level H = HIGH Voltage Level C_n = Constant

Function Table

Inputs						Internal	Outputs		Function
$\overline{PL}$	CP	K	M	X_i	Y	Y_{a-1}	SP	S±B	
X	X	L	L	X	X	X	X	X	Most Significant Multiplier Device
X	X	CS	H	X	X	X	X	X	Devices Cascaded in Multiplier String
L	X	X	X	OP	X	L	L	L	Load New Multiplicand and Clear Internal Sum and Carry Registers
H	X	X	X	X	X	X	X	X	Device Enabled
H	↑	X	X	X	L	L	P	P±B	Shift Sum Register
H	↑	X	X	X	L	H	P	P±B	Add Multiplicand to Sum Register and Shift
H	↑	X	X	X	H	L	P	P±B	Subtract Multiplicand from Sum Register and Shift
H	↑	X	X	X	H	H	P	P±B	Shift Sum Register

H = HIGH Voltage Level
L = LOW Voltage Level
↑ = LOW-to-HIGH Transition
CS = Connected to SP output of high order device
OP = X_i latches open for new data (i = 0–7)
P = Output as required per Booth's algorithm
P±B = Product ± a constant (delayed one clock cycle)
X = Immaterial

Logic Diagram

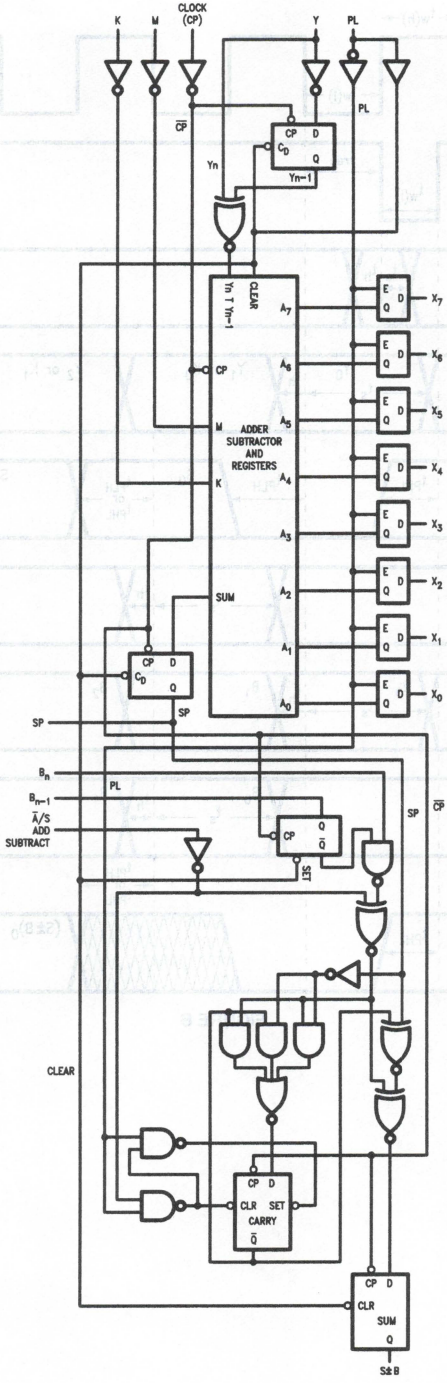


TL/F/10230–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

FIGURE A

Timing Waveforms

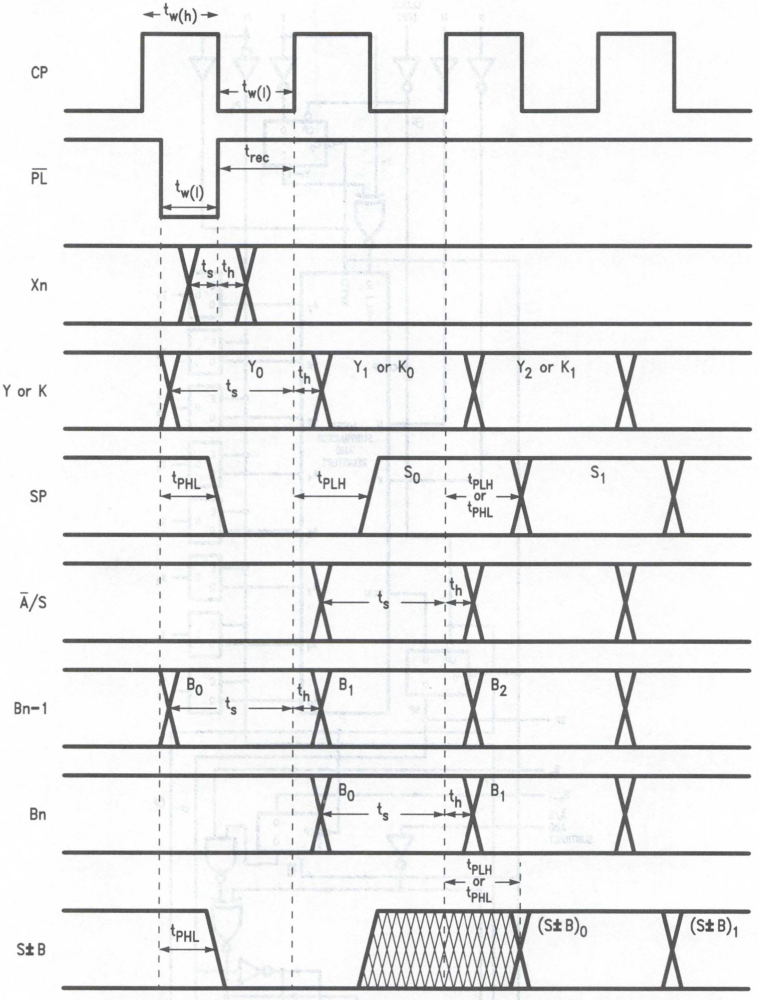

TL/F/10230–5

FIGURE B

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 20 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Except $\overline{PL}$)
					−1.2	mA	Max	V_{IN} = 0.5V ($\overline{PL}$)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CC}	Power Supply Current			70	100	mA	Max	V_O = HIGH

AC Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	54F/74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	50	65				50		MHz	2-1
t_{PHL}	Propagation Delay $\overline{PL}$ to SP	6.0	10.0	13.0			5.0	14.5	ns	2-3
t_{PHL}	Propagation Delay $\overline{PL}$ to S ±B	5.5	9.5	12.0			4.5	13.5	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay CP to SP	4.0 4.5	6.5 8.0	9.0 10.5			3.5 4.0	10.0 12.0	ns	2-3
t_{PLH} t_{PHL}	Propagation Delay CP to S ± B	4.0 4.0	7.0 7.0	9.0 9.0			3.5 3.5	10.0 10.0	ns	2-3

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	54F/74F $T_A = +25°C$, $V_{CC} = +5.0V$			54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW K to CP	9.0 9.0					10.0 10.0		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW K to CP	2.0 2.0					2.0 2.0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW Y to CP	15.0 15.0					15.0 15.0		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW Y to CP	2.0 2.0					2.0 2.0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW X to $\overline{PL}$	3.0 6.0					4.0 7.0		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW X to $\overline{PL}$	2.0 4.0					2.0 4.0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW B_n to CP	7.0 7.0					8.0 8.0		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW B_n to CP	0 0					0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A/$\overline{S}$ to CP	12.0 12.0					13.0 13.0		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A/$\overline{S}$ to CP	0 0					0 0			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW B_{n-1} to CP	5.0 5.0					5.0 5.0		ns	2-6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW B_{n-1} to CP	1.0 1.0					2.0 2.0			
$t_W(L)$	$\overline{PL}$ Pulse Width, LOW	6.5					7.0		ns	2-4
$t_W(H)$ $t_W(L)$	CP Pulse Width HIGH or LOW	7.0 7.0					7.0 7.0		ns	2-4
t_{rec}	Recovery Time $\overline{PL}$ to CP	6.0					10.0		ns	2-6

National Semiconductor

54F/74F794
8-Bit Register with Readback

General Description

The 'F794 is an 8-bit register with readback capability designed to store data as well as read the register information back onto the data bus. The I/O bus (D bus) has TRI-STATE® outputs. Current sinking capability is 64 mA on both the D and Q busses.


Data is loaded into the registers on the low-to-high transition of the clock (CP). The output enable ($\overline{OE}$) is used to enable data on D_0–D_7. When $\overline{OE}$ is low, the output of the registers is enabled on D_0–D_7, enabling D as an output bus. When $\overline{OE}$ is high, D_0–D_7 are inputs to the registers configuring D as an input bus.

Features

- TRI-STATE outputs on the I/O port
- D and Q output sink capability of 64 mA
- Guaranteed 4000V minimum ESD protection
- Functionally and pin equivalent to the 'LS794

Ordering Code: See Section 5


Logic Symbol



TL/F/10652–1

Connection Diagram

DIP, SOIC and Flatpak



TL/F/10652–2

Input Loading/Fan-Out


Pin Names	Description	74F High/Low	
		(U.L.)	Current
$\overline{OE}$	Output Enable Input	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Inputs	1.0/1.0	20 μA/−0.6 mA
D_0–D_7	D Bus Inputs/	3.5/1.083	70 μA/−650 μA
	TRI-STATE Outputs	750/106.6	−15 mA/64 mA
Q_0–Q_7	Q Bus Outputs	750/106.6	−15 mA/64 mA

Truth Table

Inputs		Outputs	
CP	$\overline{OE}$	Q	D
L or H or ↓	L	Q_n	Output, Q
L or H or ↓	H	Q_n	Input
↑	L	Q_n	Output, Q*
↑	H	D	Input

*In this case the output of the register is clocked to the inputs and the overall Q output is unchanged at Q_n.

Logic Diagram

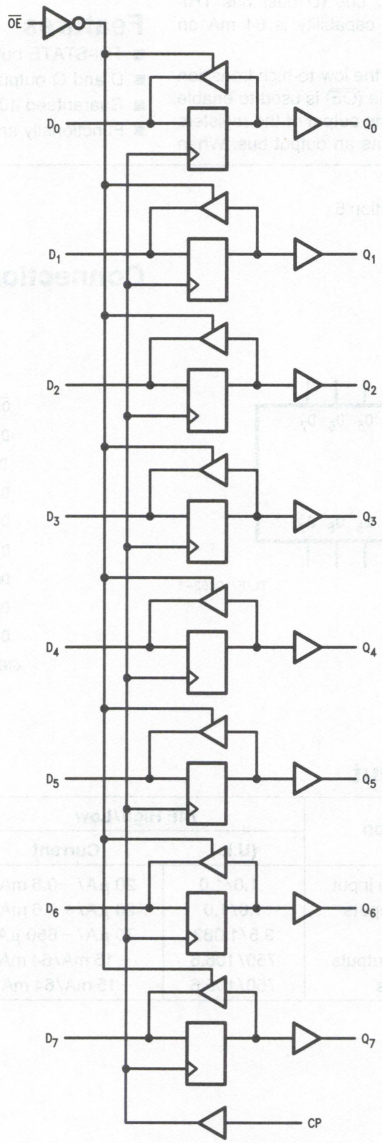

TL/F/10652–3

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to + 150°C
Ambient Temperature under Bias	−55° to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Voltage Applied to Output	
In HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	Twice the Rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to 70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Characteristics over Operating Temperature Range unless otherwise specified

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage		2.4 2.0	2.8 2.44		V	Min	I_{OH} = −3 mA I_{OH} = −15 mA
V_{OL}	Output LOW Voltage			0.45	0.55	V	Min	I_{OL} = 64 mA
I_{IH}	Input HIGH Current	54F 74F			20.0 5.0	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test	54F 74F			100 7.0	μA	Max	V_{IN} = 7.0V ($\overline{OE}$, CP)
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F 74F			1.0 0.5	mA	Max	V_{IN} = 5.5V (D_n)
I_{CEX}	Output HIGH Leakage Current	54F 74F			250 50	μA	Max	V_{OUT} = V_{CC}
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V ($\overline{OE}$, CP)

DC Characteristics over Operating Temperature Range unless other specified (Continued)

Symbol	Parameter	54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
I_{OS}	Output Short-Circuit Current	−100		−225	mA	Max	V_{OUT} = 0V
I_{IH} + I_{OZH}	Output Leakage Current			70	μA	Max	V_{OUT} = 2.7V (Dn)
I_{IL} + I_{OZL}	Output Leakage Current			−650	μA	Max	V_{OUT} = 0.5V (Dn)
V_{ID}	Input Leakage Test 74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Circuit Leakage Current 74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{ZZ}	Bus Drainage Test			100	μA	0.0	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current			65	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			80	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			80	mA	Max	V_O = HIGH Z

AC Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F T_A = +25°C, V_{CC} = +5.0V, C_L = 50 pF Min	Typ	Max	54F T_A, V_{CC} = Mil Min	Max	74F T_A, V_{CC} = Comm, C_L = 50 pF Min	Max	Units	Fig. No.
f_{MAX}	Max. Clock Frequency	90					90		MHz	2-1
t_{PLH} t_{PHL}	Propagation Delay CP to Qn	2.5 2.5		7.0 8.0			2.5 2.5	8.0 9.0	ns	2-3
t_{PZH} t_{PZL}	Output Enable Time	2.3 2.0		8.5 10.0			2.0 2.0	9.0 10.5	ns	2-5
t_{PHZ} t_{PLZ}	Output Disable Time	1.0 1.0		7.0 7.0			1.0 1.0	8.0 8.0	ns	2-5
t_s(H) t_s(L)	Setup Time, HIGH or LOW Bus to Clock	4.0 4.0					4.0 4.0		ns	2-6
t_h(H) t_h(L)	Hold Time, HIGH or LOW Bus to Clock	1.5 1.5					1.5 1.5		ns	2-6
t_w(H	Clock Pulse Width HIGH or LOW	5.8 5.8					5.8 5.8		ns	2-14

National Semiconductor

54F/74F821
10-Bit D-Type Flip-Flop

General Description


The 'F821 is a 10-bit D-type flip-flop with TRI-STATE® true outputs arranged in a broadside pinout. The 'F821 is functionally and pin compatible with the AMD's Am29821.

Features

- TRI-STATE Outputs
- Direct replacement for AMD's Am29821


Ordering Code: See Section 5

Logic Symbols



TL/F/9595–1


IEEE/IEC



TL/F/9595–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

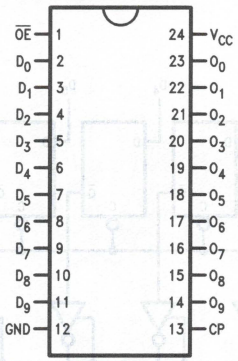

TL/F/9595–2

Pin Assignment for LCC



TL/F/9595–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_9	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable TRI-STATE Input	1.0/1.0	20 μA/−0.6 mA
CP	Clock Input	1.0/1.0	20 μA/−0.6 mA
O_0–O_9	TRI-STATE Outputs	150/40 (33.3)	−3.0 mA/24 mA (20 mA)

Functional Description


The 'F821 consists of ten D-type edge-triggered flip-flops. This device has TRI-STATE true outputs for bus systems organized in a broadside pinning. The buffered Clock (CP) and buffered Output Enable ($\overline{OE}$) are common to all flip-flops. The flip-flops will store the state of their individual D inputs that meet the setup and hold times requirements on the LOW-to-HIGH CP transition. With the $\overline{OE}$ LOW the content of the flip-flops are available at the outputs. When the $\overline{OE}$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}$ input does not affect the state of the flip-flops.

Function Table

Inputs			Internal	Output	Function
$\overline{OE}$	CP	D	$\overline{Q}$	O	
H	H	X	NC	Z	Hold
H	L	X	NC	Z	Hold
H	⌐	L	H	Z	Load
H	⌐	H	L	Z	Load
L	⌐	L	H	L	Data Available
L	⌐	H	L	H	Data Available
L	H	X	NC	NC	No Change in Data
L	L	X	NC	NC	No Change in Data

L = LOW Voltage Level
H = HIGH Voltage Level
X = Immaterial
Z = High Impedance
⌐ = LOW-to-HIGH Transition
NC = No Change

Logic Diagram

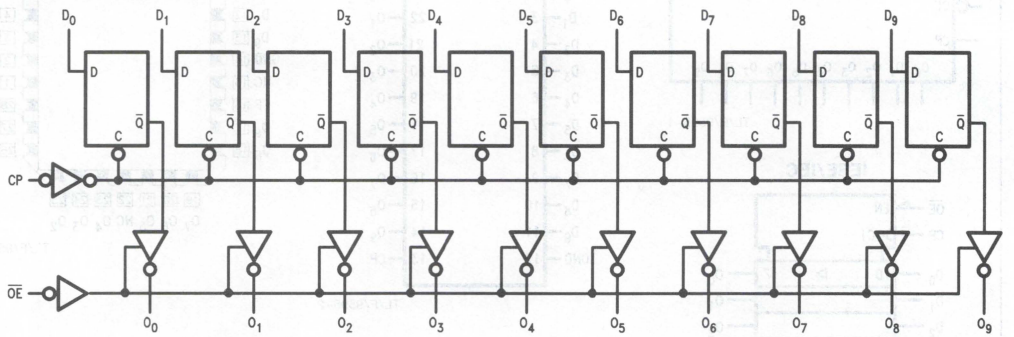

TL/F/9595–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA, All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CCZ}	Power Supply Current			78	100	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	150		60		70		MHz	2–1
t_{PLH}	Propagation Delay	2.0	6.4	9.5	2.0	10.5	2.0	10.5	ns	2–3
t_{PHL}	CP to O_n	2.0	6.2	9.5	2.0	10.5	2.0	10.5		
t_{PZH}	Output Enable Time	2.0	5.8	10.5	2.0	13.0	2.0	11.5	ns	2–5
t_{PZL}	$\overline{OE}$ to O_n	2.0	6.3	10.5	2.0	13.0	2.0	11.5		
t_{PHZ}	Output Disable Time	1.5	3.4	7.0	1.0	7.5	1.5	7.5		
t_{PLZ}	$\overline{OE}$ to O_n	1.5	3.5	7.0	1.0	7.5	1.5	7.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	2.5		4.0		3.0		ns	2–6
$t_s(L)$	D_n to CP	2.5		4.0		3.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.5		2.5		2.5			
$t_h(L)$	D_n to CP	2.5		2.5		2.5			
$t_w(H)$	CP Pulse Width	5.0		6.0		6.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0		6.0		6.0			

National Semiconductor

54F/74F823
9-Bit D-Type Flip-Flop

General Description

The 'F823 is a 9-bit buffered register. It features Clock Enable and Clear which are ideal for parity bus interfacing in high performance microprogramming systems.


The 'F823 is functionally and pin compatible with AMD's Am29823.

Features

- TRI-STATE® outputs
- Clock Enable and Clear
- Direct replacement for AMD's Am29823


Ordering Code: See Section 5

Logic Symbols



TL/F/9596–2


IEEE/IEC



TL/F/9596–1


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9596–3

Pin Assignment for LCC



TL/F/9596–4

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_8	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable Input	1.0/1.0	20 μA/−0.6 mA
$\overline{CLR}$	Clear	1.0/1.0	20 μA/−0.6 mA
CP	Clock Input	1.0/2.0	20 μA/−1.2 mA
$\overline{EN}$	Clock Enable	1.0/1.0	20 μA/−0.6 mA
O_0–O_8	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

4

Functional Description

The 'F823 device consists of nine D-type edge-triggered flip-flops. It has TRI-STATE true outputs and is organized in broadside pinning. The buffered Clock (CP) and buffered Output Enable ($\overline{OE}$) are common to all flip-flops. The flip-flops will store the state of their individual D inputs that meet the setup and hold times requirements on the LOW-to-HIGH CP transition. With the $\overline{OE}$ LOW the contents of the flip-flops are available at the outputs. When the $\overline{OE}$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}$ input does not affect the state of the flip-flops. In addition to the Clock and Output Enable pins, the 'F823 has Clear ($\overline{CLR}$) and Clock Enable ($\overline{EN}$) pins.


When the $\overline{CLR}$ is LOW and the $\overline{OE}$ is LOW, the outputs are LOW. When $\overline{CLR}$ is HIGH, data can be entered into the flip-flops. When $\overline{EN}$ is LOW, data on the inputs is transferred to the outputs on the LOW to HIGH clock transition. When the $\overline{EN}$ is HIGH, the outputs do not change state regardless of the data or clock inputs transitions. This device is ideal for parity bus interfacing in high performance systems.

Function Table

Inputs					Internal	Output	Function
$\overline{OE}$	$\overline{CLR}$	$\overline{EN}$	CP	D	$\overline{Q}$	O	
H	H	L	H	X	NC	Z	Hold
H	H	L	L	X	NC	Z	Hold
H	H	H	X	X	NC	Z	Hold
L	H	H	X	X	NC	NC	Hold
H	L	X	X	X	H	Z	Clear
L	L	X	X	X	H	L	Clear
H	H	L	⌐	H	H	Z	Load
H	H	L	⌐	H	L	Z	Load
L	H	L	⌐	L	H	L	Data Available
L	H	L	⌐	H	L	H	Data Available
L	H	L	H	X	NC	NC	No Change in Data
L	H	L	L	X	NC	NC	No Change in Data

L = LOW Voltage Level
H = HIGH Voltage Level
X = Immaterial
Z = High Impedance
⌐ = LOW-to-HIGH Transition
NC = No Change

Logic Diagram

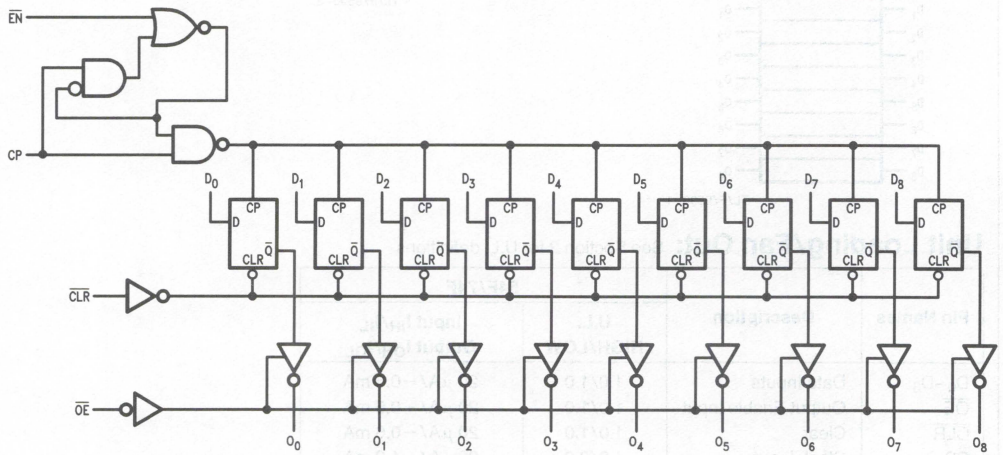

TL/F/9596–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V ($\overline{OE}$, $\overline{CLR}$, $\overline{EN}$)
					−1.2	mA	Max	V_{IN} = 0.5V (CP)
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Buss Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			75	100	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	160		60		70		MHz	2–1
t_{PLH} t_{PHL}	Propagation Delay CP to O_n	2.0 2.0	5.6 5.2	9.5 9.5	2.0 2.0	10.5 10.5	2.0 2.0	10.5 10.5	ns	2–3
t_{PHL}	Propagation Delay $\overline{CLR}$ to O_n	4.0	7.1	12.0	4.0	13.0	4.0	13.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to O_n	2.0 2.0	5.8 5.5	10.5 10.5	2.0 2.0	13.0 13.0	2.0 2.0	11.5 11.5	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to O_n	1.5 1.5	2.9 2.7	7.0 7.0	1.0 1.0	7.5 7.5	1.5 1.5	7.5 7.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW D_n to CP	2.5 2.5		4.0 4.0		3.0 3.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW D_n to CP	2.5 2.5		2.5 2.5		2.5 2.5			
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{EN}$ to CP	4.5 2.5		5.0 3.0		5.0 3.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{EN}$ to CP	2.0 0		3.0 1.0		2.0 0			
$t_w(H)$ $t_w(L)$	CP Pulse Width HIGH or LOW	5.0 5.0		6.0 6.0		6.0 6.0		ns	2–4
$t_w(L)$	$\overline{CLR}$ Pulse Width, LOW	5.0		5.0		5.0		ns	2–4
t_{rec}	$\overline{CLR}$ Recovery Time	5.0		5.0		5.0		ns	2–6

National Semiconductor

54F/74F825
8-Bit D-Type Flip-Flop

General Description

The 'F825 is an 8-bit buffered register. It has Clock Enable and Clear features which are ideal for parity bus interfacing in high performance microprogramming systems. Also included in the 'F825 are multiple enables that allow multiuser control of the interface.


The 'F825 is functionally and pin compatible with AMD's Am29825.

Features

- TRI-STATE® output
- Clock enable and clear
- Multiple output enables
- Direct replacement for AMD's Am24825


Ordering Code: See Section 5

Logic Symbols



TL/F/9597–1


IEEE/IEC

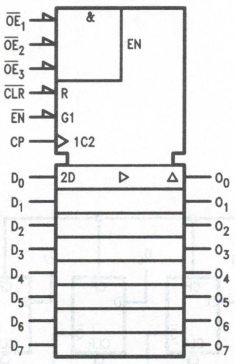

TL/F/9597–4


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9597–2

Pin Assignment for LCC



TL/F/9597–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	TRI-STATE Data Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
$\overline{OE}_1$, $\overline{OE}_2$, $\overline{OE}_3$	Output Enable Input	1.0/1.0	20 μA/−0.6 mA
$\overline{EN}$	Clock Enable	1.0/1.0	20 μA/−0.6 mA
$\overline{CLR}$	Clear	1.0/1.0	20 μA/−0.6 mA
CP	Clock Input	1.0/2.0	20 μA/−1.2 mA

Functional Description

The 'F825 consists of eight D-type edge-triggered flip-flops. This device has TRI-STATE true outputs and is organized in broadside pinning. In addition to the clock and output enable pins, the buffered clock (CP) and buffered Output Enable ($\overline{OE}$) are common to all flip-flops. The flip-flops will store the state of their individual D inputs that meet the setup and hold times requirements on the LOW-to-HIGH CP transition. With the $\overline{OE}$ LOW the contents of the flip-flops are available at the outputs. When the $\overline{OE}$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}$ input does not affect the state of the flip-flops. The 'F825 has Clear ($\overline{CLR}$) and Clock Enable ($\overline{EN}$) pins.


When the $\overline{CLR}$ is LOW and the $\overline{OE}$ is LOW the outputs are LOW. When $\overline{CLR}$ is HIGH, data can be entered into the flip-flops. When $\overline{EN}$ is LOW, data on the inputs is transferred to the outputs on the LOW-to-HIGH clock transition. When the $\overline{EN}$ is HIGH the outputs do not change state, regardless of the data or clock input transitions.

Function Table

Inputs					Internal	Output	Function
$\overline{OE}$	$\overline{CLR}$	$\overline{EN}$	CP	D	$\overline{Q}$	O	
H	H	L	H	X	NC	Z	Hold
H	H	L	L	X	NC	Z	Hold
H	H	H	X	X	NC	Z	Hold
L	H	H	X	X	NC	NC	Hold
H	L	X	X	X	H	Z	Clear
L	L	X	X	X	H	L	Clear
H	H	L	⌐	L	H	Z	Load
H	H	L	⌐	H	L	Z	Load
L	H	L	⌐	L	H	L	Data Available
L	H	L	⌐	H	L	H	Data Available
L	H	L	H	X	NC	NC	No Change in Data
L	H	L	L	X	NC	NC	No Change in Data

L = LOW Voltage Level
H = HIGH Voltage Level
X = Immaterial
Z = High Impedance
⌐ = LOW-to-HIGH Transition
NC = No Change

Logic Diagram

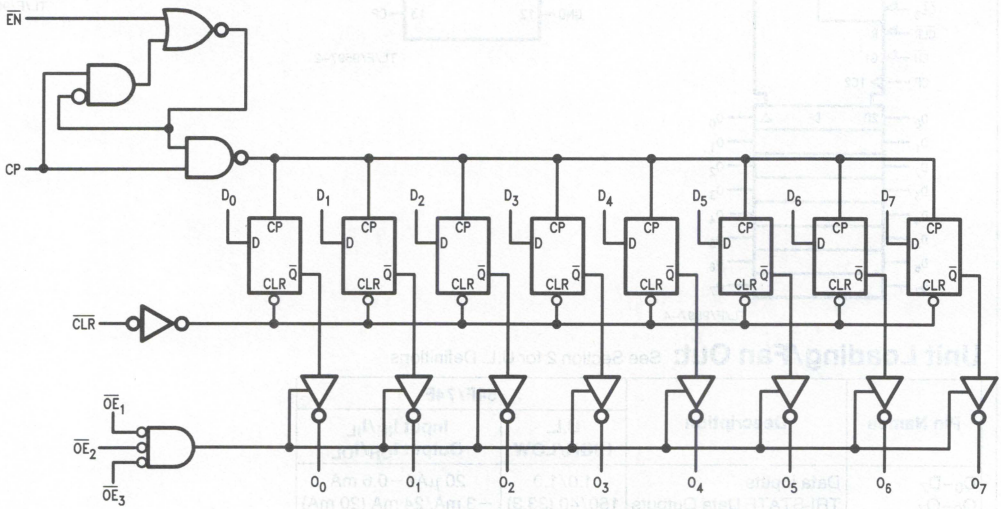

TL/F/9597–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Buss Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			75	90	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
f_{max}	Maximum Clock Frequency	100	160		60		70		MHz	2–1
t_{PLH}	Propagation Delay	2.0	6.5	9.5	2.0	10.5	2.0	10.5	ns	2–3
t_{PHL}	CP to O_n	2.0	6.6	9.5	2.0	10.5	2.0	10.5		
t_{PHL}	Propagation Delay $\overline{CLR}$ to O_n	4.0	7.4	12.0	4.0	13.0	4.0	13.0	ns	2–3
t_{PZH}	Output Enable Time	2.0	6.5	10.5	2.0	13.0	2.0	11.5	ns	2–5
t_{PZL}	$\overline{OE}$ to O_n	2.0	6.6	10.5	2.0	13.0	2.0	11.5		
t_{PHZ}	Output Disable TIme	1.5	3.5	7.0	1.0	7.5	1.5	7.5		
t_{PLZ}	$\overline{OE}$ to O_n	1.5	3.3	7.0	1.0	7.5	1.5	7.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	2.5		4.0		3.0		ns	2–6
$t_s(L)$	D_n to CP	2.5		4.0		3.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.5		2.5		2.5			
$t_h(L)$	D_n to CP	2.5		2.5		2.5			
$t_s(H)$	Setup Time, HIGH or LOW	4.5		5.0		5.0		ns	2–6
$t_s(L)$	$\overline{EN}$ to CP	2.5		3.0		3.0			
$t_h(H)$	Hold Time, HIGH or LOW	2.0		3.0		1.0			
$t_h(L)$	$\overline{EN}$ to CP	0		2.0		0			
$t_w(H)$	CP Pulse Width	5.0		6.0		6.0		ns	2–4
$t_w(L)$	HIGH or LOW	5.0		6.0		6.0			
$t_w(L)$	$\overline{CLR}$ Pulse Width, LOW	5.0		5.0		5.0		ns	2–4
t_{rec}	$\overline{CLR}$ Recovery Time	5.0		5.0		5.0		ns	2–6

National Semiconductor

54F/74F827 • 54F/74F828
10-Bit Buffers/Line Drivers

General Description

The 'F827 and 'F828 10-bit bus buffers provide high performance bus interface buffering for wide data/address paths or buses carrying parity. The 10-bit buffers have NOR output enables for maximum control flexibility.

The 'F827 and 'F828 are functionally- and pin-compatible to AMD's Am29827 and Am29828. The 'F828 is an inverting version of the 'F827.


Features

- TRI-STATE® output
- 'F828 is inverting
- Direct replacement for AMD's Am29827 and Am28828

Ordering Code: See Section 5


Connection Diagrams

Pin Assignment for DIP, Flatpak and SOIC 'F827

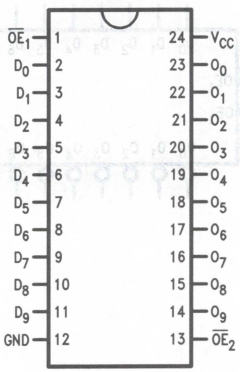


TL/F/9598–1

Pin Assignment for LCC 'F827




TL/F/9598–2

'F828

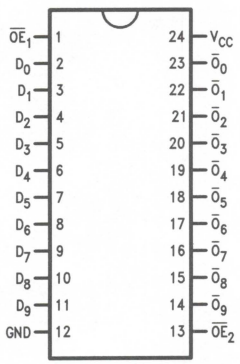

TL/F/9598–8


'F828



TL/F/9598–9


Logic Symbols

IEEE/IEC
'F827

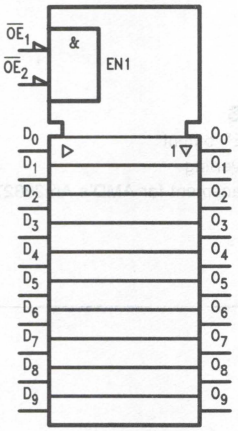


TL/F/9598–6

IEEE/IEC
'F828

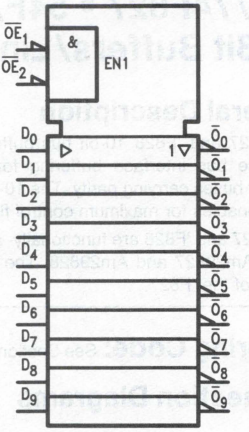


TL/F/9598–7

'F827

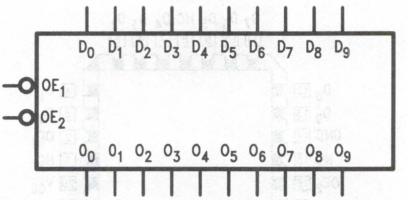

TL/F/9598–3

'F828

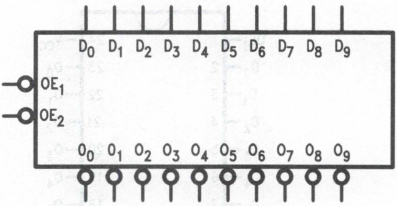

TL/F/9598–10

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}_1$, $\overline{OE}_2$	Output Enable Input	1.0/1.0	20 μA/−0.6 mA
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	Data Outputs, TRI-STATE	600/106.6 (80)	−12 mA/64 mA (48 mA)

Functional Description

The 'F827 and 'F828 are line drivers designed to be employed as memory address drivers, clock drivers and bus-oriented transmitters/receivers which provide improved PC board density. The devices have TRI-STATE outputs controlled by the Output Enable ($\overline{OE}$) pins. The outputs can sink 64 mA (48 mA mil) and source 15 mA. Input clamp diodes limit high-speed termination effects.


Function Table

Inputs		Outputs		Function
$\overline{OE}$	D_n	O_n		
		'F827	'F828	
L	H	H	L	Transparent
L	L	L	H	Transparent
H	X	Z	Z	High Z

H = HIGH Voltage level
L = LOW Voltage Level
Z = High Impedance
X = Immaterial

Logic Diagrams


'F827

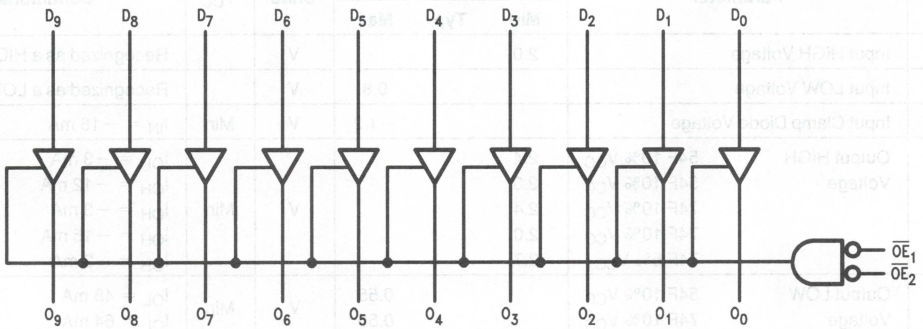

TL/F/9598–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

'F828

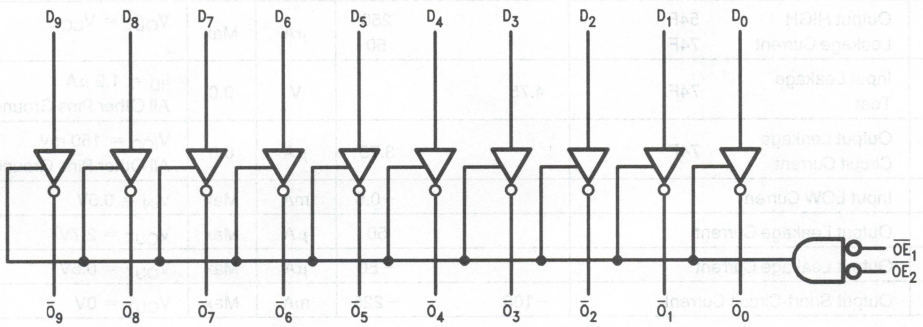

TL/F/9598–11

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.55	V	Min	I_{OL} = 48 mA
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V_{CC}	Conditions
		Min	Typ	Max			
I_{ZZ}	Bus Drainage Test			500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current ('F827)		30	45	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F827)		60	90	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F827)		40	60	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F828)		14	20	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F828)		56	85	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F828)		35	50	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F			54F		74F		Units	Fig. No.
		T_A = +25°C V_{CC} = +5.0V C_L = 50 pF			T_A, V_{CC} = Mil C_L = 50 pF		T_A, V_{CC} = Com C_L = 50 pF			
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay Data to Output ('F827)	1.0 1.5	3.0 3.3	5.5 5.5	1.0 1.5	7.5 7.0	1.0 1.5	6.5 6.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay Data to Output ('F828)	1.0 1.0	3.0 2.0	5.0 4.0	1.0 1.0	6.5 5.0	1.0 1.0	5.5 4.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to O_n	3.0 3.5	5.7 6.8	9.0 11.5	2.5 3.0	10.0 12.5	2.5 3.0	9.5 12.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to O_n	1.5 1.0	3.3 3.5	8.0 8.0	1.5 1.0	9.0 9.0	1.5 1.0	8.5 8.5	ns	2–5

National Semiconductor

PRELIMINARY

54F/74F841
10-Bit Transparent Latch

General Description

The 'F841 bus interface latch is designed to eliminate the extra packages required to buffer existing latches and provide extra data width for wider address/data paths or buses carrying parity. The 'F841 is a 10-bit transparent latch, a 10-bit version of the 'F373.


The 'F841 is functionally and pin compatible to AMD's Am29841.

Features

- TRI-STATE® output
- Direct replacement for AMD's Am29841


Ordering Code: See Section 5

Logic Symbols



TL/F/9599–1


IEEE/IEC



TL/F/9599–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak

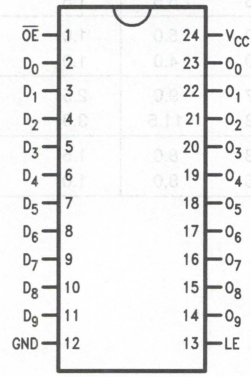

TL/F/9599–2

Pin Assignment for LCC



TL/F/9599–3

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_9	Data Inputs	1.0/1.0	20 μA/−0.6 mA
O_0–O_9	TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
$\overline{OE}$	Output Enable Input	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable	1.0/1.0	20 μA/−0.6 mA

Functional Description

The 'F841 device consists of ten D-type latches with TRI-STATE outputs. The flip-flops appear transparent to the data when Latch Enable (LE) is HIGH. This allows asynchronous operation, as the output transition follows the data in transition.


On the LE HIGH-to-LOW transition, the data that meets the setup and hold time is latched. Data appears on the bus when the Output Enable ($\overline{OE}$) is LOW. When $\overline{OE}$ is HIGH the bus output is in the high impedance state.

Function Table

Inputs			Internal	Output	Function
$\overline{OE}$	LE	D	Q	O	
X	X	X	X	Z	High Z
H	H	L	L	Z	High Z
H	H	H	H	Z	High Z
H	L	X	NC	Z	Latched
L	H	L	L	L	Transparent
L	H	H	H	H	Transparent
L	L	X	NC	NC	Latched
L	X	X	H	H	Preset
L	X	X	L	L	Clear
L	X	X	H	H	Preset
H	L	X	L	Z	Latched
H	L	X	H	Z	Latched

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = HIGH Impedance
NC = No Change

Logic Diagram

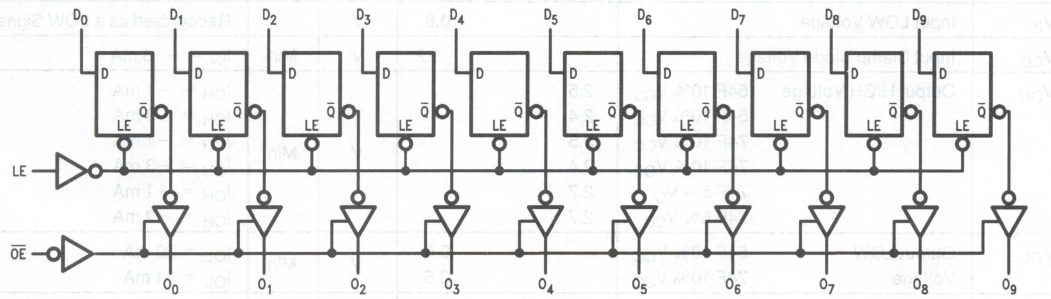

TL/F/9599–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			69	92	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.5		8.0			2.0	9.0	ns	2–3
t_{PHL}	D_n to O_n	1.5		6.5			1.5	7.0		
t_{PLH}	Propagation Delay	5.0		12.0			4.5	13.5	ns	2–3
t_{PHL}	LE to O_n	2.0		7.5			2.0	8.0		
t_{PZH}	Output Enable Time	2.5		8.5			2.0	9.5	ns	2–5
t_{PZL}	$\overline{OE}$ to O_n	2.5		9.0			2.0	10.0		
t_{PHZ}	Output Disable Time	1.0		6.5			1.0	7.5		
t_{PLZ}	$\overline{OE}$ to O_n	1.0		6.5			1.0	7.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$	Setup Time, HIGH or LOW	2.0				2.5		ns	2–6
$t_s(L)$	D_n to LE	2.0				2.5			
$t_h(H)$	Hold Time, HIGH or LOW	2.5				3.0			
$t_h(L)$	D_n to LE	3.0				3.5			
$t_w(H)$	LE Pulse Width, HIGH	4.0				4.0		ns	2–4

National Semiconductor

54F/74F843
9-Bit Transparent Latch

General Description

The 'F843 bus interface latch is designed to eliminate the extra packages required to buffer existing latches and provide extra data width for wider address/data paths or buses carrying parity.

The 'F843 is functionally and pin compatible with AMD's Am29843.


Features

- TRI-STATE® output
- Direct replacement for AMD's Am29843


Ordering Code: See Section 5

Logic Symbols

IEEE Symbol




TL/F/9453–6



TL/F/9453–1

Connection Diagram

Pin Assignment for DIP and SOIC

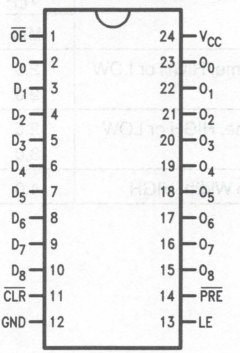

TL/F/9453–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_8	Data Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable Input	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable	1.0/1.0	20 μA/−0.6 mA
$\overline{CLR}$	Clear	1.0/1.0	20 μA/−0.6 mA
$\overline{PRE}$	Preset	1.0/1.0	20 μA/−0.6 mA
O_0–O_8	TRI-STATE Data Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)

Functional Description


The 'F843 consists of nine D-type latches with TRI-STATE outputs. The flip-flops appear transparent to the data when Latch Enable (LE) is HIGH. This allows asynchronous operation, as the output transition follows the data in transition. On the LE HIGH-to-LOW transition, the data that meets the setup times is latched. Data appears on the bus when the Output Enable ($\overline{OE}$) is LOW. When $\overline{OE}$ is HIGH, the bus output is in the high impedance state. In addition to the LE and $\overline{OE}$ pins, the 'F843 has a Clear ($\overline{CLR}$) pin and a Preset ($\overline{PRE}$). These pins are ideal for parity bus interfacing in high performance systems. When $\overline{CLR}$ is LOW, the outputs are LOW if $\overline{OE}$ is LOW. When $\overline{CLR}$ is HIGH, data can be entered into the latch. When $\overline{PRE}$ is LOW, the Outputs are HIGH if $\overline{OE}$ is LOW. Preset overrides $\overline{CLR}$.

Function Table

Inputs					Internal	Output	Function
$\overline{CLR}$	$\overline{PRE}$	$\overline{OE}$	LE	D	Q	O	
H	H	X	X	X	X	Z	High Z
H	H	H	H	L	L	Z	High Z
H	H	H	H	H	H	Z	High Z
H	H	H	L	X	NC	Z	Latched
H	H	L	H	L	L	L	Transparent
H	H	L	H	H	H	H	Transparent
H	H	L	L	X	NC	NC	Latched
H	L	L	X	X	H	H	Preset
L	H	L	X	X	L	L	Clear
L	L	L	X	X	H	H	Preset
L	H	H	L	X	L	Z	Latched
H	L	H	L	X	H	Z	Latched

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance
NC = No Change

Logic Diagram

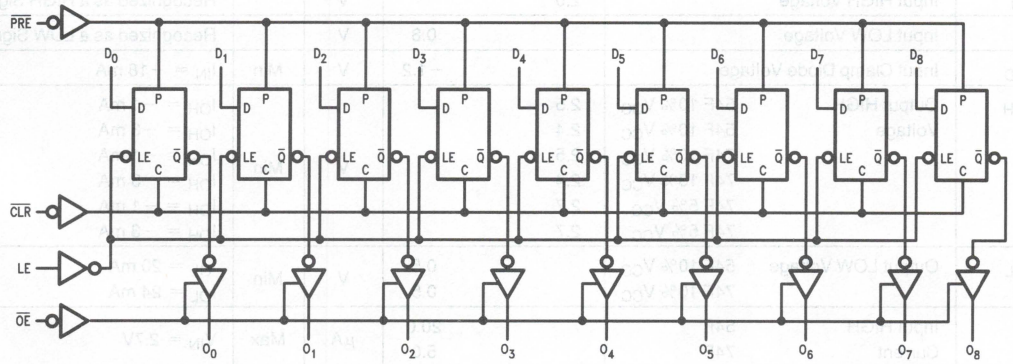

TL/F/9453–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CC}	Power Supply Current			65	90	mA	Max	

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay D_n to O_n	2.5 1.5	5.4 4.2	8.0 6.5			2.0 1.5	9.0 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay LE to O_n	5.0 2.0	8.5 4.7	12.0 7.5			4.5 2.0	13.5 8.0	ns	2–3
t_{PLH}	Propagation Delay $\overline{PRE}$ to O_n	3.0	7.3	10.0			2.5	11.0	ns	2–3
t_{PHL}	Propagation Delay $\overline{CLR}$ to O_n	3.0	6.9	10.0			2.5	11.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to O_n	2.5 2.5	5.0 6.1	8.5 9.0			2.0 2.0	9.5 10.0	ns	2–3
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to O_n	1.0 1.0	3.6 3.4	6.5 6.5			1.0 1.0	7.5 7.5	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_s (H) t_s (L)	Setup Time, HIGH or LOW D_n to LE	2.0 2.0				2.5 2.5		ns	2–6
t_h (H) t_h (L)	Hold Time, HIGH or LOW D_n to LE	2.5 3.0				3.0 3.5			
t_w (H)	LE Pulse Width, HIGH	4.0				4.0		ns	2–4
t_w (L)	$\overline{PRE}$ Pulse Width, LOW	5.0				5.0		ns	2–4
t_w (L)	$\overline{CLR}$ Pulse Width, LOW	5.0				5.0		ns	2–4
t_{rec}	$\overline{PRE}$ Recovery Time	10.0				10.0		ns	2–6
t_{rec}	$\overline{CLR}$ Recovery Time	12.0				13.0		ns	2–6

National Semiconductor

54F/74F845
8-Bit Transparent Latch

General Description

The 'F845 bus interface latch is designed to eliminate the extra packages required to buffer existing latches and provide extra data width for wider address/data paths or buses carrying parity.


The 'F845 is functionally- and pin-compatible with AMD's Am29845.

Features

- TRI-STATE® outputs
- Direct replacement for AMD's Am29845


Ordering Code: See Section 5

Logic Symbols



TL/F/9601–3


IEEE/IEC



TL/F/9601–5


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9601–1

Pin Assignment for LCC



TL/F/9601–2

Unit Loading/Fan Out: See Section 2 for U.L. Definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
O_0–O_7	Data Outputs	150/40 (33.3)	−3.0 μA/24 mA (20 mA)
$\overline{OE}_1$–$\overline{OE}_3$	Output Enables	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable	1.0/1.0	20 μA/−0.6 mA
$\overline{CLR}$	Clear	1.0/1.0	20 μA/−0.6 mA
$\overline{PRE}$	Preset	1.0/1.0	20 μA/−0.6 mA

Functional Description

The 'F845 consists of eight D-type latches with TRI-STATE outputs. The flip-flops appear transparent to the data when Latch Enable (LE) is HIGH. This allows asynchronous operation as the output transition follows the data in transition.

On the LE HIGH-to-LOW transition, the data that meets the setup times is latched. Data appears on the bus when the output Enable ($\overline{OE}$) is LOW. When $\overline{OE}$ is HIGH, the bus output is in the high impedance state.

Logic Diagram

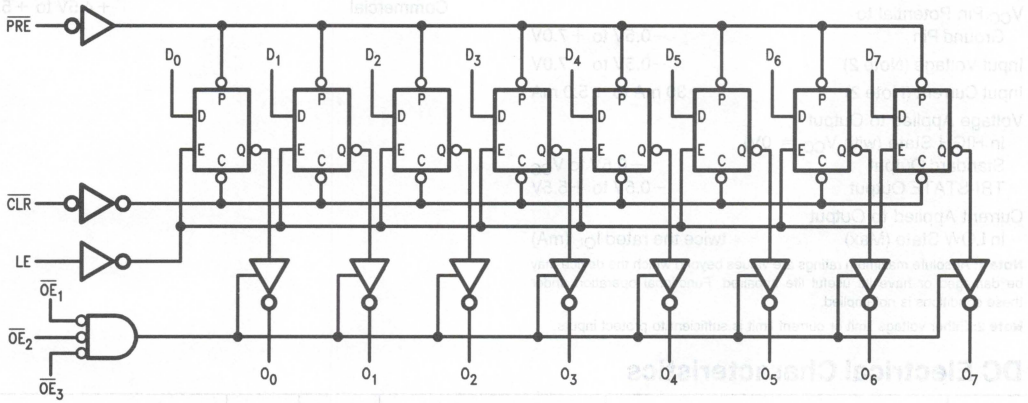

TL/F/9601–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Function Table

Inputs					Internal	Output	Function
$\overline{CLR}$	$\overline{PRE}$	$\overline{OE}$	LE	D	Q	O	
H	H	H	X	X	X	Z	High Z
H	H	H	H	L	L	Z	High Z
H	H	H	H	H	H	Z	High Z
H	H	H	L	X	NC	Z	Latched
H	H	L	H	L	L	L	Transparent
H	H	L	H	H	H	H	Transparent
H	H	L	L	X	NC	NC	Latched
H	L	L	X	X	H	H	Preset
L	H	L	X	X	L	L	Clear
L	L	L	X	X	H	H	Preset
L	H	H	L	X	L	Z	Latched
H	L	H	L	X	H	Z	Latched

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance
NC = No Change

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			63	85	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay D_n to O_n	2.5 1.5	4.8 3.6	8.0 6.5			2.0 1.5	9.0 7.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay LE to O_n	5.0 2.0	8.1 4.4	12.0 7.5			4.5 2.0	13.5 8.0	ns	2–3
t_{PLH}	Propagation Delay $\overline{PRE}$ to O_n	3.0	5.9	10.0			2.5	11.0	ns	2–3
t_{PHL}	Propagation Delay $\overline{CLR}$ to O_n	3.0	6.5	10.0			2.5	11.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to O_n	2.5 2.5	5.8 7.6	9.5 12.0			2.0 2.0	10.5 13.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to O_n	1.0 1.0	3.1 2.8	7.5 6.5			1.0 1.0	8.5 7.5	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F T_A, V_{CC} = Mil		74F T_A, V_{CC} = Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_s (H) t_s (L)	Setup Time, HIGH or LOW D_n to LE	2.0 2.0				2.5 2.5		ns	2–6
t_h (H) t_h (L)	Hold Time, HIGH or LOW D_n to LE	2.5 3.0				3.0 3.5		ns	2–6
t_w (H)	LE Pulse Width, HIGH	4.0				4.0		ns	2–4
t_w (L)	$\overline{PRE}$ Pulse Width, LOW	5.0				5.0		ns	2–4
t_w (L)	$\overline{CLR}$ Pulse Width, LOW	5.0				5.0		ns	2–4
t_{rec}	$\overline{PRE}$ Recovery Time	10.0				10.0		ns	2–6
t_{rec}	$\overline{CLR}$ Recovery Time	12.0				13.0		ns	2–6

National Semiconductor

54F/74F899
9-Bit Latchable Transceiver with Parity Generator/Checker

General Description

The 'F899 is a 9-bit to 9-bit parity transceiver with transparent latches. The device can operate as a feed-through transceiver or it can generate/check parity from the 8-bit data busses in either direction. It has a guaranteed current sinking capability of 24 mA at the A-bus and 64 mA at the B-bus.


The 'F899 features independent latch enables for the A-to-B direction and the B-to-A direction, a select pin for ODD/$\overline{\text{EVEN}}$ parity, and separate error signal output pins for checking parity.

Features

- Latchable transceiver with output sink of 24 mA at the A-bus and 64 mA at the B-bus
- Option to select generate parity and check or "feed-through" data/parity in directions A-to-B or B-to-A
- Independent latch enables for A-to-B and B-to-A directions
- Select pin for ODD/$\overline{\text{EVEN}}$ parity
- $\overline{\text{ERRA}}$ and $\overline{\text{ERRB}}$ output pins for parity checking
- Ability to simultaneously generate and check parity
- May be used in systems applications in place of the 'F543 and 'F280
- May be used in system applications in place of the 'F657 and 'F373 (no need to change T/$\overline{\text{R}}$ to check parity)
- Guaranteed 4000V min ESD protection

Ordering Code: See Section 5


Logic Symbol

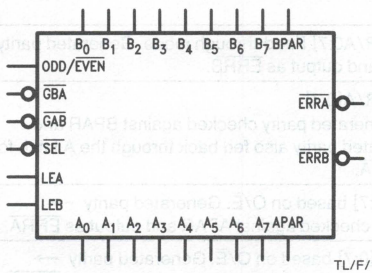

TL/F/10195–16

Connection Diagram

Pin Assignment for PCC



TL/F/10195–1

Input Loading/Fan-Out: See Section 2

Pin Names	Description	54F/74F HIGH/LOW	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0–A_7	Data Inputs/	1.0/1.0	20 μA/−0.6 mA
	Data Outputs	150/40	−3 mA/24 mA
B_0–B_7	Data Inputs/	1.0/1.0	20 μA/−0.6 mA
	Data Outputs	600/106.6	−12 mA/64 mA
APAR	A Bus Parity	1.0/1.0	20 μA/−0.6 mA
	Input/Output	150/40	−3 mA/24 mA
BPAR	B Bus Parity	1.0/1.0	20 μA/−0.6 mA
	Input/Output	600/106.6	−12 mA/64 mA
ODD/$\overline{\text{EVEN}}$	Parity Select Input	1.0/1.0	20 μA/−0.6 mA
$\overline{\text{GBA}}$, $\overline{\text{GAB}}$	Output Enable Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{\text{SEL}}$	Mode Select Input	1.0/1.0	20 μA/−0.6 mA
LEA, LEB	Latch Enable Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{\text{ERRA}}$, $\overline{\text{ERRB}}$	Error Signal Outputs	50/33.3	−1 mA/20 mA

Pin Names	Description
A_0–A_7	A Bus Data Inputs/Data Outputs
B_0–B_7	B Bus Data Inputs/Data Outputs
APAR, BPAR	A and B Bus Parity Inputs
ODD/$\overline{\text{EVEN}}$	ODD/$\overline{\text{EVEN}}$ Parity Select, Active LOW for EVEN Parity
$\overline{\text{GBA}}$, $\overline{\text{GAB}}$	Output Enables for A or B Bus, Active LOW
$\overline{\text{SEL}}$	Select Pin for Feed-Through or Generate Mode, LOW for Generate Mode
LEA, LEB	Latch Enables for A and B Latches, HIGH for Transparent Mode
$\overline{\text{ERRA}}$, $\overline{\text{ERRB}}$	Error Signals for Checking Generated Parity with Parity In, LOW if Error Occurs

Functional Description

The 'F899 has three principal modes of operation which are outlined below. These modes apply to both the A-to-B and B-to-A directions.

— Bus A (B) communicates to Bus B (A), parity is generated and passed on to the B (A) Bus as BPAR (APAR). If LEB (LEA) is HIGH and the Mode Select ($\overline{\text{SEL}}$) is LOW, the parity generated from B[0:7] (A[0:7]) can be checked and monitored by $\overline{\text{ERRB}}$ ($\overline{\text{ERRA}}$).

— Bus A (B) communicates to Bus B (A) in a feed-through mode if $\overline{\text{SEL}}$ is HIGH. Parity is still generated and checked as $\overline{\text{ERRA}}$ and $\overline{\text{ERRB}}$ in the feed-through mode (can be used as an interrupt to signal a data/parity bit error to the CPU).

— Independent Latch Enables (LEA and LEB) allow other permutations of generating/checking (see Function Table below).


Function Table

Inputs					Operation
$\overline{\text{GAB}}$	$\overline{\text{GBA}}$	$\overline{\text{SEL}}$	LEA	LEB	
H	H	X	X	X	Busses A and B are TRI-STATE®.
H	L	L	L	H	Generates parity from B[0:7] based on O/$\overline{\text{E}}$ (Note 1). Generated parity → APAR. Generated parity checked against BPAR and output as $\overline{\text{ERRB}}$.
H	L	L	H	H	Generates parity from B[0:7] based on O/$\overline{\text{E}}$. Generated parity → APAR. Generated parity checked against BPAR and output as $\overline{\text{ERRB}}$. Generated parity also fed back through the A latch for generate/check as $\overline{\text{ERRA}}$.
H	L	L	X	L	Generates parity from B latch data based on O/$\overline{\text{E}}$. Generated parity → APAR. Generated parity checked against latched BPAR and output as $\overline{\text{ERRB}}$.
H	L	H	X	H	BPAR/B[0:7] → APAR/A0:7] Feed-through mode. Generated parity checked against BPAR and output as $\overline{\text{ERRB}}$.
H	L	H	H	H	BPAR/B[0:7] → APAR/A[0:7] Feed-through mode. Generated parity checked against BPAR and output as $\overline{\text{ERRB}}$. Generated parity also fed back through the A latch for generate/check as $\overline{\text{ERRA}}$.
L	H	L	H	L	Generates parity for A[0:7] based on O/$\overline{\text{E}}$. Generated parity → BPAR. Generated parity checked against APAR and output as $\overline{\text{ERRA}}$.
L	H	L	H	H	Generates parity from A[0:7] based on O/$\overline{\text{E}}$. Generated parity → BPAR. Generated parity checked against APAR and output as $\overline{\text{ERRA}}$. Generated parity also fed back through the B latch for generate/check as $\overline{\text{ERRB}}$.
L	H	L	L	X	Generates parity from A latch data based on O/$\overline{\text{E}}$. Generated parity → BPAR. Generated parity checked against latched APAR and output as $\overline{\text{ERRA}}$.
L	H	H	H	L	APAR/A[0:7] → BPAR/B[0:7] Feed-through mode. Generated parity checked against APAR and output as $\overline{\text{ERRA}}$.
L	H	H	H	H	APAR/A[0:7] → BPAR/B[0:7] Feed-through mode. Generated parity checked against APAR and output as $\overline{\text{ERRA}}$. Generated parity also fed back through the B latch for generate/check as $\overline{\text{ERRB}}$.

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial


Note 1: O/$\overline{\text{E}}$ = ODD/$\overline{\text{EVEN}}$

Functional Block Diagram

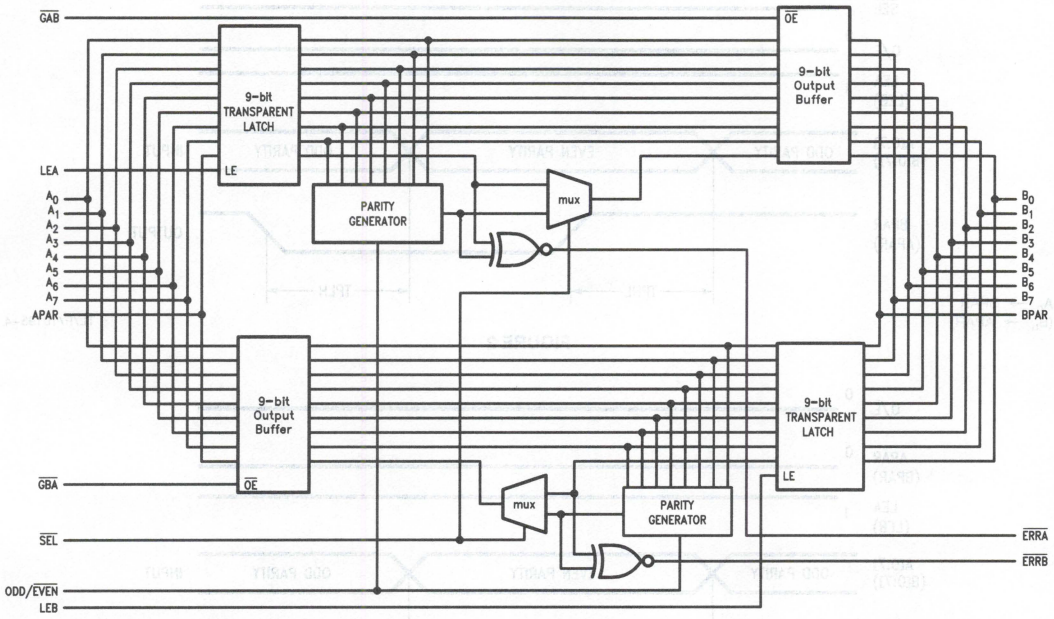

TL/F/10195–2

AC Path

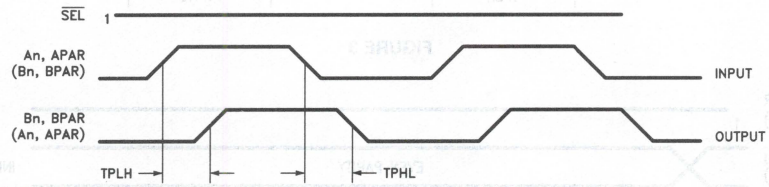


A_n, APAR → B_n, BPAR
(B_n, BPAR → A_n, APAR)

TL/F/10195–3


FIGURE 1

AC Path (Continued)

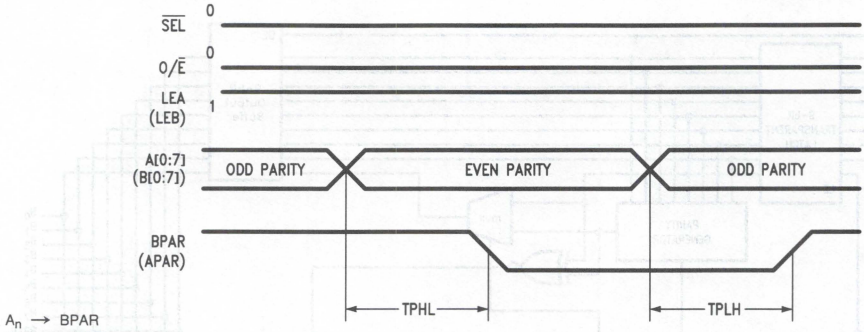


TL/F/10195–4

FIGURE 2

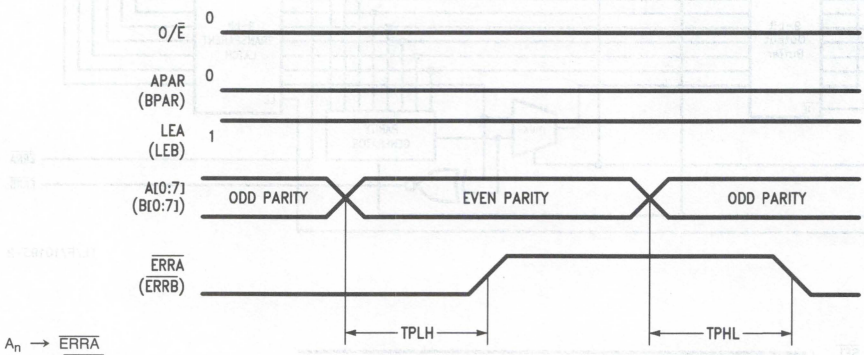

TL/F/10195–5


FIGURE 3

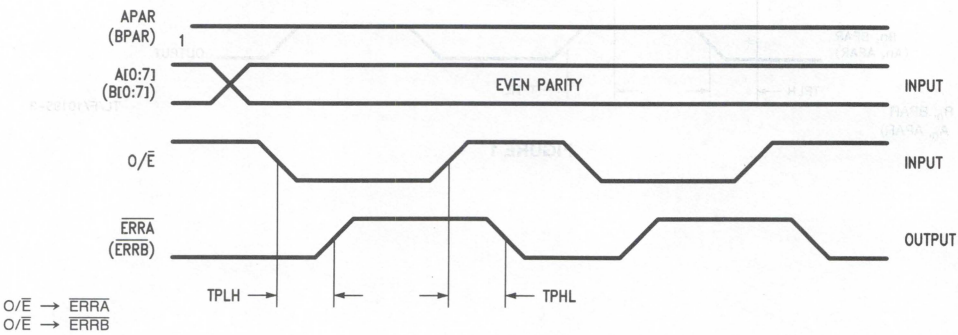

TL/F/10195–6


FIGURE 4

AC Path (Continued)

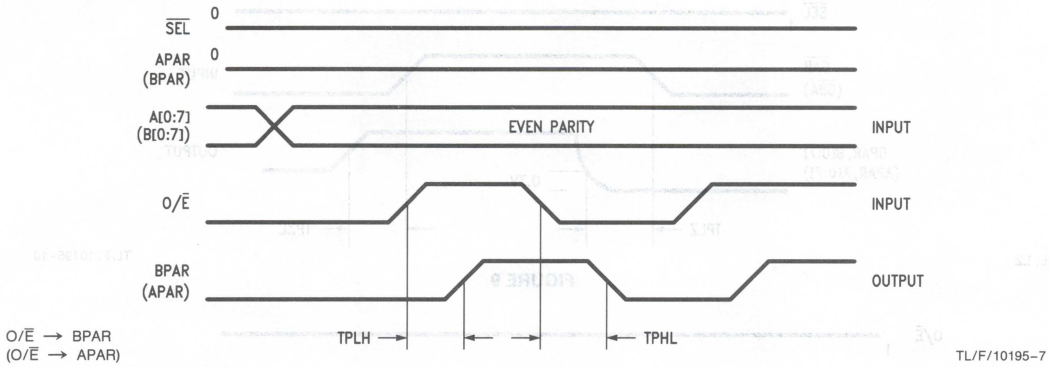


TL/F/10195–7

FIGURE 5

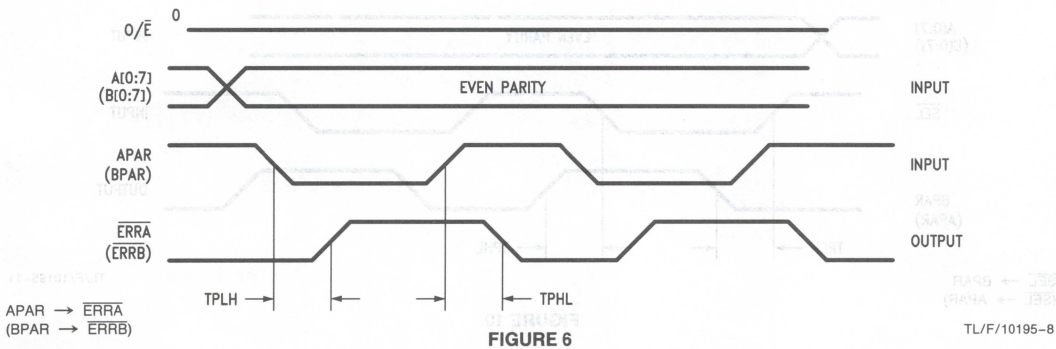


TL/F/10195–8

FIGURE 6

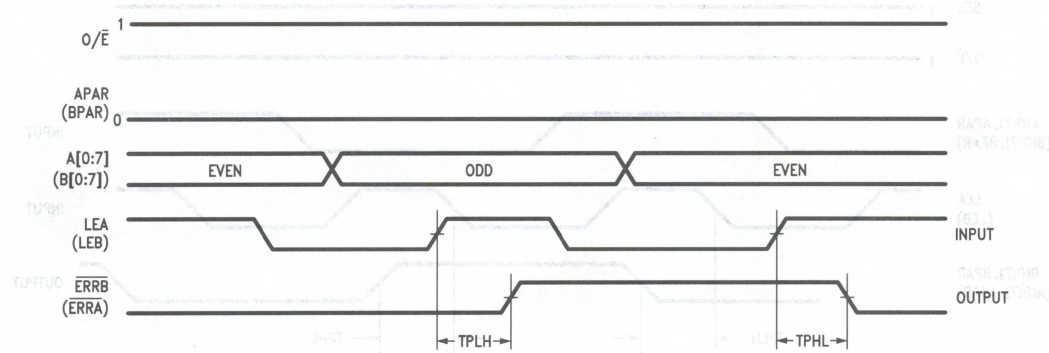

TL/F/10195–18

FIGURE 7

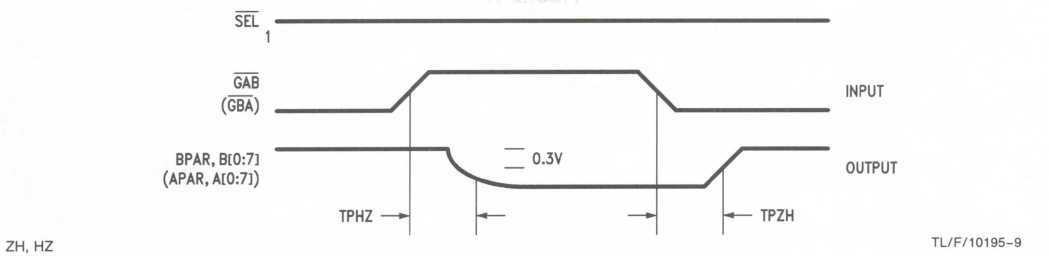


ZH, HZ

TL/F/10195–9

FIGURE 8


AC Path (Continued)

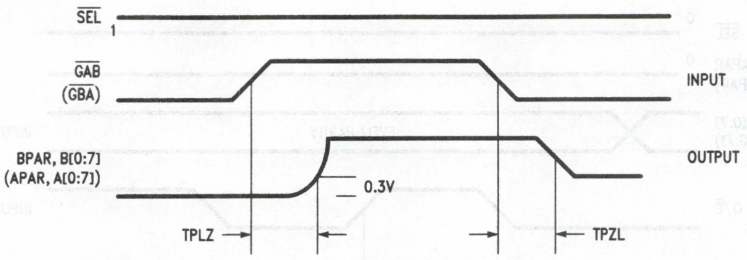

ZL, LZ

TL/F/10195–10


FIGURE 9

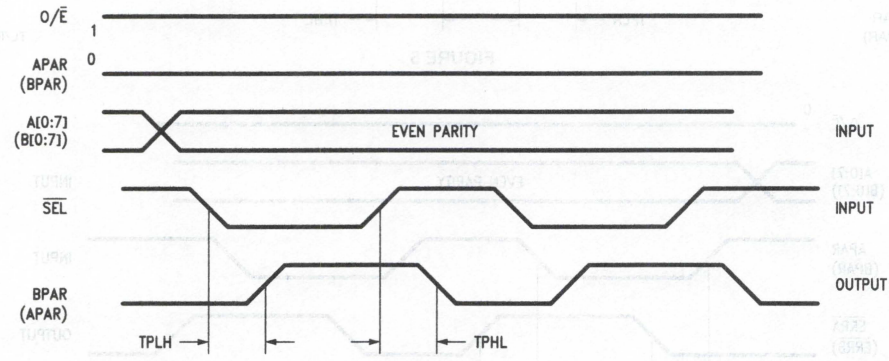

SEL → BPAR
(SEL → APAR)

TL/F/10195–11

FIGURE 10

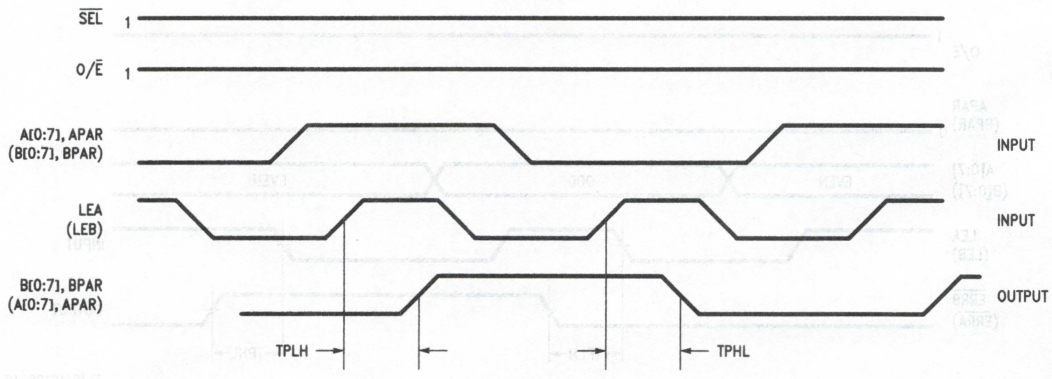


LEA → BPAR, B[0:7]
(LEB → APAR, A[0:7])

TL/F/10195–12

FIGURE 11


AC Path (Continued)

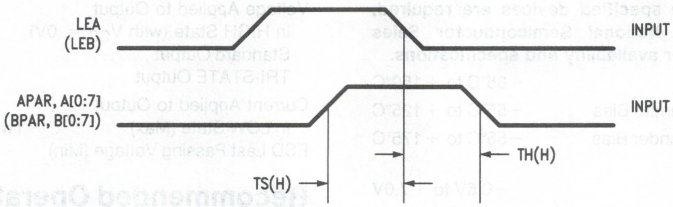

TS(H), TH(H)
LEA → APAR, A[0:7]
(LEB → BPAR, B[0:7])

TL/F/10195–13


FIGURE 12

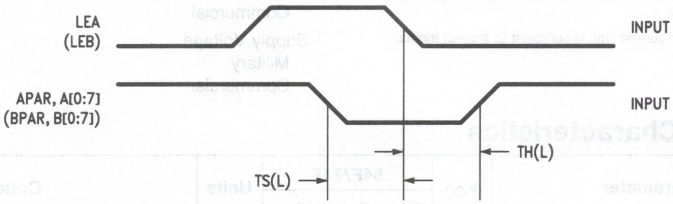

TS(L), TH(L)
LEA → APAR, A[0:7]
(LEB → BPAR, B[0:7])

TL/F/10195–14

FIGURE 13

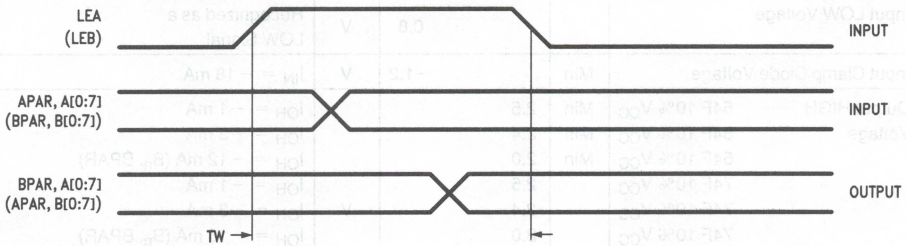

TL/F/10195–17

FIGURE 14

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	Twice the Rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		V_{CC}	54F/74F Min	54F/74F Typ	54F/74F Max	Units	Conditions
V_{IH}	Input HIGH Voltage			2.0			V	Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage					0.8	V	Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage		Min			−1.2	V	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	Min	2.5			V	I_{OH} = −1 mA
		54F 10% V_{CC}	Min	2.4				I_{OH} = −3 mA
		54F 10% V_{CC}	Min	2.0				I_{OH} = −12 mA (B_n, BPAR)
		74F 10% V_{CC}		2.5				I_{OH} = −1 mA
		74F 10% V_{CC}		2.4				I_{OH} = −3 mA
		74F 10% V_{CC}		2.0				I_{OH} = −15 mA (B_n, BPAR)
		74F 5% V_{CC}		2.7				I_{OH} = −1 mA
		74F 5% V_{CC}		2.7				I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}	Min			0.5	V	I_{OL} = 20 mA (A_n, APAR, $\overline{ERRA}$, $\overline{ERRB}$)
		54F 10% V_{CC}	Min			0.55		I_{OL} = 48 mA (B_n, BPAR)
		74F 10% V_{CC}				0.5		I_{OL} = 20 mA (A_n, APAR, $\overline{ERRA}$, $\overline{ERRB}$)
		74F 5% V_{CC}				0.5		I_{OL} = 24 mA (A_n, APAR, $\overline{ERRA}$, $\overline{ERRB}$)
		74F 10% V_{CC}				0.55		I_{OL} = 64 mA (B_n, BPAR)
V_{TH}	Input Threshold Voltage				1.45		V	±0.1V, Sweep Edge Rate must be > 1V/50 ns
V_{OLV}	Negative Ground Bounce Voltage				1.0		V	Observed on "quiet" output during simultaneous switching of remaining outputs
V_{OLP}	Positive Ground Bounce Voltage				1.0		V	Observed on "quiet" output during simultaneous switching of remaining outputs
I_{IL}	Input Low Current		Max			−0.6	mA	V_{IN} = 0.5V
I_{IH}	Input HIGH Current	54F			20.0		μA Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100		μA Max	V_{IN} = 7.0V (ODD/$\overline{EVEN}$, $\overline{GBA}$, $\overline{GAB}$, $\overline{SEL}$, LEA, LEB)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F			1.0		mA Max	V_{IN} = 5.5V (A_n, B_n, A_{PAR}, B_{PAR})
		74F			0.5			

DC Electrical Characteristics (Continued)

Symbol	Parameter		V_{CC}	54F/74F			Units	Conditions
				Min	Typ	Max		
I_{CEX}	Output HIGH Leakage Current	54F 74F			250 50	μA	Max	$V_{OUT} = V_{CC}$
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	$I_{ID} = 1.9$ μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	$V_{IOD} = 150$ mV All Other Pins Grounded
I_{IL}	Input Low Current		Max			−0.6	mA	$V_{IN} = 0.5V$
I_{IH}^+ I_{OZH}	Output Leakage Current Current		Max			70	μA	$V_{I/O} = 2.7V$ (A_n, B_n, APAR, BPAR)
I_{IL}^+ I_{OZL}	Output Leakage Current		Max			−650	μA	$V_{I/O} = 0.5V$ (A_n, B_n, APAR, BPAR)
I_{OS}	Output Short-Circuit Current		Max Max	−60 −100		−150 −225	mA	$V_{OUT} = 0V$ (A_n, APAR, $\overline{ERRA}$, $\overline{ERRB}$) $V_{OUT} = 0V$ (B_n, BPAR)
I_{ZZ}	Bus Drainage Test		0.0V			500	μA	$V_{OUT} = 5.25V$
I_{CCH}	Power Supply Current		Max		132	155	mA	V_O = HIGH
I_{CCL}	Power Supply Current		Max		178	210	mA	V_O = LOW, GAB = LOW, GBA = HIGH, V_{IL} = LOW
I_{CCZ}	Power Supply Current		Max		160	190	mA	V_O = HIGH Z

AC Electrical Characteristics

Symbol	Parameter	54F/74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F T_A, V_{CC} = Mil $C_L = 50$ pF		74F T_A, V_{CC} = Com $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n, APAR to B_n, BPAR	4.0 4.0	7.5 8.5	13.0 13.0			4.0 4.0	14.0 14.0	ns	899-1
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n to BPAR, APAR	7.5 7.5	12.0 12.5	17.0 17.0			7.5 7.5	18.0 18.0	ns	899-2
t_{PLH} t_{PHL}	Propagation Delay A_n, B_n to $\overline{ERRA}$, $\overline{ERRB}$	7.5 7.5	12.0 12.5	17.0 17.0			7.5 7.5	18.0 18.0	ns	899-3
t_{PLH} t_{PHL}	Propagation Delay ODD/$\overline{EVEN}$ to $\overline{ERRA}$, $\overline{ERRB}$	4.5 4.5	7.5 8.0	11.0 11.0			4.5 4.5	12.0 12.0	ns	899-4
t_{PLH} t_{PHL}	Propagation Delay ODD/$\overline{EVEN}$ to APAR, BPAR	4.5 4.5	7.5 8.5	11.5 11.5			4.5 4.5	12.5 12.5	ns	899-5
t_{PLH} t_{PHL}	Propagation Delay APAR, BPAR to $\overline{ERRA}$, $\overline{ERRB}$	5.5 5.5	9.0 9.5	13.0 13.0			5.5 5.5	14.0 14.0	ns	899-6
t_{PLH} t_{PHL}	LEA/LEB to $\overline{ERRA}$/$\overline{ERRB}$	9.5 9.7	13.0	17.5 17.5			7.5 7.5	18.0 18.0	ns	899-7

AC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay $\overline{SEL}$ to APAR, BPAR	3.0 3.0	6.0 7.0	10.0 10.0			3.0 3.0	11.0 11.0	ns	899-10
t_{PLH} t_{PHL}	Propagation Delay LEB to A_n, APAR	3.5 3.5	7.0 8.0	10.0 10.0			3.5 3.5	11.0 11.0	ns	899-11
t_{PLH} t_{PHL}	Propagation Delay LEA to B_n, BPAR	3.5 3.5	6.5 7.5	10.0 10.0			3.5 3.5	11.0 11.0	ns	899-11
t_{PZH} t_{PZL}	Output Enable Time $\overline{GBA}$ or $\overline{GAB}$ to A_n, APAR or B_n, BPAR	1.0 1.0	4.5 6.5	10.0 10.0			1.0 1.0	11.0 11.0	ns	899-8, 9
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{GBA}$ or $\overline{GAB}$ to A_n, APAR or B_n, BPAR	1.0 1.0	4.0 4.0	7.0 7.0			1.0 1.0	8.0 8.0	ns	899-8, 9
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A_n, B_n to LEA, LEB	5.0 5.0	1.6 1.8				5.0 5.0		ns	899-12, 13
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A_n, B_n to LEA, LEB	0 0	−1.7 −1.5				0 0		ns	899-12, 13
t_w	Pulse Width for LEA, LEB	6.0	2.0				6.0		ns	899-14

National Semiconductor

54F/74F968
1 Mbit Dynamic RAM Controller

General Description


The 'F968 is a high performance memory controller, replacing many SSI and MSI devices by grouping several unique functions. It provides two 10-bit address latches and two 10-bit counters for row and column address generation during refresh. A 2-bit bank select latch for row and column address generation during refresh and a 2-bit bank select latch for the two high order address bits are provided to select one of the four RAS and CAS outputs.

Features

- Provides control for 16k, 64k, 256k or 1 Mbit DRAM systems
- Outputs directly drive up to 88 DRAMs
- Chip select for easy expansion
- Provides memory refresh with error correction mode
- 52-pin plastic leaded chip carrier

Ordering Code: See Section 5


Logic Symbol

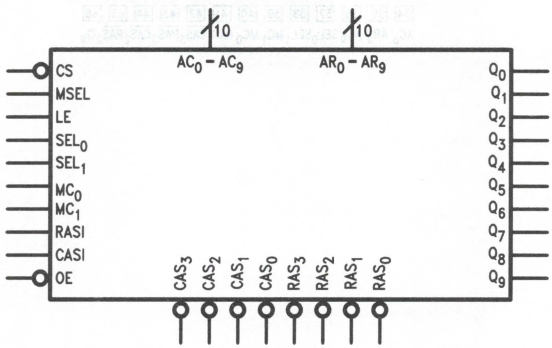

TL/F/9604–1

Connection Diagram

Pin Assignment for PCC

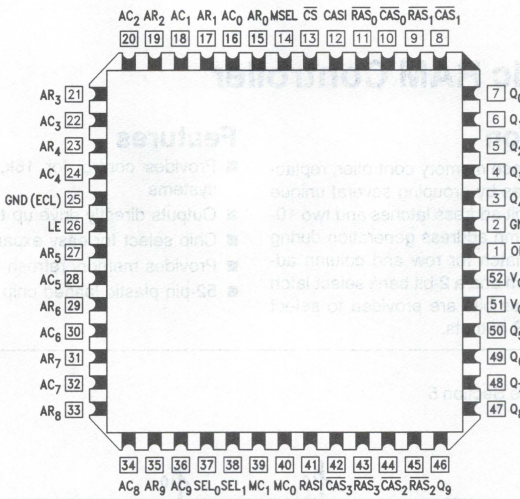

TL/F/9604-3

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
AC_0-AC_9	Column Address Inputs	1.0/1.0	20 μA/−0.6 mA
AR_0-AR_9	Row Address Inputs	1.0/1.0	20 μA/−0.6 mA
MC_0, MC_1	Mode Control Inputs	1.0/1.0	20 μA/−0.6 mA
$\overline{CS}$	Chip Select Input	1.0/1.0	20 μA/−0.6 mA
MSEL	Multiplexer Select Input	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable Input	1.0/1.0	20 μA/−0.6 mA
SEL_0, SEL_1	Bank Select Inputs	1.0/1.0	20 μA/−0.6 mA
RASI	Row Address Strobe In	1.0/1.0	20 μA/−0.6 mA
CASI	Column Address Strobe In	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	Output Enable	1.0/1.0	20 μA/−0.6 mA
$\overline{RAS}_0-\overline{RAS}_3$	Row Address Strobe Outputs	150/1.667	−3 mA/1.0 mA
$\overline{CAS}_0-\overline{CAS}_3$	Column Address Strobe Outputs	150/1.667	−3 mA/1.0 mA
Q_0-Q_9	Address Outputs	150/1.667	−3 mA/1.0 mA

Pin Description

Name	I/O	Description
AR_0-AR_9 AC_0-AC_9	I	**Address Inputs.** AR_0-AR_9 are latched in as the 10-bit Row Address for the RAM. These inputs drive Q_0-Q_9 when the 'F968 is in the Read/Write mode and MSEL is LOW. AC_0-AC_9 are latched in as the Column Address, and will drive Q_0-Q_9 when MSEL is HIGH and the 'F968 is in the Read/Write mode. The addresses are latched with the Latch Enable (LE) signal.
SEL_0-SEL_1	I	**Bank Select.** These two inputs are normally the two higher order address bits, and are used in the Read/Write mode to select which bank of memory will be receiving the $\overline{RAS}_n$ and $\overline{CAS}_n$ signals after RASI and CASI go HIGH.
LE	I	**Latch Enable.** This active-HIGH input causes the Row, Column and Bank Select latches to become transparent, allowing the latches to accept new input data. A LOW input on LE latches the input data, assuming it meets the setup and hold time requirements.
MSEL	I	**Multiplexer Select.** This input determines whether the Row or Column Address will be sent to the memory address inputs. When MSEL is HIGH the Column Address is selected, while the Row Address is selected when MSEL is LOW. The address may come from either the address latch or refresh address counter depending on MC_0, MC_1.
$\overline{CS}$	I	**Chip Select.** This active-LOW input is used to enable the 'F968. When $\overline{CS}$ is active, the 'F968 operates normally in all four modes. When $\overline{CS}$ goes HIGH, the device will not enter the Read/Write mode. This allows other devices to access the same memory that the 'F968 is controlling (e.g., DMA controller).
$\overline{OE}$	I	**Output Enable.** This active-LOW input enables/disables the output signals. When $\overline{OE}$ is HIGH, the outputs of the 'F968 enter the high impedance state. The $\overline{OE}$ signal allows more than one 'F968 to control the same memory, thus providing an easy method to expand the memory size.
MC_0, MC_1	I	**Mode Control.** These inputs are used to specify which of the four operating modes the 'F968 should be using. The description of the four operating modes is given in the Mode Control Function Table.
Q_0-Q_9	O	**Address Outputs.** These address outputs will feed the DRAM address inputs and provide drive for memory systems up to 500 pF in capacitance.
RASI	I	**Row Address Strobe Input.** During normal memory cycles, the decoded $\overline{RAS}_n$ output ($\overline{RAS}_0$, $\overline{RAS}_1$, $\overline{RAS}_2$ or $\overline{RAS}_3$) is forced LOW after receipt of RASI. In either refresh mode, all four $\overline{RAS}_n$ outputs will go LOW following RASI going HIGH.
$\overline{RAS}_0-\overline{RAS}_3$	O	**Row Address Strobe.** Each one of the Row Address Strobe outputs provides a $\overline{RAS}_n$ signal to one of the four banks of dynamic memory. Each will go LOW only when selected by SEL_0 and SEL_1 and only after RASI goes HIGH. All four go LOW in response to RASI in either of the Refresh modes.
CASI	I	**Column Address Strobe Input.** This input going active will cause the selected $\overline{CAS}_n$ output to be forced LOW.
$\overline{CAS}_0-\overline{CAS}_3$	O	**Column Address Strobe.** During normal Read/Write cycles the two select bits (SEL_0, SEL_1) determine which $\overline{CAS}_n$ output will go active following CASI going HIGH. When memory error correction is performed, only the $\overline{CAS}_n$ signal selected by $CNTR_0$ and $CNTR_1$ will be active. For non-error correction cycles, all four $\overline{CAS}_n$ outputs remain HIGH.

Functional Description

The 74F968 is a 1 Mbit DRAM controller which is functionally equivalent to AMD's Am29368. The 74F968 provides row/column address multiplexing, refresh address generation and bank selection for up to four banks of RAMs.

Twenty-two (22) address bits (AR_0–AR_9, AC_0–AC_9 and bank select addresses SEL_0 and SEL_1) are presented to the controller. These addresses are latched by a 22-bit latch. A 22-bit counter generates the refresh address.

A 10-bit multiplexer selects the output address between the input row address, column address, refresh counter row address, column address, or zero (clear). Four RAS and four CAS outputs select the appropriate bank of RAMs and strobe in the row and column addresses.

It should be noted that the counters are cleared (MC_0, MC_1 = 1, 1) on the next RASI transition, but the Q outputs are asynchronously cleared through the multiplexer.

Mode Control Function Table

MC_1	MC_0	Operating Mode
L	L	**Refresh without Error Correction—** Refresh cycles are performed with only the Row Counter being used to generate addresses. In this mode, all four $\overline{RAS}_n$ outputs are active while the four $\overline{CAS}_n$ signals are kept HIGH.
L	H	**Refresh with Error Correction/Initialize—** During this mode, refresh cycles are done with both the Row and Column counters generating the addresses. MSEL is used to select between the Row and Column counter. All four $\overline{RAS}_n$ outputs go active in response to RASI, while only one $\overline{CAS}_n$ output goes LOW in response to CASI. The Bank Counter keeps track of which $\overline{CAS}_n$ output will go active. This mode of operation is possible when supported by an error detection/correction circuit such as the 'F632.
H	L	**Read/Write—** This mode is used to perform Read/Write cycles. Both the Row and Column addresses are latched and multiplexed to the address output lines using MSEL; SEL_0 and SEL_1 are decoded to determine which $\overline{RAS}_n$ and $\overline{CAS}_n$ will be active.
H	H	**Clear Refresh Counter—** This mode will clear the three refresh counters (Row, Column and Bank) on the HIGH-to-LOW transition of RASI, putting them at the start of the refresh sequence. In this mode, all four $\overline{RAS}_n$ outputs are driven LOW upon receipt of RASI so that DRAM wake-up cycles are performed. This mode also asynchronously clears the Q_n outputs.

H = HIGH Voltage Level
L = LOW Voltage Level

Address Output Function Table

$\overline{CS}$	MC_1	MC_0	MSEL	Mode	MUX Output
L	L	L	X	Refresh without Error Correction	Row Counter Address
	L	H	H	Refresh with Error Correction	Column Counter Address
			L		Row Counter Address
	H	L	H	Read/Write	Column Address Latch
			L		Row Address Latch
	H	H	X	Clear Refresh Counter	Zero
H	L	L	X	Refresh without Error Correction	Row Counter Address
	L	H	H	Refresh with Error Correction	Column Counter Address
			L		Row Counter Address
	H	L	X	Read/Write	Zero
	H	H	X	Clear Refresh Counter	Zero

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial


$\overline{RAS}$ Output Function Table

RASI	$\overline{CS}$	MC_1	MC_0	SEL_1	SEL_0	Mode	$\overline{RAS}_0$	$\overline{RAS}_1$	$\overline{RAS}_2$	$\overline{RAS}_3$
L	X	X	X	X	X	Non-Refresh	H	H	H	H
H	L	L	L	X	X	Refresh without Error Correction	L	L	L	L
		L	H	X	X	Refresh with Error Correction	L	L	L	L
		H	L	L	L	Read/Write	L	H	H	H
				L	H		H	L	H	H
				H	L		H	H	L	H
				H	H		H	H	H	L
		H	H	X	X	Clear Refresh Counter	L	L	L	L
	H	L	L	X	X	Refresh without Error Correction	L	L	L	L
		L	H			Refresh with Error Correction	L	L	L	L
		H	L			Read/Write	H	H	H	H
		H	H			Clear Refresh Counter	L	L	L	L

$\overline{CAS}$ Output Function Table

Inputs				Internal Counter		Inputs		Outputs			
CASI	$\overline{CS}$	MC_1	MC_0	$CNTR_1$	$CNTR_0$	SEL_1	SEL_0	$\overline{CAS}_0$	$\overline{CAS}_1$	$\overline{CAS}_2$	$\overline{CAS}_3$
H	L	L	L	X	X	X	X	H	H	H	H
		L	H	L	L	X	X	L	H	H	H
				L	H			H	L	H	H
				H	L			H	H	L	H
				H	H			H	H	H	L
		H	L	X	X	L	L	L	H	H	H
						L	H	H	L	H	H
						H	L	H	H	L	H
						H	H	H	H	H	L
		H	H	X	X	X	X	H	H	H	H
	H	L	L	X	X	X	X	H	H	H	H
		L	H	L	L	X	X	L	H	H	H
				L	H			H	L	H	H
				H	L			H	H	L	H
				H	H			H	H	H	L
		H	L	X	X	X	X	H	H	H	H
		H	H								
L	X	X	X	X	X	X	X	H	H	H	H

Block Diagram

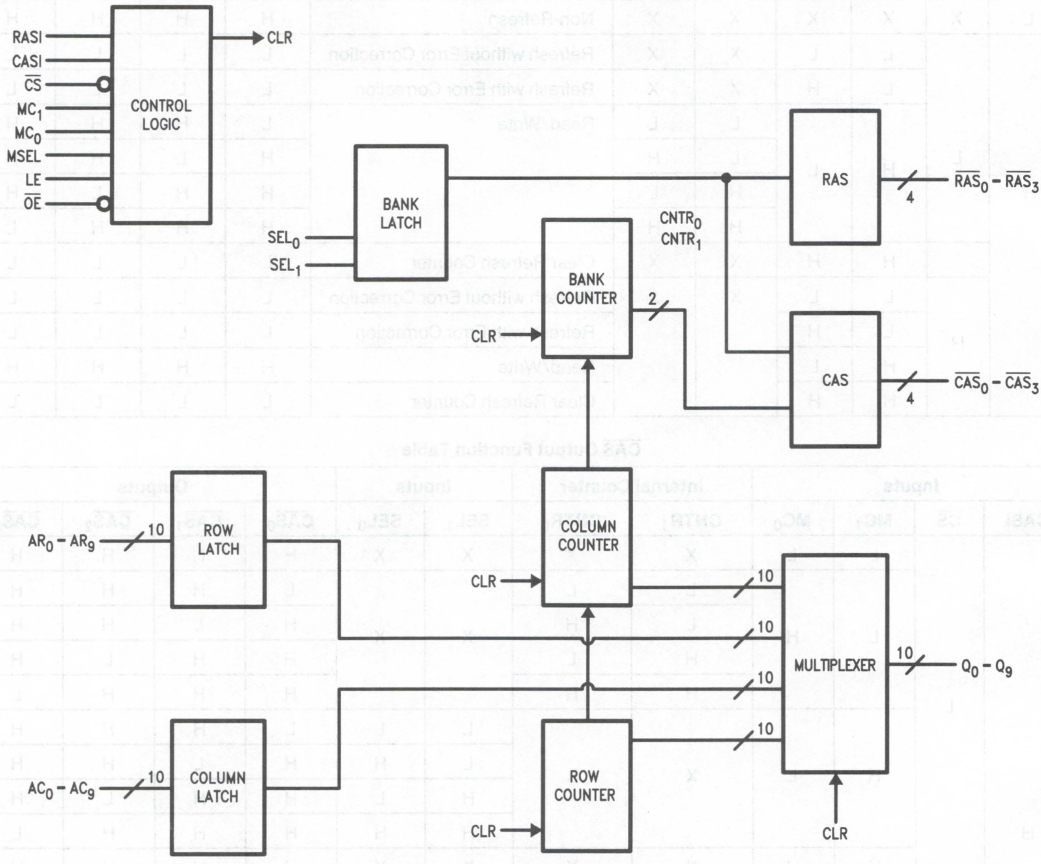

Memory Cycle Timing

The relationship between the 'F968 specifications and system timing requirements is shown in *Figures 1–6*. T1, T2 and T3 represent the minimum timing requirements at the 'F968 inputs to guarantee that the RAM timing requirements are met and that maximum system performance is achieved.

The minimum requirement for T1, T2 and T3 are as follows:


T1 Min = $t_{ASR} + t_{skew}$

T2 Min = $t_{RAH} + t_{skew}$

T3 Min = T2 + $t_{skew} + t_{ASC}$.


See RAM data sheet for applicable values for t_{RAH}, t_{ASC} and t_{ASR}.

Memory Cycle Timing (Continued)

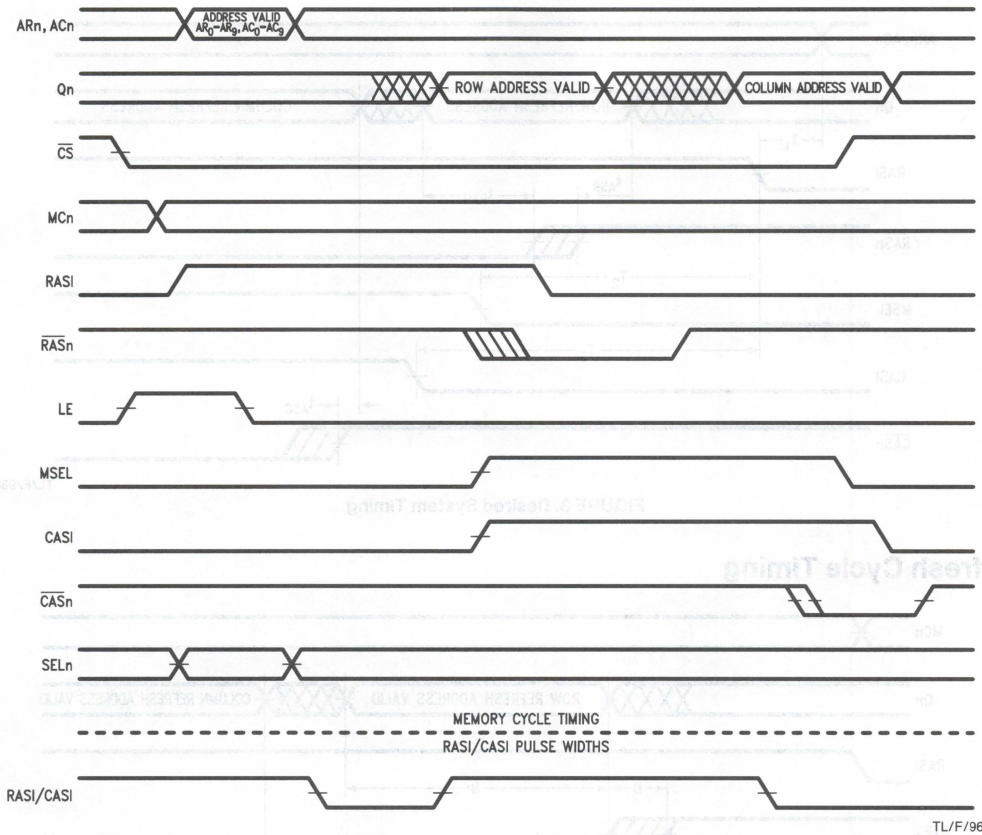

TL/F/9604–5

FIGURE 1. Dynamic Memory Controller Timing

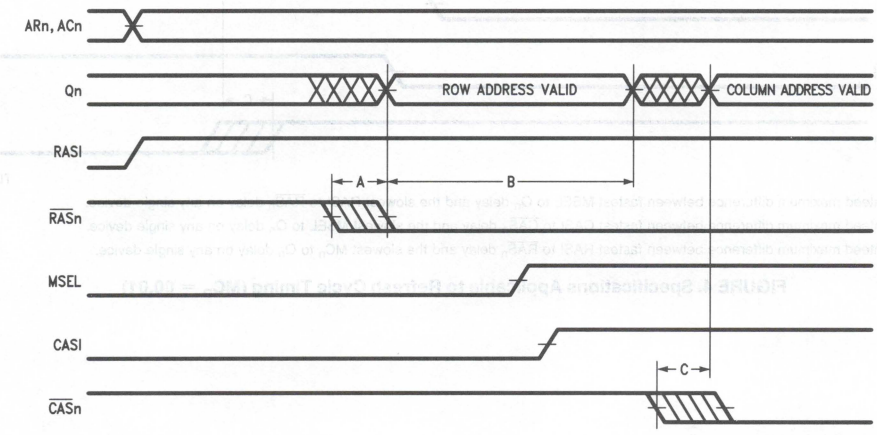


TL/F/9604–6

Note A: Guaranteed maximum difference between fastest RASI to $\overline{RAS}_n$ delay and the slowest A_n to Q_n delay on any single device.
Note B: Guaranteed maximum difference between fastest MSEL to Q_n delay and the slowest RASI to $\overline{RAS}_n$ delay on any single device.
Note C: Guaranteed maximum difference between fastest CASI to $\overline{CAS}_n$ delay and the slowest MSEL to Q_n delay on any single device.

FIGURE 2. Specifications Applicable to Memory Cycle Timing (MC_n = 1,0)


Memory Cycle Timing (Continued)

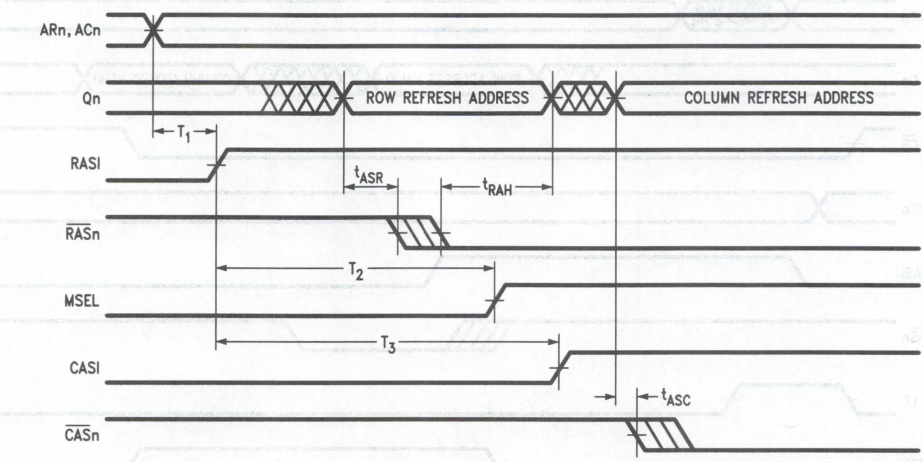

TL/F/9604–7

FIGURE 3. Desired System Timing

Refresh Cycle Timing

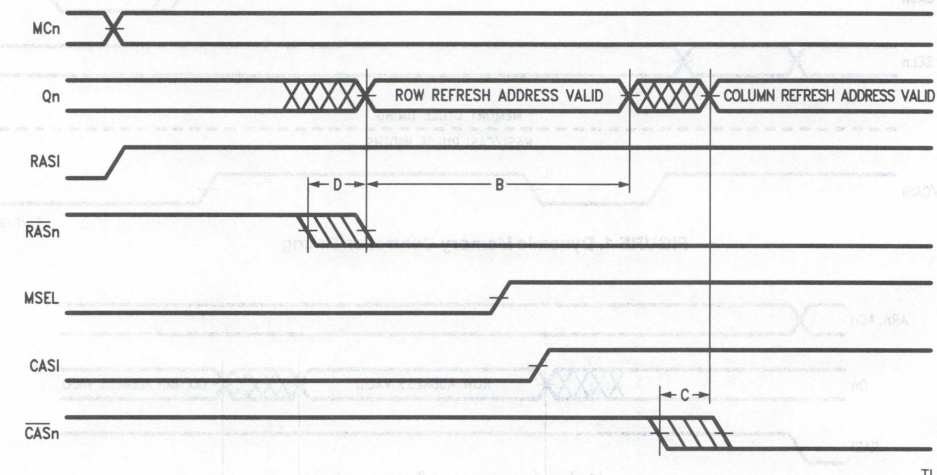


TL/F/9604–8

Note B: Guaranteed maximum difference between fastest MSEL to Q_n delay and the slowest RASI to $\overline{RAS}_n$ delay on any single device.
Note C: Guaranteed maximum difference between fastest CASI to $\overline{CAS}_n$ delay and the slowest MSEL to Q_n delay on any single device.
Note D: Guaranteed maximum difference between fastest RASI to $\overline{RAS}_n$ delay and the slowest MC_n to Q_n delay on any single device.


FIGURE 4. Specifications Applicable to Refresh Cycle Timing (MC_n = 00,01)

Refresh Cycle Timing (Continued)

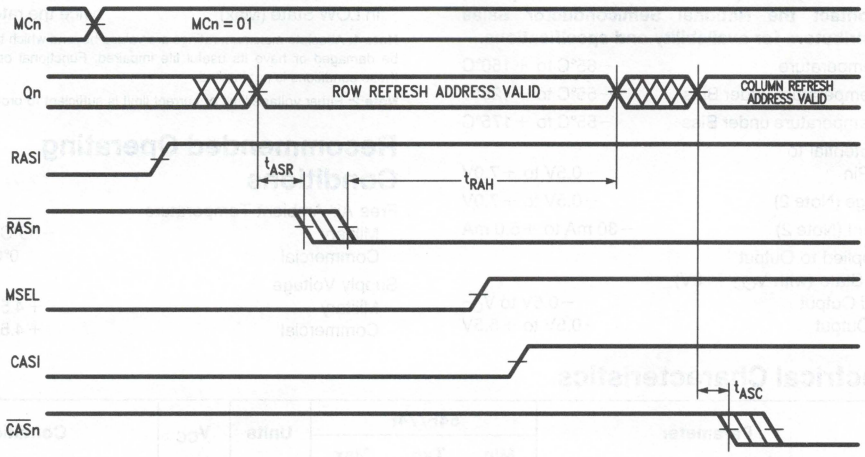

TL/F/9604–9

FIGURE 5. Designed Timing—Refresh with Error Correction

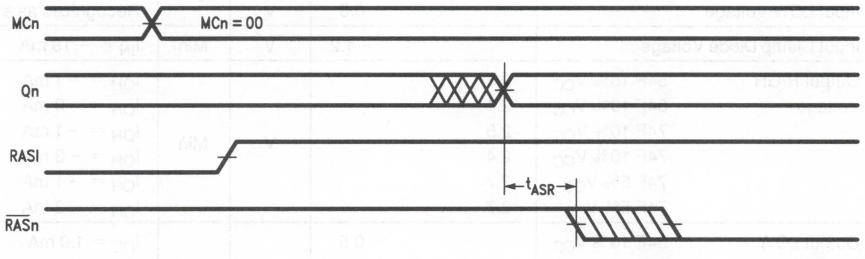

TL/F/9604–10

FIGURE 6. Desired Timing—Refresh without Error Correction

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
3-State Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 1.0 mA
		54F 10% V_{CC}			0.8			I_{OL} = 12 mA
		74F 10% V_{CC}			0.5			I_{OL} = 1.0 mA
		74F 10% V_{CC}			0.8			I_{OL} = 12 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Buss Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current				300	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				300	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current				300	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F								Units	Fig. No.
		$T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			$T_A, V_{CC} = Com$ $C_L = 50\ pF$		$T_A, V_{CC} = Com$ $C_L = 500\ pF$*				
		Min	Typ	Max	Min	Max	Min	Typ	Max		
t_{PLH}	Propagation Delay	3.0	7.0	11.0	2.5	12.0		19.0		ns	2–3
t_{PHL}	AR to Q_n	3.0	7.0	11.0	2.5	12.0		22.0			
t_{PLH}	Propagation Delay	3.0	7.0	11.0	2.5	12.0		19.0		ns	2–3
t_{PHL}	AC to Q_n	3.0	7.0	11.0	2.5	12.0		22.0			
t_{PLH}	Propagation Delay	3.5	8.0	12.0	3.0	13.0		23.0		ns	2–3
t_{PHL}	RASI to $\overline{RAS}_n$	3.5	7.0	12.0	3.0	13.0		20.0			
t_{PLH}	Propagation Delay	1.0	6.0	8.0	1.0	8.5		19.0		ns	2–3
t_{PHL}	CASI to $\overline{CAS}_n$	1.0	4.0	8.0	1.0	8.5		17.0			
t_{PLH}	Propagation Delay	3.0	9.0	13.0	2.5	14.0		24.0		ns	2–3
t_{PHL}	MSEL to Q_n	3.0	8.0	13.0	2.5	14.0		21.0			
t_{PLH}	Propagation Delay	4.0	10.0	15.0	3.5	16.0		25.0		ns	2–3
t_{PHL}	MC_n to Q_n	4.0	9.0	15.0	3.5	16.0		22.0			
t_{PLH}	Propagation Delay	3.5	11.0	17.5	3.0	18.5		24.0		ns	2–3
t_{PHL}	MC_n to $\overline{RAS}_n$	3.5	8.0	17.5	3.0	18.5		22.0			
t_{PLH}	Propagation Delay	4.0	8.0	12.5	3.5	13.5		23.0		ns	2–3
t_{PHL}	MC_n to $\overline{CAS}_n$	4.0	9.0	12.5	3.5	13.5		21.0			
t_{PLH}	Propagation Delay	4.0	10.0	15.0	3.5	16.0		25.0		ns	2–3
t_{PHL}	LE to $\overline{RAS}_n$	4.0	9.0	15.0	3.5	16.0		24.0			
t_{PLH}	Propagation Delay	5.0	9.0	13.5	4.5	14.5		24.0		ns	2–3
t_{PHL}	LE to $\overline{CAS}_n$	5.0	9.0	13.5	4.5	14.5		24.0			
t_{PLH}	Propagation Delay	3.5	8.0	12.0	3.0	13.0		23.0		ns	2–3
t_{PHL}	LE to Q_n	3.5	7.0	12.0	3.0	13.0		22.0			
t_{PLH}	Propagation Delay	3.0	10.0	14.5	3.0	15.5		25.0		ns	2–3
t_{PHL}	$\overline{CS}$ to Q_n	3.0	8.0	14.5	3.0	15.5		23.0			
t_{PLH}	Propagation Delay	3.5	8.0	13.0	3.0	14.0		23.0		ns	2–3
t_{PHL}	$\overline{CS}$ to $\overline{RAS}_n$	3.5	8.0	13.0	3.0	14.0		23.0			
t_{PLH}	Propagation Delay	4.0	8.0	11.5	3.5	12.5		23.0		ns	2–3
t_{PHL}	$\overline{CS}$ to $\overline{CAS}_n$	4.0	8.0	11.5	3.5	12.5		23.0			
t_{PLH}	Propagation Delay	4.0	9.0	15.5	3.5	16.0		24.0		ns	2–3
t_{PHL}	SEL_n to $\overline{RAS}_n$	4.0	8.0	15.5	3.5	16.0		23.0			
t_{PLH}	Propagation Delay	4.5	9.0	14.5	4.0	15.5		24.0		ns	2–3
t_{PHL}	SEL_n to $\overline{CAS}_n$	4.5	9.0	14.5	4.0	15.5		24.0			

*These values are given for typical derivative with a 500 pF load; these are not guaranteed specifications.

AC Electrical Characteristics (Continued): See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F					Units	Fig. No.
		$T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50\ pF$			$T_A, V_{CC} = Com$, $C_L = 50\ pF$			
		Min	Typ	Max	Min	Max		
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to Q_n	1.0 1.0	5.0 4.0	9.5 9.5	1.0 1.0	10.0 10.0	ns	2–5
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to Q_n	1.0 1.0	5.0 6.0	9.5 9.5	1.0 1.0	10.0 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to $\overline{RAS}_n$	1.0 1.0	5.0 4.0	9.5 9.5	1.0 1.0	10.0 10.0	ns	2–5
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to $\overline{RAS}_n$	1.0 1.0	5.0 6.0	9.5 9.5	1.0 1.0	10.0 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OE}$ to $\overline{CAS}_n$	1.0 1.0	5.0 4.0	9.5 9.5	1.0 1.0	10.0 10.0	ns	2–5
t_{PZH} t_{PZL}	Output Enable Time $\overline{OE}$ to $\overline{CAS}_n$	1.0 1.0	5.0 6.0	9.5 9.5	1.0 1.0	10.0 10.0	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F				Units	Fig. No.
		$T_A = +25°C$, $V_{CC} = +5.0V$		$T_A, V_{CC} = Com$			
		Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A_n to LE	5.0 5.0		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A_n to LE	5.0 5.0		5.0 5.0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW SEL to LE	5.0 5.0		5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW SEL to LE	5.0 5.0		5.0 5.0		ns	2–6
$t_w(H)$ $t_w(L)$	Pulse Width, HIGH or LOW $\overline{CAS}_n$, $\overline{RAS}_n$	15.0 15.0		15.0 15.0		ns	2–4
t_{skew}	Q_n to $\overline{CAS}_n$, $\overline{RAS}_n$	10.0		10.0		ns	

National Semiconductor

54F/74F2241•54F/74F2244 Octal Buffers/Line Drivers with 25Ω Series Resistors in Outputs

General Description

The 'F2241 and 'F2244 are octal buffers and line drivers designed to drive the capacitive inputs of MOS memory drivers, address drivers, clock drivers and bus-oriented transmitters/receivers.

The 25Ω series resistors in the outputs reduce ringing and eliminate the need for external resistors.

Features


- TRI-STATE® outputs drive bus lines or buffer memory address registers
- 12 mA source current
- 25Ω series resistors in outputs eliminate the need for external resistors.
- Designed to drive the capacitive inputs of MOS devices
- Guaranteed 4000V minimum ESD protection

Ordering Code: See Section 5

Connection Diagrams


'F2241

Pin Assignment for LCC




TL/F/9499–1

Pin Assignment for DIP, SOIC and Flatpak




TL/F/9499–2

'F2244




TL/F/9499–3



TL/F/9499–4


Logic Symbols

IEEE/IEC
'F2241

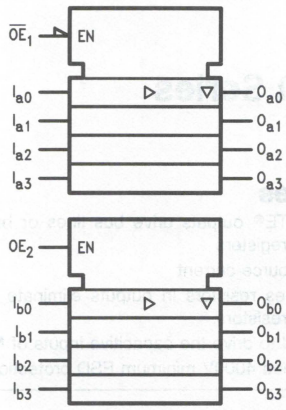

TL/F/9499–5

IEEE/IEC
'F2244

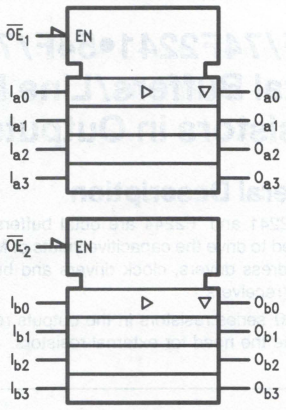

TL/F/9499–6

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}_1$, $\overline{OE}_2$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.667	20 μA/−1 mA
OE_2	TRI-STATE Output Enable Input (Active HIGH)	1.0/1.667	20 μA/−1 mA
I_{an}, I_{bn}	Inputs	1.0/2.667*	20 μA/−1.6 mA
O_{an},O_{bn}	Outputs	750/20	−15 mA/12 mA

*Worst-case 'F2241, 'F2244 disabled

Truth Tables

'F2241

$\overline{OE}_1$	I_{an}	O_{an}	OE_2	I_{bn}	O_{bn}
H	X	Z	L	X	Z
L	H	H	H	H	H
L	L	L	H	L	L

'F2244

$\overline{OE}_1$	I_{an}	O_{an}	$\overline{OE}_2$	I_{bn}	O_{bn}
H	X	Z	H	X	Z
L	H	H	L	H	H
L	L	L	L	L	L

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage				0.50	V	Min	I_{OL} = 1 mA
					0.75			I_{OL} = 12 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All other pins grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All other pins grounded
I_{IL}	Input LOW Current				−1.0	mA	Max	V_{IN} = 0.5V ($\overline{OE}_1$, $\overline{OE}_2$, OE_2)
					−1.6			V_{IN} = 0.5V (I_n)
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{CCH}	Power Supply Current			40	60	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current			60	90	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current			60	90	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	1.5		7.0	2.0	6.5	1.5	7.0	ns	2–3
t_{PHL}	Data to Output	2.5		8.0	2.0	7.0	2.0	8.0		
t_{PZH}	Output Enable Time	1.5		9.0	2.0	7.0	1.0	9.5	ns	2–5
t_{PZL}		2.5		11.5	2.0	8.5	2.5	12.0		
t_{PHZ}	Output Disable Time	1.5		9.0	2.0	7.0	1.0	9.5		
t_{PLZ}		1.5		8.5	2.0	7.5	1.5	9.5		

National Semiconductor

54F/74F2243
Quad Bus Transceiver with 25Ω Series Resistors in the Outputs

General Description

The 'F2243 is a quad bus transmitter/receiver which can be used for 4-line asynchronous 2-way data communications between data busses. It is designed to drive the capacitive inputs of MOS memory drivers, address drivers, clock drivers, and bus-oriented transmitters/receivers.


The 25Ω series resistors in the outputs reduce ringing and eliminate the need for external resistors.

Features

- 25Ω series resistors in outputs eliminate the need for external resistors
- 2-Way asynchronous data bus communication
- TRI-STATE® outputs
- 12 mA source current
- Designed to drive the capacitive inputs of MOS devices
- Guaranteed 4000V minimum ESD protection


Ordering Code: See Section 5

Logic Symbol



TL/F/9530–1

Connection Diagram



TL/F/9530–2

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{E}_1$	Enable Input (Active LOW)	1.0/1.67	20 μA/−1 mA
E_2	Enable Input (Active HIGH)	1.0/1.67	20 μA/−1 mA
A_n, B_n	Inputs	3.5/2.67	70 μA/−1.6 mA
	Outputs	750/20	−15 mA/12 mA

Truth Table

Inputs		Inputs/Outputs	
$\overline{E}_1$	E_2	A_n	B_n
L	L	Input	B = A
L	H	N/A	N/A
H	L	Z	Z
H	H	A = B	Input

H = HIGH Voltage Level
L = LOW Voltage Level
Z = High Impedance
N/A = Not Allowed

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter	54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage	2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage			0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage			−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage 54F 10% V_{CC}	2.4			V	Min	I_{OH} = −3 mA (A_n, B_n)
	54F 10% V_{CC}	2.0					I_{OH} = −12 mA (A_n, B_n)
	74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n)
	74F 10% V_{CC}	2.0					I_{OH} = −15 mA (A_n, B_n)
	74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n, B_n)
V_{OL}	Output LOW Voltage			0.50	V	Min	I_{OL} = 1 mA (A_n, B_n)
				0.75			I_{OL} = 12 mA (A_n, B_n)
I_{IH}	Input HIGH Current			20	μA	Max	V_{IN} = 2.7V ($\overline{E}_1$, $\overline{E}_2$)
I_{BVI}	Input HIGH Current Breakdown Test			100	μA	Max	V_{IN} = 7.0V ($\overline{E}_1$, E_2)
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)			1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n)
I_{IL}	Input LOW Current			−1.0	mA	Max	V_{IN} = 0.5V ($\overline{E}_1$, E_2)
I_{IH} + I_{OZH}	Output Leakage Current			70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current			−1.6	mA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current	−100		−225	mA	Max	V_{OUT} = 0V (A_n, B_n)
I_{CEX}	Output HIGH Leakage Current			250	μA	Max	V_{OUT} = V_{CC}
I_{CCH}	Power Supply Current		64	80	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current		64	90	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current		71	90	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A_n to B_n, B_n to A_n	1.5 2.5		7.0 8.0	1.5 2.0	7.0 8.0	1.5 2.0	7.0 8.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{E}_1$ to B_n, E_2 to A_n	1.5 2.5		9.0 11.5	1.0 2.5	9.5 12.0	1.0 2.5	9.5 12.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{E}_1$ to B_n, E_2 to A_n	1.5 1.5		9.0 8.5	1.0 1.5	9.5 9.5	1.0 1.5	9.5 9.5		

National Semiconductor

54F/74F2620 • 54F/74F2623
Inverting Octal Bus Transceiver with 25Ω Series Resistors in the Outputs

General Description


These devices are octal bus transceivers designed for asynchronous two-way data flow between the A and B busses. These devices are functionally equivalent to the 'F620 and 'F623. The 25Ω series resistors in the outputs reduce ringing and eliminate the need for external resistors. Both busses are capable of sinking 12 mA, sourcing 15 mA, and have TRI-STATE outputs. Dual enable pins (GAB, $\overline{GBA}$) allow data transmission from the A bus to the B bus or from the B bus to the A bus. The 'F2620 is an inverting option of the 'F2623.

Features

- 25Ω series resistors in the outputs eliminate the need for external resistors.
- Designed for asynchronous two-way data flow between busses
- Outputs sink 12 mA and source 15 mA
- Dual enable inputs control direction of data flow
- Guaranteed 4000V minimum ESD protection
- 'F2620 is an inverting option of the 'F2623

Ordering Code: See Section 5

Logic Symbol




TL/F/10628–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{GBA}$, GAB	Enable Inputs	1.0/1.0	20 μA/−0.6 mA
A_0–A_7	A Inputs or	3.5/0.667	70 μA/−0.4 mA
	TRI-STATE Outputs	750/20	−15 mA/12 mA
B_0–B_7	B Inputs or	3.5/0.667	70 μA/−0.4 mA
	TRI-STATE Outputs	750/20	−15 mA/12 mA


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/10628–2

Pin Assignment for LCC



TL/F/10628–3

Functional Description

The enable inputs GAB and $\overline{G}$BA control whether data is transmitted from the A bus to the B bus or from the B bus to the A bus. If both $\overline{G}$BA and GAB are disabled ($\overline{G}$BA HIGH and GAB low), the outputs are in the high impedance state and data is stored at the A and B busses. When $\overline{G}$BA is active (LOW), B data is sent to the A bus. When GAB is active (HIGH), data from the A bus is sent to the B bus. If both enable inputs are active ($\overline{G}$BA LOW and GAB HIGH) B data is sent to the A bus while A data is sent to the B bus.


Function Table

Enable Inputs		Operation	
$\overline{G}$BA	GAB	'2620	'2623
L	L	$\overline{B}$ Data to A Bus	B Data to A Bus
H	H	$\overline{A}$ Data to B Bus	A Data to B Bus
H	L	Z	Z
L	H	$\overline{B}$ Data to A Bus, $\overline{A}$ Data to B Bus	B Data to A Bus, A Data to B Bus

H = HIGH Voltage Level
L = LOW Voltage Level
Z = High Impedance

Logic Diagram


'F2620

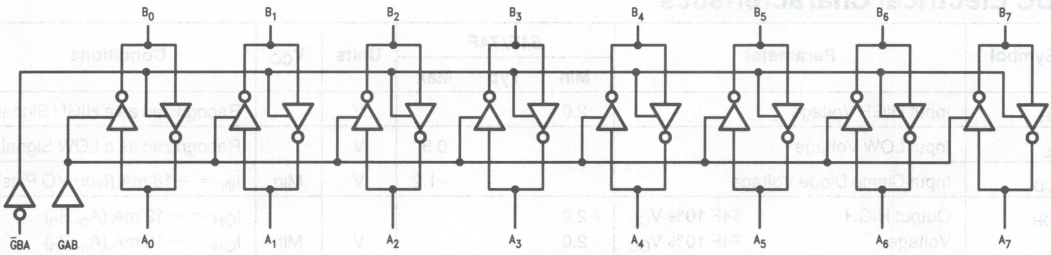

TL/F/10628–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

'F2623

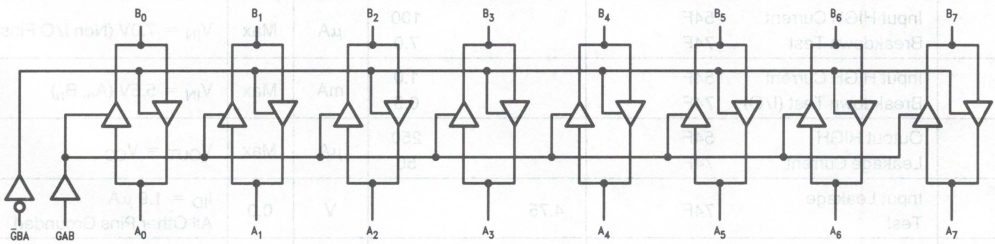

TL/F/10628–5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V


DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA (Non I/O Pins)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.0			V	Min	I_{OH} = −12 mA (A_n, B_n)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (A_n, B_n)
V_{OL}	Output LOW Voltage				0.5	V	Min	I_{OL} = 1.0 mA (A_n, B_n)
					0.75			I_{OL} = 12 mA (A_n, B_n)
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V (Non I/O Pins)
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V (Non I/O Pins)
		74F			7.0			
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)	54F			1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n)
		74F			0.5			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Non I/O Pins)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current ('F2620)				82	mA	Max	V_O = HIGH, V_{IN} = 0.2V
I_{CCL}	Power Supply Current ('F2620)				82	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F2620)				95	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F2623)				82	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F2623)				82	mA	Max	V_O = LOW, V_{IN} = 0.2V
I_{CCZ}	Power Supply Current ('F2623)				95	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F T_A, V_{CC} = Mil, $C_L = 50$ pF		74F T_A, V_{CC} = Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A Input to B Output ('F2620)	2.5 3.0		7.5 8.0			2.0 3.0	8.0 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay B Input to A Output ('F2620)	2.5 3.0		7.5 8.0			2.0 3.0	8.0 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay A Input to B Output ('F2623)	1.5 2.5		6.5 7.5			1.5 2.5	7.5 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay B Input to A Output ('F2623)	1.5 2.5		6.5 7.5			1.5 2.5	7.5 8.0	ns	2–3
t_{PZH} t_{PZL}	Enable Time $\overline{G}$BA Input to A Output	2.0 2.5		7.0 8.0			2.0 2.0	8.0 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{G}$BA Input to A Output	1.5 1.0		6.5 5.5			1.5 1.0	7.5 5.5		
t_{PZH} t_{PZL}	Enable Time GAB Input to B Output ('F2620)	2.0 3.0		7.5 8.0			2.0 2.0	8.5 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time GAB Input to B Output ('F2620)	2.5 2.0		8.0 7.5			2.0 2.0	9.0 8.0		
t_{PZH} t_{PZL}	Enable Time GAB Input to B Output ('F2623)	2.0 2.5		7.5 8.0			2.0 2.0	8.5 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time GAB Input to B Output ('F2623)	2.0 2.0		8.0 8.0			2.0 2.0	9.0 8.0		

Basic FAST Circuit Showing Series Resistor Placement

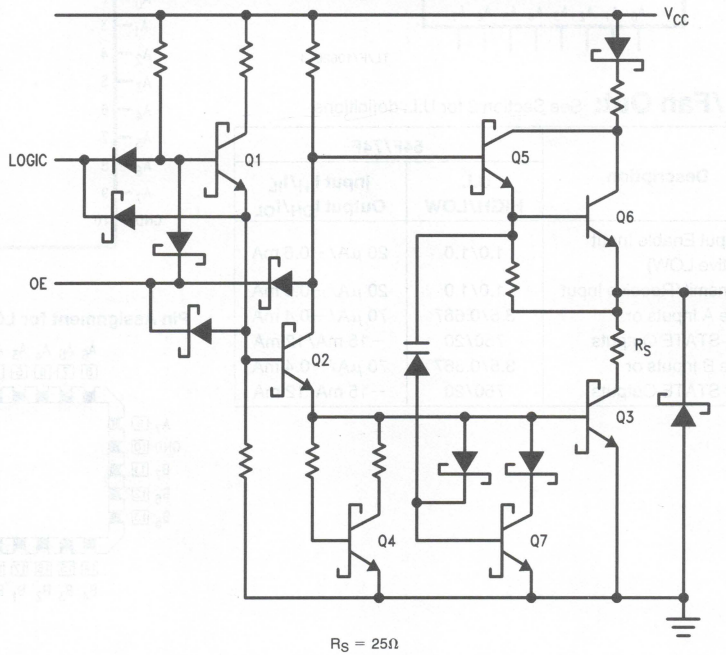

$R_S = 25\Omega$

TL/F/10628–6

National Semiconductor

54F/74F2640 • 54F/74F2643 • 54F/74F2645
Octal Bus Transceiver with 25Ω Series Resistors in the Outputs

General Description


These devices are octal bus transceivers designed for asynchronous two-way data flow between the A and B busses. These devices are functionally equivalent to the 'F640, 'F643, and 'F645. The 25Ω series resistors in the outputs reduce ringing and eliminate the need for external resistors. Both busses are capable of sinking 12 mA, sourcing 15 mA, have TRI-STATE outputs, and a common output enable pin. The direction of data flow is determined by the transmit/receive (T/$\overline{R}$) input. The 'F2640 is an inverting version of the 'F2645. The 'F2643 has a noninverting A bus and an inverting B bus. The 'F2645 is a low power version of the 'F245 with 25Ω series resistors in the outputs.

Features

- 25Ω series resistors in the outputs eliminates the need for external resistors
- Designed for asynchronous two-way data flow between busses
- Outputs sink 12 mA and source 15 mA
- Transmit/receive (T/$\overline{R}$) input controls the direction of data flow
- Guaranteed 4000V minimum ESD protection
- 'F2645 is a low power version of the 'F245 with 25Ω series resistors in the outputs
- 'F2640 is an inverting option of the 'F2645
- 'F2643 has noninverting A bus and inverting B bus

Ordering Code: See Section 5

Logic Symbol




TL/F/10629–1

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OE}$	Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
T/$\overline{R}$	Transmit/Receive Input	1.0/1.0	20 μA/−0.6 mA
A_0–A_7	Side A Inputs or TRI-STATE Outputs	3.5/0.667 750/20	70 μA/−0.4 mA −15 mA/12 mA
B_0–B_7	Side B Inputs or TRI-STATE Outputs	3.5/0.667 750/20	70 μA/−0.4 mA −15 mA/12 mA


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/10629–2

Pin Assignment for LCC and PCC



TL/F/10629–3

Functional Description

The output enable ($\overline{OE}$) is active LOW. If the device is disabled ($\overline{OE}$ HIGH), the outputs are in the high impedance state. The transmit/receive input (T/$\overline{R}$) controls whether data is transmitted from the A bus to the B bus or from the B bus to the A bus. When T/$\overline{R}$ is LOW, B data is sent to the A bus. If T/$\overline{R}$ is HIGH, A data is sent to the B bus.


Function Table

Inputs		Outputs		
$\overline{OE}$	T/$\overline{R}$	'F2640	'F2643	'F2645
L	L	Bus $\overline{B}$ data to Bus A	Bus B data to Bus A	Bus B data to Bus A
L	H	Bus $\overline{A}$ data to Bus B	Bus $\overline{A}$ data to Bus B	Bus A data to Bus B
H	X	Z	Z	Z

H = High voltage level
L = Low voltage level
X = Don't care
Z = High-impedance state


Logic Diagrams

'F2640

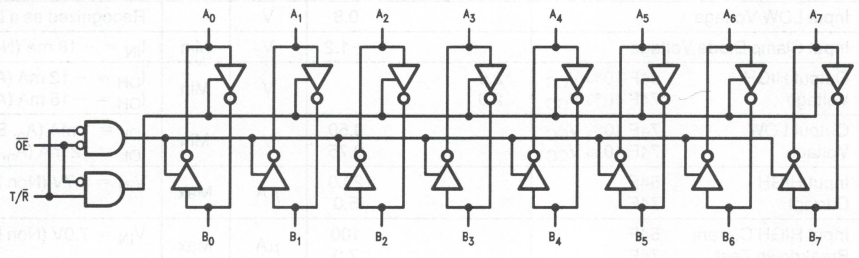


TL/F/10629–4

'F2643

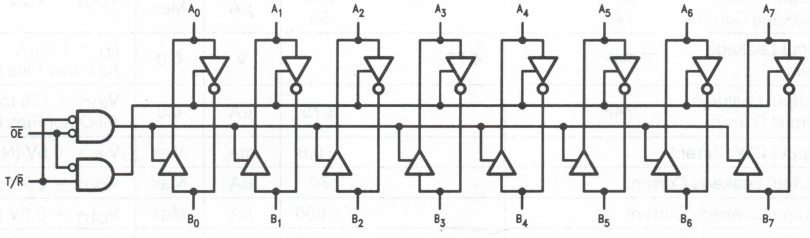

TL/F/10629–5

'F2645

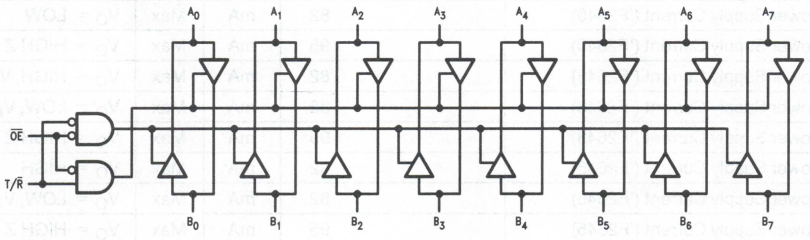

TL/F/10629–6

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA (Non I/O Pins)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC} 74F 10% V_{CC}	2.0 2.0			V	Min	I_{OH} = −12 mA (A_n, B_n) I_{OH} = −15 mA (A_n, B_n)
V_{OL}	Output LOW Voltage	74F 10% V_{CC} 74F 10% V_{CC}			0.50 0.75	V	Min	I_{OL} = 1 mA (A_n, B_n) I_{OL} = 12 mA (A_n, B_n)
I_{IH}	Input HIGH Current	54F 74F			20.0 5.0	μA	Max	V_{IN} = 2.7V (Non I/O Pins)
I_{BVI}	Input HIGH Current Breakdown Test	54F 74F			100 7.0	μA	Max	V_{IN} = 7.0V (Non I/O Pins)
I_{BVIT}	Input HIGH Current Breakdown (I/O)	54F 74F			1.0 0.5	mA	Max	V_{IN} = 5.5V (A_n, B_n)
I_{CEX}	Output HIGH Leakage Current	54F 74F			250 50	μA	Max	V_{OUT} = V_{CC}
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 150 mV All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Non I/O Pins)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−100		−225	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25
I_{CCH}	Power Supply Current ('F2640)				82	mA	Max	V_O = HIGH, V_{IN} = 0.2V
I_{CCL}	Power Supply Current ('F2640)				82	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current ('F2640)				95	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F2643)				82	mA	Max	V_O = HIGH, V_{IN} = 0.2V (A_n)
I_{CCL}	Power Supply Current ('F2643)				82	mA	Max	V_O = LOW, V_{IN} = 0.2V (B_n)
I_{CCZ}	Power Supply Current ('F2643)				95	mA	Max	V_O = HIGH Z
I_{CCH}	Power Supply Current ('F2645)				82	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current ('F2645)				82	mA	Max	V_O = LOW, V_{IN} = 0.2V
I_{CCZ}	Power Supply Current ('F2645)				95	mA	Max	V_O = HIGH Z

'F2640 AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.5		7.5			2.0	8.0	ns	2–3
t_{PHL}	A Input to B Output	2.5		7.5			2.5	7.5		
t_{PLH}	Propagation Delay	2.5		7.5			2.0	8.0	ns	2–3
t_{PHL}	B Input to A Output	2.5		7.5			2.5	7.5		
t_{PZH}	Enable Time	2.5		7.5			2.0	9.0	ns	2–5
t_{PZL}	$\overline{OE}$ Input to A Output	2.5		8.0			2.0	8.5		
t_{PHZ}	Disable Time	1.5		7.0			1.0	7.5		
t_{PLZ}	$\overline{OE}$ Input to A Output	1.5		6.0			1.5	6.0		
t_{PZH}	Enable Time	2.5		7.5			2.0	9.0	ns	2–5
t_{PZL}	$\overline{OE}$ Input to B Output	2.5		8.0			2.0	8.5		
t_{PHZ}	Disable Time	1.5		6.5			1.0	7.5		
t_{PLZ}	$\overline{OE}$ Input to B Output	1.5		6.0			1.5	6.0		


'F2643 AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH}	Propagation Delay	2.5		7.5			2.0	8.0	ns	2–3
t_{PHL}	A Input to B Output	2.5		7.5			2.5	7.5		
t_{PLH}	Propagation Delay	2.5		7.0			2.5	8.0	ns	2–3
t_{PHL}	B Input to A Output	2.5		7.5			2.5	8.0		
t_{PZH}	Enable Time	2.5		8.0			2.0	9.0	ns	2–5
t_{PZL}	$\overline{OE}$ Input to A Output	2.5		8.5			2.0	8.5		
t_{PHZ}	Disable Time	1.5		7.0			1.0	8.0		
t_{PLZ}	$\overline{OE}$ Input to A Output	1.0		5.5			1.0	5.5		
t_{PZH}	Enable Time	2.5		7.5			2.0	9.0	ns	2–5
t_{PZL}	$\overline{OE}$ Input to B Output	2.5		8.0			2.0	8.5		
t_{PHZ}	Disable Time	1.5		6.5			1.0	7.5		
t_{PLZ}	$\overline{OE}$ Input to B Output	1.5		6.0			1.5	6.0		

'F2645 AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$, $V_{CC} = +5.0V$, $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil, $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com, $C_L = 50$ pF		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay A Input to B Output	1.5 2.5		6.0 7.5			1.5 2.5	7.0 8.0	ns	2–3
t_{PLH} t_{PHL}	Propagation Delay B Input to A Output	1.5 2.5		6.0 7.5			1.5 2.5	7.0 8.0	ns	2–3
t_{PZH} t_{PZL}	Enable Time $\overline{OE}$ Input to A Output	2.5 2.5		8.0 8.5			2.0 2.0	9.0 8.5	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{OE}$ Input to A Output	1.5 1.0		7.0 5.5			1.0 1.0	8.0 5.5		
t_{PZH} t_{PZL}	Enable Time $\overline{OE}$ Input to B Output	2.5 2.5		7.5 8.5			2.0 2.5	9.5 9.0	ns	2–5
t_{PHZ} t_{PLZ}	Disable Time $\overline{OE}$ Input to B Output	1.5 1.0		6.5 6.5			1.0 1.0	7.5 6.5		

Basic FAST Circuit Showing Series Resistor Placement

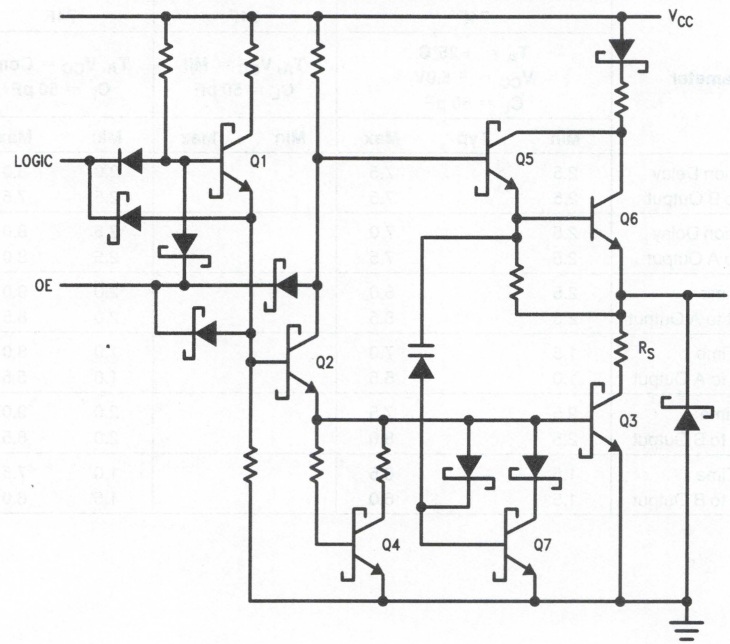

TL/F/10629–7

National Semiconductor

29F52•29F53
8-Bit Registered Transceiver

General Description

The 29F52 and 29F53 are 8-bit registered transceivers. Two 8-bit back to back registers store data flowing in both directions between two bidirectional buses. Separate clock, clock enable and TRI-STATE® output enable signals are provided for each register. The A_0–A_7 output pins are guaranteed to sink 24 mA (20 mA mil.) while the B_0–B_7 output pins are designed for 64 mA.

The 29F53 is an inverting option of the 29F52. Both transceivers are AMD Am2952/2953 functional equivalents.


Features

- 8-bit registered transceivers
- Separate clock, clock enable and TRI-STATE output enable provided for each register
- AMD Am2952/2953 functional equivalents
- Both inverting and non-inverting options available
- 24-Pin slimline package

Ordering Code: See Section 5


Logic Symbols

29F52




TL/F/9606–1

29F53




TL/F/9606–7

IEEE/IEC
29F52

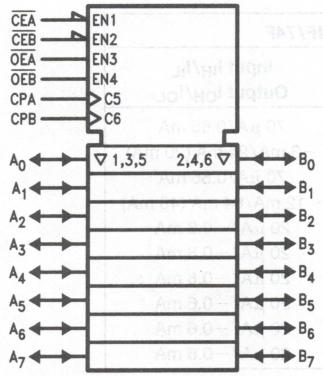

TL/F/9606–4


IEEE/IEC
29F53

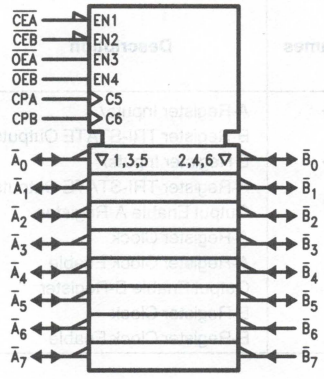

TL/F/9606–5


Connection Diagrams (Continued)

Pin Assignment for DIP, SOIC and Flatpak 29F52

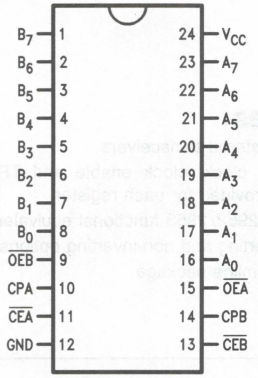


TL/F/9606–2

Pin Assignment for DIP, SOIC and Flatpak 29F53

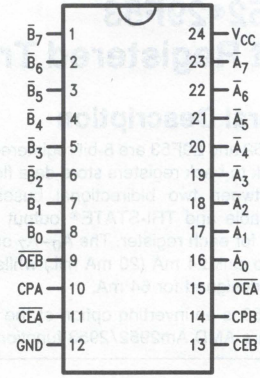


TL/F/9606–8

Pin Assignment for LCC and PCC 29F52



TL/F/9606–3

Pin Assignment for LCC and PCC 29F53




TL/F/9606–9

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
A_0-A_7	A-Register Inputs/	3.5/1.083	70 μA/0.65 mA
	B-Register TRI-STATE Outputs	150/40 (33.3)	−3 mA/24 mA (20 mA)
B_0-B_7	B Register Inputs/	3.5/1.083	70 μA/0.65 mA
	A-Register TRI-STATE Outputs	600/106.6 (80)	−12 mA/64 mA (48 mA)
$\overline{OEA}$	Output Enable A-Register	1.0/1.0	20 μA/−0.6 mA
CPA	A-Register Clock	1.0/1.0	20 μA/−0.6 mA
$\overline{CEA}$	A-Register Clock Enable	1.0/1.0	20 μA/−0.6 mA
$\overline{OEB}$	Output Enable B-Register	1.0/1.0	20 μA/−0.6 mA
CPB	B-Register Clock	1.0/1.0	20 μA/−0.6 mA
$\overline{CEB}$	B-Register Clock Enable	1.0/1.0	20 μA/−0.6 mA

Block Diagrams

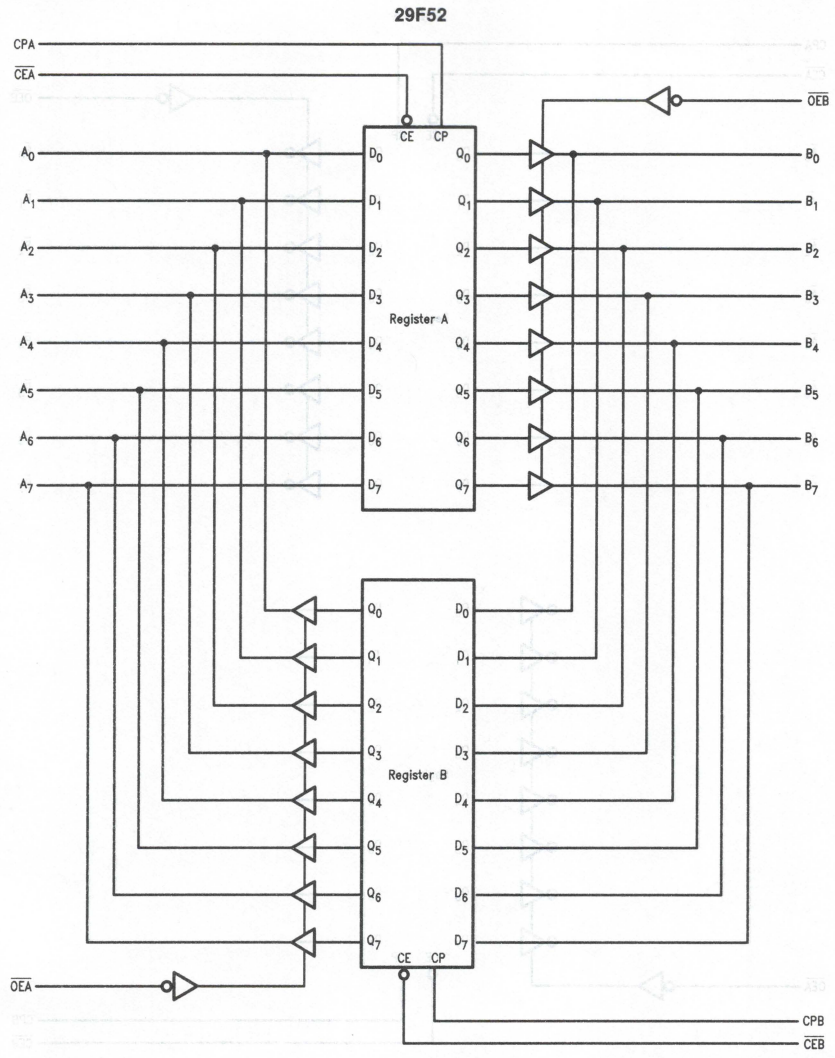

TL/F/9606–6

Block Diagrams (Continued)

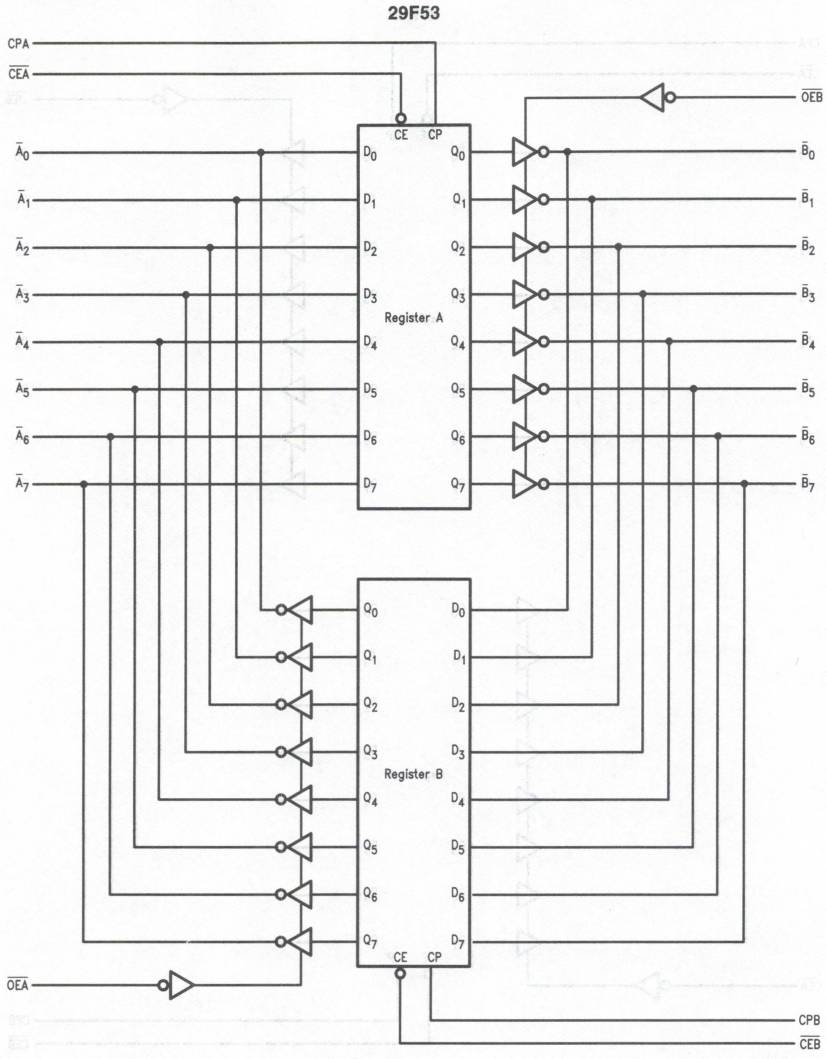

TL/F/9606–10

Output Control

OE	Internal Q	Y-Output		Function
		29F52	29F53	
H	X	Z	Z	Disable Outputs
L	L	L	H	Enable Outputs
L	H	H	L	

Register Function Table (Applies to A or B Register)

Inputs			Internal Q	Function
D	CP	CE		
X	X	H	NC	Hold Data
L	⌐	L	L	Load Data
H	⌐	L	H	

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = HIGH Impedance
⌐ = LOW-to-HIGH Transition
NC = No Change

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA (Non I/O Pins)
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA (A_n)
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n)
		54F 10% V_{CC}	2.0					I_{OH} = −12 mA (B_n)
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA (A_n)
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA (A_n, B_n)
		74F 10% V_{CC}	2.0					I_{OH} = −15 mA (B_n)
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA (A_n)
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA (A_n, B_n)
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA (A_n)
		54F 10% V_{CC}			0.55			I_{OL} = 48 mA (B_n)
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA (A_n)
		74F 10% V_{CC}			0.55			I_{OL} = 64 mA (B_n)
I_{IH}	Input HIGH Current				20	μA	Max	V_{IN} = 2.7V (Non-I/O Pins)
I_{BVI}	Input HIGH Current Breakdown Test				100	μA	Max	V_{IN} = 7.0V (Non-I/O Pins)
I_{BVIT}	Input HIGH Current Breakdown Test (I/O)				1.0	mA	Max	V_{IN} = 5.5V (A_n, B_n)
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V (Non-I/O Pins)
I_{IH} + I_{OZH}	Output Leakage Current				70	μA	Max	V_{OUT} = 2.7V (A_n, B_n)
I_{IL} + I_{OZL}	Output Leakage Current				−650	μA	Max	V_{OUT} = 0.5V (A_n, B_n)
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V (A_n)
			−100		−225			V_{OUT} = 0V (B_n)
I_{CEX}	Output HIGH Leakage Current				250	μA	Max	V_{OUT} = V_{CC} (A_n, B_n)
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V (A_n, B_n)
I_{CCH}	Power Supply Current			130	190	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				190	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current				190	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50\ pF$			54F $T_A, V_{CC} = Mil$ $C_L = 50\ pF$		74F $T_A, V_{CC} = Com$ $C_L = 50\ pF$		Units	Fig. No.
		Min	Typ	Max	Min	Max	Min	Max		
t_{PLH} t_{PHL}	Propagation Delay CPA or CPB to A_n or B_n	3.0 4.0	5.5 7.0	7.5 9.0			2.5 3.5	8.5 10.0	ns	2–3
t_{PZH} t_{PZL}	Output Enable Time $\overline{OEA}$ or $\overline{OEB}$ to A_n or B_n	2.5 3.5	5.5 7.0	7.5 9.5			2.0 3.0	8.5 10.5	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{OEA}$ or $\overline{OEB}$ to A_n or B_n	2.5 2.5	6.5 5.5	9.0 7.5			2.0 2.0	10.0 8.5	ns	2–5

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} = Mil$		74F $T_A, V_{CC} = Com$		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A_n or B_n to CPA or CPB	4.0 4.0				4.5 4.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A_n or B_n to CPA or CPB	2.0 2.0				2.5 2.5		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW $\overline{CEA}$ or $\overline{CEB}$ to CPA or CPB	1.0 4.0				1.5 4.5		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW $\overline{CEA}$ or $\overline{CEB}$ to CPA or CPB	2.0 2.0				2.5 2.5		ns	2–6
$t_w(H)$ $t_w(L)$	Pulse Width, HIGH or LOW CPA or CPB	3.0 3.0				3.5 3.5		ns	2–4

National Semiconductor

29F68
Dynamic RAM Controller

General Description

The 29F68 is a high-performance memory controller, replacing many SSI and MSI devices by grouping several unique functions. It provides two 9-bit address latches and two 9-bit counters for row and column address generation during refresh. A 2-bit bank select latch for row and column address generation during refresh, and a 2-bit bank select latch for the two high order address bits are provided to select one of the four RAS and CAS outputs.


The 29F68 is functionally equivalent to AMD's Am2968 and Motorola's MC74F2968.

Features

- High-performance memory controller
- Replaces many SSI and MSI devices by grouping several unique functions
- Functionally equivalent to AMD's Am2968 and Motorola's MC74F2968
- Provides control for 16K, 64K, or 256K dynamic RAM systems
- Outputs directly drive up to 88 DRAMs
- Highest order two address bits select one of four banks of RAMs
- Chip Select for easy expansion
- Provides memory refresh with error correction mode

Ordering Code: See Section 5


Logic Symbol

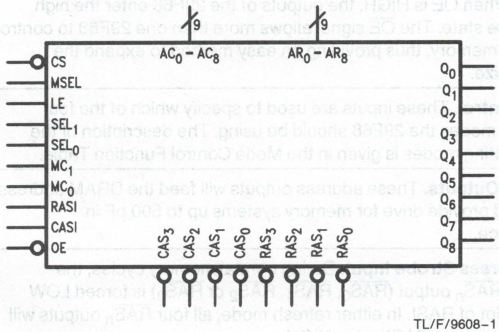

TL/F/9608–1

Connection Diagram

Pin Assignment for LCC and PCC

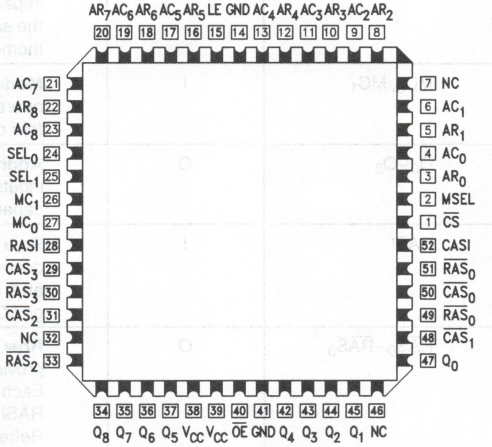

TL/F/9608–2

Pin Description

Name	I/O	Description
AR_0–AR_8 AC_0–AC_8	I	**Address Inputs**. AR_0–AR_8 are latched in as the 9-bit Row Address for the RAM. These inputs drive Q_0–Q_8 when the 29F68 is in the Read/Write mode and MSEL is LOW. AC_0–AC_8 are latched in as the Column Address, and will drive Q_0–Q_8 when MSEL is HIGH and the 29F68 is in the Read/Write mode. The addresses are latched with the Latch Enable (LE) signal.
SEL_0–SEL_1	I	**Bank Select.** These two inputs are normally the two higher order address bits, and are used in the Read/Write mode to select which bank of memory will be receiving the $\overline{RAS}_n$ and $\overline{CAS}_n$ signals after RASI and CASI go HIGH.
LE	I	**Latch Enable.** This active-HIGH input causes the Row, Column and Bank Select latches to become transparent, allowing the latches to accept new input data. A LOW input on LE latches the input data, assuming it meets the setup and hold time requirements.
MSEL	I	**Multiplexer Select.** This input determines whether the Row or Column Address will be sent to the memory address inputs. When MSEL is HIGH the Column Address is selected, while the Row Address is selected when MSEL is LOW. The address may come from either the address latch or refresh address counter depending on MC_0, MC_1.
$\overline{CS}$	I	**Chip Select.** This active-LOW input is used to enable the 29F68. When $\overline{CS}$ is active, the 29F68 operates normally in all four modes. When $\overline{CS}$ goes HIGH, the device will not enter the Read/Write mode. This allows other devices to access the same memory that the 29F68 is controlling (e.g., DMA controller).
$\overline{OE}$	I	**Output Enable.** This active-LOW input enables/disables the output signals. When $\overline{OE}$ is HIGH, the outputs of the 29F68 enter the high impedance state. The $\overline{OE}$ signal allows more than one 29F68 to control the same memory, thus providing an easy method to expand the memory size.
MC_0, MC_1	I	**Mode Control.** These inputs are used to specify which of the four operating modes the 29F68 should be using. The description of the four operating modes is given in the Mode Control Function Table.
Q_0–Q_8	O	**Address Outputs.** These address outputs will feed the DRAM address inputs and provide drive for memory systems up to 500 pF in capacitance.
RASI	I	**Row Address Strobe Input.** During normal memory cycles, the decoded $\overline{RAS}_n$ output ($\overline{RAS}_0$, $\overline{RAS}_1$, $\overline{RAS}_2$ or $\overline{RAS}_3$) is forced LOW after receipt of RASI. In either refresh mode, all four $\overline{RAS}_n$ outputs will go LOW following RASI going HIGH.
$\overline{RAS}_0$–$\overline{RAS}_3$	O	**Row Address Strobe.** Each one of the Row Address Strobe outputs provides a $\overline{RAS}_n$ signal to one of the four banks of dynamic memory. Each will go LOW only when selected by SEL_0 and SEL_1 and only after RASI goes HIGH. All four go LOW in response to RASI in either of the Refresh modes.
CASI	I	**Column Address Strobe Input.** This input going active will cause the selected $\overline{CAS}_n$ output to be forced LOW.
$\overline{CAS}_0$–$\overline{CAS}_3$	O	**Column Address Strobe.** During normal Read/Write cycles the two select bits (SEL_0, SEL_1) determine which $\overline{CAS}_n$ output will go active following CASI going HIGH. When memory error correction is performed, only the $\overline{CAS}_n$ signal selected by $CNTR_0$ and $CNTR_1$ will be active. For non-error correction cycles, all four $\overline{CAS}_n$ outputs remain HIGH.

Functional Description

The 29F68 is designed to be used with 16k, 64k, or 256k dynamic RAMs and is functionally equivalent to AMD's AM2968. The 29F68 provides row/column address multiplexing, refresh address generation and bank selection for up to four banks of RAMs.

Twenty (20) address bits (AR_0–AR_8, AC_0–AC_8, and bank select addresses SEL_0 and SEL_1) are presented to the controller. These addresses are latched by a 20-bit latch. A 20-bit counter generates the refresh address.

A 9-bit multiplexer selects the output address between the input row address, column address, refresh counter row address, column address, or zero (clear). Four RAS and four CAS outputs select the appropriate bank of RAMs and strobe in the row and column addresses.

It should be noted that the counters are cleared (MC_0, MC_1 = 1,1) on the next RASI transition, but the Q outputs are asynchronously cleared through the multiplexer.

Mode Control Function Table

MC_1	MC_0	Operating Mode
0	0	**Refresh without Error Correction.** Refresh cycles are performed with only the Row Counter being used to generate addresses. In this mode, all four $\overline{RAS}_n$ outputs are active while the four $\overline{CAS}_n$ signals are kept HIGH.
0	1	**Refresh with Error Correction/Initialize—**During this mode, refresh cycles are done with both the Row and Column counters generating the addresses. MSEL is used to select between the Row and Column counter. All four $\overline{RAS}_n$ outputs go active in response to RASI, while only one $\overline{CAS}_n$ output goes LOW in response to CASI. The Bank Counter keeps track of which $\overline{CAS}_n$ output will go active. This mode is also used on system power-up so that the memory can be written with a known data pattern.
1	0	**Read/Write—** This mode is used to perform Read/Write cycles. Both the Row and Column addresses are latched and multiplexed to the address output lines using MSEL; SEL_0 and SEL_1 are decoded to determine which $\overline{RAS}_n$ and $\overline{CAS}_n$ will be active.
1	1	**Clear Refresh Counter—**This mode will clear the three refresh counters (Row, Column, and Bank) on the HIGH-to-LOW transition of RASI, putting them at the start of the refresh sequence. In this mode, all four $\overline{RAS}_n$ are driven LOW upon receipt of RASI so that DRAM wake-up cycles may be performed. This mode also asynchronously clears the Q_n outputs.

Address Output Function Table

$\overline{CS}$	MC_1	MC_0	MSEL	Mode	MUX Output
L	L	L	X	Refresh without Error Correction	Row Counter Address
	L	H	H	Refresh with Error Correction	Column Counter Address
			L		Row Counter Address
	H	L	H	Read/Write	Column Address Latch
			L		Row Address Latch
	H	H	X	Clear Refresh Counter	Zero
H	L	L	X	Refresh without Error Correction	Row Counter Address
	L	H	H	Refresh with Error Correction	Column Counter Address
			L		Row Counter Address
	H	L	X	Read/Write	Zero
	H	H	X	Clear Refresh Counter	Zero

$\overline{RAS}$ Output Function Table

RASI	$\overline{CS}$	MC_1	MC_0	SEL_1	SEL_0	Mode	$\overline{RAS}_0$	$\overline{RAS}_1$	$\overline{RAS}_2$	$\overline{RAS}_3$
L	X	X	X	X	X	Non-refresh	H	H	H	H
H	L	L	L	X	X	Refresh without Scrubbing	L	L	L	L
		L	H	X	X	Refresh with Scrubbing	L	L	L	L
		H	L	L	L	Read/Write	L	H	H	H
				L	H		H	L	H	H
				H	L		H	H	L	H
				H	H		H	H	H	L
		H	H	X	X	Clear Refresh Counter	L	L	L	L
	H	L	L	X	X	Refresh without Error Correction	L	L	L	L
		L	H			Refresh with Error Correction	L	L	L	L
		H	L			Read/Write	H	H	H	H
		H	H			Clear Refresh Counter	L	L	L	L


$\overline{CAS}$ Output Function Table

Inputs				Internal Counter		Inputs		Outputs			
CASI	$\overline{CS}$	MC_1	MC_0	$CNTR_1$	$CNTR_0$	SEL_1	SEL_0	$\overline{CAS}_0$	$\overline{CAS}_1$	$\overline{CAS}_2$	$\overline{CAS}_3$
H	L	L	L	X	X	X	X	H	H	H	H
		L	H	L	L	X	X	L	H	H	H
				L	H			H	L	H	H
				H	L			H	H	L	H
				H	H			H	H	H	L
		H	L	X	X	L	L	L	H	H	H
						L	H	H	L	H	H
						H	L	H	H	L	H
						H	H	H	H	H	L
	H	H	H	X	X	X	X	H	H	H	H
		L	L	X	X	X	X	H	H	H	H
		L	H	L	L	X	X	L	H	H	H
				L	H			H	L	H	H
				H	L			H	H	L	H
				H	H			H	H	H	L
		H	L	X	X	X	X	H	H	H	H
		H	H								
L	X	X	X	X	X	X	X	H	H	H	H

Unit Loading/Fan Out: See Section 2 for U.L. definitions


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
AC_0–AC_8	Column Address	1.0/1.0	20 μA/−0.6 mA
AR_0–AR_8	Row Address	1.0/1.0	20 μA/−0.6 mA
Q_0–Q_8	Address Outputs	50/33.3	−1 mA/20 mA
MC_0, MC_1	Memory Cycle	1.0/1.0	20 μA/−0.6 mA
$\overline{CS}$	Chip Select Input	1.0/1.0	20 μA/−0.6 mA
MSEL	Multiplexer Select Input	1.0/1.0	20 μA/−0.6 mA
LE	Latch Enable Input	1.0/1.0	20 μA/−0.6 mA
SEL_0, SEL_1	Select Inputs	1.0/1.0	20 μA/−0.6 mA
RASI	Row Address Strobe In	1.0/1.0	20 μA/−0.6 mA
CASI	Column Address Strobe In	1.0/1.0	20 μA/−0.6 mA
$\overline{RAS}_0$–$\overline{RAS}_3$	Row Address Stobe Outputs	50/33.3	−1 mA/20 mA
$\overline{CAS}_0$–$\overline{CAS}_3$	Column Address Strobe Outputs	50/33.3	−1 mA/20 mA
$\overline{OE}$	Output Enable	1.0/1.0	20 μA/−0.6 mA

Block Diagram

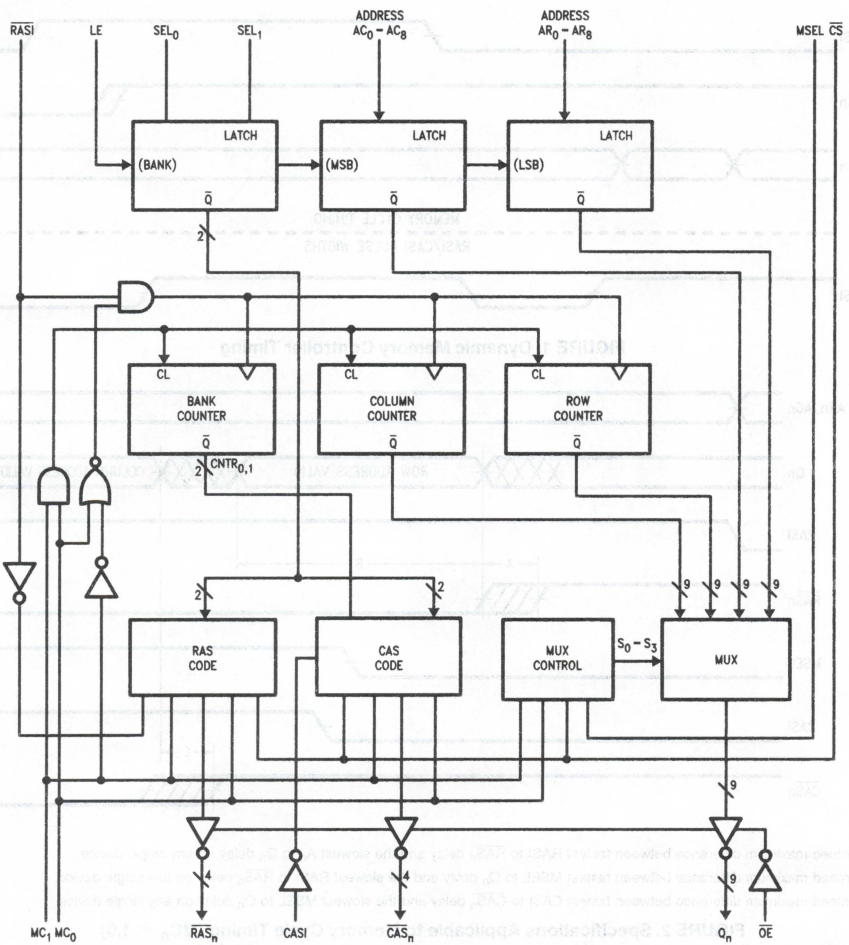


TL/F/9608–3

Timing Waveforms

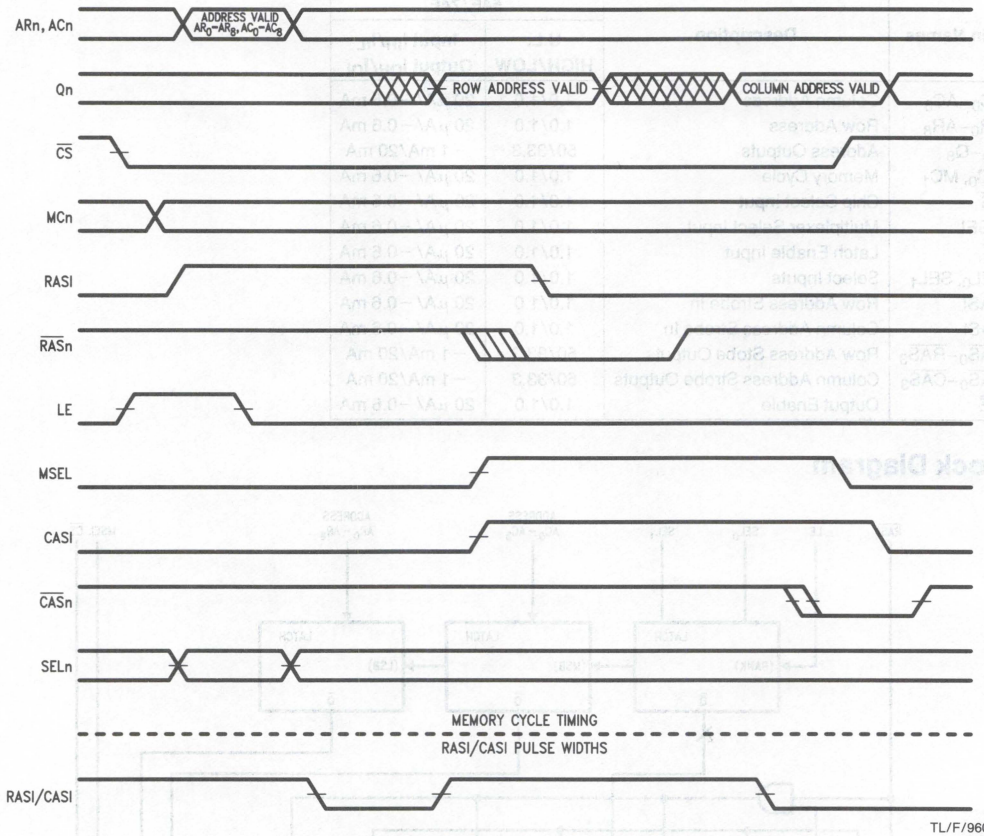

TL/F/9608–4

FIGURE 1. Dynamic Memory Controller Timing

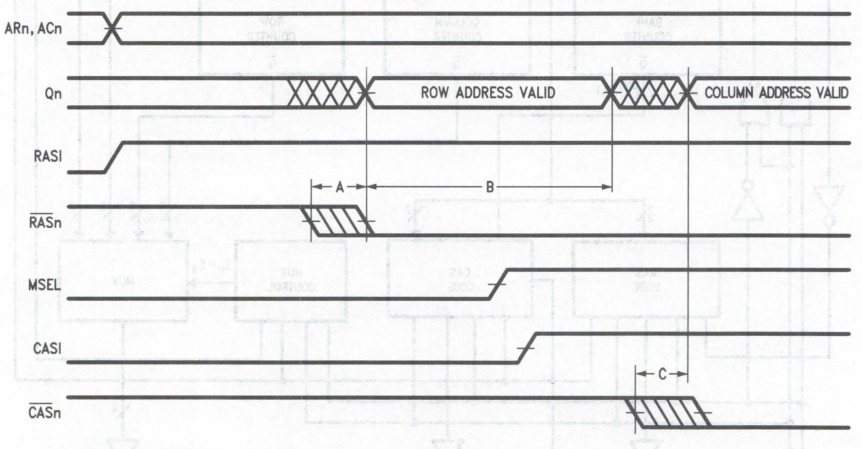

TL/F/9608–5


Note A: Guaranteed maximum difference between fastest RASI to $\overline{RAS}_n$ delay and the slowest A_n to Q_n delay on any single device.

Note B: Guaranteed maximum difference between fastest MSEL to Q_n delay and the slowest RASI to $\overline{RAS}_n$ delay on any single device.

Note C: Guaranteed maximum difference between fastest CASI to $\overline{CAS}_n$ delay and the slowest MSEL to Q_n delay on any single device.

FIGURE 2. Specifications Applicable to Memory Cycle Timing (MC_n = 1,0)


Timing Waveforms (Continued)

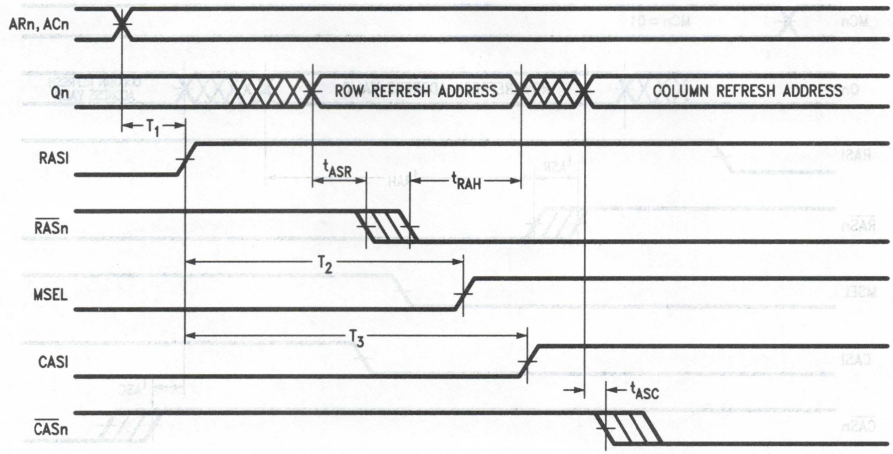

TL/F/9608–6

FIGURE 3. Desired System Timing

Refresh Cycle Timing

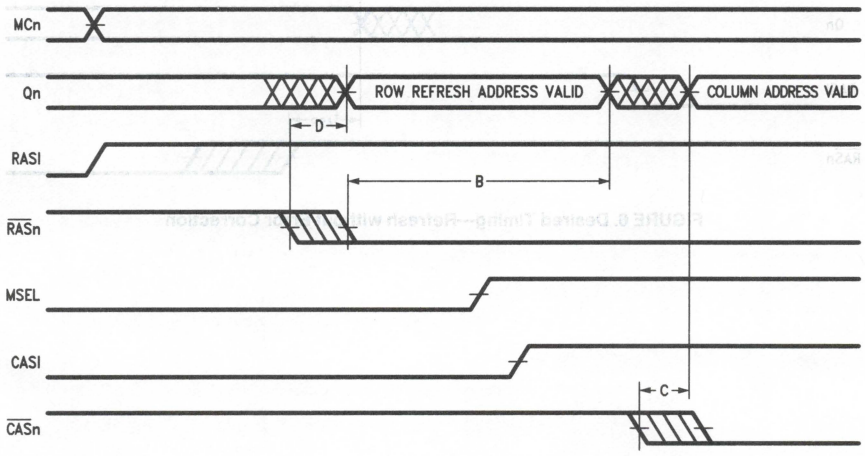

TL/F/9608–7


FIGURE 4. Specifications Applicable to Refresh Cycle Timing (MC_n = 00,01)

Note B: Guaranteed maximum difference between fastest MSEL to Q_n delay and the slowest RASI to $\overline{RAS}_n$ delay on any single device.

Note C: Guaranteed maximum difference between fastest CASI to $\overline{CAS}_n$ delay and the slowest MSEL to Q_n delay on any single device.


Note D: Guaranteed maximum difference between fastest RASI to $\overline{RAS}_n$ delay and the slowest MC_n to Q_n delay on any single device.

Refresh Cycle Timing (Continued)

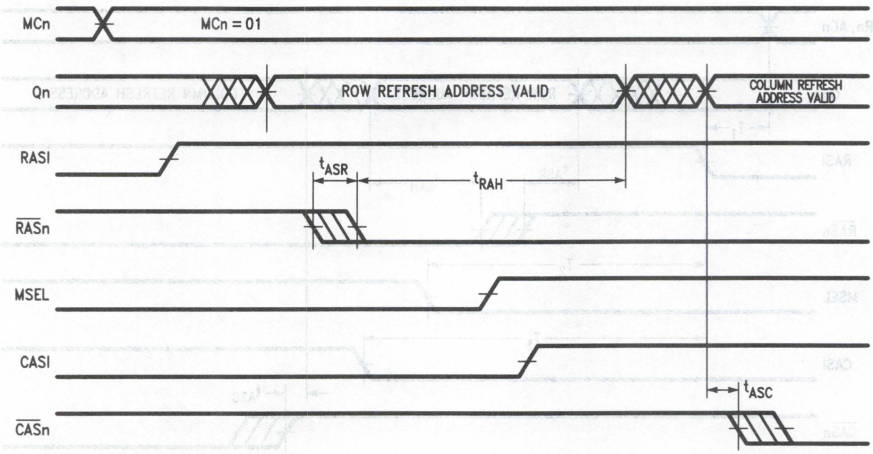

TL/F/9608–8

FIGURE 5. Designed Timing—Refresh with Error Correction

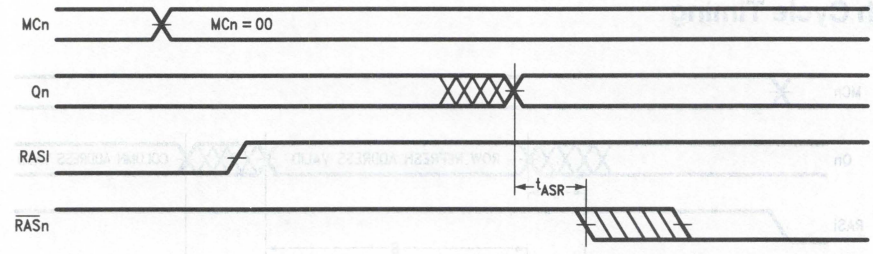

TL/F/9608–9

FIGURE 6. Desired Timing—Refresh without Error Correction

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE® Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 1.0 mA
		54F 10% V_{CC}			0.8			I_{OL} = 12.0 mA
		74F 10% V_{CC}			0.5			I_{OL} = 1.0 mA
		74F 10% V_{CC}			0.8			I_{OL} = 12.0 mA
I_{IH}	Input HIGH Current				20	μA	Max	V_{IN} = 2.7V
I_{BVI}	Input HIGH Current Breakdown Test				100	μA	Max	V_{IN} = 7.0V
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{CEX}	Output HIGH Leakage Current				250	μA	Max	V_{OUT} = V_{CC}
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCH}	Power Supply Current				300	mA	Max	V_O = HIGH
I_{CCL}	Power Supply Current				300	mA	Max	V_O = LOW
I_{CCZ}	Power Supply Current				300	mA	Max	V_O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	29F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF		Military 29F $T_A, V_{CC} = Mil$ $C_L = 50$ pF		Commercial 29F $T_A, V_{CC} = Com$ $C_L = 50$ pF		Commercial 29F $T_A, V_{CC} = Com$ $C_L = 500$ pF			Units	Fig. No.
		Min	Max	Min	Max	Min	Max	Min	Typ	Max		
t_{PLH}	Propagation Delay	3.0	11.0			2.5	12.0		19.0		ns	2–3
t_{PHL}	AR to Q_n	3.0	11.0			2.5	12.0		22.0			
t_{PLH}	Propagation Delay	3.0	11.0			2.5	12.0		19.0		ns	2–3
t_{PHL}	AC to Q_n	3.0	11.0			2.5	12.0		22.0			
t_{PLH}	Propagation Delay	3.5	12.0			3.0	13.0		23.0		ns	2–3
t_{PHL}	RASI to RAS_i	3.5	12.0			3.0	13.0		20.0			
t_{PLH}	Propagation Delay	1.0	8.0			1.0	8.5		19.0		ns	2–3
t_{PHL}	CASI to CAS_i	1.0	8.0			1.0	8.5		17.0			
t_{PLH}	Propagation Delay	3.0	13.0			2.5	14.0		24.0		ns	2–3
t_{PHL}	MSEL to Q_n	3.0	13.0			2.5	14.0		21.0			
t_{PLH}	Propagation Delay	4.0	15.0			3.5	16.0		25.0		ns	2–3
t_{PHL}	MC_n to Q_n	4.0	15.0			3.5	16.0		22.0			
t_{PLH}	Propagation Delay	3.5	17.5			3.0	18.5		24.0		ns	2–3
t_{PHL}	MC_n to RAS_n	3.5	17.5			3.0	18.5		22.0			
t_{PLH}	Propagation Delay	4.0	12.5			3.5	13.5		23.0		ns	2–3
t_{PHL}	MC_n to CAS_n	4.0	12.5			3.5	13.5		21.0			
t_{PLH}	Propagation Delay	4.0	15.0			3.5	16.0		25.0		ns	2–3
t_{PHL}	LE to RAS_n	4.0	15.0			3.5	16.0		24.0			
t_{PLH}	Propagation Delay	5.0	13.5			4.5	14.5		24.0		ns	2–3
t_{PHL}	LE to CAS_n	5.0	13.5			4.5	14.5		24.0			
t_{PLH}	Propagation Delay	3.5	12.0			3.0	13.0		23.0		ns	2–3
t_{PHL}	LE to Q_n	3.5	12.0			3.0	13.0		22.0			

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	29F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF		Military 29F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		Commercial 29F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
t_{PZH} t_{PZL}	Output Disable Time OE to Q_n	1.0 1.0	9.5 9.5			1.0 1.0	10.0 10.0	ns	2–5
t_{PZH} t_{PZL}	Output Disable Time OE to Q_n	1.0 1.0	9.5 9.5			1.0 1.0	10.0 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time OE to RAS_n	1.0 1.0	9.5 9.5			1.0 1.0	10.0 10.0	ns	2–5
t_{PZH} t_{PZL}	Output Disable Time OE to RAS_n	1.0 1.0	9.5 9.5			1.0 1.0	10.0 10.0	ns	2–5
t_{PHZ} t_{PLZ}	Output Disable Time OE to CAS_n	1.0 1.0	9.5 9.5			1.0 1.0	10.0 10.0	ns	2–5
t_{PZH} t_{PZL}	Output Enable Time OE to CAS_n	1.0 1.0	9.5 9.5			1.0 1.0	10.0 10.0	ns	2–5
$t_w(H)$ $t_w(L)$	Pulse Width, HIGH or LOW CAS_n, RAS_n	15.0 15.0				15.0 15.0		ns	2–4
t_{skew}	Q_n to CAS_n, RAS_n		10.0				10.0	ns	

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	29F $T_A = +25°C$ $V_{CC} = +5.0V$		Military 29F $T_A, V_{CC} =$ Mil		Commercial 29F $T_A, V_{CC} =$ Com		Units	Fig. No.
		Min	Max	Min	Max	Min	Max		
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW A_n to LE	5.0 5.0				5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW A_n to LE	5.0 5.0				5.0 5.0		ns	2–6
$t_s(H)$ $t_s(L)$	Setup Time, HIGH or LOW SEL to LE	5.0 5.0				5.0 5.0		ns	2–6
$t_h(H)$ $t_h(L)$	Hold Time, HIGH or LOW SEL to LE	5.0 5.0				5.0 5.0		ns	2–6

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	29F		Military 29F		Commercial 29F		Units	Fig. No.
		T_A = +25°C, V_{CC} = +5.0V, C_L = 50 pF		T_A, V_{CC} = Mil, C_L = 50 pF		T_A, V_{CC} = Com, C_L = 50 pF			
		Min	Max	Min	Max	Min	Max		
t_{PZH} / t_{PZL}	Output Enable Time $\overline{OE}$ to O_n	1.0	9.5			1.0	10.0	ns	2–5
t_{PLZ} / t_{PHZ}	Output Disable Time $\overline{OE}$ to O_n	1.0	9.5			1.0	10.0	ns	2–5
t_{PHZ} / t_{PLZ}	Output Disable Time $\overline{OE}$ to $\overline{PAS}_n$	1.0	9.5			1.0	10.0	ns	2–5
t_{PZH} / t_{PZL}	Output Enable Time $\overline{OE}$ to $\overline{RAS}_n$	1.0	9.5			1.0	10.0	ns	2–5
t_{PHZ} / t_{PLZ}	Output Disable Time $\overline{OE}$ to $\overline{RAS}_n$	1.0	9.5			1.0	10.0	ns	2–5
t_{PZH} / t_{PZL}	Output Enable Time $\overline{OE}$ to $\overline{CAS}_n$	1.0	9.5			1.0	10.0	ns	2–5
t_{WH} / t_{WL}	Pulse Width, HIGH or LOW $\overline{CAS}_n$, $\overline{RAS}_n$	15.0				15.0		ns	2–4
t	O_n to $\overline{CAS}_n$, $\overline{RAS}_n$	10.0				10.0		ns	

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	29F		Military 29F		Commercial 29F		Units	Fig. No.
		T_A = +25°C, V_{CC} = +5.0V		T_A, V_{CC} = Mil		T_A, V_{CC} = Com			
		Min	Max	Min	Max	Min	Max		
t_{SHL} / t_{SLH}	Setup Time, HIGH or LOW A_n to $\overline{LE}$	5.0				5.0		ns	2–6
t_{HLH} / t_{HHL}	Hold Time, HIGH or LOW A_n to $\overline{LE}$	5.0				5.0		ns	2–6
t_{SLH} / t_{SHL}	Setup Time, HIGH or LOW $\overline{SEL}$ to $\overline{LE}$	5.0				5.0		ns	2–6
t_{HLH} / t_{HHL}	Hold Time, HIGH or LOW $\overline{SEL}$ to $\overline{LE}$	5.0				5.0		ns	2–6



Section 5

Ordering Information and Physical Dimensions

Section 5 Contents

Ordering Information and Physical Dimensions 5-3
Bookshelf
Distributors

National Semiconductor

FAST® Ordering Information

The device number is used to form part of a simplified purchasing code where the package type and temperature range are defined as follows:

74F XXX P C QR

Temperature Range Family
- 74F = Commercial
- 54F = Military
- 29F = Commercial or Military

Device Type

Package Code
- P = Plastic DIP
- SP = Slim Plastic DIP
- D = Ceramic DIP
- SD = Slim Ceramic DIP
- F = Flatpak
- L = Leadless Chip Carrier (LCC)
- Q = Plastic Chip Carrier (PCC)
- S = Small Outline (SOIC)

Temperature Range
- C = Commercial—JEDEC (−40°C to +85°C)
- J = Commercial—EIAJ (0°C to +70°C) SOIC Only
- M = Military (−55°C to +125°C)


Special Variations
- X = Devices shipped in 13″ reels
- QR = Commercial grade device with burn-in
- QB = Military grade device with environmental and burn-in processing

For most current packaging information, contact Product Marketing.

JEDEC-EIAJ Small Outline Package Comparison

	Dim	14-Pin		16-Pin		20-Pin		24-Pin	
		Min	Max	Min	Max	Min	Max	Min	Max
JEDEC	A	0.228 (5.80)	0.245 (6.20)	0.228 (5.80)	0.245 (6.20)	0.393 (10.0)	0.420 (10.65)	0.393 (10.0)	0.420 (10.65)
	B	0.149 (3.80)	0.158 (4.00)	0.149 (3.80)	0.158 (4.00)	0.291 (7.40)	0.300 (7.60)	0.291 (7.40)	0.300 (7.60)
EIAJ	A	0.300 (7.62)	0.350 (8.89)	0.300 (7.62)	0.350 (8.89)	0.300 (7.62)	0.350 (8.89)	0.300 (7.62)	0.350 (8.89)
	B	0.198 (5.02)	0.245 (6.22)	0.198 (5.02)	0.245 (6.22)	0.198 (5.02)	0.245 (6.22)	0.198 (5.02)	0.245 (6.22)

Units: Inch (mm)




TL/F/9790–2

National Semiconductor


All dimensions are in incnes (millimeters)

52 Lead Side-Brazed Dual In-Line Package (D)
NS Package Number D52A

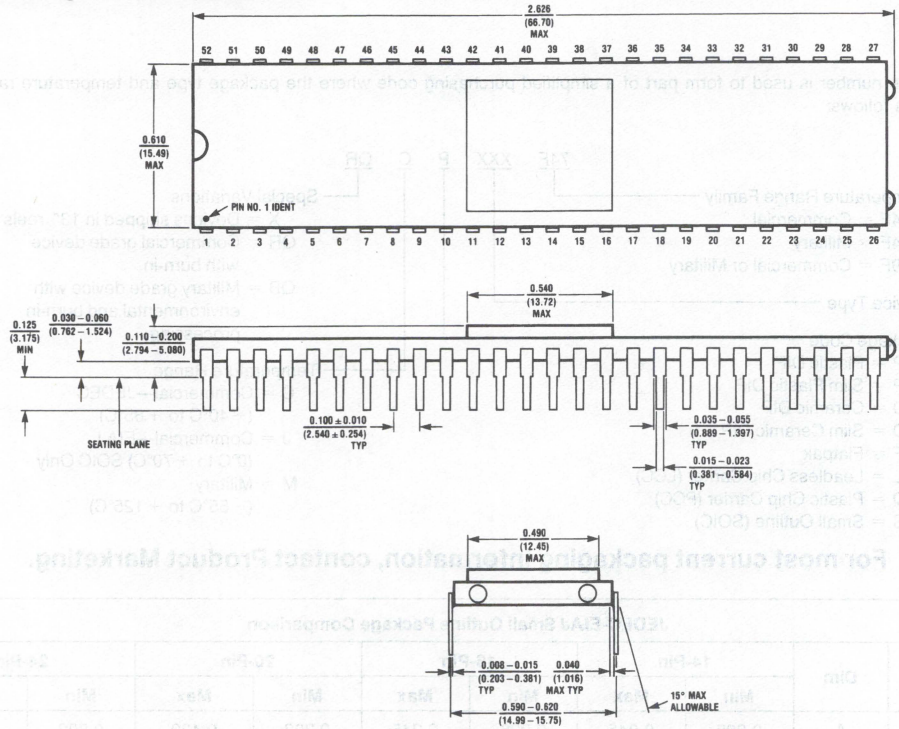


D52A (REV A)

20 Terminal Ceramic Leadless Chip Carrier (L)
NS Package Number E20A

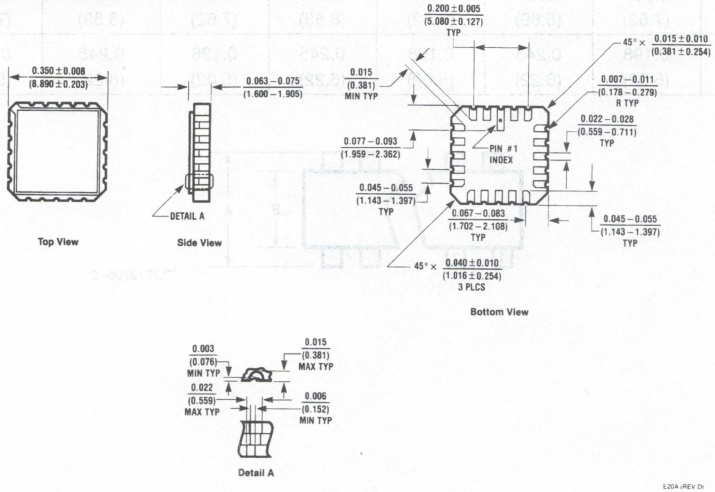


E20A (REV D)

28 Terminal Ceramic Leadless Chip Carrier (L)
NS Package Number E28A

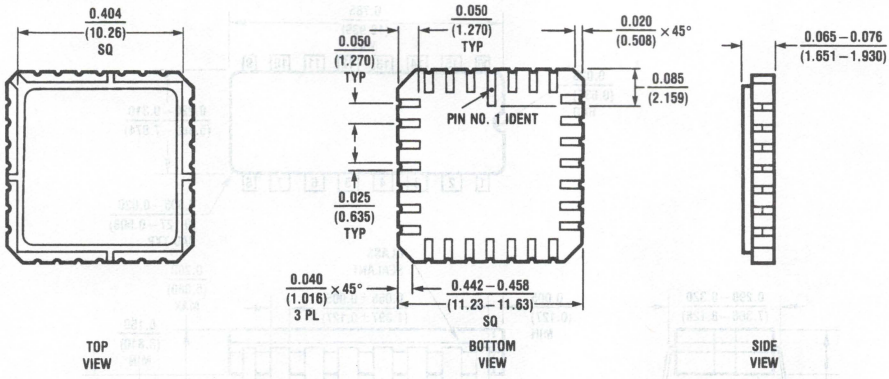


E28A (REV C)

14 Lead Ceramic Dual In-Line Package (D)
NS Package Number J14A

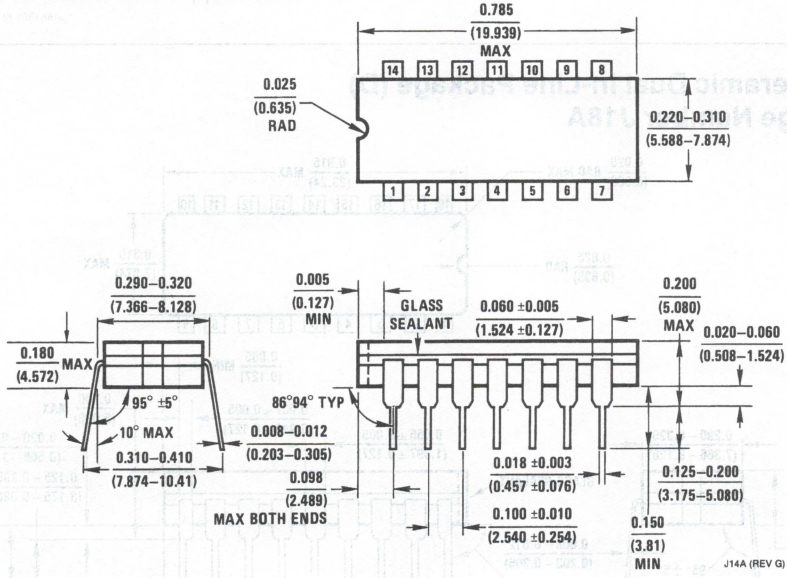


J14A (REV G)

16 Lead Ceramic Dual In-Line Package (D)
NS Package Number J16A

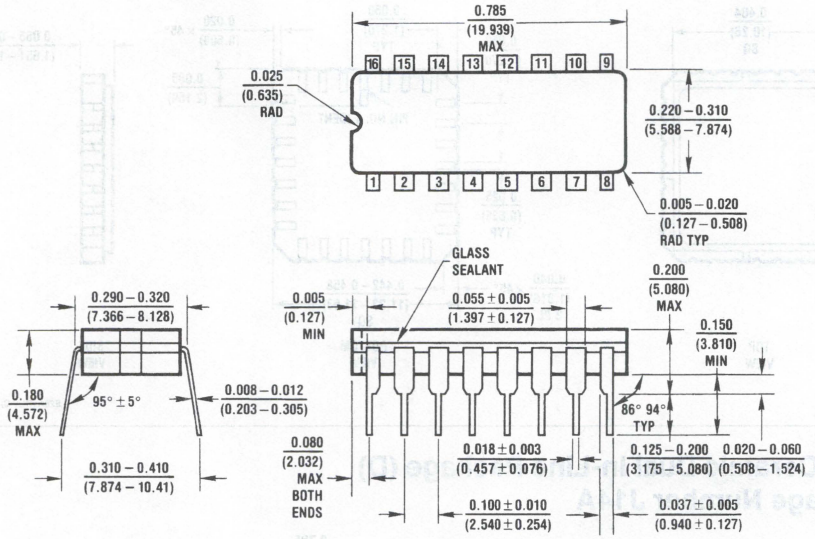


J16A (REV K)

18 Lead Ceramic Dual In-Line Package (D)
NS Package Number J18A

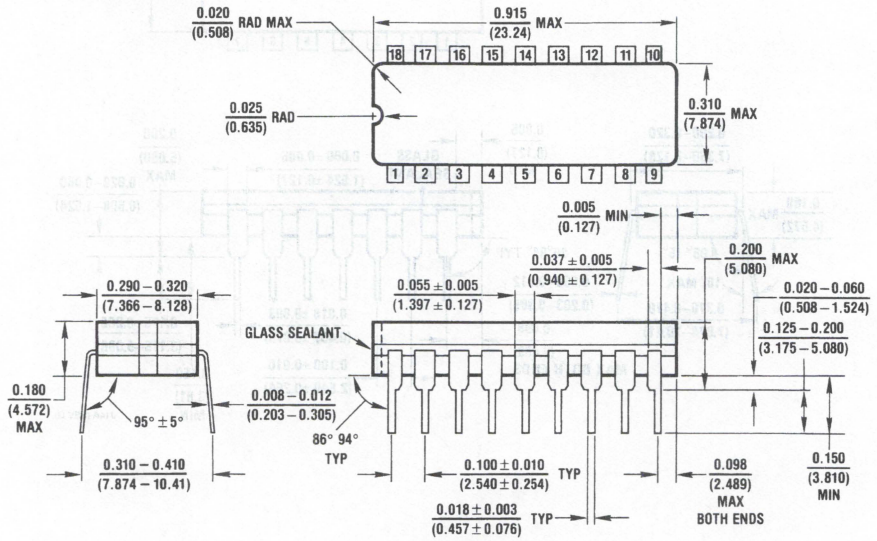


J18A (REV L)


20 Lead Ceramic Dual In-Line Package (D)
NS Package Number J20A

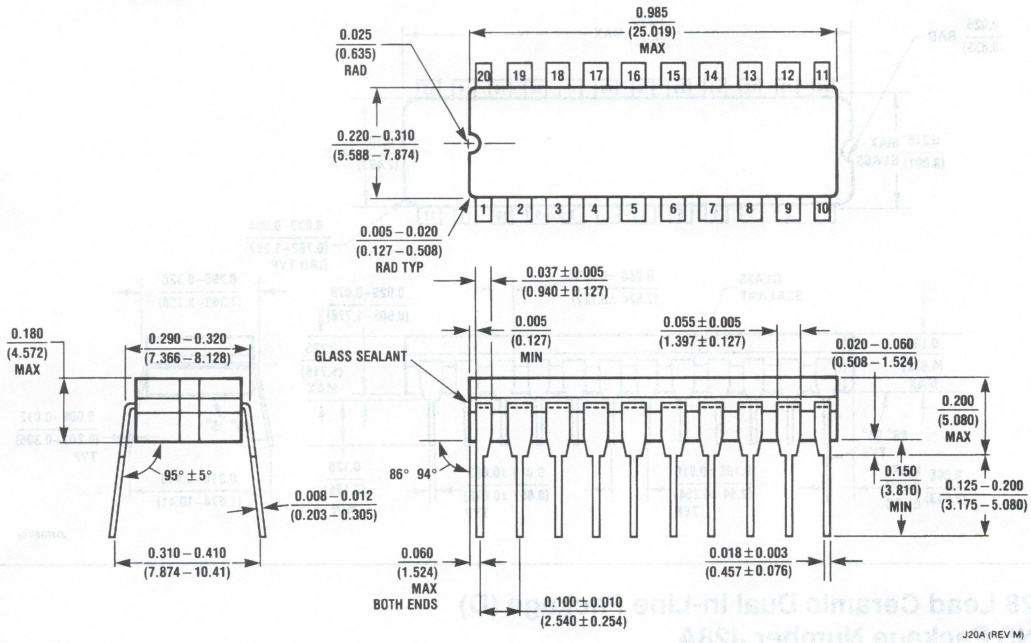


24 Lead Ceramic Dual In-Line Package (D)
NS Package Number J24A

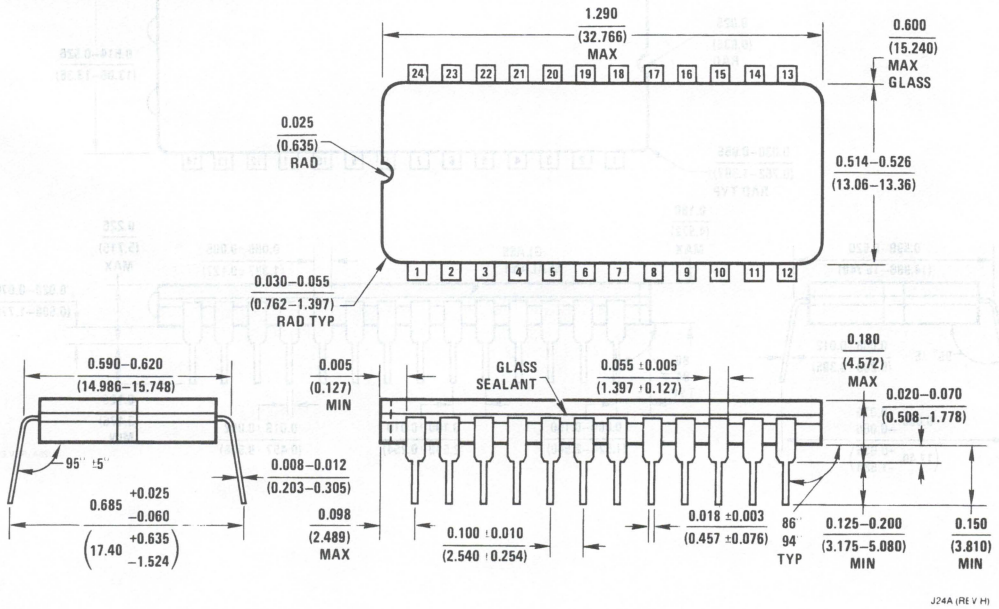


24 Lead Slim (0.300″ Wide) Ceramic Dual In-Line Package (SD)
NS Package Number J24F

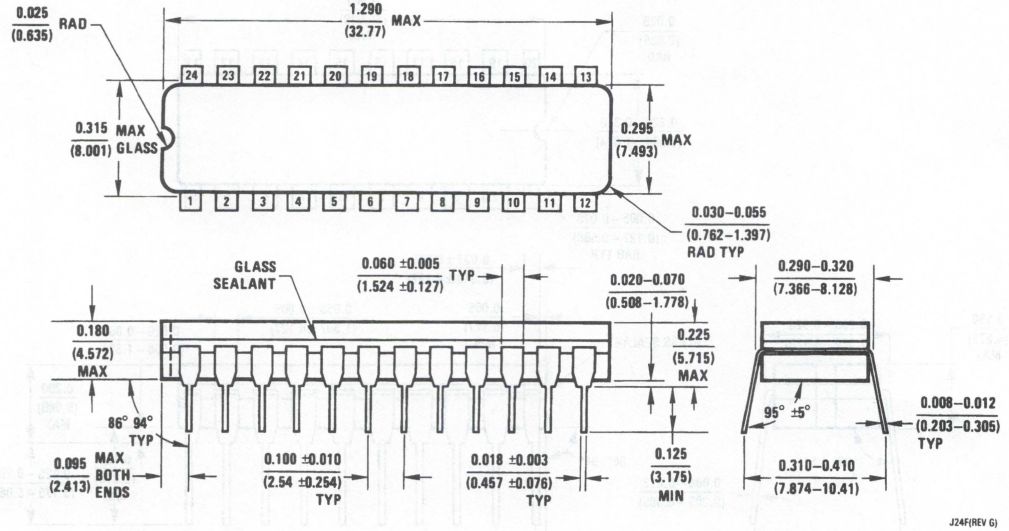


28 Lead Ceramic Dual In-Line Package (D)
NS Package Number J28A

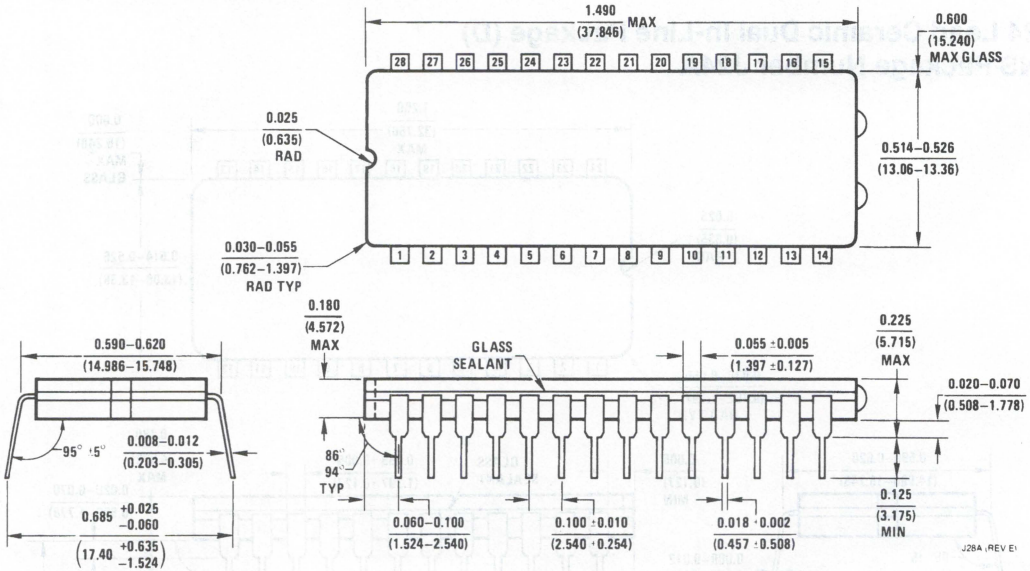


14 Lead Small Outline Integrated Circuit (S)
NS Package Number M14A

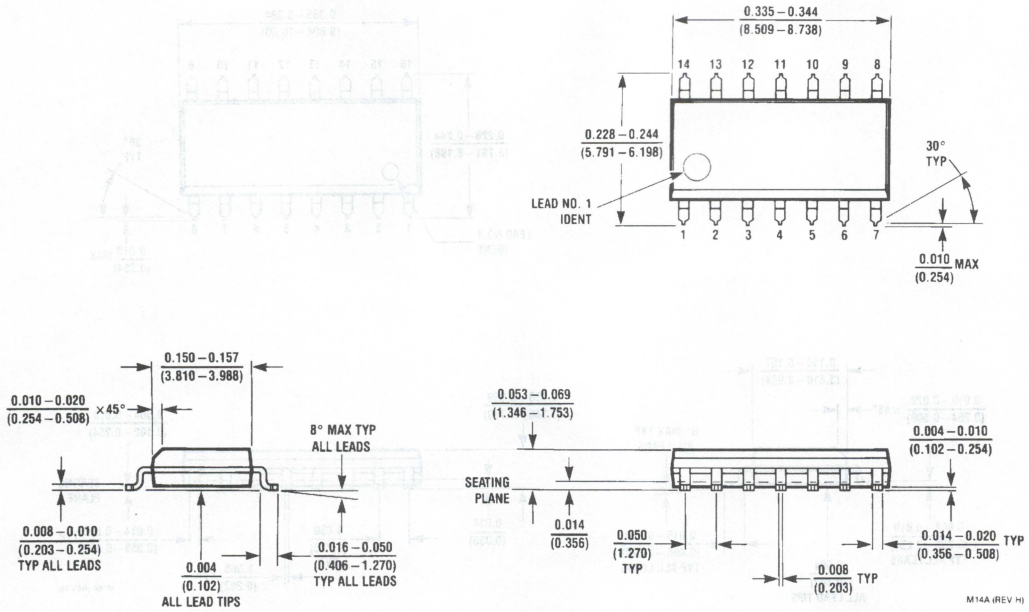


14 Lead Small Outline Package — EIAJ (SJ)
NS Package Number M14D

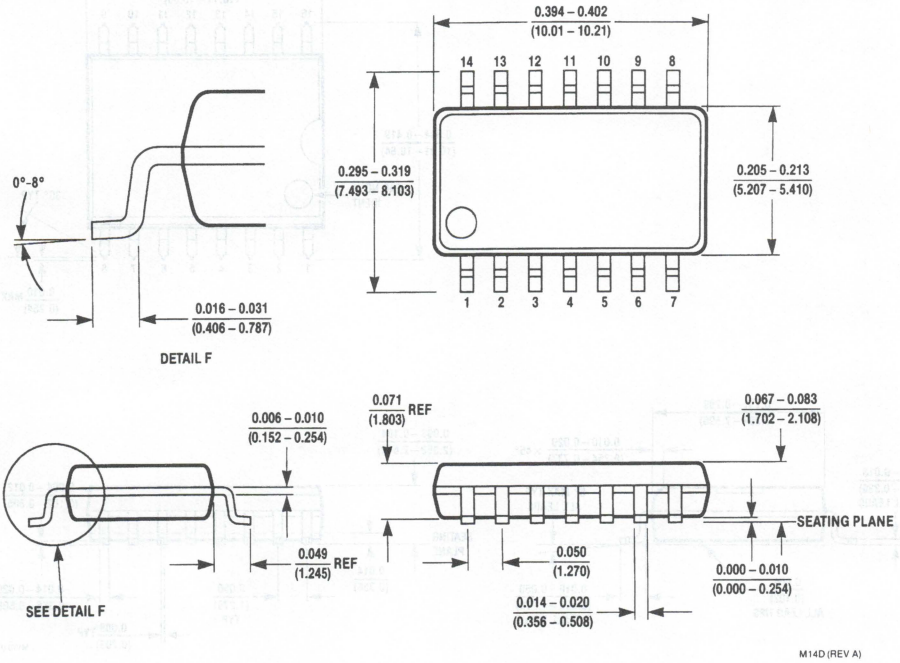


16 Lead Small Outline Integrated Circuit (S)
NS Package Number M16A

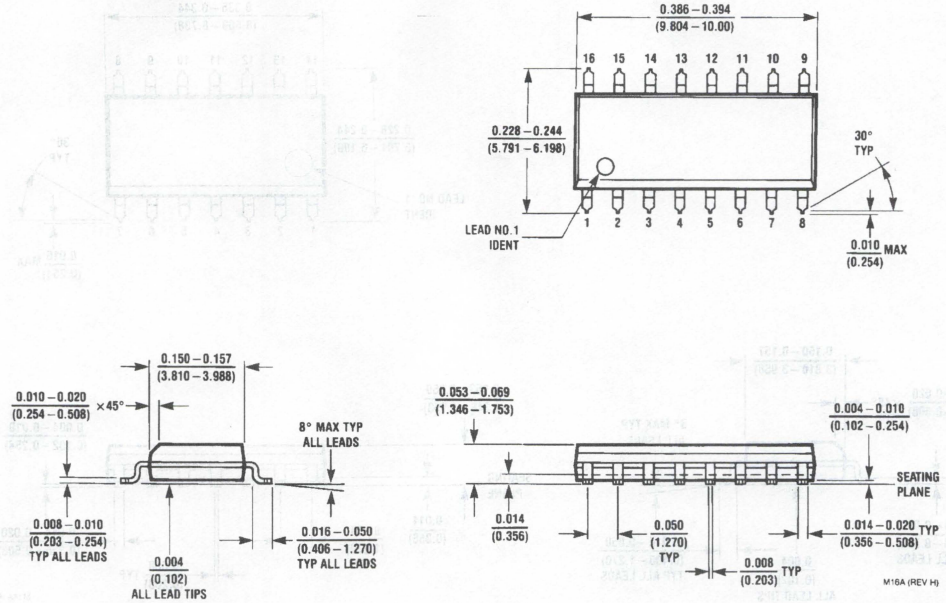


16 Lead (0.300" Wide) Small Outline Integrated Circuit (S)
NS Package Number M16B

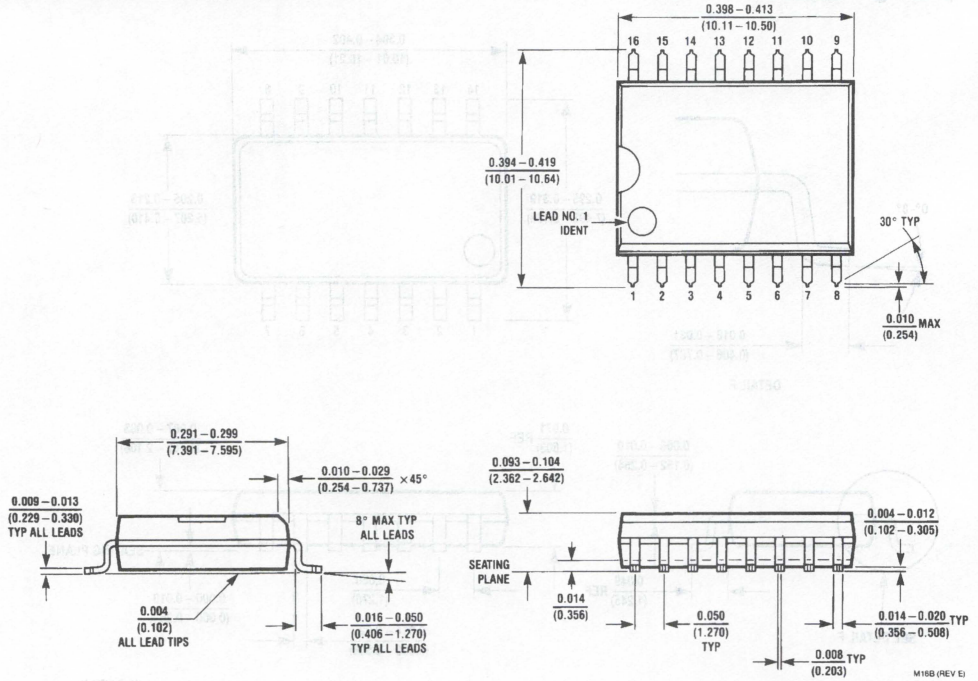


16 Lead Small Outline Package — EIAJ (SJ)
NS Package Number M16D

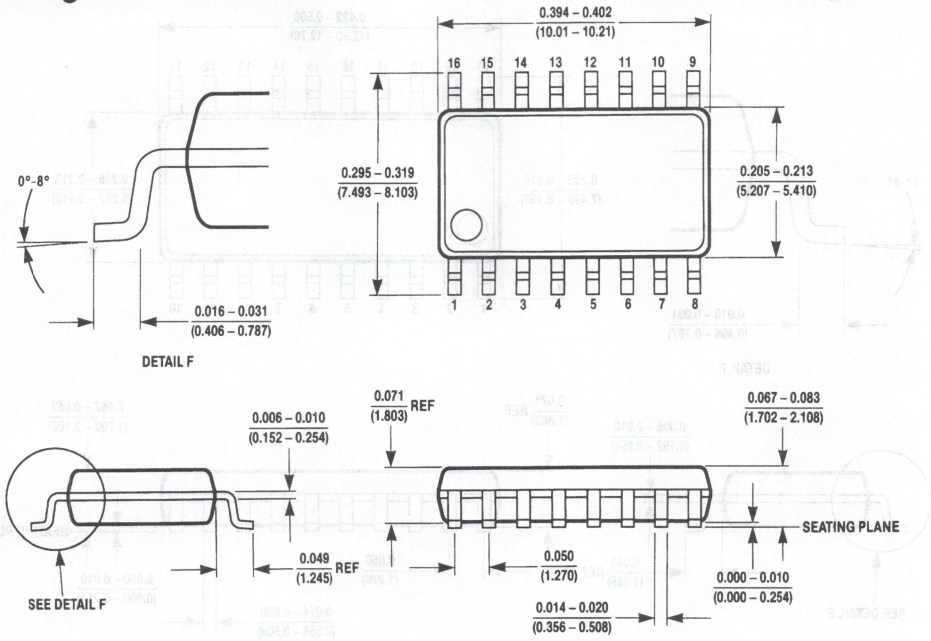

20 Lead Small Outline Integrated Circuit (S)
NS Package Number M20B

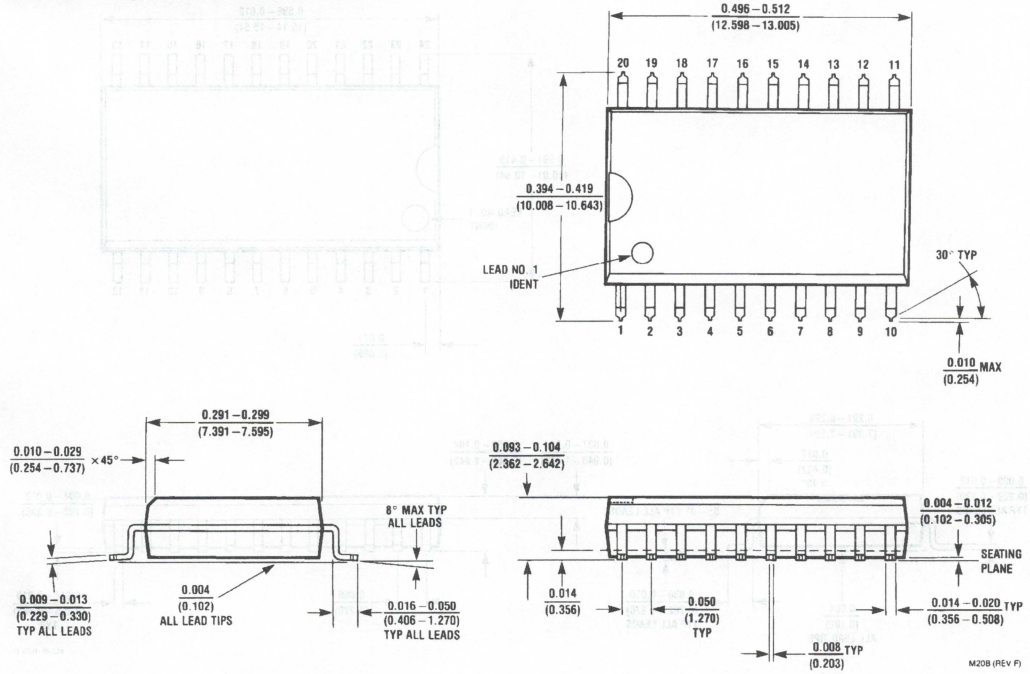


20 Lead Small Outline Package — EIAJ (SJ)
NS Package Number M20D

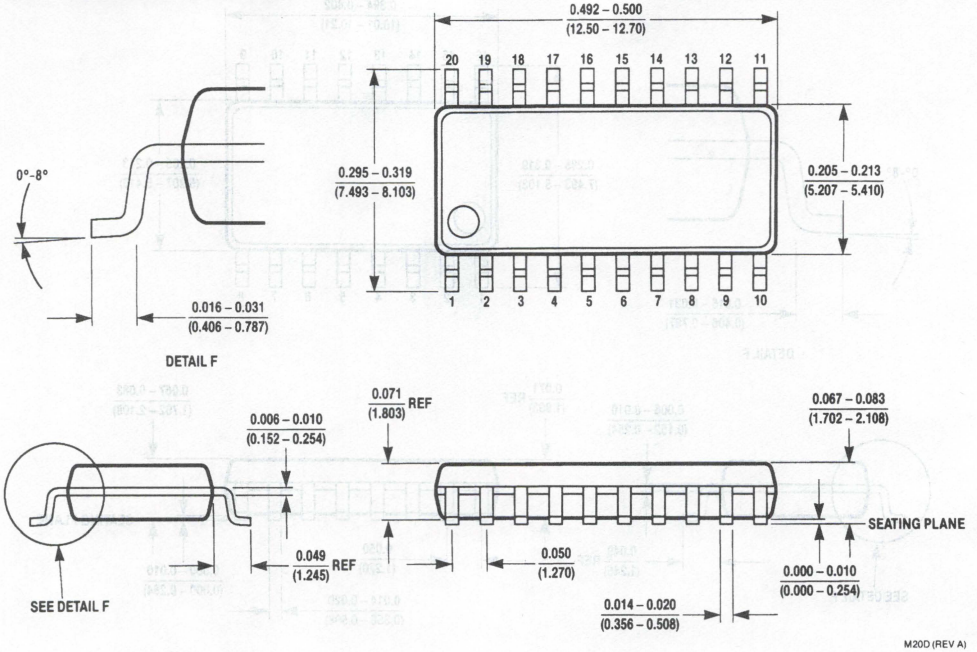


M20D (REV A)

24 Lead Small Outline Integrated Circuit (S)
NS Package Number M24B

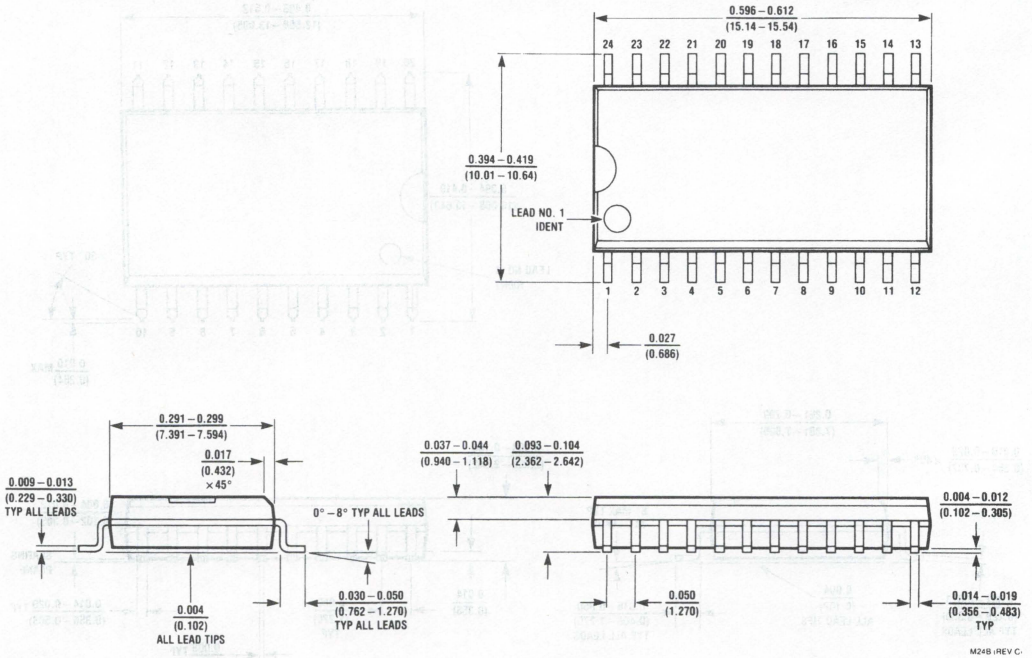


M24B (REV C)

28 Lead Small Outline Integrated Circuit (S)
*NS Package Number M28B

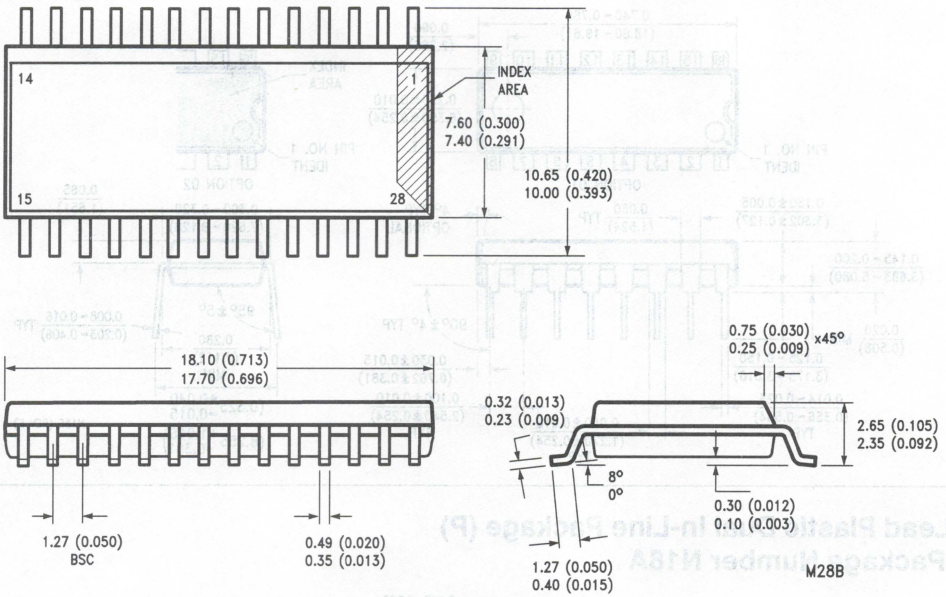


*For most current package information contact product marketing.


14 Lead Plastic Dual In-Line Package (P)
NS Package Number N14A

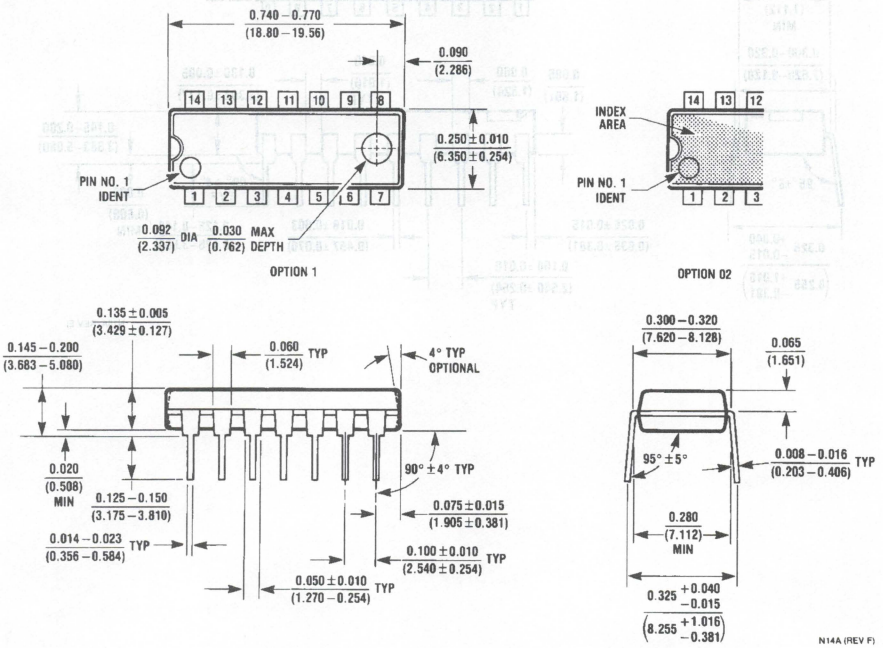


16 Lead Plastic Dual In-Line Package (P)
NS Package Number N16E

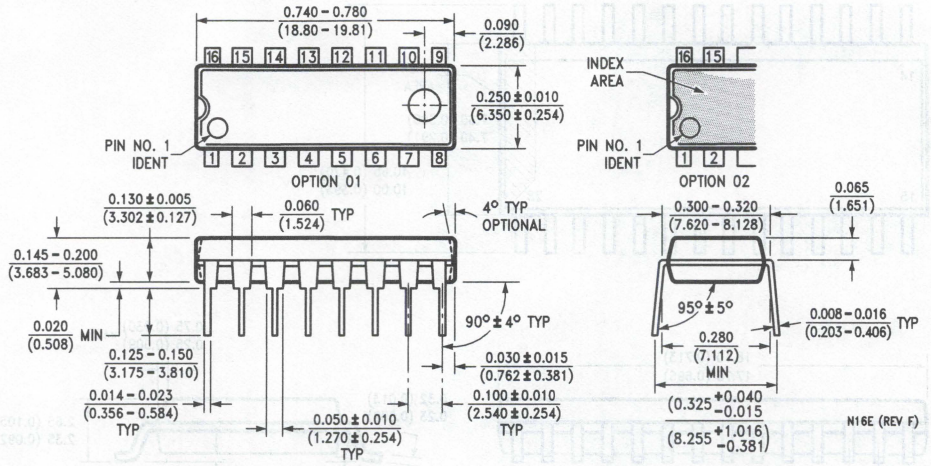


18 Lead Plastic Dual In-Line Package (P)
NS Package Number N18A

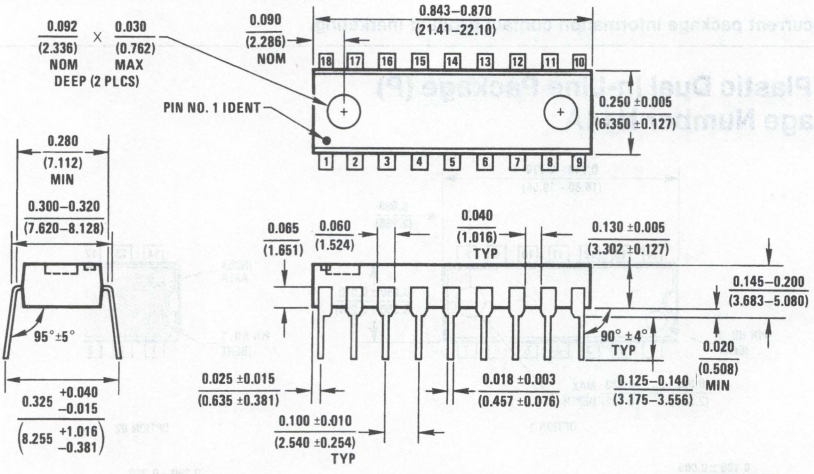


20 Lead Plastic Dual In-Line Package (P)
NS Package Number N20B

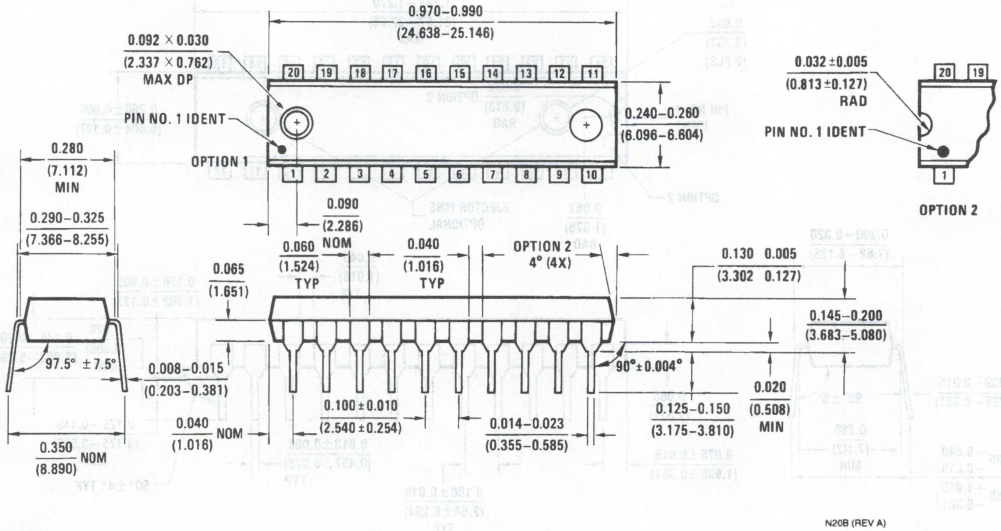

24 Lead Plastic Dual In-Line Package (P)
NS Package Number N24A

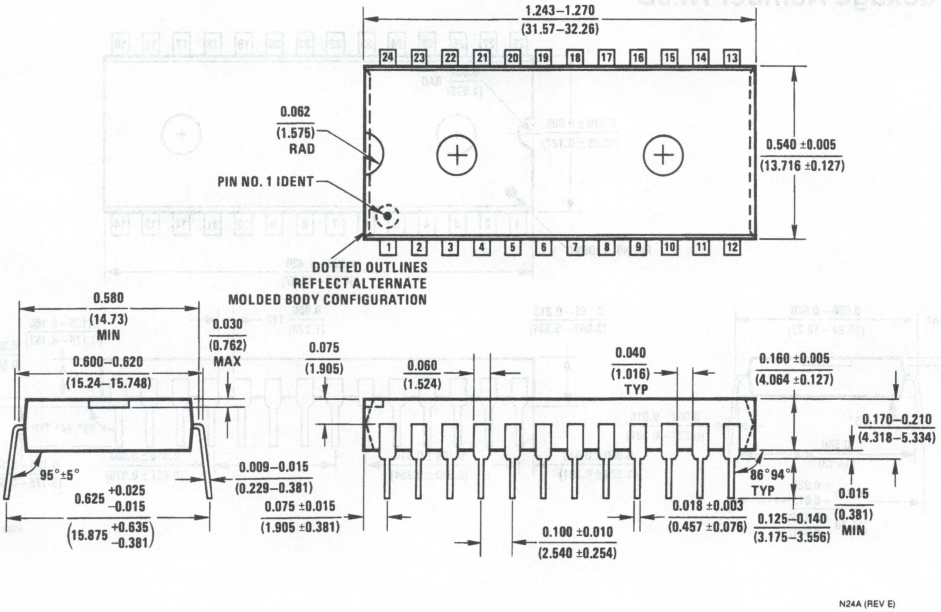


24 Lead Slim (0.300″ Wide) Plastic Dual In-Line Package (SP)
NS Package Number N24C

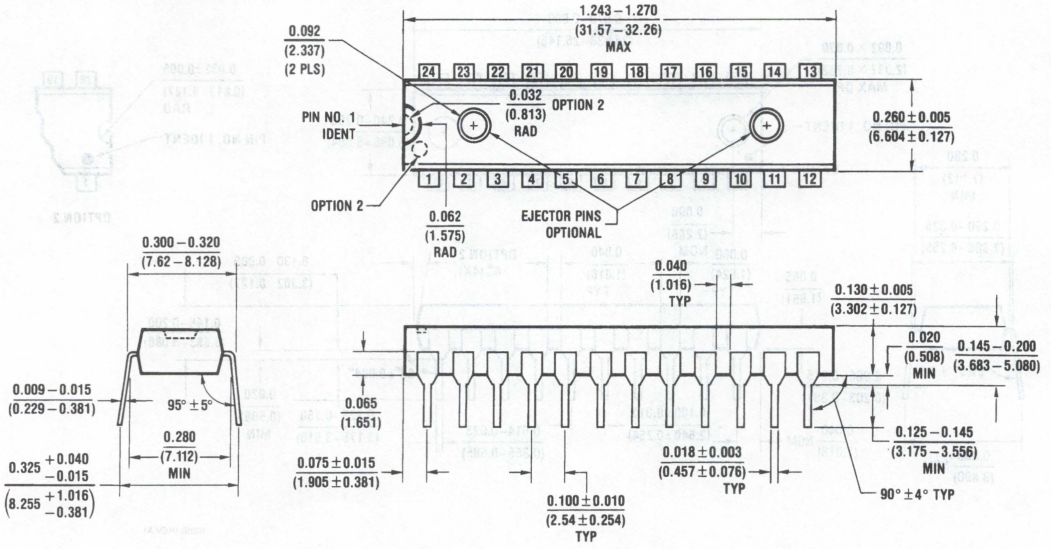


N24C (REV F)

28 Lead Plastic Dual In-Line Package (P)
NS Package Number N28B

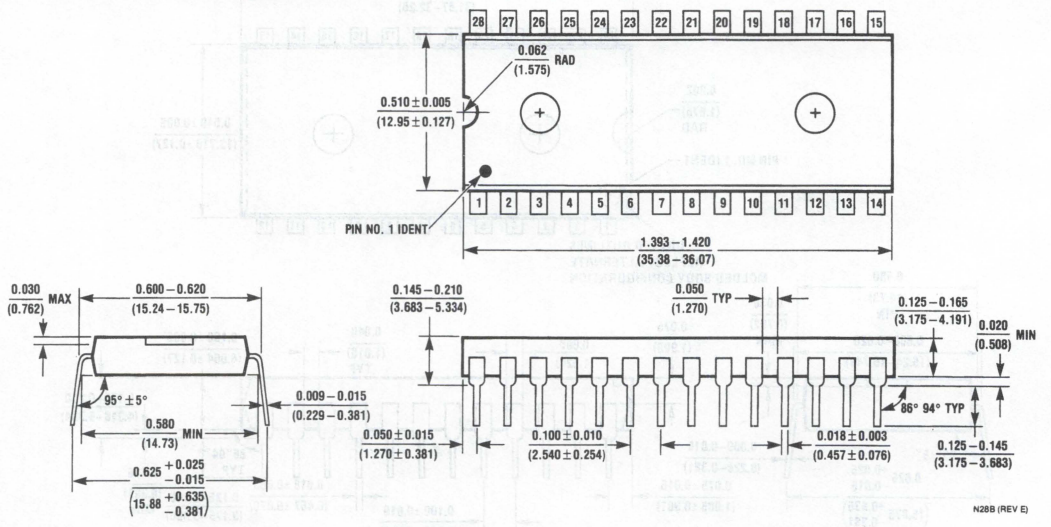


N28B (REV E)

20 Lead Plastic Chip Carrier (Q)
NS Package Number V20A

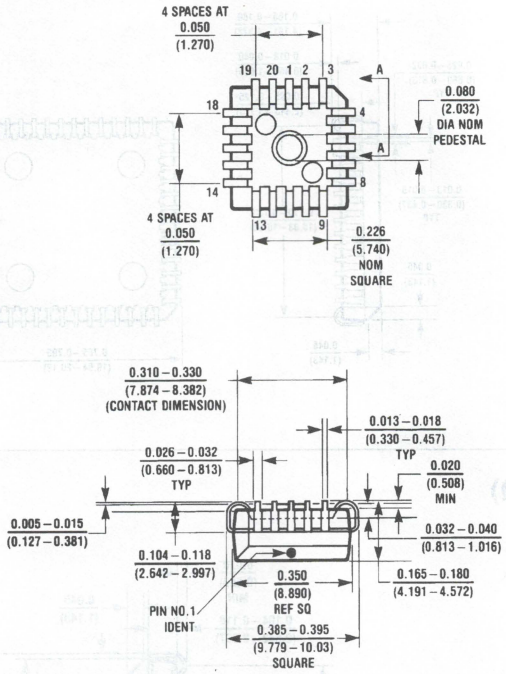


V20A (REV J)

28 Lead Plastic Chip Carrier (Q)
NS Package Number V28A

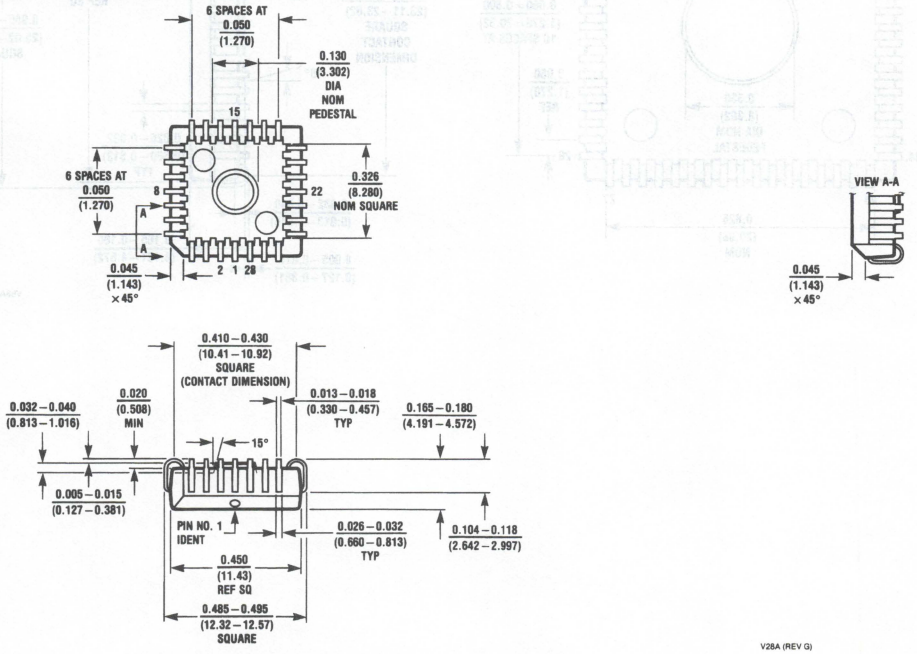


V28A (REV G)

52 Lead Plastic Chip Carrier (Q)
NS Package Number V52A

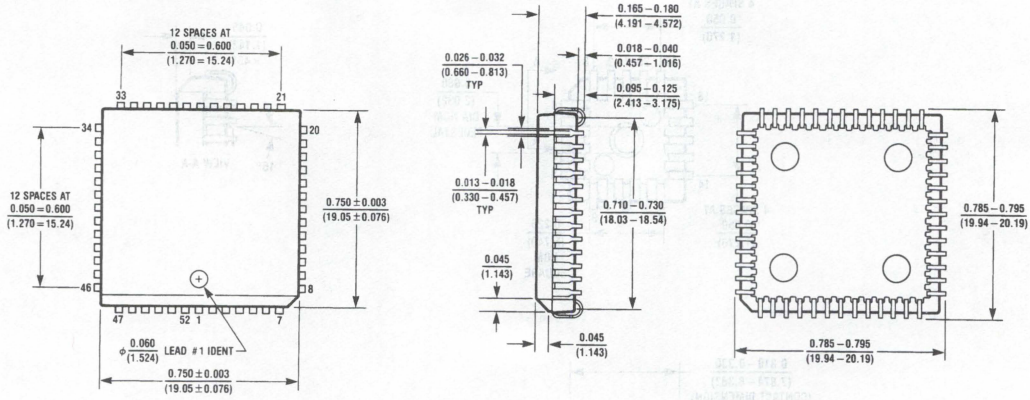


V52A (REV A)

68 Lead Plastic Chip Carrier (Q)
NS Package Number V68A

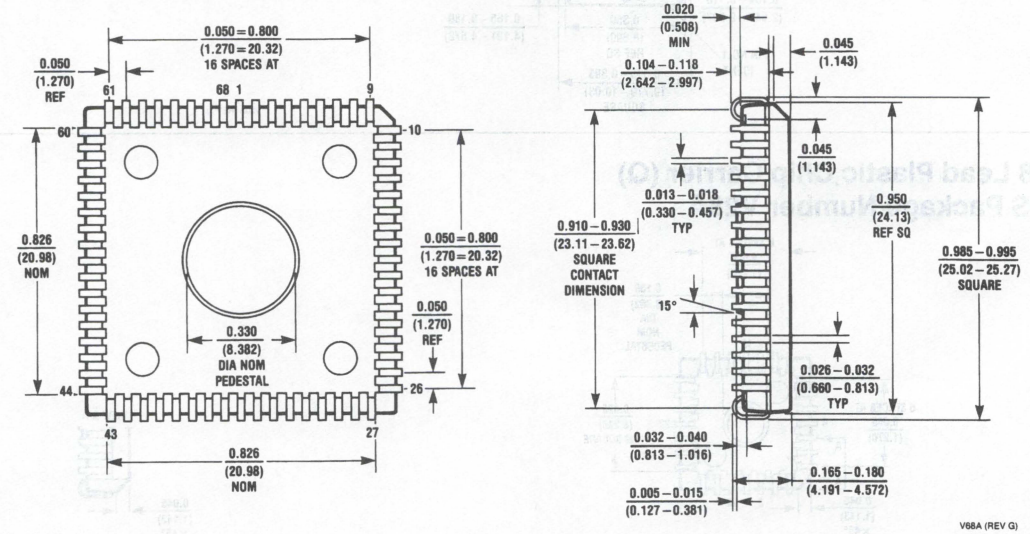


V68A (REV G)


14 Lead Ceramic Flatpak (F)
NS Package Number W14B

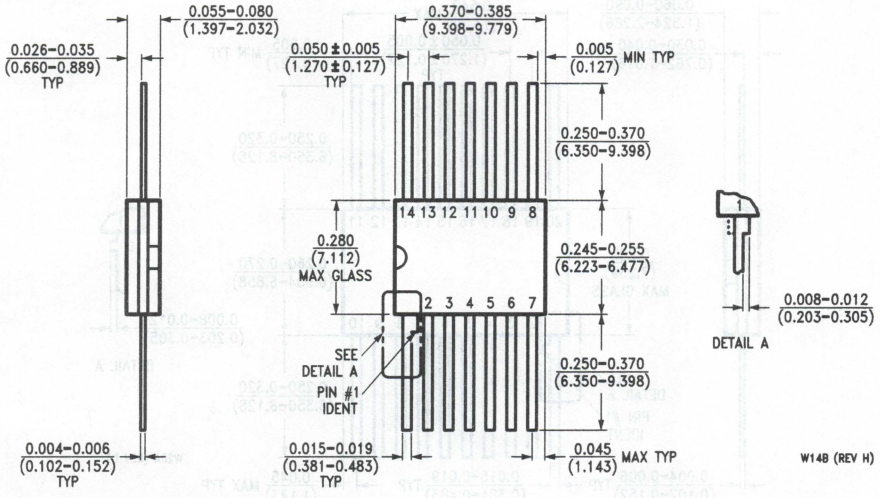


16 Lead Ceramic Flatpak (F)
NS Package Number W16A

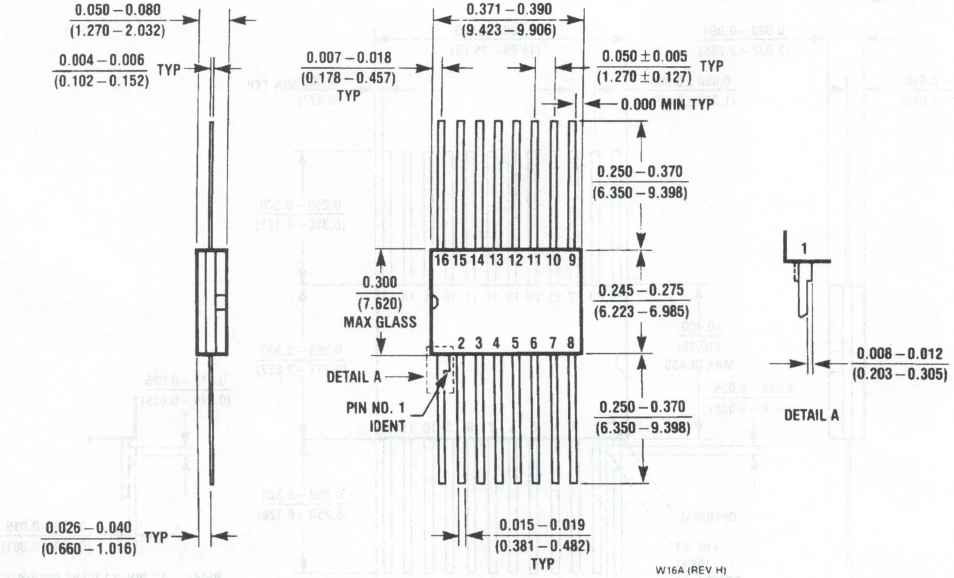

20 Lead Ceramic Flatpak (F)
NS Package Number W20A

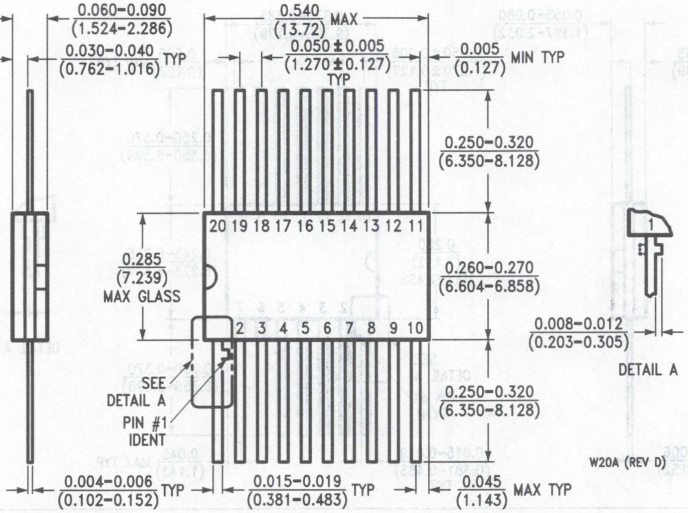

24 Lead Ceramic Flatpak (F)
NS Package Number W24C

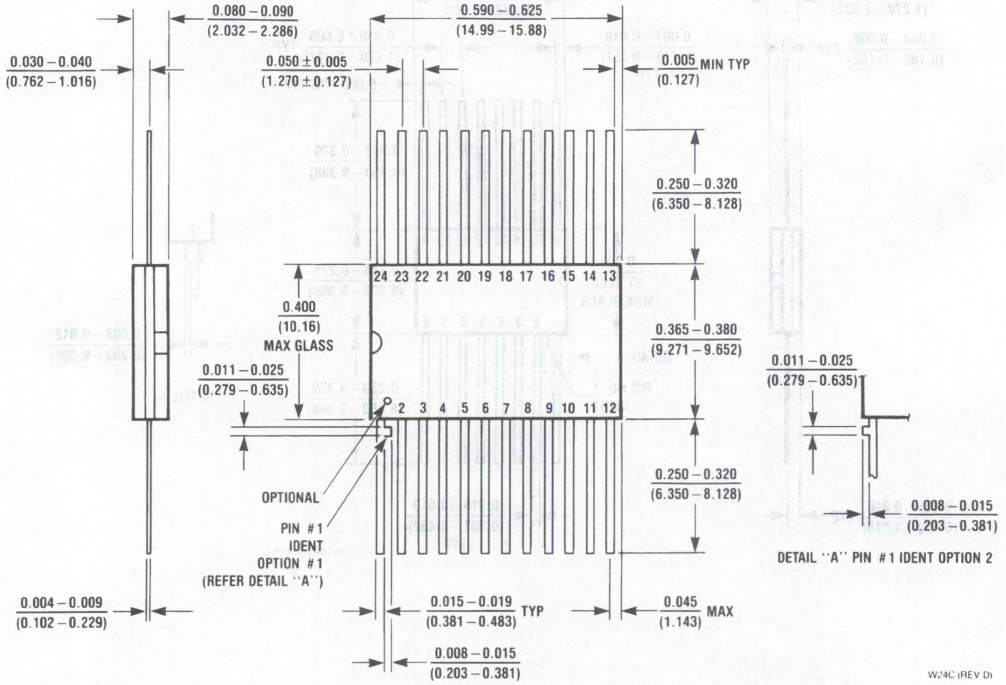

NOTES

NOTES

NOTES

NOTES

NOTES

NOTES

NOTES

National Semiconductor

Bookshelf of Technical Support Information

National Semiconductor Corporation recognizes the need to keep you informed about the availability of current technical literature.

This bookshelf is a compilation of books that are currently available. The listing that follows shows the publication year and section contents for each book.

Please contact your local National sales office for possible complimentary copies. A listing of sales offices follows this bookshelf.

We are interested in your comments on our technical literature and your suggestions for improvement.

Please send them to:

Technical Communications Dept. M/S 16-300
2900 Semiconductor Drive
P.O. Box 58090
Santa Clara, CA 95052-8090

ALS/AS LOGIC DATABOOK—1990

Introduction to Advanced Bipolar Logic • Advanced Low Power Schottky • Advanced Schottky

ASIC DESIGN MANUAL/GATE ARRAYS & STANDARD CELLS—1987

SSI/MSI Functions • Peripheral Functions • LSI/VLSI Functions • Design Guidelines • Packaging

CMOS LOGIC DATABOOK—1988

CMOS AC Switching Test Circuits and Timing Waveforms • CMOS Application Notes • MM54HC/MM74HC MM54HCT/MM74HCT • CD4XXX • MM54CXXX/MM74CXXX • Surface Mount

DATA ACQUISITION LINEAR DEVICES—1989

Active Filters • Analog Switches/Multiplexers • Analog-to-Digital Converters • Digital-to-Analog Converters Sample and Hold • Temperature Sensors • Voltage Regulators • Surface Mount

DATA COMMUNICATION/LAN/UART DATABOOK—1990

LAN IEEE 802.3 • High Speed Serial/IBM Data Communications • ISDN Components • UARTs Modems • Transmission Line Drivers/Receivers

DISCRETE SEMICONDUCTOR PRODUCTS DATABOOK—1989

Selection Guide and Cross Reference Guides • Diodes • Bipolar NPN Transistors Bipolar PNP Transistors • JFET Transistors • Surface Mount Products • Pro-Electron Series Consumer Series • Power Components • Transistor Datasheets • Process Characteristics

DRAM MANAGEMENT HANDBOOK—1989

Dynamic Memory Control • Error Detection and Correction • Microprocessor Applications for the DP8408A/09A/17/18/19/28/29 • Microprocessor Applications for the DP8420A/21A/22A Microprocessor Applications for the NS32CG821

EMBEDDED SYSTEM PROCESSOR DATABOOK—1989

Embedded System Processor Overview • Central Processing Units • Slave Processors • Peripherals Development Systems and Software Tools

F100K ECL LOGIC DATABOOK & DESIGN GUIDE—1990

Family Overview • 300 Series (Low-Power) Datasheets • 100 Series Datasheets • 11C Datasheets ECL BiCMOS SRAM, ECL PAL, and ECL ASIC Datasheets • Design Guide • Circuit Basics • Logic Design Transmission Line Concepts • System Considerations • Power Distribution and Thermal Considerations Testing Techniques • Quality Assurance and Reliability • Application Notes

FACT™ ADVANCED CMOS LOGIC DATABOOK—1990

Description and Family Characteristics • Ratings, Specifications and Waveforms
Design Considerations • 54AC/74ACXXX • 54ACT/74ACTXXX • Quiet Series: 54ACQ/74ACQXXX
Quiet Series: 54ACTQ/74ACTQXXX • 54FCT/74FCTXXX • FCTA: 54FCTXXXA/74FCTXXXA

FAST® ADVANCED SCHOTTKY TTL LOGIC DATABOOK—1990

Circuit Characteristics • Ratings, Specifications and Waveforms • Design Considerations • 54F/74FXXX

FAST® APPLICATIONS HANDBOOK—1990

Reprint of 1987 Fairchild FAST Applications Handbook
Contains application information on the FAST family: Introduction • Multiplexers • Decoders • Encoders
Operators • FIFOs • Counters • TTL Small Scale Integration • Line Driving and System Design
FAST Characteristics and Testing • Packaging Characteristics

GENERAL PURPOSE LINEAR DEVICES DATABOOK—1989

Continuous Voltage Regulators • Switching Voltage Regulators • Operational Amplifiers • Buffers • Voltage Comparators
Instrumentation Amplifiers • Surface Mount

GRAPHICS HANDBOOK—1989

Advanced Graphics Chipset • DP8500 Development Tools • Application Notes

INTERFACE DATABOOK—1990

Transmission Line Drivers/Receivers • Bus Transceivers • Peripheral Power Drivers • Display Drivers
Memory Support • Microprocessor Support • Level Translators and Buffers • Frequency Synthesis • Hi-Rel Interface

LINEAR APPLICATIONS HANDBOOK—1986

The purpose of this handbook is to provide a fully indexed and cross-referenced collection of linear integrated circuit applications using both monolithic and hybrid circuits from National Semiconductor.

Individual application notes are normally written to explain the operation and use of one particular device or to detail various methods of accomplishing a given function. The organization of this handbook takes advantage of this innate coherence by keeping each application note intact, arranging them in numerical order, and providing a detailed Subject Index.

LS/S/TTL DATABOOK—1989

Contains former Fairchild Products
Introduction to Bipolar Logic • Low Power Schottky • Schottky • TTL • TTL—Low Power

MASS STORAGE HANDBOOK—1989

Rigid Disk Pulse Detectors • Rigid Disk Data Separators/Synchronizers and ENDECs
Rigid Disk Data Controller • SCSI Bus Interface Circuits • Floppy Disk Controllers • Disk Drive Interface Circuits
Rigid Disk Preamplifiers and Servo Control Circuits • Rigid Disk Microcontroller Circuits • Disk Interface Design Guide

MEMORY DATABOOK—1990

PROMs, EPROMs, EEPROMs • TTL I/O SRAMs • ECL I/O SRAMs

MICROCONTROLLER DATABOOK—1989

COP400 Family • COP800 Family • COPS Applications • HPC Family • HPC Applications
MICROWIRE and MICROWIRE/PLUS Peripherals • Microcontroller Development Tools

MICROPROCESSOR DATABOOK—1989

Series 32000 Overview • Central Processing Units • Slave Processors • Peripherals
Development Systems and Software Tools • Application Notes • NSC800 Family

PROGRAMMABLE LOGIC DATABOOK & DESIGN MANUAL—1990

Product Line Overview • Datasheets • Designing with PLDs • PLD Design Methodology • PLD Design Development Tools
Fabrication of Programmable Logic • Application Examples

REAL TIME CLOCK HANDBOOK—1989

Real Time Clocks and Timer Clock Peripherals • Application Notes

RELIABILITY HANDBOOK—1986

Reliability and the Die • Internal Construction • Finished Package • MIL-STD-883 • MIL-M-38510
The Specification Development Process • Reliability and the Hybrid Device • VLSI/VHSIC Devices
Radiation Environment • Electrostatic Discharge • Discrete Device • Standardization
Quality Assurance and Reliability Engineering • Reliability and Documentation • Commercial Grade Device
European Reliability Programs • Reliability and the Cost of Semiconductor Ownership
Reliability Testing at National Semiconductor • The Total Military/Aerospace Standardization Program
883B/RETS™ Products • MILS/RETS™ Products • 883/RETS™ Hybrids • MIL-M-38510 Class B Products
Radiation Hardened Technology • Wafer Fabrication • Semiconductor Assembly and Packaging
Semiconductor Packages • Glossary of Terms • Key Government Agencies • AN/ Numbers and Acronyms
Bibliography • MIL-M-38510 and DESC Drawing Cross Listing

SPECIAL PURPOSE LINEAR DEVICES DATABOOK—1989

Audio Circuits • Radio Circuits • Video Circuits • Motion Control Circuits • Special Function Circuits
Surface Mount

TELECOMMUNICATIONS—1990

Line Card Components • Integrated Services Digital Network Components • Analog Telephone Components
Application Notes

NATIONAL SEMICONDUCTOR CORPORATION DISTRIBUTORS

ALABAMA
Huntsville
Arrow Electronics
(205) 837-6955
Bell Industries
(205) 837-1074
Hamilton/Avnet
(205) 837-7210
Pioneer Technology
(205) 837-9300
Time Electronics
(205) 721-1133

ARIZONA
Chandler
Hamilton/Avnet
(602) 231-5100
Phoenix
Arrow Electronics
(602) 437-0750
Tempe
Anthem Electronics
(602) 966-6600
Bell Industries
(602) 966-7800
Time Electronics
(602) 967-2000

CALIFORNIA
Agora Hills
Bell Industries
(818) 706-2608
Zeus Components
(818) 889-3838
Anaheim
Time Electronics
(714) 934-0911
Chatsworth
Anthem Electronics
(818) 700-1000
Arrow Electronics
(818) 701-7500
Hamilton Electro Sales
(818) 700-6500
Time Electronics
(818) 998-7200
Costa Mesa
Avnet Electronics
(714) 754-6050
Hamilton Electro Sales
(714) 641-4159
Cypress
Bell Industries
(714) 895-7801
Gardena
Bell Industries
(213) 515-1800
Hamilton/Avnet
(213) 217-6751
Irvine
Anthem Electronics
(714) 768-4444
Ontario
Hamilton/Avnet
(714) 989-4602
Rocklin
Anthem Electronics
(916) 624-9744
Bell Industries
(916) 652-0414
Sacramento
Hamilton/Avnet
(916) 925-2216
San Diego
Anthem Electronics
(619) 453-9005
Arrow Electronics
(619) 565-4800
Hamilton/Avnet
(619) 571-7510
Time Electronics
(619) 586-1331
San Jose
Anthem Electronics
(408) 453-1200
Pioneer Technology
(408) 954-9100
Zeus Components
(408) 629-4789
Sunnyvale
Arrow Electronics
(408) 745-6600
Bell Industries
(408) 734-8570
Hamilton/Avnet
(408) 743-3355
Time Electronics
(408) 734-9888
Thousand Oaks
Bell Industries
(805) 499-6821
Torrance
Time Electronics
(213) 320-0880
Tustin
Arrow Electronics
(714) 838-5422
Yorba Linda
Zeus Components
(714) 921-9000

COLORADO
Englewood
Anthem Electronics
(303) 790-4500
Arrow Electronics
(303) 790-4444
Hamilton/Avnet
(303) 799-7800

CONNECTICUT
Cheshire
Time Electronics
(203) 271-3200
Danbury
Hamilton/Avnet
(203) 797-2800
Norwalk
Pioneer Standard
(203) 853-1515
Wallingford
Arrow Electronics
(203) 265-7741
Waterbury
Anthem Electronics
(203) 575-1575

FLORIDA
Altamonte Springs
Bell Industries
(407) 339-0078
Pioneer Technology
(407) 834-9090
Clearwater
Pioneer Technology
(813) 536-0445
Deerfield Beach
Arrow Electronics
(305) 429-8200
Bell Industries
(305) 421-1997
Pioneer Technology
(305) 428-8877
Fort Lauderdale
Hamilton/Avnet
(305) 971-2900
Time Electronics
(305) 484-7778
Lake Mary
Arrow Electronics
(407) 333-9300
Largo
Bell Industries
(813) 541-4434
Orlando
Time Electronics
(407) 841-6565
Oviedo
Zeus Components
(407) 365-3000
St. Petersburg
Hamilton/Avnet
(813) 576-3930
Winter Park
Hamilton/Avnet
(407) 628-3888

GEORGIA
Duluth
Arrow Electronics
(404) 497-1300
Norcross
Bell Industries
(404) 662-0923
Hamilton/Avnet
(404) 447-7500
Pioneer Technology
(404) 448-1711
Time Electronics
(404) 448-4448

ILLINOIS
Addison
Pioneer Electronics
(708) 437-9680
Bensenville
Hamilton/Avnet
(708) 860-7780
Elk Grove Village
Anthem Electronics
(708) 640-6066
Bell Industries
(708) 640-1910
Itasca
Arrow Electronics
(708) 250-0500
Urbana
Bell Industries
(217) 328-1077
Wood Dale
Time Electronics
(708) 350-0610

INDIANA
Carmel
Hamilton/Avnet
(317) 844-9333
Fort Wayne
Bell Industries
(219) 423-3422
Indianapolis
Advent Electronics Inc.
(317) 872-4910
Arrow Electronics
(317) 243-9353
Bell Industries
(317) 634-8200
Pioneer Standard
(317) 573-0880

IOWA
Cedar Rapids
Advent Electronics
(319) 363-0221
Arrow Electronics
(319) 395-7230
Bell Industries
(319) 395-0730
Hamilton/Avnet
(319) 362-4757

KANSAS
Lenexa
Arrow Electronics
(913) 541-9542
Hamilton/Avnet
(913) 888-8900

MARYLAND
Columbia
Anthem Electronics
(301) 995-6640
Arrow Electronics
(301) 995-0003
Hamilton/Avnet
(301) 995-3500
Time Electronics
(301) 964-3090
Zeus Components
(301) 997-1118
Gaithersburg
Pioneer Technology
(301) 921-0660

MASSACHUSETTS
Andover
Bell Industries
(508) 474-8880
Lexington
Pioneer Standard
(617) 861-9200
Zeus Components
(617) 863-8800
Norwood
Gerber Electronics
(617) 769-6000
Peabody
Hamilton/Avnet
(508) 531-7430
Time Electronics
(508) 532-6200
Wilmington
Anthem Electronics
(508) 657-5170
Arrow Electronics
(508) 658-0900

MICHIGAN
Ann Arbor
Bell Industries
(313) 971-9093
Grand Rapids
Arrow Electronics
(616) 243-0912
Hamilton/Avnet
(616) 243-8805
Pioneer Standard
(616) 698-1800
Livonia
Arrow Electronics
(313) 665-4100
Pioneer Standard
(313) 525-1800
Novi
Hamilton/Avnet
(313) 347-4720
Southfield
R. M. Electronics, Inc.
(313) 262-1582
Wyoming
R. M. Electronics, Inc.
(616) 531-9300

MINNESOTA
Eden Prairie
Anthem Electronics
(612) 944-5454
Pioneer Standard
(612) 944-3355
Edina
Arrow Electronics
(612) 830-1800
Time Electronics
(612) 835-1250
Minnetonka
Hamilton/Avnet
(612) 932-0600

NATIONAL SEMICONDUCTOR CORPORATION DISTRIBUTORS (Continued)

MISSOURI
Chesterfield
Hamilton/Avnet
(314) 537-1600
St. Louis
Arrow Electronics
(314) 567-6888
Pioneer Standard
(314) 432-4350
Time Electronics
(314) 391-6444

NEW HAMPSHIRE
Hudson
Bell Industries
(603) 882-1133
Manchester
Arrow Electronics
(603) 668-6968
Hamilton/Avnet
(603) 624-9400

NEW JERSEY
Cherry Hill
Hamilton/Avnet
(609) 424-0100
Fairfield
Anthem Electronics
(201) 227-7960
Hamilton/Avnet
(201) 575-3390
Marlton
Arrow Electronics
(609) 596-8000
Parsippany
Arrow Electronics
(201) 538-0900
Pine Brook
Pioneer Standard
(201) 575-3510
Time Electronics
(201) 882-4611

NEW MEXICO
Albuquerque
Alliance Electronics Inc.
(505) 292-3360
Arrow Electronics
(505) 243-4566
Bell Industries
(505) 292-2700
Hamilton/Avnet
(505) 345-0001

NEW YORK
Binghamton
Pioneer
(607) 722-9300
Buffalo
Summit Electronics
(716) 887-2800
Commack
Anthem Electronics
(516) 864-6600
Fairport
Pioneer Standard
(716) 381-7070
Time Electronics
(716) 383-8853
Hauppauge
Arrow Electronics
(516) 231-1000
Hamilton/Avnet
(516) 434-7413
Time Electronics
(516) 273-0100
Port Chester
Zeus Components
(914) 937-7400
Rochester
Arrow Electronics
(716) 427-0300
Hamilton/Avnet
(716) 475-9130
Summit Electronics
(716) 334-8110
Ronkonkoma
Zeus Components
(516) 737-4500
Syracuse
Hamilton/Avnet
(315) 437-2641
Time Electronics
(315) 432-0355
Westbury
Hamilton/Avnet Export Div.
(516) 997-6868
Woodbury
Pioneer Electronics
(516) 921-8700

NORTH CAROLINA
Charlotte
Pioneer Technology
(704) 527-8188
Time Electronics
(704) 522-7600
Durham
Pioneer Technology
(919) 544-5400
Raleigh
Arrow Electronics
(919) 876-3132
Hamilton/Avnet
(919) 878-0810
Winston-Salem
Arrow Electronics
(919) 725-8711

OHIO
Centerville
Arrow Electronics
(513) 435-5563
Bell Industries
(513) 435-8660
Bell Industries-Military
(513) 434-8231
Cleveland
Pioneer
(216) 587-3600
Dayton
Hamilton/Avnet
(513) 439-6700
Pioneer Standard
(513) 236-9900
Zeus Components
(914) 937-7400
Dublin
Time Electronics
(614) 761-1100
Solon
Arrow Electronics
(216) 248-3990
Hamilton/Avnet
(216) 831-3500
Westerville
Hamilton/Avnet
(614) 882-7004

OKLAHOMA
Tulsa
Arrow Electronics
(918) 252-7537
Hamilton/Avnet
(918) 252-7297
Pioneer Standard
(918) 492-0546
Radio Inc.
(918) 587-9123

OREGON
Beaverton
Almac-Stroum Electronics
(503) 629-8090
Anthem Electronics
(503) 643-1114
Arrow Electronics
(503) 645-6456
Hamilton/Avnet
(503) 627-0201
Lake Oswego
Bell Industries
(503) 635-6500
Portland
Time Electronics
(503) 684-3780

PENNSYLVANIA
Horsham
Anthem Electronics
(215) 443-5150
Pioneer Technology
(215) 674-4000
King of Prussia
Time Electronics
(215) 337-0900
Monroeville
Arrow Electronics
(412) 856-7000
Pittsburgh
Hamilton/Avnet
(412) 281-4150
Pioneer
(412) 782-2300

TEXAS
Austin
Arrow Electronics
(512) 835-4180
Hamilton/Avnet
(512) 837-8911
Pioneer Standard
(512) 835-4000
Time Electronics
(512) 399-3051
Carrollton
Arrow Electronics
(214) 380-6464
Time Electronics
(214) 241-7441
Dallas
Hamilton/Avnet
(214) 404-9906
Pioneer Standard
(214) 386-7300
Houston
Arrow Electronics
(713) 530-4700
Pioneer Standard
(713) 988-5555
Richardson
Anthem Electronics
(214) 238-7100
Zeus Components
(214) 783-7010
Stafford
Hamilton/Avnet
(713) 240-7733

UTAH
Midvale
Bell Industries
(801) 255-9611
Salt Lake City
Anthem Electronics
(801) 973-8555
Arrow Electronics
(801) 973-6913
Hamilton/Avnet
(801) 972-4300
West Valley
Time Electronics
(801) 973-8181

WASHINGTON
Bellevue
Almac-Stroum Electronics
(206) 643-9992
Bothell
Anthem Electronics
(206) 483-1700
Kent
Arrow Electronics
(206) 575-4420
Redmond
Bell Industries
(206) 885-9963
Hamilton/Avnet
(206) 881-6697
Time Electronics
(206) 882-1600

WISCONSIN
Brookfield
Arrow Electronics
(414) 792-0150
Mequon
Taylor Electric
(414) 241-4321
Waukesha
Bell Industries
(414) 547-8879
Hamilton/Avnet
(414) 784-4516

CANADA
WESTERN PROVINCES
Burnaby
Hamilton/Avnet
(604) 437-6667
Semad Electronics
(604) 420-9889
Calgary
Hamilton/Avnet
(403) 250-9380
Semad Electronics
(403) 252-5664
Zentronics
(403) 272-1021
Edmonton
Zentronics
(403) 468-9306
Richmond
Zentronics
(604) 273-5575
Saskatoon
Zentronics
(306) 955-2207
Winnipeg
Zentronics
(204) 694-1957

EASTERN PROVINCES
Mississauga
Hamilton/Avnet
(416) 677-7432
Time Electronics
(416) 672-5300
Zentronics
(416) 564-9600
Nepean
Hamilton/Avnet
(613) 226-1700
Zentronics
(613) 226-8840
Ottawa
Semad Electronics
(613) 727-8325
Pointe Claire
Semad Electronics
(514) 694-0860
St. Laurent
Hamilton/Avnet
(514) 335-1000
Zentronics
(514) 737-9700
Willowdale
ElectroSonic Inc.
(416) 494-1666

SALES OFFICES

ALABAMA
Huntsville
(205) 721-9367

ARIZONA
Tempe
(602) 966-4563

CALIFORNIA
El Segundo
(213) 643-7099
Rocklin
(916) 632-2750
San Diego
(619) 587-0666
Santa Clara
(408) 562-5900
Tustin
(714) 259-8880
Woodland Hills
(818) 888-2602

COLORADO
Boulder
(303) 440-3400
Colorado Springs
(719) 578-3319
Englewood
(303) 790-8090

FLORIDA
Boca Raton
(407) 997-9891
Orlando
(407) 629-1720
St. Petersburg
(813) 577-5017

GEORGIA
Norcross
(404) 441-2740

ILLINOIS
Schaumburg
(708) 397-8777

INDIANA
Carmel
(317) 843-7160
Fort Wayne
(219) 484-0722

IOWA
Cedar Rapids
(319) 395-0090

KANSAS
Overland Park
(913) 451-4402

MARYLAND
Hanover
(301) 796-8900

MASSACHUSETTS
Burlington
(617) 221-4500

MICHIGAN
Grand Rapids
(616) 940-0588
W. Bloomfield
(313) 855-0166

MINNESOTA
Bloomington
(612) 854-8200

MISSOURI
St. Louis
(314) 569-9830

NEW JERSEY
Paramus
(201) 599-0955

NEW MEXICO
Albuquerque
(505) 884-5601

NEW YORK
Fairport
(716) 223-7700
Melville
(516) 351-1000
Wappinger Falls
(914) 298-0680

NORTH CAROLINA
Raleigh
(919) 832-0661

OHIO
Dayton
(513) 435-6886
Independence
(216) 524-5577

ONTARIO
Mississauga
(416) 678-2920
Nepean
(613) 596-0411

OREGON
Portland
(503) 639-5442

PENNSYLVANIA
Horsham
(215) 672-6767

PUERTO RICO
Rio Piedras
(809) 758-9211

QUEBEC
Pointe Claire
(514) 426-2992

TEXAS
Austin
(512) 346-3990
Houston
(713) 771-3547
Richardson
(214) 234-3811

UTAH
Salt Lake City
(801) 322-4747

WASHINGTON
Kirkland
(206) 822-4004

WISCONSIN
Brookfield
(414) 782-1818

National Semiconductor

National Semiconductor Corporation
2900 Semiconductor Drive
P.O. Box 58090
Santa Clara, CA 95052-8090
Tel: (408) 721-5000
TWX: (910) 339-9240

SALES OFFICES (Continued)

INTERNATIONAL OFFICES

Electronica NSC de Mexico SA
Juventino Rosas No. 118-2
Col Guadalupe Inn
Mexico, 01020 D.F. Mexico
Tel: 52-5-524-9402

National Semicondutores Do Brasil Ltda.
Av. Brig. Faria Lima, 1383
6.0 Andor-Conj. 62
01451 Sao Paulo, SP, Brasil
Tel: (55/11) 212-5066
Fax: (55/11) 211-1181 NSBR BR

National Semiconductor GmbH
Industriestrasse 10
D-8080 Furstenfeldbruck
West Germany
Tel: (0-81-41) 103-0
Telex: 527-649
Fax: (08141) 103554

National Semiconductor (UK) Ltd.
The Maple, Kembrey Park
Swindon, Wiltshire SN2 6UT
United Kingdom
Tel: (07-93) 61-41-41
Telex: 444-674
Fax: (07-93) 69-75-22

National Semiconductor Benelux
Vorstlaan 100
B-1170 Brussels
Belgium
Tel: (02) 6-61-06-80
Telex: 61007
Fax: (02) 6-60-23-95

National Semiconductor (UK) Ltd.
Ringager 4A, 3
DK-2605 Brondby
Denmark
Tel: (02) 43-32-11
Telex: 15-179
Fax: (02) 43-31-11

National Semiconductor S.A.
Centre d'Affaires-La Boursidiere
Bâtiment Champagne, B.P. 90
Route Nationale 186
F-92357 Le Plessis Robinson
France
Tel: (1) 40-94-88-88
Telex: 631065
Fax: (1) 40-94-88-11

National Semiconductor (UK) Ltd.
Unit 2A
Clonskeagh Square
Clonskeagh Road
Dublin 14
Tel: (01) 69-55-89
Telex: 91047
Fax: (01) 69-55-89

National Semiconductor S.p.A.
Strada 7, Palazzo R/3
I-20089 Rozzano
Milanofiori
Italy
Tel: (02) 8242046/7/8/9
Twx: 352647
Fax: (02) 8254758

National Semiconductor S.p.A.
Via del Cararaggio, 107
00147 Rome
Italy
Tel: (06) 5-13-48-80
Fax: (06) 5-13-79-47

National Semiconductor (UK) Ltd.
Stasjonsvn 18
Postboks 15
N-1361 Billingstadsletta
Norway
Tel: 47-2-849362
Fax: 47-2-848104

National Semiconductor AB
P.O. Box 1009
Grosshandlarvaegen 7
S-121 23 Johanneshov
Sweden
Tel: 46-8-7228050
Fax: 46-8-7229095
Telex: 10731 NSC S

National Semiconductor GmbH
Calle Agustin de Foxa, 27 (9°D)
28036 Madrid
Spain
Tel: (01) 733-2958
Telex: 46133
Fax: (01) 733-8018

National Semiconductor Switzerland
Alte Winterthurerstrasse 53
Postfach 567
Ch-8304 Wallisellen-Zurich
Switzerland
Tel: (01) 830-2727
Telex: 828-444
Fax: (01) 830-1900

National Semiconductor
Kauppakartanonkatu 7 A22
SF-00930 Helsinki
Finland
Tel: (90) 33-80-33
Telex: 126116
Fax: (90) 33-81-30

National Semiconductor
Postbus 90
1380 AB Weesp
The Netherlands
Tel: (0-29-40) 3-04-48
Telex: 10-956
Fax: (0-29-40) 3-04-30

National Semiconductor Japan Ltd.
Sanseido Bldg. 5F
4-15 Nishi Shinjuku
Shinjuku-ku
Tokyo 160 Japan
Tel: 3-299-7001
Fax: 3-299-7000

National Semiconductor Hong Kong Ltd.
Suite 513, 5th Floor,
Chinachem Golden Plaza,
77 Mody Road, Tsimshatsui East,
Kowloon, Hong Kong
Tel: 3-7231290
Telex: 52996 NSSEA HX
Fax: 3-3112536

National Semiconductor (Australia) PTY, Ltd.
1st Floor, 441 St. Kilda Rd.
Melbourne, 3004
Victoria, Australia
Tel: (03) 267-5000
Fax: 61-3-2677458

National Semiconductor (PTE), Ltd.
200 Cantonment Road 13-01
Southpoint
Singapore 0208
Tel: 2252226
Telex: RS 33877

National Semiconductor (Far East) Ltd.
Taiwan Branch
P.O. Box 68-332 Taipei
7th Floor, Nan Shan Life Bldg.
302 Min Chuan East Road,
Taipei, Taiwan R.O.C.
Tel: (86) 02-501-7227
Telex: 22837 NSTW
Cable: NSTW TAIPEI

National Semiconductor (Far East) Ltd.
Korea Branch
13th Floor, Dai Han Life Insurance
63 Building,
60, Yoido-dong, Youngdeungpo-ku,
Seoul, Korea 150-763
Tel: (02) 784-8051/3, 785-0696/8
Telex: 24942 NSPKLO
Fax: (02) 784-8054

© 1990 National Semiconductor TL3029P RRD/RRD80M70/Printed in U.S.A.